
How Do World Action Models Use Their Imagined Futures? Evidence from Mechanistic Interventions

Anonymous Author(s)

Affiliation

Address

email

Abstract

World action models produce predicted futures alongside robot actions, but co-generation alone does not causally establish how the predicted future affects the action. Prior work shows that behavior depends on information at predicted-future token positions, but not how particular future content shapes the resulting action. We use two intervention stages to characterize that influence: how strongly and in what direction future content changes behavior, and which internal pathway carries the change. Stage 1 starts with two normal rollouts from the same simulator state. We insert the predicted future from one rollout (the *donor*) into the other (the *recipient*), hold all other inputs fixed, and measure whether the recomputed action moves toward the donor action, which the model never sees. Across 22 states and six RoboLab tasks, donor predicted futures redirect Cosmos 3 actions and executed endpoints almost completely toward the donor rollout. Cosmos Policy shows a smaller effect at the first decision state of all ten LIBERO-Long tasks. Matched controls rule out generic perturbation and replacement as complete explanations. Content interventions show that Cosmos Policy responds primarily to camera-visible robot motion, whereas isolated robot or object pixels do not reproduce Cosmos 3’s full predicted-future effect. In Stage 2, we keep the donor’s predicted future inserted but restore the recipient’s attention keys and values at predicted-future token positions. This removes 83–88% of Cosmos 3 steering in every tested state, identifying a pathway that carries most of the predicted future’s causal influence.

1 Introduction

Many world action models (WAMs) produce predicted futures alongside robot actions [8, 14]. Joint generation, however, does not imply that the action computation uses the predicted future. The policy could map the current observation and instruction directly to an action while producing a plausible predicted future as an auxiliary output.

Predicted-future representations could serve many roles: they may be auxiliary outputs, a general computational workspace, a content-specific input such as a prospective robot pose used for inverse dynamics [1, 7], or a representation of consequences used to evaluate candidate actions [2, 3]. RIFT provides the closest prior causal evidence across several WAMs by masking reads from and editing values at predicted-future positions [22]. These interventions change trajectories and task success, establishing that behavior depends on information carried through the predicted-future interface. However, because disrupting that interface can move an action in any direction, RIFT does not reveal how a particular coherent predicted future shapes the direction of behavior.

We therefore run a simple causal test of how coherent future content shapes action direction. We take the future representation associated with one normal rollout and insert it into another rollout that

starts from exactly the same saved state. We call the rollout receiving the future the *recipient* and the rollout supplying it the *donor*. We then recompute the recipient’s action while keeping everything else fixed. The model never sees the donor’s action; we use that action only after inference as a reference. Movement toward the donor’s action quantifies the directional causal effect of the inserted future content, rather than merely detecting arbitrary change from activity at predicted-future token positions.

We use two distinct intervention stages. In *Stage 1*, we insert the donor’s future representation into the recipient run and quantify how the recipient’s behavior shifts toward the donor. In *Stage 2*, we keep the donor’s predicted future in the recipient run but replace only the keys and values at predicted-future token positions with those recorded during a run using the recipient’s own predicted future. This K/V pathway patch traces how the Stage-1 effect reaches the action. It is a nested mechanism test, not another name for inserting the donor future into the recipient.

We study Cosmos Policy’s direct-policy mode and the diffusion-generator component of Cosmos3-Nano-Policy-DROID. Neither evaluated inference procedure generates and scores multiple candidate actions before acting; Cosmos Policy’s separate best-of- N mode is outside our study. Thus, content-specific future conditioning would not by itself demonstrate outcome comparison or planning.

We characterize how alternative future representations steer actions and executed endpoints, which visual content produces that steering, and which internal pathway carries it. Cosmos 3 provides the strongest chain: steering generalizes across 22 states, isolated robot or object pixels do not reproduce it, and replacing K/V at predicted-future token positions suppresses action and endpoint steering in every state. Cosmos Policy supplies a cross-generation comparison whose effect is concentrated at early states and is most consistent with camera-visible robot motion.

2 Related Work

Prediction and control. Some visual robot policies produce predicted futures as video frames and infer actions from them; others condition action inference on predicted video representations [1, 7]. Joint video–action models instead learn to generate predicted futures and controls in one model [6, 8, 10, 14, 20]. Their training objective does not reveal how a particular predicted future participates in action inference. UVA, for example, can omit video generation at test time [10]. Explicit visual planners answer a different question by sampling alternatives, predicting their outcomes, and comparing them with a goal-dependent score [2, 3].

Recent WAM studies separate predictive training from the use of predictions during action generation. Fast-WAM removes explicit test-time rollout while retaining competitive performance in its evaluations [21]; Faster-WAM retains a lower-cost route that conditions on the predicted future and reports improved robustness [24]. AGRA finds that visually plausible foresight need not support reliable action inference in its studied architecture [16]. RIFT directly establishes dependence on values at predicted-future positions and their organization [22]. Our contribution is complementary: RIFT establishes that behavior depends on the predicted-future interface, whereas our interventions determine how coherent alternative future content redirects behavior and trace the internal pathway carrying that influence.

Mechanistic interventions. Activation replacement reveals how changing an internal representation changes an output, going beyond evidence that the representation is merely decodable [12, 18]. Path patching extends this logic to specified computational routes [5]. Conclusions can depend on the counterfactual pair and metric [23], while multi-component effects need not add when patched and unpatched routes interact [17]. We therefore treat K/V replacement as evidence for an active pathway, not a complete circuit decomposition.

3 Stage 1: Patching the Donor’s Predicted Future into the Recipient Run

Stage 1 characterizes how specific content at future-token positions redirects the action, distinguishing directional content use from a future that merely accompanies the action.

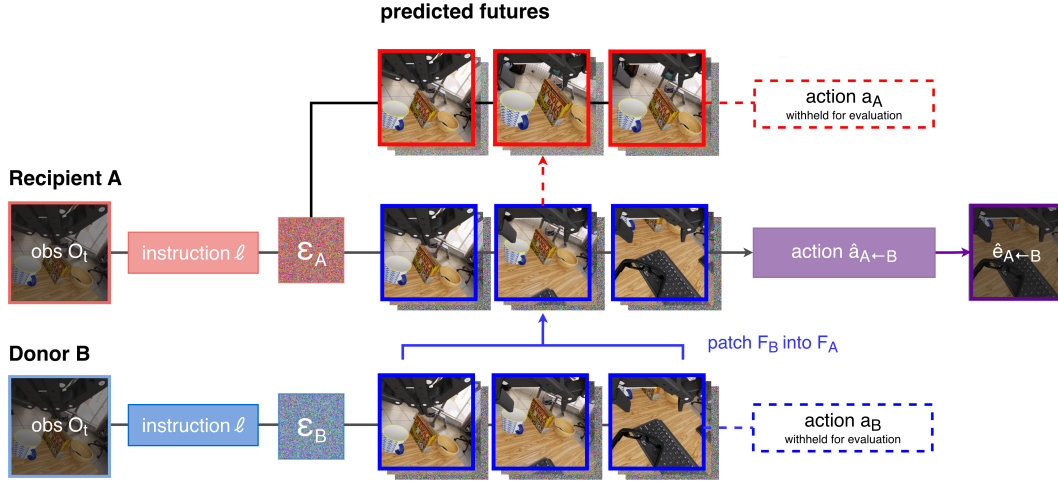


Figure 1: Stage-1 intervention. Recipient A (red) and donor B (blue) are normal rollouts from the same saved state. We insert donor B’s future representation F_B into recipient A at every denoising step and recompute $\hat{a}_{A \leftarrow B}$; executing it yields $\hat{e}_{A \leftarrow B}$. The original actions a_A and a_B are withheld and used only to evaluate whether the recomputed action moves toward the donor. For Cosmos Policy, F_B is an executed-endpoint encoding; Cosmos 3 also tests a model-predicted latent.

87 The Stage-1 procedure has four steps:

- 88 1. Generate two possibilities. Starting from the same saved simulator state, run the model
89 twice to obtain two different actions and associated future representations. The rollout that
90 will receive the insertion is the *recipient*; the rollout supplying the future representation and
91 reference action is the *donor*.
- 92 2. Insert one future into the other run. Restore the recipient to the same starting state and
93 replace only its future representation with the donor’s.
- 94 3. Recompute the action. Run the recipient again while keeping its observation, instruc-
95 tion, random draws, and solver fixed, without overwriting its action-state coordinates. The
96 model never receives the donor’s action.
- 97 4. Measure the direction of change. After inference, compare the recomputed recipient action
98 with the original recipient and donor actions. Movement toward the donor action shows
99 that the inserted future’s specific content steered behavior.

100 The controls quantify how much of this movement can instead be attributed to recomputation, per-
101 turbation size, or inserting any alternative future target. We next give the formal implementation and
102 then report the behavioral, content, and scope results.

103 3.1.1 Formal recipient–donor design and outcome

104 Let saved simulator state S admit two unmodified rollouts: recipient R and donor D , with future rep-
105 resentations F_R, F_D , action chunks a_R, a_D , and endpoints e_R, e_D obtained by executing one action
106 chunk. The recipient is the rollout whose action is recomputed; the donor supplies the alternative
107 future and defines the scoring direction. We recompute R from the identical state while retaining its
108 observation, instruction, action noise, future-noise path, solver, and denoising schedule, and replace
109 only F_R with F_D . For Cosmos Policy, we also test the reciprocal intervention, so each rollout serves
110 once in each role.

111 For an action or endpoint $x \in \{a, e\}$, normalized donor projection is

$$\pi_x(\hat{x}; R, D) = \frac{(\hat{x} - x_R)^\top (x_D - x_R)}{\|x_D - x_R\|_2^2}. \quad (1)$$

112 The recipient is 0, the donor is 1, and 0.5 is halfway between them along the donor direction; negative
 113 values move away and values above 1 overshoot. Because the dot product retains only this signed
 114 direction, a large change perpendicular to the donor receives little projection. The primary steering
 115 contrast subtracts the model-specific self reference:

$$\Delta_x = \pi_x(\hat{\mathbf{x}}_{\text{donor}}; R, D) - \pi_x(\hat{\mathbf{x}}_{\text{self}}; R, D). \quad (2)$$

116 The self reference is model-specific: Cosmos Policy reinserts the recipient target through the same
 117 intervention machinery, whereas the primary Cosmos 3 self reference is an exact native recompu-
 118 tation; Appendix A.5 reports the mechanics-matched Cosmos 3 self-clamp diagnostic. Pairs are
 119 selected using native action and endpoint separation, never intervention outcomes. Every endpoint
 120 arm is executed after restoring the exact simulator state.

121 3.1.2 How the donor’s predicted future is inserted into the recipient run

122 In both models, we overwrite only the recipient’s future-slot coordinates with the donor target at
 123 every denoising step; the recipient observation, instruction, random draws, solver schedule, and
 124 action coordinates are not overwritten. For Cosmos Policy, the target is a clean tokenizer encoding
 125 of the proprioception and two camera views at the endpoint of the donor’s executed continuation. For
 126 Cosmos 3, we replace the predicted-future video frames before both guidance branches and again at
 127 the sampler boundary, using either the donor’s predicted latent or a video obtained by executing the
 128 donor action. Exact tensor layouts, schedules, and sampler equations are in Appendix A.2.

129 3.1.3 Models, populations, and controls

130 We evaluate `Cosmos-Policy-LIBERO-Predict2-2B` on `LIBERO-Long`: ten tasks at the first
 131 query and after three and six open-loop chunks, for 30 registered states [8, 11]. We also evaluate the
 132 `16B Cosmos3-Nano-Policy-DROID` checkpoint on six RoboLab tasks: 24 state clusters were
 133 frozen without intervention outcomes and 22 completed [14, 15, 19]. Native recipient–donor pairs
 134 are chosen for action and executed-endpoint separation before intervention. Cosmos Policy averages
 135 reciprocal directions and repeated noise draws within state; Cosmos 3 uses one frozen orientation
 136 and recipient diffusion path per state.

137 Controls include the model-specific self reference, norm- and distance-matched Gaussian targets,
 138 prespecified natural alternatives, within-task shuffled future targets, and bitwise no-op checks. These
 139 distinguish recomputation, perturbation magnitude, effects of inserting any valid alternative, and
 140 pair-specific content. Executed-video conditions additionally measure how much steering survives
 141 when the donor source is physically realized. Full checkpoint, sampling, selection, restoration, and
 142 control specifications are in Appendix A.1–A.5.

143 3.1.4 Content interventions

144 We isolate content in complementary ways. In Cosmos Policy, first-query interventions separately re-
 145 place the wrist-camera, primary-camera, or proprioceptive component of the future target. A second
 146 study crosses binary robot and object states in re-rendered videos at 20 held-out states. A decoder
 147 measures how reliably the intended cell remains visible. A natural-pair screen separately searches
 148 future representations for robot-divergent/object-matched and object-divergent/robot-matched pairs;
 149 only four states meet its criteria, below the planned minimum of ten.

150 For Cosmos 3, a separately frozen factor study selected 12 population states round-robin by native
 151 object-position separation. Ten completed across all six tasks. Starting from the recipient video, an
 152 object-priority disjoint mask copies donor object pixels, donor robot pixels outside the object mask,
 153 both, or neither. This 2×2 design tests isolated pixel factors; it does not guarantee an in-distribution
 154 video or isolate a latent semantic variable.

155 Stage-1 statistical procedures, including independent-unit aggregation, bootstrap intervals, multi-
 156 plicity correction, and the prespecified smallest effect of interest, are detailed in Appendix A.6.

Table 1: Stage-1 projections split by model. Zero denotes the model-specific self reference and one the paired donor. Bold marks the largest estimate within each source–outcome block. Controls are reconstructed within independent unit; Cosmos 3 endpoint controls are secondary.

(a) Cosmos 3			(b) Cosmos Policy		
Source/outcome	Future target	Projection [95% CI]	Outcome	Future target	Projection [95% CI]
Pred. action	Self	0.000 (ref.)	Action	Self	0.000 (ref.)
	Natural	0.559 [0.465, 0.651]		Gaussian	0.001 [−0.004, 0.006]
	Paired donor	0.992 [0.972, 1.010]		Natural	0.395 [0.269, 0.553]
Exec. action	Self	0.000 (ref.)		Shuffled	0.244 [0.152, 0.347]
	Gaussian	0.041 [0.003, 0.076]	Paired donor 0.499 [0.336, 0.679]		
	Natural	0.591 [0.491, 0.687]	Endpoint	Self	0.000 (ref.)
	Paired donor	0.983 [0.890, 1.064]		Gaussian	0.003 [−0.003, 0.008]
Exec. endpoint	Self	0.000 (ref.)		Natural	0.442 [0.311, 0.598]
	Gaussian	−0.041 [−0.168, 0.054]		Shuffled	0.275 [0.185, 0.375]
	Natural	0.514 [0.387, 0.642]		Paired donor	0.552 [0.387, 0.728]
	Paired donor	1.003 [0.950, 1.050]			

3.2 Results

3.2.1 How strongly does coherent future content steer behavior?

The method succeeds if three things happen: inserting the donor future moves behavior toward that donor, the shift survives simulator execution, and the paired donor outperforms non-donor controls. Table 1 puts the method and every applicable control on one scale, organized by model, future source, and outcome. Appendix Figure 3 separates the two statistical questions. Panel a reports donor-minus-self steering, for which positive values indicate movement toward the paired donor and 1 denotes the full native recipient-to-donor displacement. Panel b reports donor-minus-control contrasts, for which positive values mean that the paired donor steers behavior more strongly than the stated control.

Cosmos 3. Across 22 completed states and all six tasks, the paired donor’s predicted future produces action steering of 0.992 ([0.972, 1.010]; 22/22 states positive), compared with 0.559 for the naturally predicted alternative (Table 1). Executed paired-donor videos produce action steering of 0.983, compared with 0.591 for the natural control and 0.041 for the geometry-matched Gaussian control. Executing the paired-donor-conditioned action yields endpoint steering of 1.003 ([0.950, 1.050]; 22/22). The corresponding endpoint projections are 0.514 ([0.387, 0.642]) for the natural control and −0.041 ([−0.168, 0.054]) for the matched Gaussian. In paired secondary analyses, the donor therefore exceeds the natural endpoint control by 0.488 ([0.348, 0.631]; 21/22 states positive) and the Gaussian endpoint control by 1.043 ([0.946, 1.168]; 22/22). Thus, the result is not explained by recomputation, an equally large unstructured displacement, or merely supplying a different valid prediction. Endpoint projection shows that the donor-directed component survives simulator execution; it does not imply equality of the full endpoint vectors. Task-balanced analyses preserve these conclusions.

Cosmos Policy. At the first query, the paired donor produces action steering of 0.499 and endpoint steering of 0.552, positive in all ten tasks (Table 1). The natural control reaches 0.395 and 0.442, respectively, while the shuffled control reaches 0.244 and 0.275 and the matched Gaussian remains near zero. The natural alternative is the hardest control: the paired donor exceeds it by 0.103 ([0.048, 0.161]; 8/10) for actions and 0.110 ([0.054, 0.166]; 8/10) for endpoints. This rules out the weak explanation that any different tokenizer-consistent future target causes the same movement. Appendix Figure 7 examines how this effect varies across state cohorts and future components.

No Cosmos Policy branch pair retained a stable success/failure label across continuation seeds; an analogous multi-seed screen was not completed for Cosmos 3. We therefore interpret these results as donor-directed changes in action and one-chunk endpoint, not changes in closed-loop task completion.

3.2.2 What future content causes steering?

The content associated with steering differs across checkpoints. Cosmos Policy’s early-state effect is wrist-camera dominated and consistent with camera-visible robot motion, whereas neither isolated pixel factor recreates Cosmos 3’s full-video effect.

Cosmos Policy. Action steering from the wrist-camera component of the future target is 0.435 ([0.284, 0.605]), compared with 0.101 ([0.057, 0.144]) for the primary-camera component and 0.001 ([−0.004, 0.008]) for future proprioception (Table 2; Appendix Figure 7b). In the 20-state 2×2 study, decoded future targets identify the intended cell with 92.5% primary-camera and 98.75% wrist-camera accuracy. The intended object manipulation is therefore visible in the rendered targets, yet the object-state main effect is 0.00015 ([−0.00012, 0.00049]) for action and 0.00018 ([−0.00040, 0.00102]) for the executed goal-state endpoint (Table 2). Four exploratory natural pairs provide a complementary comparison: robot-motion targets yield action steering of 0.291 ([0.060, 0.521]) and robot-endpoint steering of 0.315 ([0.059, 0.571]), whereas the object-only effects are 0.021 for both action and goal endpoint, with intervals crossing zero. At these sampled early states, the pattern is most consistent with an inverse-dynamics-like role for camera-visible robot motion. It does not show that Cosmos Policy generally ignores object consequences.

Table 2: Cosmos Policy content interventions with complete population estimates. Component effects use ten first-query LIBERO-Long tasks; rendered object-state effects use 20 held-out states. Entries are means with 95% bootstrap intervals.

Intervention or contrast	Independent units	Outcome	Effect [95% CI]
Wrist-camera component	10 tasks	Action	0.435 [0.284, 0.605]
Primary-camera component	10 tasks	Action	0.101 [0.057, 0.144]
Predicted future proprioception	10 tasks	Action	0.001 [−0.004, 0.008]
Rendered object-state main effect	20 states	Action	0.00015 [−0.00012, 0.00049]
Rendered object-state main effect	20 states	Executed endpoint	0.00018 [−0.00040, 0.00102]

Cosmos 3. Across ten factor-study states and all six tasks, every isolated-factor interval lies inside the prespecified [−0.10, 0.10] equivalence region (Table 3; Appendix Figure 4). Steering from the full executed donor video is 0.9876 for actions and 0.9292 for executed endpoints, whereas robot-pixel main effects are 0.0022 and 0.0102, and object-pixel main effects are 0.0061 and −0.0001. Neither isolated factor therefore recreates a meaningful fraction of the full-video effect. Appendix Figure 4 shows the four cells and state-level variation in the 2×2 hybrid intervention. The useful signal may be distributed across the image, require robot–object coherence, depend on camera or temporal structure, or interact nonlinearly with masking and tokenization. Hybrid videos may also be off distribution. The experiment establishes insufficiency of each isolated pixel factor, not irrelevance of robot or object information and not joint necessity.

Table 3: Cosmos 3 content interventions across 10 states from six tasks. Entries are mean effects with 95% state-bootstrap intervals; 0 denotes recipient-like behavior and 1 the full recipient-to-donor displacement. The full-video row reports executed-donor-video minus executed-self steering. Robot- and object-pixel rows report factorial main effects averaged over the other pixel factor. Robot and object masks are disjoint; the prespecified practical-equivalence region is [−0.10, 0.10].

Intervention or contrast	Action effect [95% CI]	Endpoint effect [95% CI]
Full executed donor video (benchmark)	0.9876 [0.8204, 1.1207]	0.9292 [0.8542, 0.9919]
Robot-pixel main effect	0.0022 [−0.0016, 0.0060]	0.0102 [−0.0067, 0.0275]
Object-pixel main effect	0.0061 [0.0009, 0.0119]	−0.0001 [−0.0254, 0.0239]

3.2.3 Where is the Cosmos Policy effect concentrated?

Figure 7 (Appendix B.5) summarizes three scope checks. Steering is strong at the first query but near zero at separately sampled states after three or six open-loop chunks; because these are different physical states, this is state dependence rather than causal temporal decay. The first-query effect is concentrated in the wrist-camera component of the future target (0.435), with smaller primary-camera steering (0.101) and no measurable proprioceptive steering (0.001). The paired donor also

retains its largest advantage over self and Gaussian controls and a smaller but positive advantage over natural and shuffled targets. Thus, the Cosmos Policy result is localized to early visual components of the future representation rather than a generic response to any replacement.

4 Stage 2: K/V Pathway Patching

Stage 1 measures how inserting a different predicted future redirects behavior. Stage 2 traces how information from that inserted predicted future reaches the action. It is a separate, nested experiment: the donor’s predicted future remains inserted while one internal attention route is changed.

4.1 Method

An attention layer can be understood as a lookup. An action token produces a *query*; comparing that query with each token’s *key* determines how strongly the action attends to that token. The token’s *value* is the information then mixed into the action representation. Keys and values at predicted-future token positions therefore determine both which predicted-future information the action reads and what information it receives.

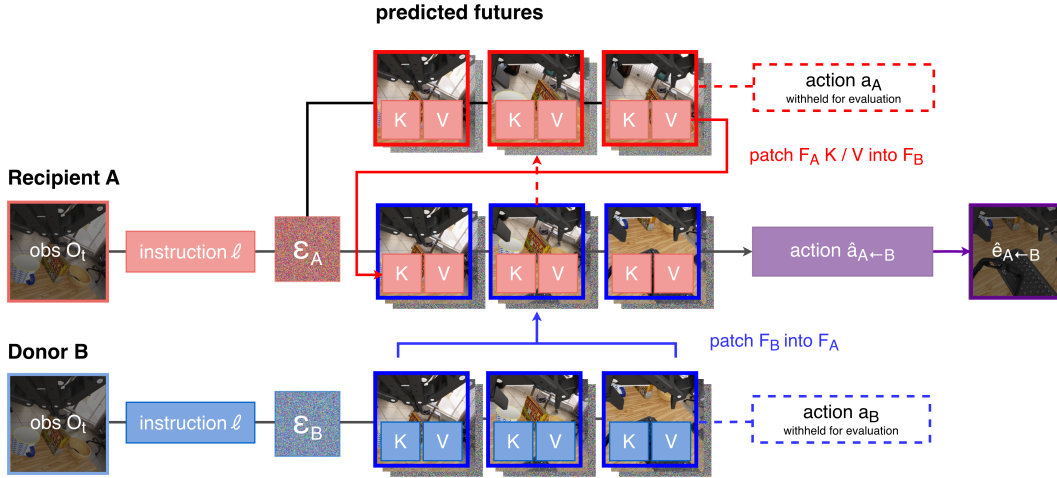


Figure 2: Stage-2 pathway intervention. We keep donor B’s predicted future F_B inserted into recipient A, but replace only its keys and values at predicted-future token positions with the K/V states recorded from A’s original predicted future F_A . We then recompute the recipient action and endpoint. The original actions remain withheld and are used only for evaluation. This schematic illustrates the Cosmos 3 population intervention.

The Stage-2 procedure has five steps:

1. Save the recipient’s predicted-future pathway. Run the recipient with its own predicted future and record the keys and values at predicted-future token positions.
2. Reproduce the Stage-1 effect. Insert the donor’s predicted future into the recipient and verify that the recomputed action moves toward the donor action. This is the unpatched donor-predicted-future run.
3. Replace only K/V. Keep the donor’s predicted future inserted, but replace its keys and values at predicted-future token positions with the states saved using the recipient’s own predicted future.
4. Recompute with everything else unchanged. Preserve the observation, instruction, noise, token positions, and all non-targeted states, then recompute the action.
5. Measure how much steering disappears. Subtract the patched donor steering from the unpatched donor steering. We call this decrease *K/V replacement loss*. A large loss means

249 that the replaced predicted-future K/V route carried much of the donor-specific influence;
250 residual steering may use other or interacting routes.

251 4.1.1 Cosmos Policy: removing keys at predicted-future positions

252 Action queries can attend to keys at predicted-future positions. We continuously gate these keys at
253 prespecified block 27, with exact all-key recomputation, equal-count random-key and current-key
254 controls, and a block-0 control. This removal changes attention normalization, so it measures the
255 contribution of a late edge from predicted-future positions to the action, not the information carried
256 by a token-count-preserving route.

257 4.1.2 Cosmos 3: K/V replacement at predicted-future token positions

258 For Cosmos 3, the cache from the recipient’s predicted-future run records keys and values at
259 predicted-future video positions in all 36 layers and all eight model forwards. During the run with
260 the donor’s predicted future, replacement is replayed call by call at every layer, and only the action-
261 query rows are recomputed. Text, current-video and action K/V, token count and order, observation,
262 instruction, noise, and all other query outputs remain native to the run with the donor’s predicted
263 future. The intervention therefore makes the direct K/V route from predicted-future positions to
264 the action recipient-like while leaving the donor’s predicted future present. Exact cache alignment
265 and the separate layer-16 calibration are detailed in Appendix A.3. This is an operational pathway
266 intervention, not a complete circuit decomposition.

267 Stage-2 statistical procedures and their relationship to Stage 1 are detailed in Appendix A.7.

268 4.2 Results

269 Attention to predicted-future tokens provides an active route from predicted futures to action.
270 Population-level K/V replacement in Cosmos 3 gives the stronger of the two pathway tests.

271 4.2.1 Cosmos Policy

272 Removing keys at predicted-future positions in block 27 produces a monotonic action-disruption
273 curve: normalized L_2 change is 0.022, 0.035, 0.054, and 0.068 at gates 0.25, 0.50, 0.75, and 1.00.
274 All-key recomputation is bitwise exact. Full removal is 0.016 more disruptive than equal-count
275 random-key removal and 0.048 more disruptive than removing predicted-future-position keys at
276 block 0; equal-count current-key removal is 0.024 larger. Executed-endpoint disruption is 0.281
277 ([0.164, 0.430]; 10/10 states), exceeding random-key removal by 0.169 ([0.058, 0.322]; 9/10). The
278 late edge from predicted-future positions to the action is active, but it is neither the only nor the
279 largest route through the block.

280 4.2.2 Cosmos 3

281 The interface was selected on excluded calibration tasks and frozen before population testing. The
282 results follow the logic of the intervention directly (Table 4; Appendix Figure 9). For predicted ac-
283 tions, mean donor steering falls from 0.992 before patching to 0.115 after replacing K/V at predicted-
284 future token positions, a loss of 0.877, or 88%. Executed-action steering falls from 0.983 to 0.169,
285 a loss of 0.814, or 83%. Executed-endpoint steering falls from 1.003 to 0.152, a loss of 0.851, or
286 85%. The loss is positive in all 22 states. Because the donor’s predicted future remains inserted
287 while token count, attention positions, and all non-targeted states remain fixed, this drop shows that
288 donor-specific information travels through the predicted-future K/V interface. The nonzero residu-
289 als show that this interface carries most, but not all, of the effect. Task-balanced loss estimates are
290 0.877, 0.812, and 0.853; all prespecified primary sign tests remain significant after Holm correction.

291 4.3 Interpretation

292 Stage 2 localizes part of the Stage-1 behavioral effect without redefining the recipient–donor inter-
293 vention. In Cosmos 3, K/V at predicted-future token positions carries most of the donor-directed
294 shift, while the residual effect leaves room for additional or interacting routes. Cosmos Policy pro-
295 vides weaker but convergent evidence for an active late edge from predicted-future positions to the

Table 4: K/V pathway test across 22 states from six tasks. Replacement loss is the decrease in donor steering after predicted-future token positions supply K/V recorded using the recipient’s own predicted future; intervals are 95% state-bootstrap intervals.

Outcome	Donor steering	Replacement loss [95% CI]	Relative reduction
Predicted action	0.992	0.877 [0.842, 0.910]	88%
Executed action	0.983	0.814 [0.723, 0.900]	83%
Executed endpoint	1.003	0.851 [0.766, 0.922]	85%

action. These results identify an influential pathway; they do not recover a complete circuit, exclude interactions with unpatched components, or establish planning.

5 Discussion and Limitations

Across both WAM generations, replacing the recipient’s future-slot representation with a coherent donor target predicts the direction of the resulting action and simulator endpoint. RIFT established dependence on an organized predicted-future interface; our result adds content-specific sufficiency by using a coherent alternative to predict the sign of behavioral change. The checkpoints nevertheless show different response profiles: Cosmos Policy’s early-state pattern is consistent with inverse dynamics from visible robot motion, whereas Cosmos 3’s full-future effect is not recreated by isolated robot or object pixels. Its useful signal may be distributed, contextual, or nonlinear. Pathway tests further locate an active late edge in Cosmos Policy and show that K/V at predicted-future token positions carries most of Cosmos 3’s donor-directed shift.

This evidence is narrower than planning, which would require generating alternatives, predicting their outcomes, comparing them using a goal or value, and selecting accordingly. We do not test that sequence, and the experiments do not establish stable success/failure mediation. Here, the intervention target is content placed at future-token positions: Cosmos Policy uses an executed-endpoint encoding, whereas Cosmos 3 also tests model-predicted latents. These direct policies can condition action on coherent future content without planning over consequences.

Limitations. All interventions are in simulation and cover two checkpoints, six RoboLab tasks, and LIBERO-Long. Cosmos Policy’s strongest result uses one first-query state per task; later estimates use different states, its natural content analysis has only four states, and rendered hybrids may be off distribution. Cosmos 3 completed 22 of 24 frozen population states and 10 of 12 factor states. Pixel masks may miss distributed features, key removal changes attention normalization, and K/V replacement can interact with unpatched routes. We neither demonstrate task-success mediation nor recover a full circuit.

Broader impact. Mechanistic tests can distinguish plausible predictions from representations that control behavior, but the same interfaces could redirect actions or create false confidence on narrow state distributions. Use beyond simulation requires broader coverage, physical safety constraints, and monitoring outside the intervention metric.

6 Conclusion

Inserting one normal rollout’s future representation into another turns future use into a directional causal test. Cosmos 3 actions and executed endpoints move almost completely toward the inserted future across 22 states and six tasks, and replacing K/V at predicted-future video positions removes 83–88% of that steering. Cosmos Policy shows a smaller early-state effect that survives execution and exceeds natural, shuffled, and geometry-matched controls. Together, these results show that content at future-token positions is not merely correlated with action: it can help determine what the policy does, through an identifiable but incomplete internal route.

The next step is to move from causal conditioning to consequence-sensitive choice. Experiments should hold predicted robot motion fixed while varying task outcomes, quantify how goal or value representations mediate the response, and measure closed-loop success rather than one-chunk endpoints. Finer head- and layer-level patching can resolve the residual Cosmos 3 pathway, while

broader checkpoints, tasks, and physical robots can test generality. That progression would separate inverse-dynamics-like use of a predicted future from genuine comparison among predicted futures—the missing evidence needed to turn a claim about predicted-future-conditioned action into a claim about planning.

References

- [1] Yilun Du, Sherry Yang, Bo Dai, Hanjun Dai, Ofir Nachum, Joshua B. Tenenbaum, Dale Schuurmans, and Pieter Abbeel. Learning universal policies via text-guided video generation. In *Advances in Neural Information Processing Systems*, volume 36, 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/1d5b9233ad716a43be5c0d3023cb82d0-Abstract.html.
- [2] Yilun Du, Sherry Yang, Pete Florence, Fei Xia, Ayzaan Wahid, Brian Ichter, Pierre Sermanet, Tianhe Yu, Pieter Abbeel, Joshua B. Tenenbaum, Leslie Kaelbling, Andy Zeng, and Jonathan Tompson. Video language planning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=9pKtcJcMP3>.
- [3] Frederik Ebert, Chelsea Finn, Sudeep Dasari, Annie Xie, Alex Lee, and Sergey Levine. Visual foresight: Model-based deep reinforcement learning for vision-based robotic control. *arXiv preprint arXiv:1812.00568*, 2018. URL <https://arxiv.org/abs/1812.00568>.
- [4] C. A. Field and A. H. Welsh. Bootstrapping clustered data. *Journal of the Royal Statistical Society: Series B*, 69(3):369–390, 2007. doi: 10.1111/j.1467-9868.2007.00593.x.
- [5] Nicholas Goldowsky-Dill, Chris MacLeod, Lucas Sato, and Aryaman Arora. Localizing model behavior with path patching, 2023. URL <https://arxiv.org/abs/2304.05969>. arXiv preprint, version 2.
- [6] Yanjiang Guo, Yucheng Hu, Jianke Zhang, Yen-Jen Wang, Xiaoyu Chen, Chaochao Lu, and Jianyu Chen. Prediction with action: Visual policy learning via joint denoising process. In *Advances in Neural Information Processing Systems*, volume 37, pages 112386–112410. Curran Associates, Inc., 2024. doi: 10.52202/079017-3570. URL https://proceedings.neurips.cc/paper_files/paper/2024/hash/cbe25fa0e7c7084049276888a09acc8d-Abstract-Conference.html.
- [7] Yucheng Hu, Yanjiang Guo, Pengchao Wang, Xiaoyu Chen, Yen-Jen Wang, Jianke Zhang, Koushil Sreenath, Chaochao Lu, and Jianyu Chen. Video prediction policy: A generalist robot policy with predictive visual representations. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 24328–24346. PMLR, 2025. URL <https://proceedings.mlr.press/v267/hu25g.html>.
- [8] Moo Jin Kim, Yihuai Gao, Tsung-Yi Lin, Yen-Chen Lin, Yunhao Ge, Grace Lam, Percy Liang, Shuran Song, Ming-Yu Liu, Chelsea Finn, and Jinwei Gu. Cosmos Policy: Fine-tuning video models for visuo-motor control and planning. In *The Fourteenth International Conference on Learning Representations*, 2026. URL <https://openreview.net/forum?id=wPEIStHxYH>.
- [9] Daniël Lakens. Equivalence tests: A practical primer for t tests, correlations, and meta-analyses. *Social Psychological and Personality Science*, 8(4):355–362, 2017. doi: 10.1177/1948550617697177.
- [10] Shuang Li, Yihuai Gao, Dorsa Sadigh, and Shuran Song. Unified video action model, 2025. URL <https://arxiv.org/abs/2503.00200>. arXiv preprint, version 3.
- [11] Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. LIBERO: Benchmarking knowledge transfer for lifelong robot learning. In *Advances in Neural Information Processing Systems*, volume 36, pages 44776–44791. Curran Associates, Inc., 2023. doi: 10.52202/075280-1939. URL https://proceedings.neurips.cc/paper_files/paper/2023/hash/8c3c666820ea055a77726d66fc7d447f-Abstract-Datasets_and_Benchmarks.html.
- [12] Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in GPT. In *Advances in Neural Information Processing Systems*, volume 35, pages 17359–17372. Curran Associates, Inc., 2022. doi: 10.52202/068431-1262. URL https://proceedings.neurips.cc/paper_files/paper/2022/hash/6f1d43d5a82a37e89b0665b33bf3a182-Abstract-Conference.html.

- [13] Soroush Nasiriany, Abhiram Maddukuri, Lance Zhang, Adeet Parikh, Aaron Lo, Abhishek Joshi, Ajay Mandelkar, and Yuke Zhu. RoboCasa: Large-scale simulation of household tasks for generalist robots. In *Proceedings of Robotics: Science and Systems*, Delft, Netherlands, July 2024. doi: 10.15607/RSS.2024.XX.050. URL <https://www.roboticsproceedings.org/rss20/p050.html>.
- [14] NVIDIA. Cosmos 3: Omnimodal world models for physical AI. *arXiv preprint arXiv:2606.02800*, 2026. doi: 10.48550/arXiv.2606.02800. URL <https://research.nvidia.com/labs/cosmos-lab/cosmos3/technical-report.pdf>.
- [15] NVIDIA. Cosmos3-nano-policy-droid. Hugging Face model checkpoint and configuration, 2026. URL <https://huggingface.co/nvidia/Cosmos3-Nano-Policy-DROID>. Checkpoint revision 2b9f9517.
- [16] Lu Qiu, Yizhuo Li, Yi Chen, Yuying Ge, Yixiao Ge, and Xihui Liu. Making foresight actionable: Repurposing representation alignment in world action models, 2026. URL <https://arxiv.org/abs/2606.12217>. arXiv preprint.
- [17] Sankaran Vaidyanathan, David Arbour, Aaron Mueller, Scott Niekum, and David Jensen. The curse of multiple mediators: Hidden interaction effects in activation patching, 2026. URL <https://arxiv.org/abs/2606.27510>. arXiv preprint.
- [18] Jesse Vig, Sebastian Gehrmann, Yonatan Belinkov, Sharon Qian, Daniel Nevo, Yaron Singer, and Stuart Shieber. Investigating gender bias in language models using causal mediation analysis. In *Advances in Neural Information Processing Systems*, volume 33, pages 12388–12401. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/hash/92650b2e92217715fe312e6fa7b90d82-Abstract.html>.
- [19] Xuning Yang, Rishit Dagli, Alex Zook, Hugo Hadfield, Ankit Goyal, Stan Birchfield, Fabio Ramos, and Jonathan Tremblay. RoboLab: A high-fidelity simulation benchmark for analysis of task generalist policies. In *Proceedings of Robotics: Science and Systems*, Sydney, Australia, July 2026. doi: 10.15607/RSS.2026.XXII.096. URL <https://roboticsproceedings.org/rss22/p096.html>.
- [20] Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, Ayaan Malik, Kyungmin Lee, William Liang, Nadun Ranawaka, Jiasheng Gu, Yinzhen Xu, Guanzhi Wang, Fengyuan Hu, Avnish Narayan, Johan Bjorck, Jing Wang, Gwanghyun Kim, Dantong Niu, Ruijie Zheng, Yuqi Xie, Jimmy Wu, Qi Wang, Ryan Julian, Danfei Xu, Yilun Du, Yevgen Chebotar, Scott Reed, Jan Kautz, Yuke Zhu, Linxi “Jim” Fan, and Joel Jang. World action models are zero-shot policies, 2026. URL <https://arxiv.org/abs/2602.15922>. arXiv preprint.
- [21] Tianyuan Yuan, Zibin Dong, Yicheng Liu, and Hang Zhao. Fast-WAM: Do world action models need test-time future imagination?, 2026. URL <https://arxiv.org/abs/2603.16666>. arXiv preprint, version 2.
- [22] Chushan Zhang, Jinguang Tong, Xuesong Li, Yikai Wang, and Hongdong Li. Keep the future, drop the rollout: RIFT for world action models, 2026. URL <https://arxiv.org/abs/2608.11521>. arXiv preprint, version 2.
- [23] Fred Zhang and Neel Nanda. Towards best practices of activation patching in language models: Metrics and methods. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=Hf17y6u9BC>.
- [24] Weiheng Zhao, Haoyi Jiang, Xin Shi, Liu Liu, Fan Huang, Zhizhong Su, Wei Sui, and Xinggang Wang. Faster-WAM: Efficient inference-time future conditioning for robust world action models, 2026. URL <https://arxiv.org/abs/2608.04404>. arXiv preprint.

432 A Reproducibility and Protocol Details

433 A.1 Experimental settings and frozen designs

434 The Cosmos Policy experiments use the public Cosmos-Policy-LIBERO-Predict2-2B
 435 checkpoint, LIBERO-Long, PyTorch 2.7 with CUDA 12.8, and two NVIDIA H100 80GB GPUs.
 436 The frozen design contains ten tasks, three state indices, eight native policy runs per state, one
 437 reciprocal donor pair per state, and three predicted-future noise draws per direction. The observation

prefix, instruction, recipient action noise, predicted-future noise schedule, tokenizer settings, and denoising schedule are held fixed within an intervention comparison.

The Cosmos 3 experiments use the public 16B `Cosmos3-Nano-Policy-DROID` checkpoint with the released Cosmos, Cosmos Framework, and RoboLab evaluation stack. The frozen population screen selected 24 state clusters across six eligible tasks, capped at four clusters per task, using only native success, donor separation, and replay-validity information. Twenty-two clusters completed. The separate robot/object factor study selected 12 clusters by native object-position separation and completed its prespecified minimum of ten across all six tasks.

A.2 How the donor’s predicted future is inserted into the recipient run

Cosmos Policy. The donor target is a clean latent encoded with the public tokenizer from the RGB and proprioceptive endpoint reached by a normal 16-action rollout. In the released latent layout, temporal indices 5, 6, and 7 are predicted future proprioception, wrist RGB, and primary RGB. At initialization and at each of the five solver evaluations ($\sigma = 80.0, 42.291, 20.972, 9.618, 4.0$), we replace only these recipient predicted-future coordinates with the donor values. The denoiser input at noise level σ is $F_D + \sigma\epsilon_R$, where ϵ_R is the recipient’s fixed predicted-future noise draw, and the returned clean- x_0 estimate is reset to F_D at the same coordinates. The action and value coordinates are never written. Thus, the donor’s predicted future is reimposed at every solver evaluation rather than inserted once into a noisy state or predicted velocity. The evaluated direct-policy configuration is always conditional (its unconditioned input is `None`), so every solver call uses the wrapped x_0 function.

Cosmos 3. The prepared rectified-flow state is flattened as vision then action: vision has shape `[1, 48, 9, 33, 40]` and action `[33, 64]`. We preserve latent frame 0 and replace predicted-future video frames 1–8 with the donor target throughout denoising. A target F_D is either the final clean video latent from a normal prediction or the public-tokenizer encoding of a 33-frame video produced by executing a normal 32-action rollout. Before both model forwards at each of four UniPC calls, predicted-future vision is set to $(1-\sigma)F_D + \sigma\epsilon_R$. After guidance-3 combines the predicted velocities, we replace only the predicted-future-vision velocity by $(x_\sigma - F_D)/\sigma$, making its clean estimate F_D at the sampler boundary. The recorded sigmas are 0.999, 0.937, 0.833, 0.624. The current-video and action state and action velocity are never changed.

A.3 K/V pathway implementation

The Cosmos 3 run with the recipient’s own predicted future records keys and values at predicted-future video positions separately for all 36 layers and all eight model forwards: four denoising calls, each with conditional and unconditional passes. Cache entries are replayed call by call in the run with the donor’s predicted future, and only action-query rows are recomputed. Query outputs at current-video and predicted-future-video positions remain native; text, current-video, and action K/V are unchanged. A calibration scan on excluded tasks selected layer 16 for single-layer localization, whereas the population estimate replaces all 36 direct K/V interfaces from predicted-future positions to action queries.

A.4 State restoration, execution, and missingness

Each endpoint comparison begins from an identical saved simulator state. Evaluation reconstructs the environment, restores that state, replays the observation prefix, verifies the restored observation, and then executes one recomputed action chunk. Recipient and donor endpoints are produced by the same restoration and execution procedure. This design makes the endpoint projection a comparison between reachable continuations of one physical state rather than between unrelated trajectories.

Two frozen Cosmos 3 population units were unavailable because their registered source branches ended after 21 and 29 actions, before producing the required 32-action, 33-frame intervention source. Neither unit was replaced, and no intervention outcome entered the decision to retain or omit a state. The completed population therefore exceeds the prespecified minimum of 20 states across at least five tasks. The factor study likewise meets its minimum of ten states across at least five tasks.

487 A.5 Intervention validity and controls

488 For Cosmos Policy, the self condition passes the recipient target through the complete interven-
489 tion machinery. For Cosmos 3, the primary self reference is an exact native recomputation. The
490 mechanics-matched clean self-clamp has mean donor projection -0.006 ; donor-minus-self-clamp
491 steering remains 0.999 and is positive in 22/22 states. Identity token-layout capture and K/V
492 record/replay are bitwise exact relative to the same clamped-self trajectory. Sentinels at the sampler
493 boundary confirm that replacing recipient predicted-future coordinates with donor values does not
494 write directly into action coordinates. The pathway experiment at predicted-future token positions
495 preserves token count and order while leaving current-video, language, action, and all non-targeted
496 key/value states unchanged.

497 The geometry-matched Gaussian control has the same norm and recipient distance as the donor
498 displacement but no coherent content. Natural controls are valid unpaired predicted futures selected
499 without intervention outcomes, and shuffled controls use another predicted future from the same
500 task. These comparisons distinguish exact recomputation, perturbation magnitude, effects of generic
501 alternative predicted futures, and pair-specific content. Executed-video conditions add a separate
502 realizability check by encoding frames generated when a native donor action is physically replayed
503 in the simulator.

504 A.6 Stage-1 statistical analysis

505 The independent unit is a restored simulator state, not an individual noise draw or recipient–donor
506 direction. Cosmos Policy reciprocal directions and repeated noise draws are averaged within state;
507 each Cosmos 3 state uses one frozen recipient–donor orientation and recipient diffusion path. Re-
508 ported 95% intervals use 10,000 percentile-bootstrap resamples of states [4]. For the common-scale
509 condition estimates in Table 1, each control’s projection is reconstructed within unit from the regis-
510 tered pairwise contrasts before bootstrapping; these are not differences of aggregate means. Task-
511 balanced sensitivity analyses first average states within task and then resample tasks.

512 We prespecified 0.10 projection units—10% of the native recipient-to-donor displacement—as the
513 smallest effect of interest for the Cosmos Policy confirmatory family and the Cosmos 3 population
514 and factor families [9]. An interval contained within $[-0.10, 0.10]$ supports practical equivalence
515 to zero at that scale. Prespecified primary sign tests use state-level directions and Holm correction
516 within each family.

517 A.7 Stage-2 statistical analysis

518 Stage 2 reuses the Stage-1 independent-unit and bootstrap conventions. For Cosmos 3, replacement
519 loss is formed within restored state by subtracting K/V-patched donor steering from the correspond-
520 ing unpatched donor steering before population aggregation. Task-balanced sensitivity estimates
521 and family-wise Holm correction follow the Stage-1 procedure. The Cosmos Policy key-removal
522 study uses ten first-query states; its endpoint intervals are reported in Appendix B.5.

523 B Additional Experiments and Diagnostics

524 B.1 Stage-1 directional steering

525 Figure 3 displays the Stage-1 estimates at the state or task level. Panel a shows donor-minus-self
526 steering, while panel b shows the paired donor’s advantage over each control. The unit-level markers
527 expose variation that is suppressed by the aggregate estimates in Table 1.

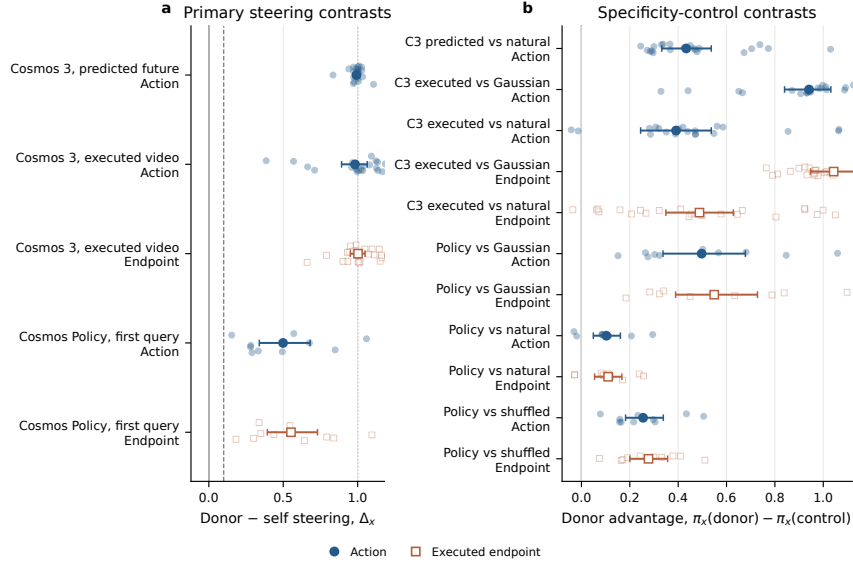


Figure 3: Stage-1 directional steering (a) and donor-minus-control contrasts (b). Small markers are states for Cosmos 3 and tasks for Cosmos Policy; large markers and whiskers are means and 95% bootstrap intervals. Blue denotes actions and orange denotes endpoints.

528 B.2 Cosmos 3 robot/object factorization diagnostic

529 Figure 4 shows the full 2×2 hybrid intervention underlying Table 3. Panels a and b retain the four
 530 pixel-source cells and state-level estimates; panel c places the two factorial main effects beside the
 531 full-predicted-future benchmark.

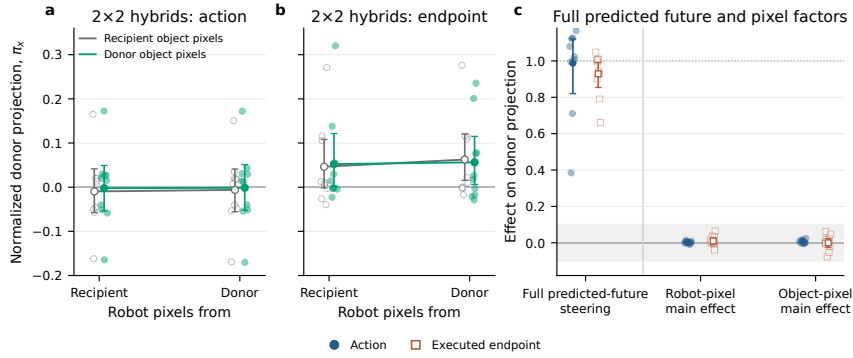


Figure 4: Cosmos 3 robot/object pixel factorization. Panels (a)–(b) show the four hybrid-video cells; panel (c) compares robot/object main effects with the full-predicted-future benchmark. Small markers are states; large markers and whiskers are means and 95% bootstrap intervals.

532 B.3 Condition-level Cosmos 3 projections

533 Figure 5 shows the condition estimates before they are converted into donor-minus-control contrasts.
 534 Recomputation with the recipient’s own predicted future stays at zero, naturally predicted alterna-
 535 tives produce partial donor-directed movement, and paired donors cluster near one. For executed
 536 videos, the matched Gaussian remains near zero while both action and endpoint effects preserve the
 537 same ordering. The state-level display also makes clear that the endpoint conclusion is not produced
 538 by a single task or a single extreme unit.

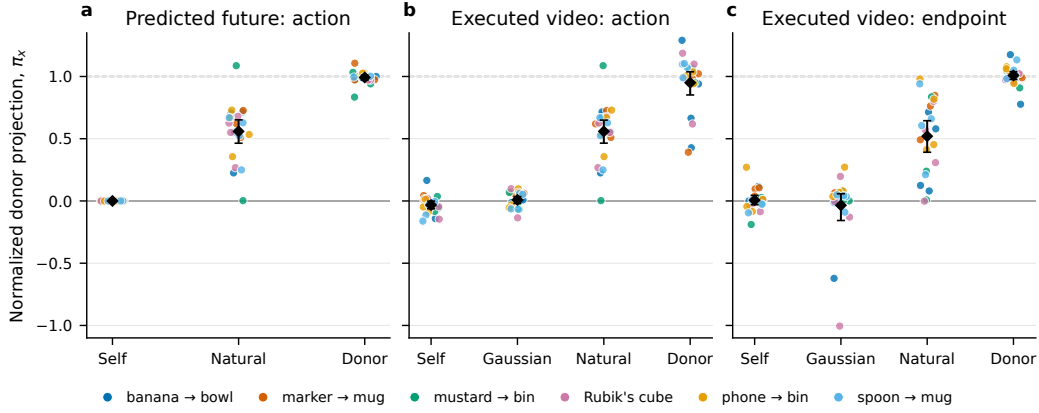


Figure 5: Cosmos 3 condition-level projections across 22 restored states for predicted actions, executed actions, and endpoints. Colors identify tasks; black diamonds and whiskers are means and 95% state-bootstrap intervals.

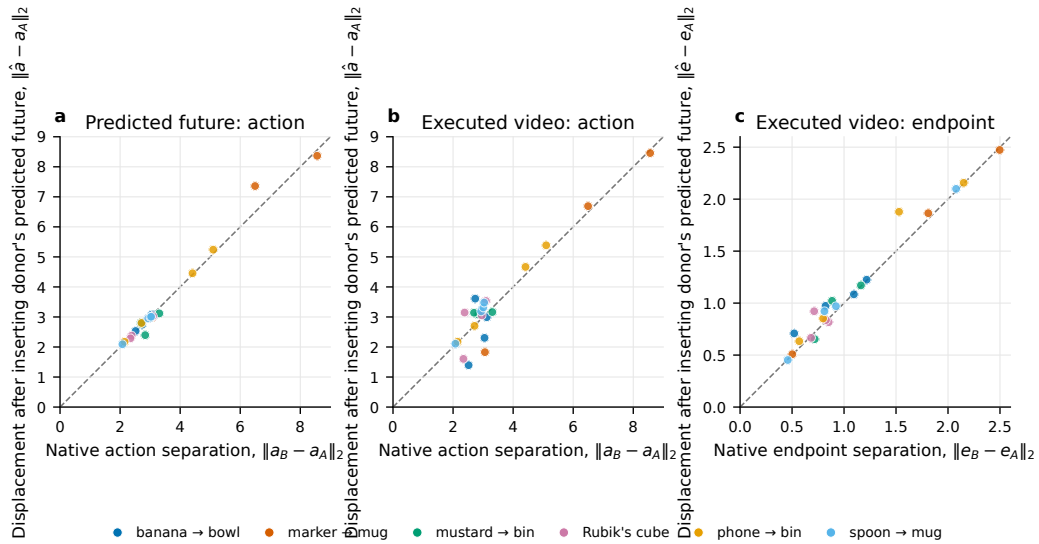


Figure 6: Native recipient-to-donor separation versus predicted-future-insertion displacement for Cosmos 3 predicted actions, executed actions, and endpoints. Dashed lines indicate equality; colors identify tasks.

539 B.4 Displacement-magnitude diagnostic

540 Directional projection could be misleading if a large normalized estimate arose from an extremely
 541 small native denominator or if inserting the donor's predicted future caused only a negligible
 542 displacement. Figure 6 therefore compares unnormalized recipient-to-donor separation with the
 543 displacement caused by replacing the recipient's predicted future with the donor's. Predicted-action and
 544 executed-endpoint displacements lie close to the identity line across the observed range; executed-
 545 action displacement is more variable but remains on the scale of the native difference. This diagnos-
 546 tic supports the interpretation that the intervention recreates a substantial behavioral displacement,
 547 not merely a tiny change that happens to align with the donor axis.

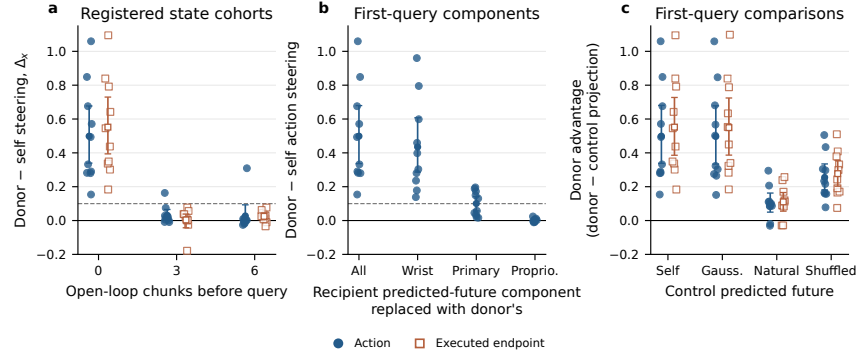


Figure 7: Cosmos Policy scope checks: (a) state cohorts, (b) predicted-future components, and (c) donor-minus-control contrasts. Small markers are tasks; large markers and whiskers are means and 95% task-bootstrap intervals.

B.5 Cosmos Policy timing and cross-domain checks

Across all 30 registered Cosmos Policy states, mean donor-minus-self steering is 0.186 ([0.095, 0.290]) for actions and 0.194 ([0.091, 0.305]) for endpoints. The first-query, after-three-chunk, and after-six-chunk action estimates are 0.499, 0.031, and 0.027; the corresponding endpoint estimates are 0.552, 0.004, and 0.025. Because the three indices represent different physical states that may be nested within task trajectories, the first-query analysis is the cleaner confirmatory result and the differences should not be read as causal temporal decay.

The six-state RoboCasa replication is exploratory and is not pooled with LIBERO [13]. Donor-minus-self action steering is 0.0144 ([0.0034, 0.0276]), but its donor-minus-Gaussian contrast is only 0.0025 and has an interval crossing zero. Endpoint steering is 0.0287 ([0.0101, 0.0492]), positive in 6/6 states; donor-minus-Gaussian endpoint steering is 0.0187 ([0.0063, 0.0329]), also positive in 6/6. The replication therefore supports a small executed-state effect while leaving action-space specificity uncertain.

B.6 Within-task relationships in Cosmos Policy

Figure 8 provides two task-level diagnostics at the first query. Action and executed-endpoint steering generally rise together, supporting the use of simulator execution as a behavioral continuation of the action result. Steering from the wrist-camera component also tracks steering from the full predicted future across tasks, consistent with the aggregate modality decomposition while showing that the wrist view does not reproduce the entire effect uniformly.

B.7 Additional content and pathway checks

The Cosmos Policy rendered 2×2 study supplies a manipulation check for the object-content null. Decoded predicted futures identify the intended hybrid cell with 92.5% accuracy in the primary camera and 98.75% in the wrist camera, while executed endpoints identify the four cells at the 25% chance rate. Thus, the predicted-future representation visibly contains the imposed distinction even though the preregistered object main effect on action and goal-state endpoint is approximately zero. The complementary natural-pair search found only four states with both an object-divergent/robot-matched and a robot-divergent/object-matched donor at a common recipient; these exploratory data favor the robot-motion donor, but the available population is below the planned minimum of ten.

The block-27 Cosmos Policy key-removal analysis includes two additional checks beyond the action-space dose curve reported in the main text. Removing all keys at predicted-future positions changes the executed endpoint by an absolute mean projection of 0.281 ([0.164, 0.430]; 10/10 first-query states) and exceeds equal-count random-key removal by 0.169 ([0.058, 0.322]; 9/10). Its difference from equal-count current-key removal is -0.035 with an interval crossing zero. The endpoint analysis therefore supports an active route from the predicted future at the first query while reinforcing the conclusion that this route is not uniquely dominant over current-state information.

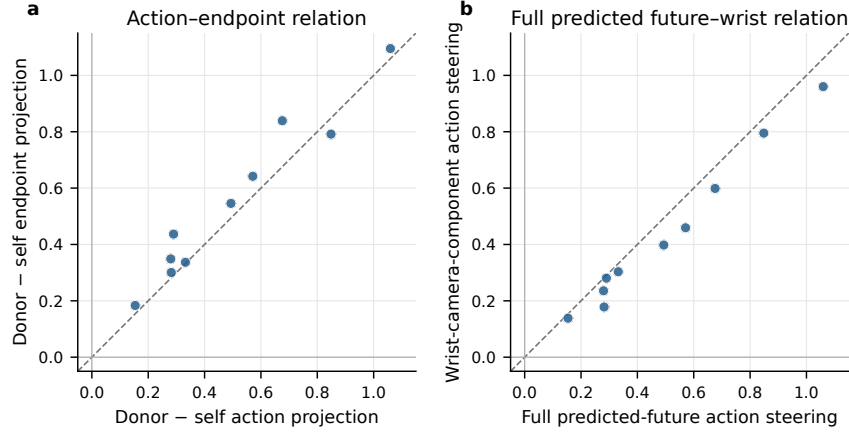


Figure 8: Cosmos Policy task-level relationships at the first query: (a) action versus endpoint steering and (b) full predicted-future versus wrist-camera-component steering. Points are tasks; dashed lines indicate equality.

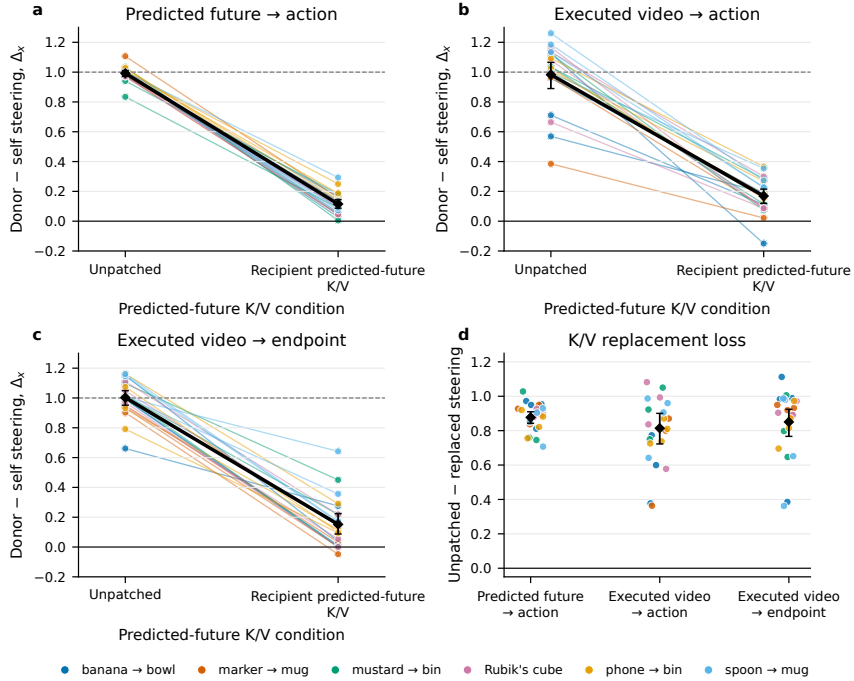


Figure 9: Cosmos 3 donor steering before and after K/V replacement at predicted-future token positions. Lines connect the same state; black diamonds and whiskers are means and 95% state-bootstrap intervals. Panel (d) shows replacement loss.

For Cosmos 3, task-balanced pathway-loss estimates are 0.877 for predicted actions, 0.812 for executed-video actions, and 0.853 for executed endpoints, closely matching the state-weighted estimates. The remaining steering after K/V replacement using the recipient's own predicted future is 0.115, 0.169, and 0.152, respectively. This residual motivates finer-grained tests of parallel attention heads, non-attention routes, and interactions between patched and unpatched components rather than a claim that the selected interface is the complete mechanism.