

Axon Training

Module 8 – Monitoring, Tracing and Advanced Tuning

Agenda

Week 1

1. DDD and CQRS Fundamentals
2. Command Model
3. Event Handling & Projections
4. Sagas and Deadlines

Week 2

1. Snapshotting and Event Processors
2. Preparing for Production
3. CQRS and Distributed Systems
4. **Monitoring, Tracing, Advanced Tuning**

Big Brother is watching you...

Monitoring

Messaging infrastructure

- Message flow provides valuable information about component health
- Cause-and-effect flow gives insight in what's happening

Message Monitors

- Axon infrastructure components allow for MessageMonitors
 - Invoked on ingest and after processing of message
 - Measure throughput, response times, utilization, etc.

Message Monitors - Implementations

- Generic monitors
 - NoOpMessageMonitor
 - MultiMessageMonitor
- Dropwizard Metrics / Micrometer monitors
 - MessageTimerMonitor
 - CapacityMonitor
 - MessageCountingMonitor
 - EventProcessorLatencyMonitor
 - PayloadTypeMessageMonitorWrapper

Configuring Message Monitors

```
// With Axon's Configuration API in place...
Configurer configurer = DefaultConfigurer.defaultConfiguration();

// a registry (micrometer in this sample) can be build
MeterRegistry meterRegistry = ...;

// GlobalMetricRegistry is a quick handle to configure Axon's default set of MessageMonitors
GlobalMetricRegistry metricRegistry = new GlobalMetricRegistry(meterRegistry);

// and by registering it with the Configurer, you are done.
metricRegistry.registerWithConfigurer(configurer);

// For custom MessageMonitors the Configurer should be called
CustomMessageMonitor customMessageMonitor ...
configurer.configureMessageMonitor(CommandBus.class, configuration -> customMessageMonitor);
```

A dependency on
axon-metrics or
axon-micrometer is required

Configuring Message Monitors - Spring

// With Spring Boot, just this dependency is sufficient for the default MessageMonitors

// Maven

```
<dependency>  
  <groupId>org.axonframework</groupId>  
  <artifactId>axon-micrometer</artifactId>  
  <version>{axon-version}</version>  
</dependency>
```

// Gradle

```
implementation 'org.axonframework:axon-micrometer:{axon-version}'
```


Tracking Event Processor Status

Tracking Event Processor status is an important health-indicator as well

- Overall state
 - `isRunning()`
 - `isError()`
- Thread counts
 - `availableProcessorThreads()`
 - `activeProcessorThreads()`


Tracking Event Processor Status

- Status provides information per active segment in a processor
 - `boolean isCaughtUp();`
 - `boolean isReplaying();`
 - `boolean isMerging();`
 - `TrackingToken getTrackingToken();`
 - `OptionalLong getCurrentPosition();`
 - `OptionalLong getResetPosition();`
- Overall state (`getState()`)
 - `NOT_STARTED`
 - `STARTED`
 - `PAUSED / SHUTDOWN`
 - `PAUSED_ERROR`

Correlation Data Providers

- Unit of Work attaches correlation data
 - Based on incoming message
 - Attached to all outgoing messages
- CorrelationDataInterceptor
- CorrelationDataProvider
 - MessageOriginProvider (correlationId, traceId)

MessageOriginProvider – traceId and correlationId

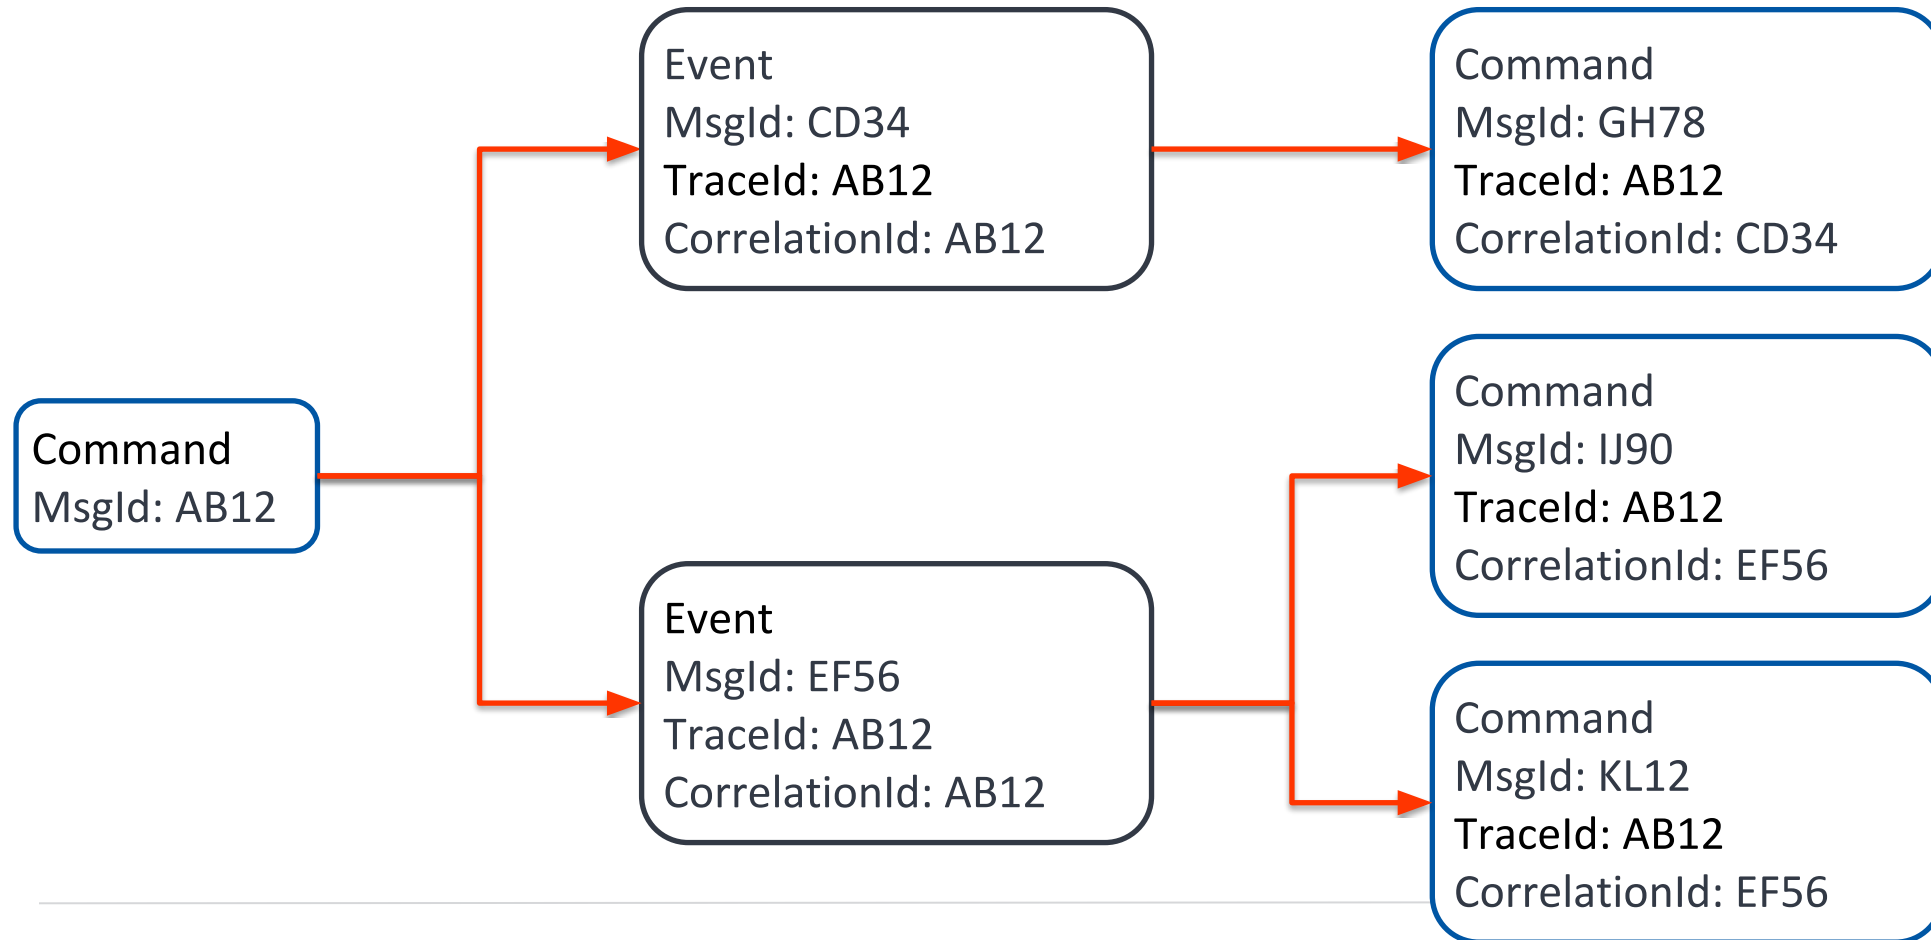

Dropping the breadcrumbs

Tracing


Distributed Tracing

- Tracing is a great tool for additional monitoring
 - Especially in a distributed application
- Several API's out there
 - OpenTracing → opentracing.io
 - OpenCensus → opencensus.io
 - OpenTelemetry (merger of the former two) → opentelemetry.io
- Axon provides the Tracing Extension, based on OpenTracing

Distributed Tracing - Axon

- Tracing Extension exist out of several components:
 - TracingCommandGateway
 - TracingQueryGateway
 - OpenTraceDispatchInterceptor
 - OpenTraceHandlerInterceptor
 - TracingProvider

Distributed Tracing - Sample UI

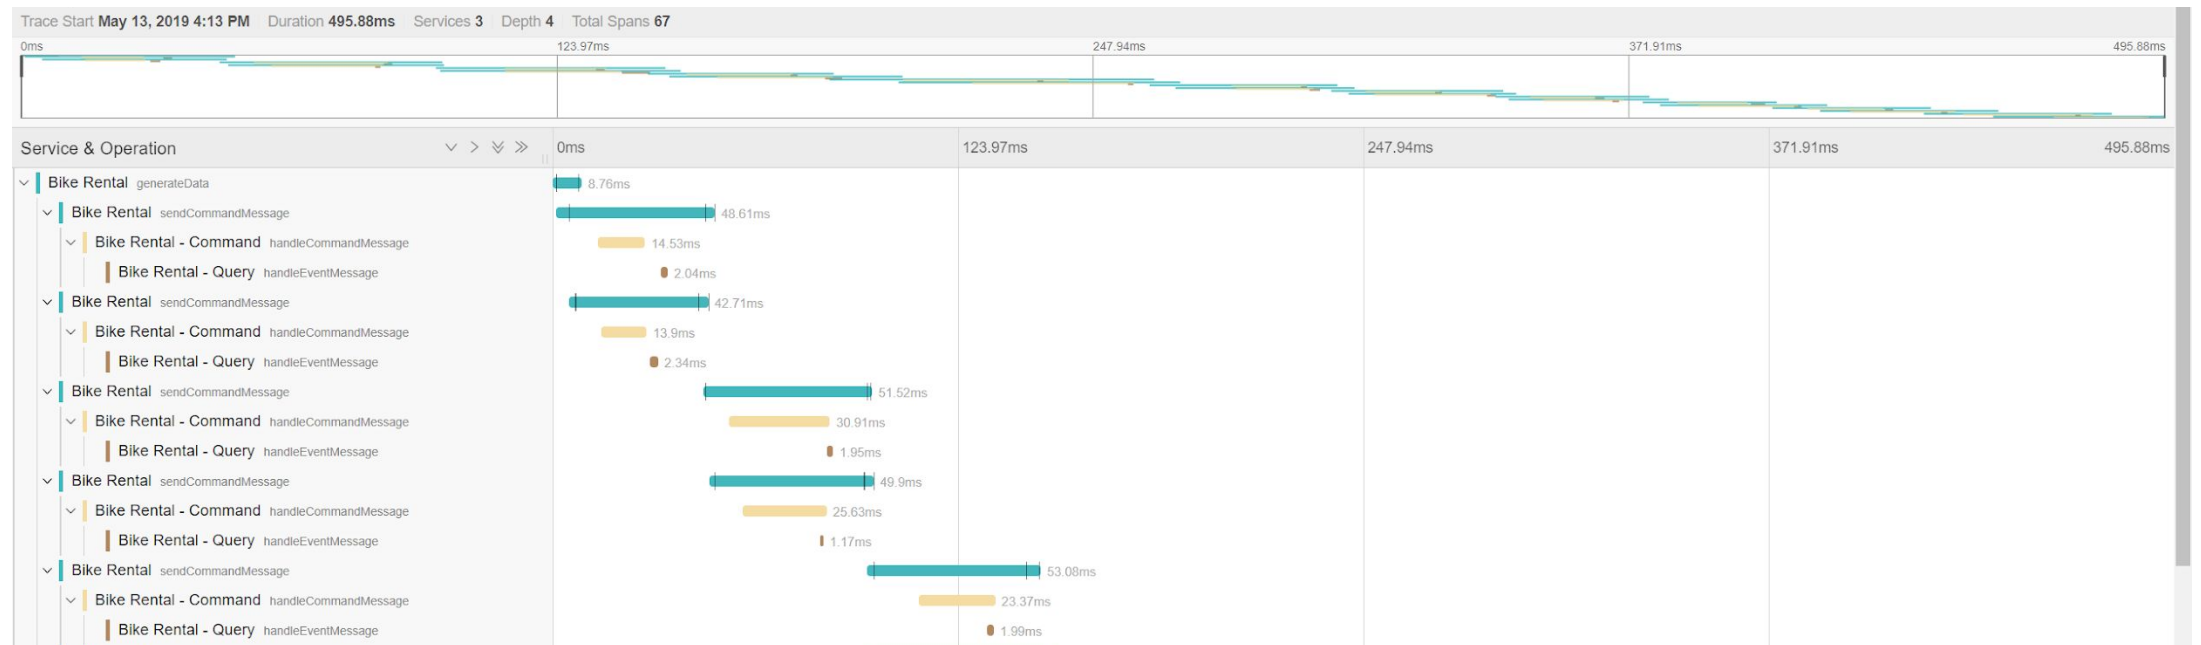

Configuring Tracing

```
// Build the Tracer from the preferred implementation and the dispatch and handler interceptor,
Tracer tracer = ...;
OpenTraceDispatchInterceptor traceDispatchInterceptor = new OpenTraceDispatchInterceptor(tracer);
OpenTraceHandlerInterceptor traceHandlerInterceptor = new OpenTraceHandlerInterceptor(tracer);

// then configure the TracingProvider as a CorrelationDataProvider,
List<CorrelationDataProvider> correlationDataProviders = Collections.singletonList(new TracingProvider(tracer));
Configuration configuration = DefaultConfigurer.defaultConfiguration()
    .configureCorrelationDataProviders(config -> correlationDataProviders)...

// Ending with configuring the handler interceptor
configuration.commandBus().registerHandlerInterceptor(traceHandlerInterceptor);

// and building the dedicated gateways with the dispatch interceptor
TracingCommandGateway tracingCommandGateway = TracingCommandGateway.builder().tracer(tracer)
    .delegateCommandGateway(configuration.commandGateway()).build();
tracingCommandGateway.registerDispatchInterceptor(traceDispatchInterceptor);
```

Configuring Tracing - Spring

// With Spring Boot, just this dependency is sufficient

// Maven

```
<dependency>  
  <groupId>org.axonframework.extensions.tracing</groupId>  
  <artifactId>axon-tracing-spring-boot-starter</artifactId>  
  <version>{extension-version}</version>  
</dependency>
```

// Gradle

```
implementation  
'org.axonframework.extensions.tracing:axon-tracing-spring-boot-starter:{extension-version}'
```

Whatever else you wanted to know...

Questions

But wait, there's more!

Advanced Tuning

There's a time and place for every task

Unit of Work

Unit of Work

- Records Message and Execution Result
- Coordinate lifecycle of message handling
 - start → prepare commit → commit → after commit → cleanup
→ rollback → cleanup
- Register for resources used during processing
 - e.g. Database connections
- Correlation data management
 - Correlation data automatically attached to generated messages

Unit of Work

- To access the current Unit of Work
 - Parameter on Message Handler method
 - `CurrentUnitOfWork.get();`
- Unit of Work is created by all components processing Messages
- Only one Unit of Work can be active at any time
 - Nesting is supported

UoW – Message and Execution Result

- `T getMessage();`
- `ExecutionResult getExecutionResult()`
- `boolean isRolledBack()`
- `transformMessage(
 Function<T, ? extends Message<?>> transformOperator
)`

UoW – Hooking into the lifecycle

- `phase()`
- `onPrepareCommit(Consumer<UnitOfWork<T>> handler)`
- `onCommit(Consumer<UnitOfWork<T>> handler)`
- `afterCommit(Consumer<UnitOfWork<T>> handler)`
- `onRollback(Consumer<UnitOfWork<T>> handler)`
- `onCleanup(Consumer<UnitOfWork<T>> handler)`

UoW – Registering Resources

- `Map<String, Object> resources()`
- `R getResource(String name)`
- `R getDefaultResource(String key, R defaultValue)`
- `R getOrComputeResource(
 String key,
 Function<? super String, R> mappingFunction
)`

Register resources that should be reused
with the `root()` Unit of Work.

UoW – Correlation Data Management

- `registerCorrelationDataProvider(
 CorrelationDataProvider correlationDataProvider
)`
- `MetaData getCorrelationData()`

Used by constructors of all Message implementations to initialize MetaData (except copy-constructors)

```
interface CorrelationDataProvider {  
    Map<String, ?> correlationDataFor(Message<?> message);  
}
```

Injecting dependencies...

Parameter Resolvers

Parameter Resolvers

- Resolves parameters of `@MessageHandler` methods
 - Based on incoming Message
 - Resolves single parameter value
- Explicitly configured on components
- Located using `ServiceLoader`
 - `META-INF/services/org.axonframework.messaging.annotation.ParameterResolverFactory`
- As Spring bean in the `ApplicationContext`

Parameter Resolvers - API

```
@FunctionalInterface
public interface ParameterResolverFactory {
    ParameterResolver createInstance(
        Executable executable, Parameter[] parameters, int parameterIndex
    );
}
```

```
public interface ParameterResolver<T> {
    T resolveParameterValue(Message<?> message);

    boolean matches(Message<?> message);
}
```

Enhance the handling experience

Handler Enhancers

Handler Enhancers

- All message handlers are (meta-)annotated with `@MessageHandler`
- Type specific logic is implemented as Handler Enhancers
 - Wrap handler method
 - Provide additional information about handler (e.g. routing keys)
 - Add additional behavior to handler (e.g. end Saga lifecycle)
- Explicitly configured on components
- Configure using `ServiceLoader`
 - `META-INF/services/org.axonframework.messaging.annotation.HandlerEnhancerDefinition`
- As Spring bean in the `ApplicationContext`

Handler Enhancers - API

```
public interface HandlerEnhancerDefinition {  
    <T> MessageHandlingMember<T> wrapHandler(  
        MessageHandlingMember<T> original  
    );  
}
```

- For convenience, return a WrappedMessageHandlingMember instance
- Return “original” to reject “enhancement”

Handler Enhancers - Use Cases

- More specific alternative to Handler Interceptor
 - Handler Enhancers have more information about handling type / instance
- React to (additional) annotations on Handler methods
 - e.g. Security annotations
- Detailed logging / tracing

Whatever else you wanted to know...

Questions

That's all folks!

Survey - <https://lp.axoniq.io/survey-axoniq>

Thanks for attending!