


/home/nicolas/Documentos  
/especialidad\_en\_SE/2\_arquitectura  
\_2024\_SE/lcd\_hdt11\_nico/main/devices  
/dht11\_app.c

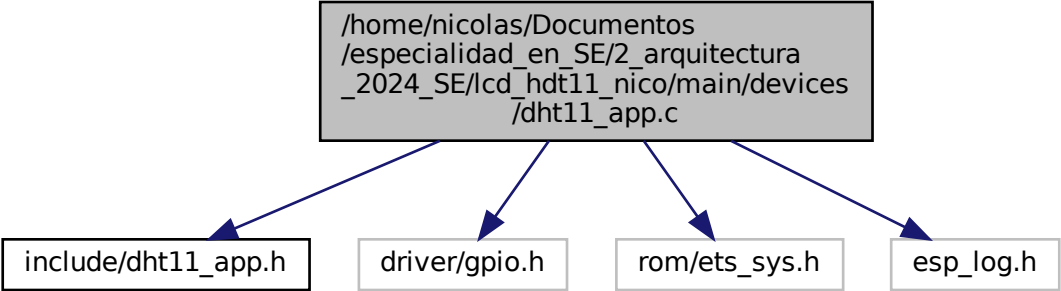

```
graph TD; A["/home/nicolas/Documentos  
/especialidad_en_SE/2_arquitectura  
_2024_SE/lcd_hdt11_nico/main/devices  
/dht11_app.c"] --> B["include/dht11_app.h"]; A --> C["driver/gpio.h"]; A --> D["rom/ets_sys.h"]; A --> E["esp_log.h"];
```

The diagram illustrates the file dependencies for the source file `/dht11_app.c`. A central box at the top lists the full path to the file. Four arrows point downwards from this box to four separate boxes, each representing a header file that the source file depends on: `include/dht11_app.h`, `driver/gpio.h`, `rom/ets_sys.h`, and `esp_log.h`.

include/dht11\_app.h

driver/gpio.h

rom/ets\_sys.h

esp\_log.h