


# Data tidying with tidyr :: CHEATSHEET



**Tidy data** is a way to organize tabular data in a consistent data structure across packages.

A table is tidy if:



Each **variable** is in its own **column**


&



Each **observation**, or **case**, is in its own row



Access **variables** as **vectors**



Preserve **cases** in vectorized operations

## Tibbles

### AN ENHANCED DATA FRAME

Tibbles are a table format provided by the **tibble** package. They inherit the data frame class, but have improved behaviors:

- **Subset** a new tibble with `[],` a vector with `[[` and `$.`
- **No partial matching** when subsetting columns.
- **Display** concise views of the data on one screen.

**options**(tibble.print\_max = n, tibble.print\_min = m, tibble.width = Inf) Control default display settings.

**View()** or **glimpse()** View the entire data set.

### CONSTRUCT A TIBBLE

**tibble(...)** Construct by columns.

`tibble(x = 1:3, y = c("a", "b", "c"))`

**tribble(...)** Construct by rows.

`tribble(~x, ~y,`  
1, "a",  
2, "b",  
3, "c")

Both make this tibble

A tibble: 3 × 2  
x <int> y <chr>  
1 1 a  
2 2 b  
3 3 c

**as\_tibble(x, ...)** Convert a data frame to a tibble.

**enframe(x, name = "name", value = "value")**

Convert a named vector to a tibble. Also **deframe()**.

**is\_tibble(x)** Test whether x is a tibble.



## Reshape Data - Pivot data to reorganize values into a new layout.

table4a

country	1999	2000
A	0.7K	2K
B	37K	80K
C	212K	213K

→

country	year	cases
A	1999	0.7K
B	1999	37K
C	1999	212K
A	2000	2K
B	2000	80K
C	2000	213K

**pivot\_longer**(data, cols, names\_to = "name", values\_to = "value", values\_drop\_na = FALSE)

"Lengthen" data by collapsing several columns into two. Column names move to a new names\_to column and values to a new values\_to column.

`pivot_longer(table4a, cols = 2:3, names_to = "year", values_to = "cases")`

table2

country	year	type	count
A	1999	cases	0.7K
A	1999	pop	19M
A	2000	cases	2K
A	2000	pop	20M
B	1999	cases	37K
B	1999	pop	172M
B	2000	cases	80K
B	2000	pop	174M
C	1999	cases	212K
C	1999	pop	1T
C	2000	cases	213K
C	2000	pop	1T

→

country	year	cases	pop
A	1999	0.7K	19M
A	2000	2K	20M
B	1999	37K	172M
B	2000	80K	174M
C	1999	212K	1T
C	2000	213K	1T

**pivot\_wider**(data, names\_from = "name", values\_from = "value")

The inverse of pivot\_longer(). "Widen" data by expanding two columns into several. One column provides the new column names, the other the values.

`pivot_wider(table2, names_from = type, values_from = count)`

## Split Cells - Use these functions to split or combine cells into individual, isolated values.

table5

country	century	year
A	19	99
A	20	00
B	19	99
B	20	00

→

country	year
A	1999
A	2000
B	1999
B	2000

**unite**(data, col, ..., sep = "\_", remove = TRUE, na.rm = FALSE) Collapse cells across several columns into a single column.

`unite(table5, century, year, col = "year", sep = "")`

table3

country	year	rate
A	1999	0.7K/19M
A	2000	2K/20M
B	1999	37K/172M
B	2000	80K/174M

→

country	year	cases	pop
A	1999	0.7K	19M
A	2000	2K	20M
B	1999	37K	172
B	2000	80K	174

**separate\_wider\_delim**(data, cols, delim, ..., names = NULL, names\_sep = NULL, names\_repair = "check\_unique", too\_few, too\_many, cols\_remove = TRUE) Separate each cell in a column into several columns. Also **separate\_wider\_regex()** and **separate\_wider\_position()**.

`separate(table3, rate, sep = "/", into = c("cases", "pop"))`

table3

country	year	rate
A	1999	0.7K/19M
A	2000	2K/20M
B	1999	37K/172M
B	2000	80K/174M

→

country	year	cases	pop
A	1999	0.7K	19M
A	2000	2K	20M
B	1999	37K	172M
B	2000	80K	174M

**separate\_longer\_delim**(data, cols, delim, ..., width, keep\_empty) Separate each cell in a column into several rows.

`separate_longer_delim(table3, rate, sep = "/")`

## Expand Tables

Create new combinations of variables or identify implicit missing values (combinations of variables not present in the data).

x

x1	x2	x3
A	1	3
B	1	4
B	2	3

→

x1	x2
A	1
A	2
B	1
B	2

**expand**(data, ...) Create a new tibble with all possible combinations of the values of the variables listed in ... Drop other variables.

`expand(mtcars, cyl, gear, carb)`

x

x1	x2	x3
A	1	3
B	1	4
B	2	3

→

x1	x2	x3
A	1	3
A	2	NA
B	1	4
B	2	3

**complete**(data, ..., fill = list()) Add missing possible combinations of values of variables listed in ... Fill remaining variables with NA.  
`complete(mtcars, cyl, gear, carb)`

## Handle Missing Values

Drop or replace explicit missing values (NA).

x

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

→

x1	x2
A	1
D	3

**drop\_na**(data, ...) Drop rows containing NA's in ... columns.  
`drop_na(x, x2)`

x

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

→

x1	x2
A	1
B	1
C	1
D	3
E	3

**fill**(data, ..., .direction = "down") Fill in NA's in ... columns using the next or previous value.  
`fill(x, x2)`

x

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

→

x1	x2
A	1
B	2
C	2
D	3
E	2

**replace\_na**(data, replace) Specify a value to replace NA in selected columns.  
`replace_na(x, list(x2 = 2))`

# Nested Data

A **nested data frame** stores individual tables as a list-column of data frames within a larger organizing data frame. List-columns can also be lists of vectors or lists of varying data types. Use a nested data frame to:

- Preserve relationships between observations and subsets of data. Preserve the type of the variables being nested (factors and datetimes aren't coerced to character).
- Manipulate many sub-tables at once with **purrr** functions like `map()`, `map2()`, or `pmap()` or with **dplyr** `rowwise()` grouping.

## CREATE NESTED DATA


**nest(data, ...)** Moves groups of cells into a list-column of a data frame. Use alone or with **dplyr::group\_by()**:

1. Group the data frame with **group\_by()** and use **nest()** to move the groups into a list-column.

```
n_storms <- storms |>
  group_by(name) |>
  nest()
```

2. Use **nest(new\_col = c(x, y))** to specify the columns to group using **dplyr::select()** syntax.

```
n_storms <- storms |>
  nest(data = c(year:long))
```

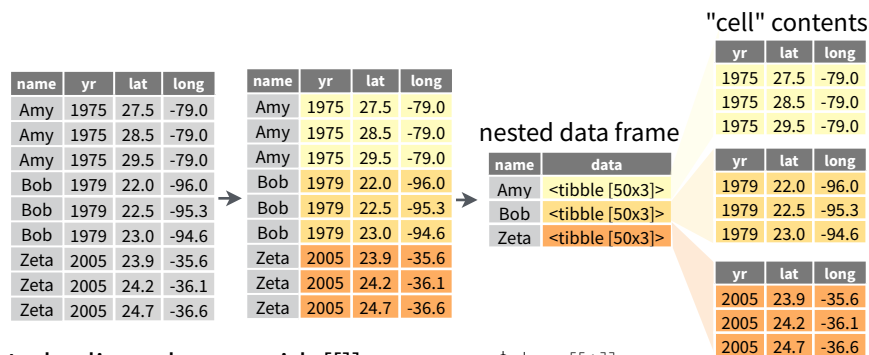

Index list-columns with `[[ ]]`. `n_storms$data[[1]]`

## CREATE TIBBLES WITH LIST-COLUMNS

**tibble::tribble(...)** Makes list-columns when needed.

```
tribble( ~max, ~seq,
  3, 1:3,
  4, 1:4,
  5, 1:5)
```

max	seq
3	<int [3]>
4	<int [4]>
5	<int [5]>

**tibble::tibble(...)** Saves list input as list-columns.

```
tibble(max = c(3, 4, 5), seq = list(1:3, 1:4, 1:5))
```

**tibble::enframe(x, name="name", value="value")**

Converts multi-level list to a tibble with list-cols.

```
enframe(list('3'=1:3, '4'=1:4, '5'=1:5), 'max', 'seq')
```

## OUTPUT LIST-COLUMNS FROM OTHER FUNCTIONS

**dplyr::mutate()**, **transmute()**, and **summarise()** will output list-columns if they return a list.

```
mtcars |>
  group_by(cyl) |>
  summarise(q = list(quantile(mpg)))
```

## RESHAPE NESTED DATA

**unnest(data, cols, ..., keep\_empty = FALSE)** Flatten nested columns back to regular columns. The inverse of `nest()`.

```
n_storms |> unnest(data)
```

**unnest\_longer(data, col, values\_to = NULL, indices\_to = NULL)**

Turn each element of a list-column into a row.

```
starwars |>
  select(name, films) |>
  unnest_longer(films)
```

name	films
Luke	The Empire Strik...
Luke	Revenge of the S...
Luke	Return of the Jed...
C-3PO	The Empire Strik...
C-3PO	Attack of the Cl...
C-3PO	The Phantom M...
R2-D2	The Empire Strik...
R2-D2	Attack of the Cl...
R2-D2	The Phantom M...

**unnest\_wider(data, col)** Turn each element of a list-column into a regular column.

```
starwars |>
  select(name, films) |>
  unnest_wider(films, names_sep = "_")
```

name	films
Luke	<chr [5]>
C-3PO	<chr [6]>
R2-D2	<chr [7]>

name	films_1	films_2	films_3
Luke	The Empire...	Revenge of...	Return of...
C-3PO	The Empire...	Attack of...	The Phantom...
R2-D2	The Empire...	Attack of...	The Phantom...

**hoist(.data, .col, ..., .remove = TRUE)** Selectively pull list components out into their own top-level columns. Uses **purrr::pluck()** syntax for selecting from lists.

```
starwars |>
  select(name, films) |>
  hoist(films, first_film = 1, second_film = 2)
```


name	films
Luke	<chr [5]>
C-3PO	<chr [6]>
R2-D2	<chr [7]>

name	first_film	second_film	films
Luke	The Empire...	Revenge of...	<chr [3]>
C-3PO	The Empire...	Attack of...	<chr [4]>
R2-D2	The Empire...	Attack of...	<chr [5]>

## TRANSFORM NESTED DATA

A vectorized function takes a vector, transforms each element in parallel, and returns a vector of the same length. By themselves vectorized functions cannot work with lists, such as list-columns.

**dplyr::rowwise(.data, ...)** Group data so that each row is one group, and within the groups, elements of list-columns appear directly (accessed with `[[ ]]`), not as lists of length one. When you use **rowwise()**, **dplyr** functions will seem to apply functions to list-columns in a vectorized fashion.



Apply a function to a list-column and **create a new list-column**.

```
n_storms |>
  rowwise() |>
  mutate(n = list(dim(data)))
```

**dim()** returns two values per row

wrap with list to tell mutate to create a list-column

Apply a function to a list-column and **create a regular column**.

```
n_storms |>
  rowwise() |>
  mutate(n = nrow(data))
```

**nrow()** returns one integer per row

Collapse **multiple list-columns** into a single list-column.

```
starwars |>
  rowwise() |>
  mutate(transport = list(append(vehicles, starships)))
```

**append()** returns a list for each row, so col type must be list

Apply a function to **multiple list-columns**.

```
starwars |>
  rowwise() |>
  mutate(n_transports = length(c(vehicles, starships)))
```

**length()** returns one integer per row

See **purrr** package for more list functions.