

Flight Information System API

INFS3202 – 3 / 4

Nida Nurrohmah 60107104

12th April 2025

API Endpoints Descriptions:

1 - /flights

- GET: Returns a list of all flight records, if no records are found it sends a message, and the HTTP status NOT FOUND
- POST: Posts a flight record containing the fields: id, airline, origin, destination, estimated departure, estimated arrival, gate, flight status. The gate is not a requirement to add a flight record, the value would by default be set to null. A gate assignment will however be required to perform other operations.

2 - /flights/<id>

- GET: Returns a flight record queried by the flight ID, if the flight is not found it returns an HTTP Status NOT FOUND
- PUT: Applies and modifications made to the flight record, the below services allow the user to modify records conveniently, however this operation allows user to manually apply changes via Json data.
- DELETE: Deletes flight record by the flight ID

3 - /flights/<id>/board

- PUT: This operation is used to change the state of a flight to 'boarding', the flight record is required to have a gate assigned to it. If the record is valid, the flight status changes to 'boarding' and the gate status changes to 'open'.
- DELETE: This operation is used to set the state of a flight to departed, it does a similar function as the PUT however this sets the flight status from 'boarding' to 'departed' and the gate status from 'open' to 'closed'. This also sets the value of 'actual departure time' to the current time.

4 - /flights/<id>/airborne

- PUT: This operation is used to set the state of a flight to 'in flight'. The flight status is first validated to be set to 'departed' before allowing for changes. If it is valid, the flight status is changed from departed to 'in flight' and sets the gate as 'available' to be used for other flights.
- DELETE: This operation is used to set the state of a flight to 'Arrived'. The flight is required to have a flight status of 'in flight' for the state to change. The gate is unassigned; setting the value to null, and the flight status is set to 'Arrived'. The value of the 'actual arrival' is set to current time.

5 - /gates

- GET: Returns a list of all gate records. If no gate records are available, it sends an HTTP Status of NOT FOUND.
- POST: This operation adds new gate records; a validation ensures no duplicates by checking for existing gates before adding.

6 - /gates/<id>

- GET: Returns the gate record based on the gate ID.

7 - /gates/<gid>/assign/<fid>

- PUT: This operation assigns a gate to a flight, provided by the gate id (gid) and the flight id (fid). This assignment sets the gate status to 'scheduled' and assigns the flight record with the gate id. Previous gate assignment on the record is unassigned and the gate status is set back to 'available'.
- DELETE: This operation assigns a gate to a flight through the gate(id) and the flight id(fid), it validates whether the gate is assigned to flight, if it is valid the gate is set to available and the value on the flight record is set to None. If the assignment of the gate and flight are wrong, and HTTP Status of BAD REQUEST is sent.

8 - /gates/available

- GET: returns a list of gate records that are available, this operation allows the users to know which gates are available to assign to flights.

9 - /status


- GET: This operation returns a list of all status records. The following records should be added for certain functions to work: 'on time', 'boarding', 'departed', 'arrived', 'in flight', as the basic states of a flight.

- POST: This operation allows new flight status to be added, a validation prevents duplicates by checking for existing records before adding.

10 - /status/<id>

- PUT: Allows changes to the flight status, querying using the flight status ID.
- DELETE: Allows flight status records to be deleted except for the default states of flights mentioned in the GET section of this report.


ER Model

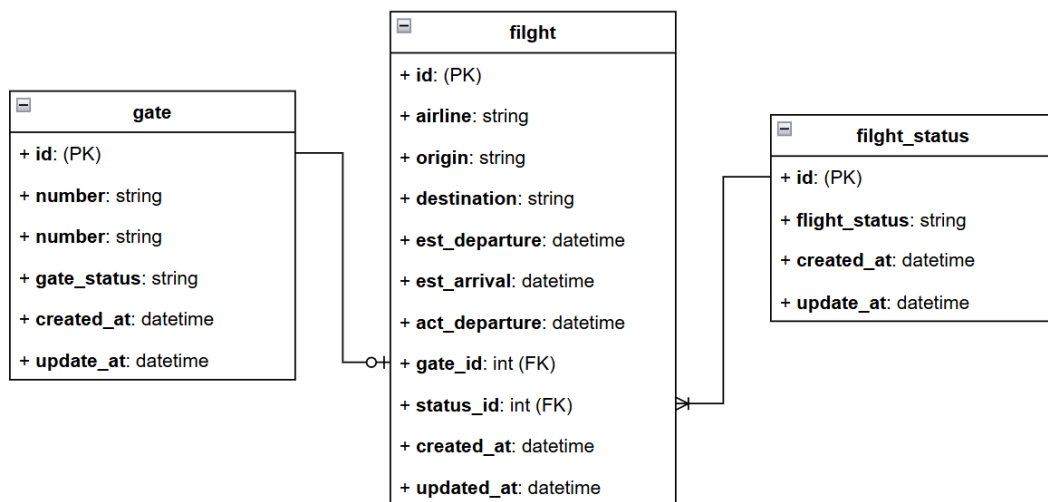


API Endpoints Testing

/flights

- **GET**
 - Successful flights get

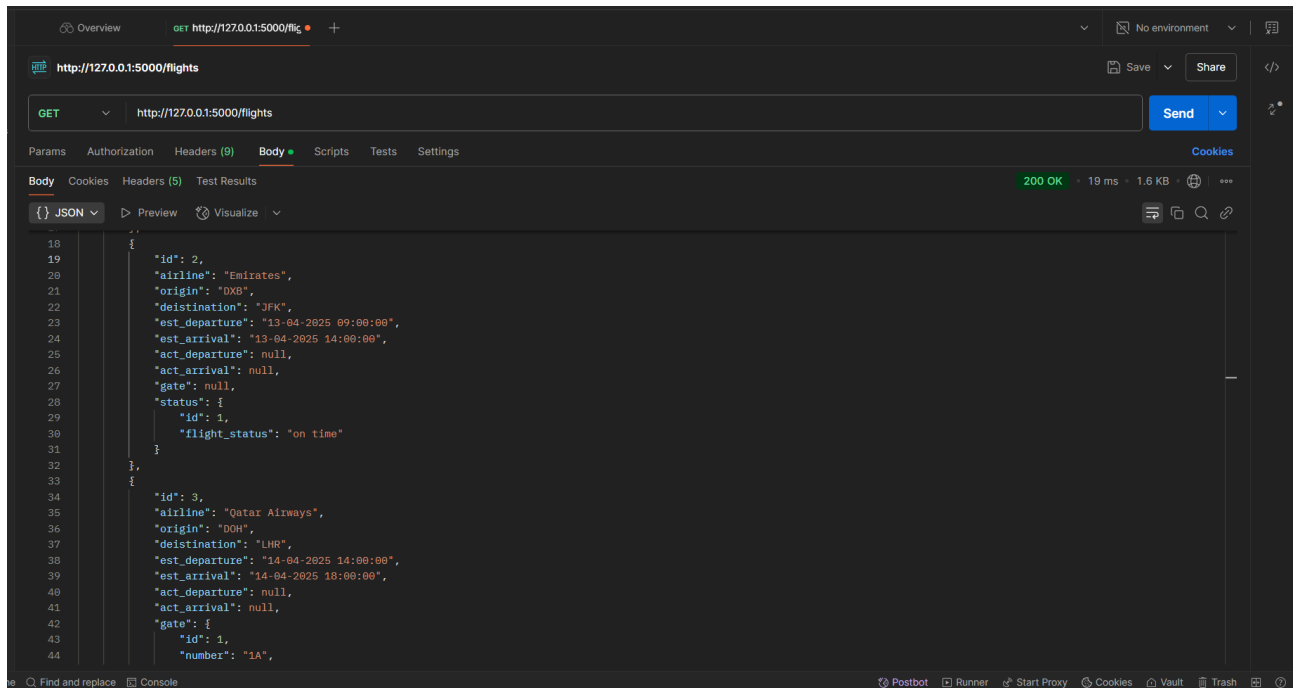

- No flight records:

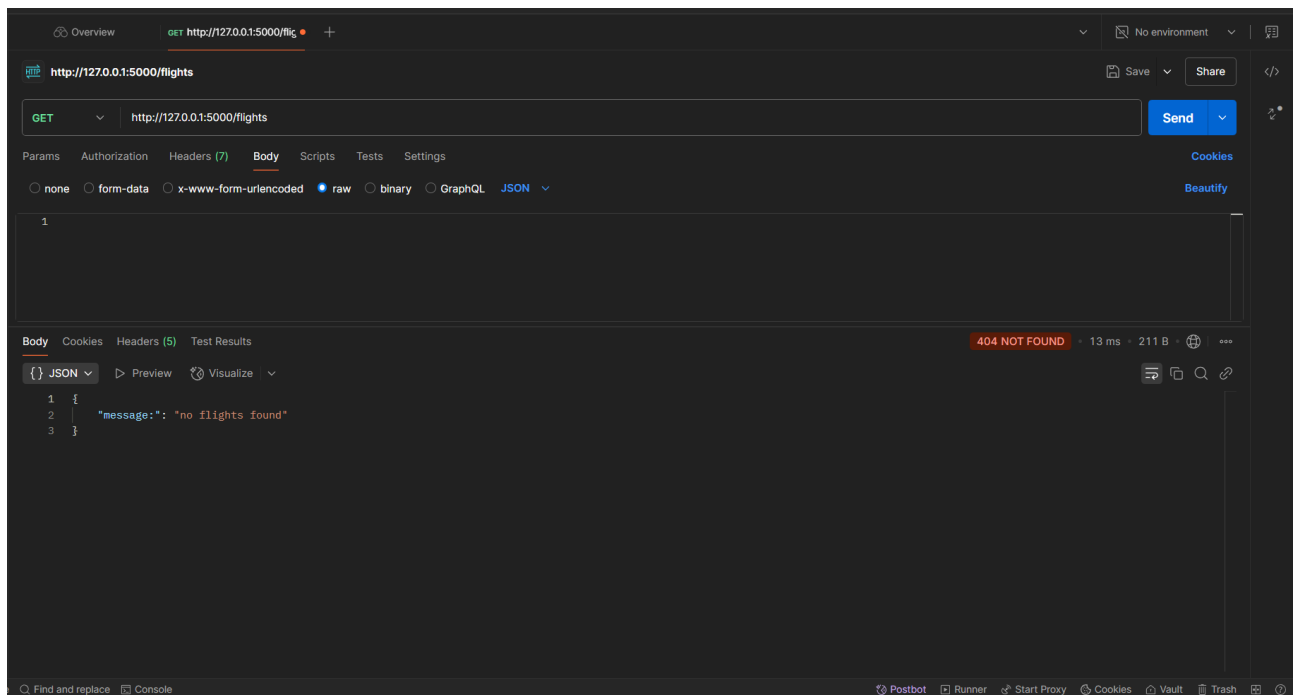

- **POST**
- successful flight post

Overview **post** http://127.0.0.1:5000/flights

Save Share

POST http://127.0.0.1:5000/flights Send

Params Authorization Headers (9) **Body** Scripts Tests Settings

none form-data x-www-form-urlencoded **raw** binary GraphQL JSON

```

1 {
2   "airline": "Garuda Indonesia",
3   "origin": "CGK",
4   "destination": "SYD",
5   "est_departure": "2025-04-14T10:00:00",
6   "est_arrival": "2025-04-14T20:00:00",
7   "act_departure": null,
8   "act_arrival": null,
9   "status_id": 1
10 }

```

Body Cookies Headers (5) Test Results **201 CREATED** 74 ms 501 B

JSON Preview Visualize

```

1 {
2   "id": 1,
3   "airline": "Garuda Indonesia",
4   "origin": "CGK",
5   "destination": "SYD",
6   "est_departure": "14-04-2025 10:00:00",
7   "est_arrival": "14-04-2025 20:00:00",
8   "act_departure": null,
9   "act_arrival": null,
10  "gate": null,
11  "status": {
12    "id": 1,
13    "flight_status": "on time"
14  }
15 }

```

Find and replace Console Postbot Runner Start Proxy Cookies Vault Trash

Database before and after:

```
flightinfo=> select * from public.flight;
```


id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00			2025-04-13 20:11:24.3916	2025-04-13 20:11:24.3916		1

=====


/flights/<id>

=====

- GET
 - Successful get flight

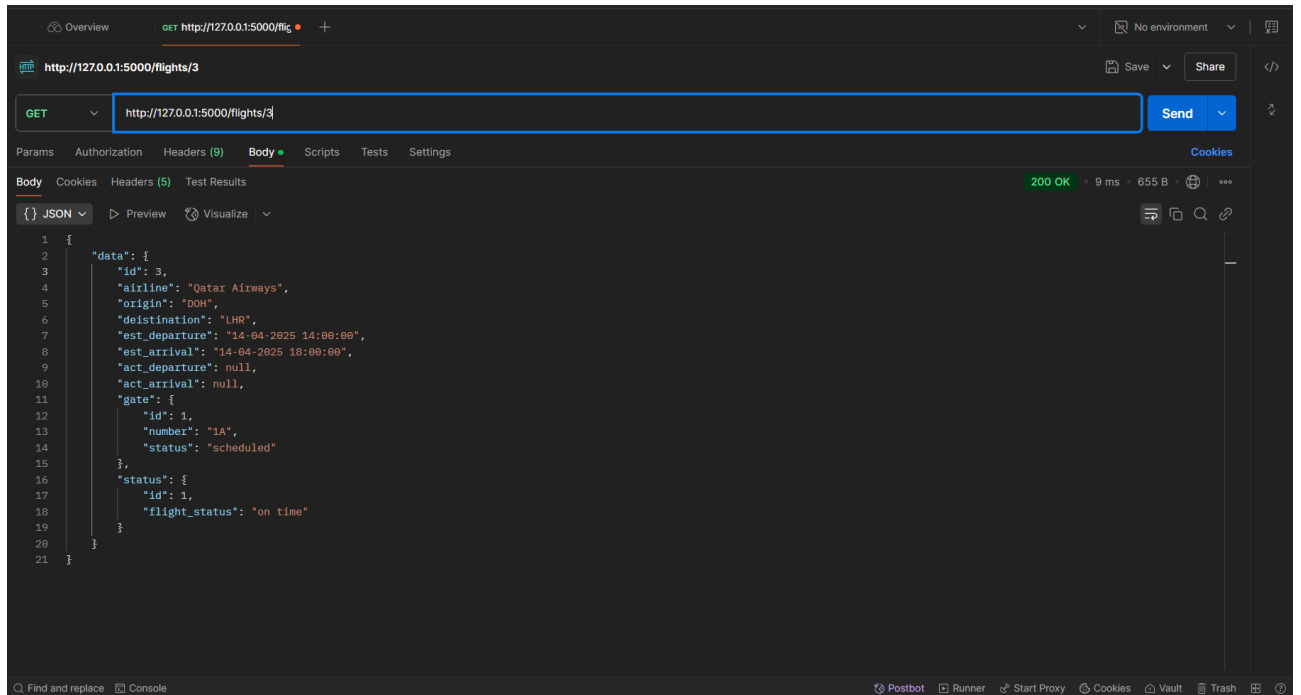

- Flight record doesn't exist

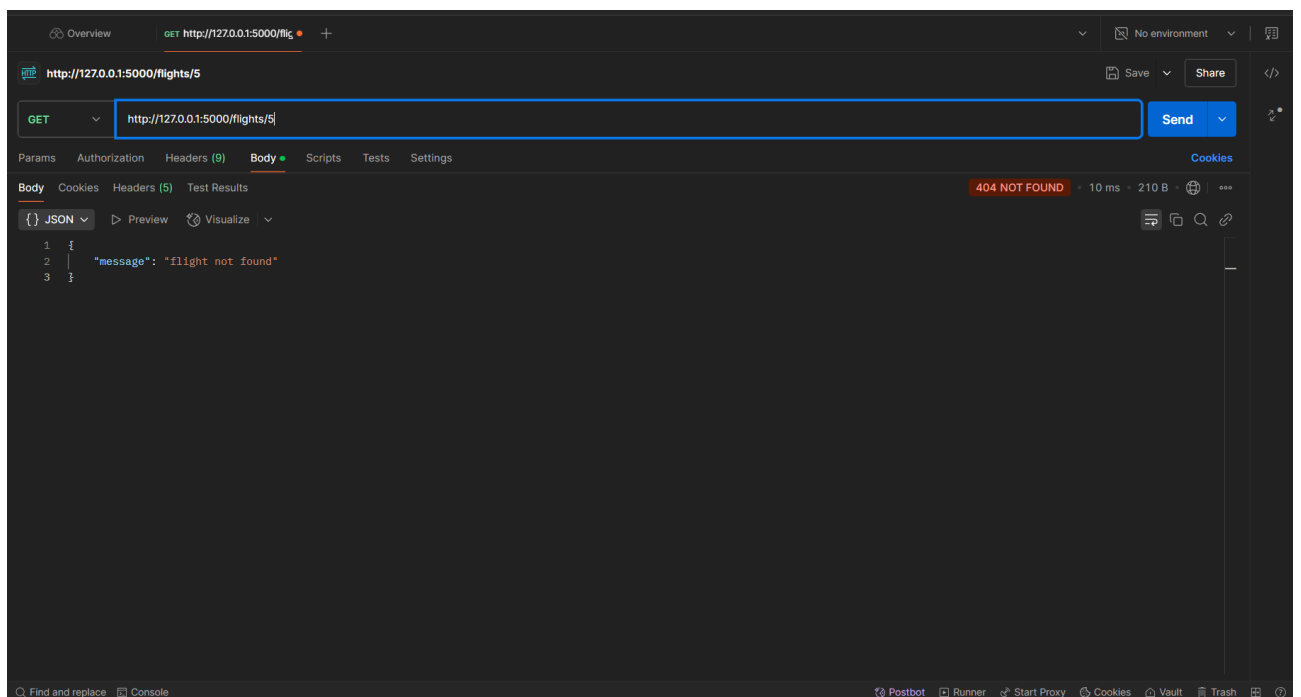

- **PUT**
- Flight values update based on what is given in the Json

The screenshot shows a REST client interface with a PUT request to `http://127.0.0.1:5000/flights/1`. The request body is a JSON object:

```
1 {
2   "airline": "Batik Air",
3   "destination": "DOH",
4   "est_departure": "2025-04-14T20:00:00",
5   "est_arrival": "2025-04-15T03:00:00"
6 }
7
```

The response is `200 OK` with a status of `200 OK`, a response time of `30 ms`, and a body size of `563 B`. The response body is a JSON object:


```
1 {
2   "id": 1,
3   "airline": "Batik Air",
4   "origin": "CGK",
5   "destination": "DOH",
6   "est_departure": "14-04-2025 20:00:00",
7   "est_arrival": "15-04-2025 03:00:00",
8   "act_departure": null,
9   "act_arrival": null,
10  "gate": {
11    "id": 2,
12    "number": "2B",
13    "status": "available"
14  },
15  ...
16 }
```

Database before and after:

```
#flightinfo=> select * from public.flight;
id | airline | origin | destination | est_departure | est_arrival | act_departure | act_arrival | created_at | updated_at | gate_id | status_id
-----
1 | Garuda Indonesia | CGK | SYD | 2025-04-14 10:00:00 | 2025-04-14 20:00:00 | | | 2025-04-13 20:11:24.3916 | 2025-04-13 20:11:24.3916 | | 1
(1 row)
```

```
#flightinfo=> select * from public.flight;
id | airline | origin | destination | est_departure | est_arrival | act_departure | act_arrival | created_at | updated_at | gate_id | status_id
-----
1 | Batik Air | CGK | DOH | 2025-04-14 20:00:00 | 2025-04-15 03:00:00 | | | 2025-04-13 20:11:24.3916 | 2025-04-13 20:13:02.954354 | | 1
(1 row)
```

- **DELETE**
- Successful deletion of flight record id = 4

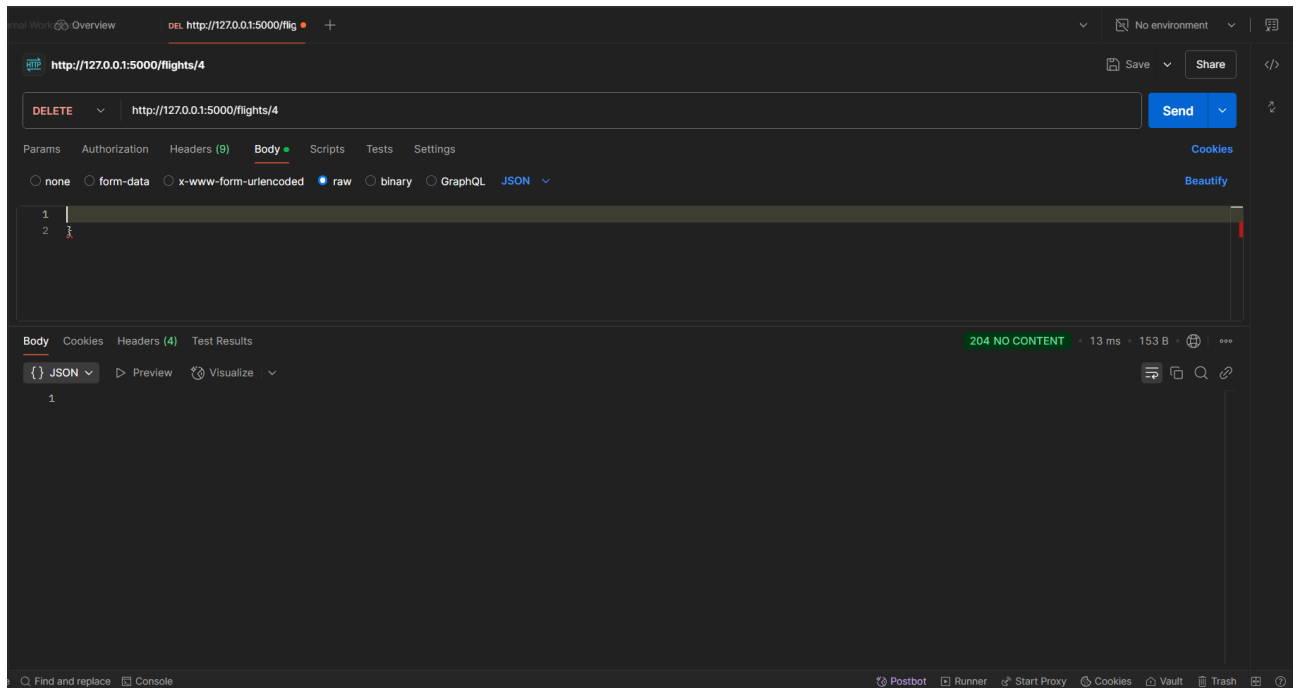

Database Before and After:

```
flightinfo=> select * from public.flight;
```

id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00			2025-04-13 20:50:32.040275	2025-04-13 20:50:32.040275		1
2	Qatar Airways	DOH	LHR	2025-04-14 14:00:00	2025-04-14 18:00:00			2025-04-13 20:51:36.751856	2025-04-13 20:51:36.751856		1
3	Batik Air	SYD	DOH	2025-04-14 20:00:00	2025-04-15 03:00:00			2025-04-13 20:52:00.437858	2025-04-13 20:52:00.437858		1
4	Batik Air	AMS	LCY	2025-04-20 18:00:00	2025-04-14 20:00:00			2025-04-13 20:52:41.233116	2025-04-13 20:52:41.233116		1


(4 rows)

```
flightinfo=> select * from public.flight;
```

id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00			2025-04-13 20:50:32.040275	2025-04-13 20:50:32.040275		1
2	Qatar Airways	DOH	LHR	2025-04-14 14:00:00	2025-04-14 18:00:00			2025-04-13 20:51:36.751856	2025-04-13 20:51:36.751856		1
3	Batik Air	SYD	DOH	2025-04-14 20:00:00	2025-04-15 03:00:00			2025-04-13 20:52:00.437858	2025-04-13 20:52:00.437858		1

(3 rows)

- Deleting flight that does not exist

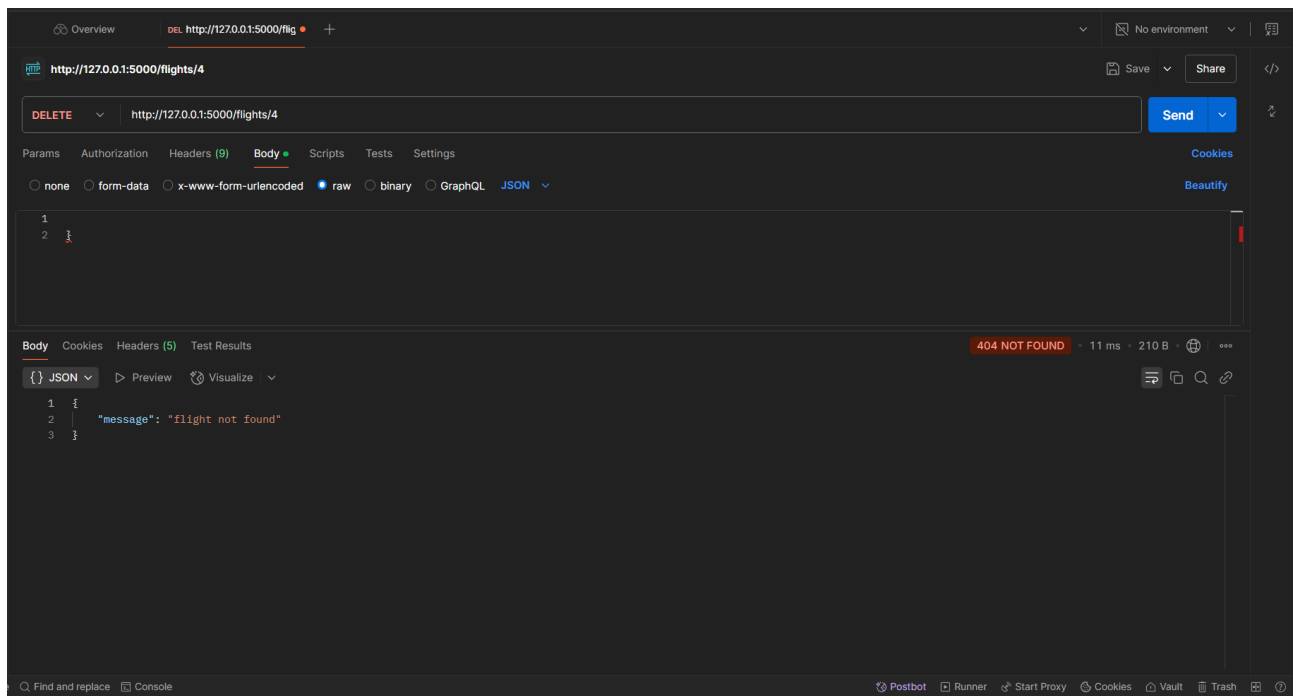


=====

/flights/<id>/board

=====

- PUT
- Flight Boarding Successful

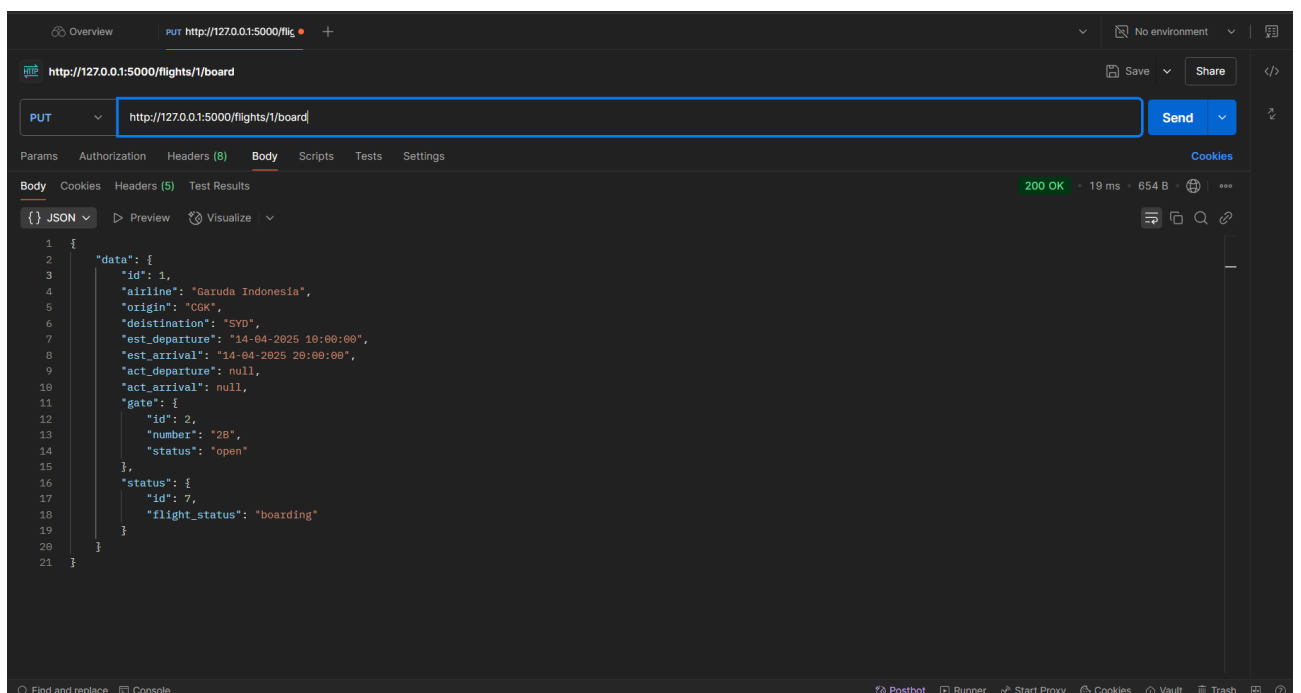

Database before:

```
flightinfo=> select * from public.flight;
id | airline | origin | destination | est_departure | est_arrival | act_departure | act_arrival | created_at | updated_at | gate_id | status_id
-----
1 | Garuda Indonesia | CGK | SYD | 2025-04-14 10:00:00 | 2025-04-14 20:00:00 | | | 2025-04-13 20:11:24.3916 | 2025-04-13 20:21:04.947645 | 2 | 1
(1 row)

flightinfo=> select * from public.gate;
id | number | gate_status | created_at | updated_at
-----
4 | 4D | available | 2025-04-11 21:14:19.421887 | 2025-04-11 21:14:19.421887
5 | 5E | available | 2025-04-11 21:21:01.137188 | 2025-04-11 21:21:01.137188
1 | 1A | available | 2025-04-11 19:58:52.953605 | 2025-04-11 21:22:38.721064
3 | 3C | available | 2025-04-11 19:59:07.123852 | 2025-04-11 22:25:32.610412
2 | 2B | available | 2025-04-11 19:59:01.925937 | 2025-04-13 20:10:02.005492
(5 rows)

flightinfo=> select * from public.status;
ERROR: relation "public.status" does not exist
LINE 1: select * from public.status;
                          ^

flightinfo=> select * from public.flight_status;
id | flight_status | created_at | updated_at
-----
2 | departed | 2025-04-11 21:04:22.302691 | 2025-04-11 21:04:22.302691
4 | boarding | 2025-04-11 21:04:53.498031 | 2025-04-11 21:04:53.498031
5 | in flight | 2025-04-11 21:04:57.914692 | 2025-04-11 21:10:50.830417
1 | on time | 2025-04-11 21:04:16.4133 | 2025-04-11 21:11:05.588194
3 | arrived | 2025-04-11 21:04:48.481402 | 2025-04-11 22:37:56.519077
(5 rows)
```

Database after:

```
flightinfo=> select * from public.flight;
id | airline | origin | destination | est_departure | est_arrival | act_departure | act_arrival | created_at | updated_at | gate_id | status_id
-----
1 | Garuda Indonesia | CGK | SYD | 2025-04-14 10:00:00 | 2025-04-14 20:00:00 | | | 2025-04-13 20:11:24.3916 | 2025-04-13 20:22:44.797859 | 2 | 4
(1 row)

flightinfo=> select * from public.gate;
id | number | gate_status | created_at | updated_at
-----
4 | 4D | available | 2025-04-11 21:14:19.421887 | 2025-04-11 21:14:19.421887
5 | 5E | available | 2025-04-11 21:21:01.137188 | 2025-04-11 21:21:01.137188
1 | 1A | available | 2025-04-11 19:58:52.953605 | 2025-04-11 21:22:38.721064
3 | 3C | available | 2025-04-11 19:59:07.123852 | 2025-04-11 22:25:32.610412
2 | 2B | open | 2025-04-11 19:59:01.925937 | 2025-04-13 20:22:44.819377
(5 rows)

flightinfo=> select * from public.flight_status;
id | flight_status | created_at | updated_at
-----
2 | departed | 2025-04-11 21:04:22.302691 | 2025-04-11 21:04:22.302691
4 | boarding | 2025-04-11 21:04:53.498031 | 2025-04-11 21:04:53.498031
5 | in flight | 2025-04-11 21:04:57.914692 | 2025-04-11 21:10:50.830417
1 | on time | 2025-04-11 21:04:16.4133 | 2025-04-11 21:11:05.588194
3 | arrived | 2025-04-11 21:04:48.481402 | 2025-04-11 22:37:56.519077
(5 rows)
```

- Flight doesn't have gate assigned to it

Overview PUT http://127.0.0.1:5000/flights/2/board

PUT http://127.0.0.1:5000/flights/2/board

Params Authorization Headers (9) Body Scripts Tests Settings


Body Cookies Headers (5) Test Results

404 NOT FOUND 6 ms 212 B


```
{
  "message": "gate not assigned"
}
```

DELETE


- Successful Flight Departure

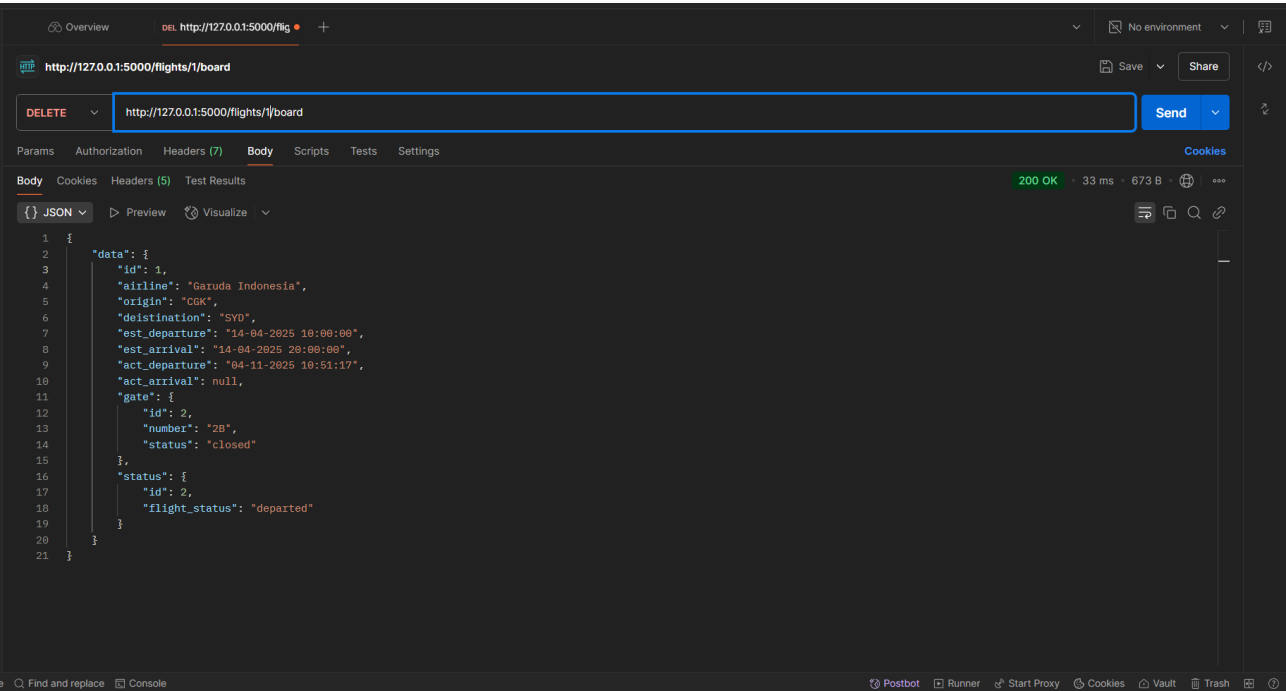


Database Before:

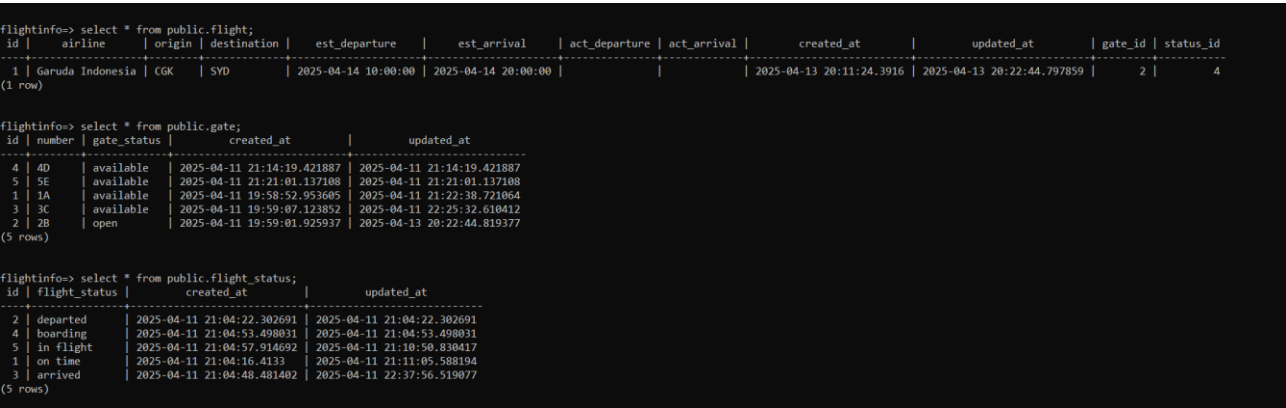

Database After:

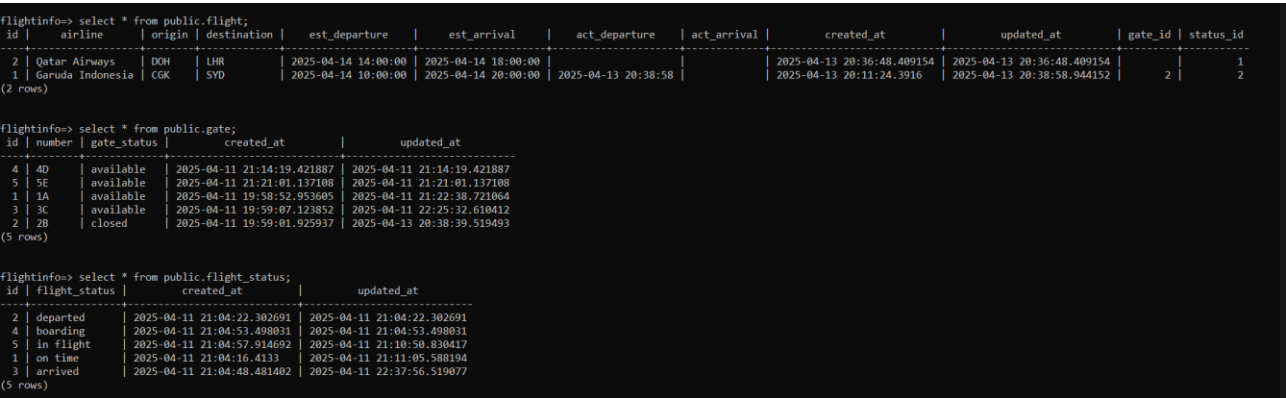

- Flight is not assigned to a gate

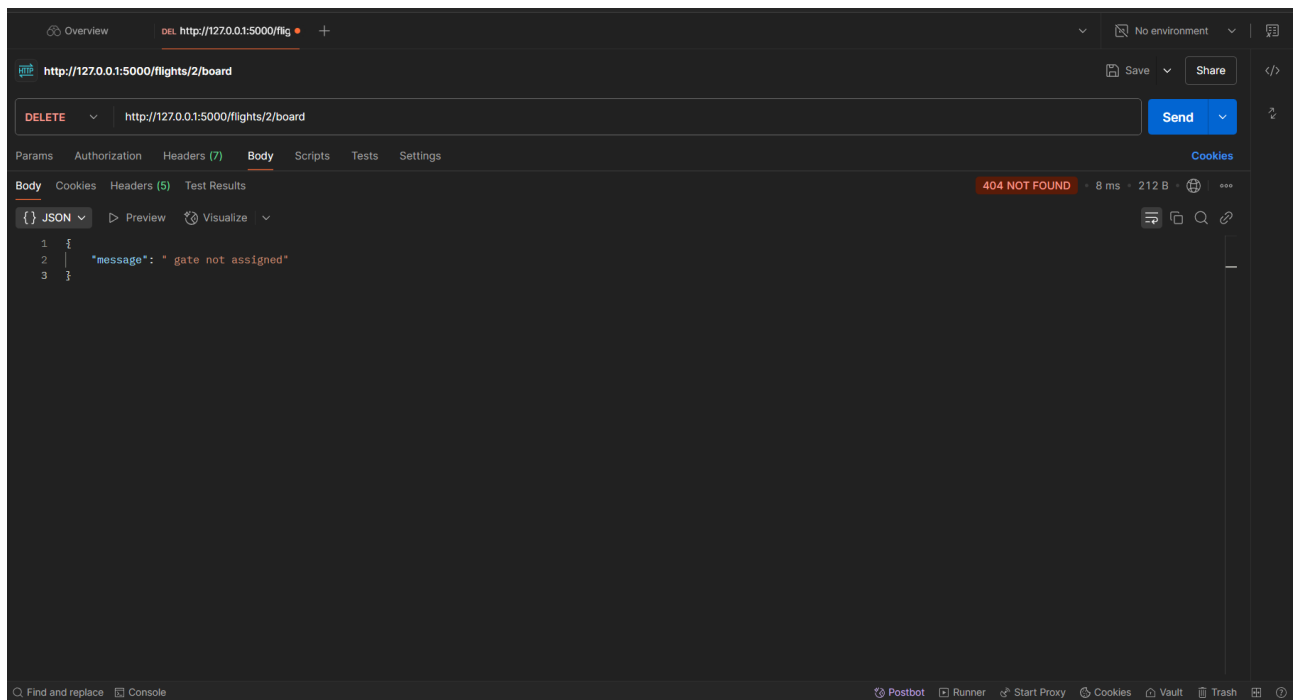


=====

/flights/<id>/airborne

=====

- PUT
- Successful Flight Airborne

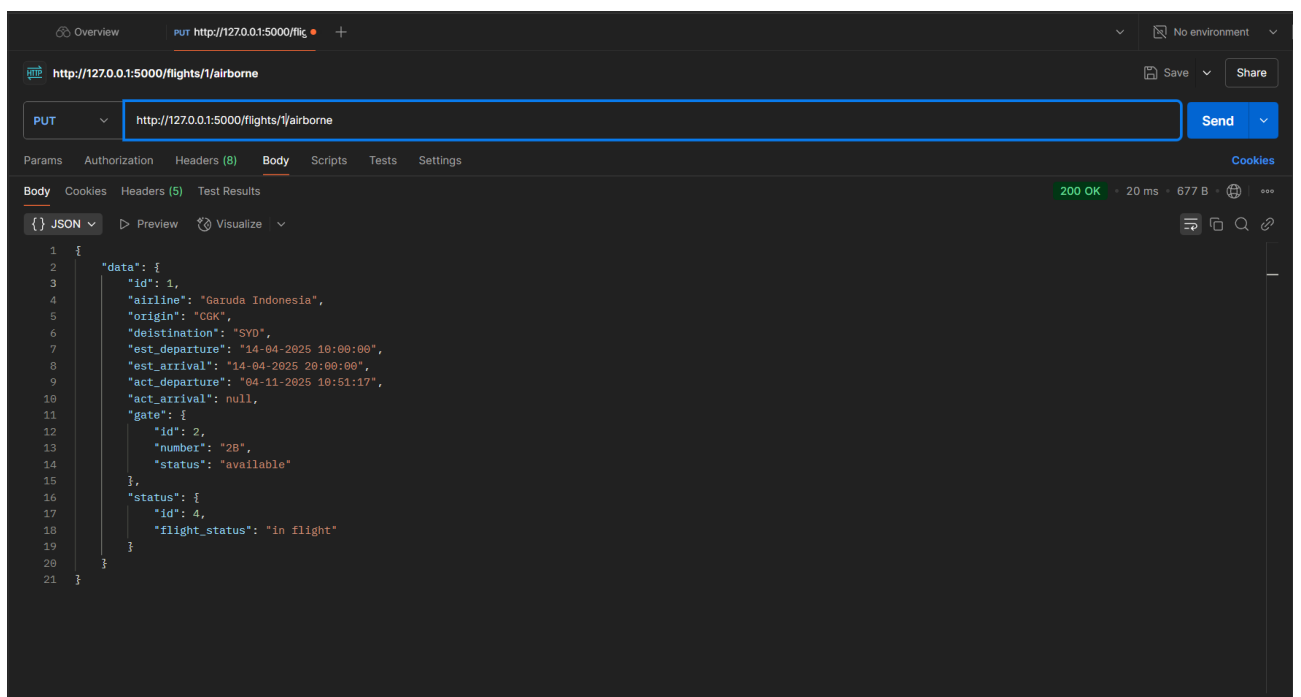

Database Before:

```
flightinfo=> select * from public.flight;
id | airline | origin | destination | est_departure | est_arrival | act_departure | act_arrival | created_at | updated_at | gate_id | status_id
-----
2 | Qatar Airways | DOH | LHR | 2025-04-14 14:00:00 | 2025-04-14 18:00:00 | | | 2025-04-13 20:36:48.409154 | 2025-04-13 20:36:48.409154 | | 1
1 | Garuda Indonesia | CGK | SYD | 2025-04-14 10:00:00 | 2025-04-14 20:00:00 | 2025-04-13 20:38:58 | | 2025-04-13 20:11:24.3916 | 2025-04-13 20:38:58.944152 | 2 | 2
(2 rows)

flightinfo=> select * from public.gate;
id | number | gate_status | created_at | updated_at
-----
4 | 4D | available | 2025-04-11 21:14:19.421887 | 2025-04-11 21:14:19.421887
5 | 5E | available | 2025-04-11 21:21:01.137108 | 2025-04-11 21:21:01.137108
1 | 1A | available | 2025-04-11 19:58:52.953605 | 2025-04-11 21:22:38.721064
3 | 3C | available | 2025-04-11 19:59:07.123852 | 2025-04-11 22:25:32.610412
2 | 2B | closed | 2025-04-11 19:59:01.925937 | 2025-04-13 20:38:39.519493
(5 rows)

flightinfo=> select * from public.flight_status;
id | flight_status | created_at | updated_at
-----
2 | departed | 2025-04-11 21:04:22.302691 | 2025-04-11 21:04:22.302691
4 | boarding | 2025-04-11 21:04:53.498031 | 2025-04-11 21:04:53.498031
5 | in flight | 2025-04-11 21:04:57.914692 | 2025-04-11 21:10:50.830417
1 | on time | 2025-04-11 21:04:16.4133 | 2025-04-11 21:11:05.588194
3 | arrived | 2025-04-11 21:04:48.481402 | 2025-04-11 22:37:56.519077
(5 rows)
```


Database After:

```
flightinfo=> select * from public.flight;
id | airline | origin | destination | est_departure | est_arrival | act_departure | act_arrival | created_at | updated_at | gate_id | status_id
-----
2 | Qatar Airways | DOH | LHR | 2025-04-14 14:00:00 | 2025-04-14 18:00:00 | | | 2025-04-13 20:36:48.409154 | 2025-04-13 20:36:48.409154 | | 1
1 | Garuda Indonesia | CGK | SYD | 2025-04-14 10:00:00 | 2025-04-14 20:00:00 | 2025-04-13 20:38:58 | | 2025-04-13 20:11:24.3916 | 2025-04-13 20:41:02.000594 | 2 | 5
(2 rows)


flightinfo=> select * from public.gate;
id | number | gate_status | created_at | updated_at
-----
4 | 4D | available | 2025-04-11 21:14:19.421887 | 2025-04-11 21:14:19.421887
5 | 5E | available | 2025-04-11 21:21:01.137108 | 2025-04-11 21:21:01.137108
1 | 1A | available | 2025-04-11 19:58:52.953605 | 2025-04-11 21:22:38.721064
3 | 3C | available | 2025-04-11 19:59:07.123852 | 2025-04-11 22:25:32.610412
2 | 2B | available | 2025-04-11 19:59:01.925937 | 2025-04-13 20:41:02.014931
(5 rows)

flightinfo=> select * from public.flight_status;
id | flight_status | created_at | updated_at
-----
2 | departed | 2025-04-11 21:04:22.302691 | 2025-04-11 21:04:22.302691
4 | boarding | 2025-04-11 21:04:53.498031 | 2025-04-11 21:04:53.498031
5 | in flight | 2025-04-11 21:04:57.914692 | 2025-04-11 21:10:50.830417
1 | on time | 2025-04-11 21:04:16.4133 | 2025-04-11 21:11:05.588194
3 | arrived | 2025-04-11 21:04:48.481402 | 2025-04-11 22:37:56.519077
(5 rows)
```

- Flight has not been departed and cannot be set to airborne

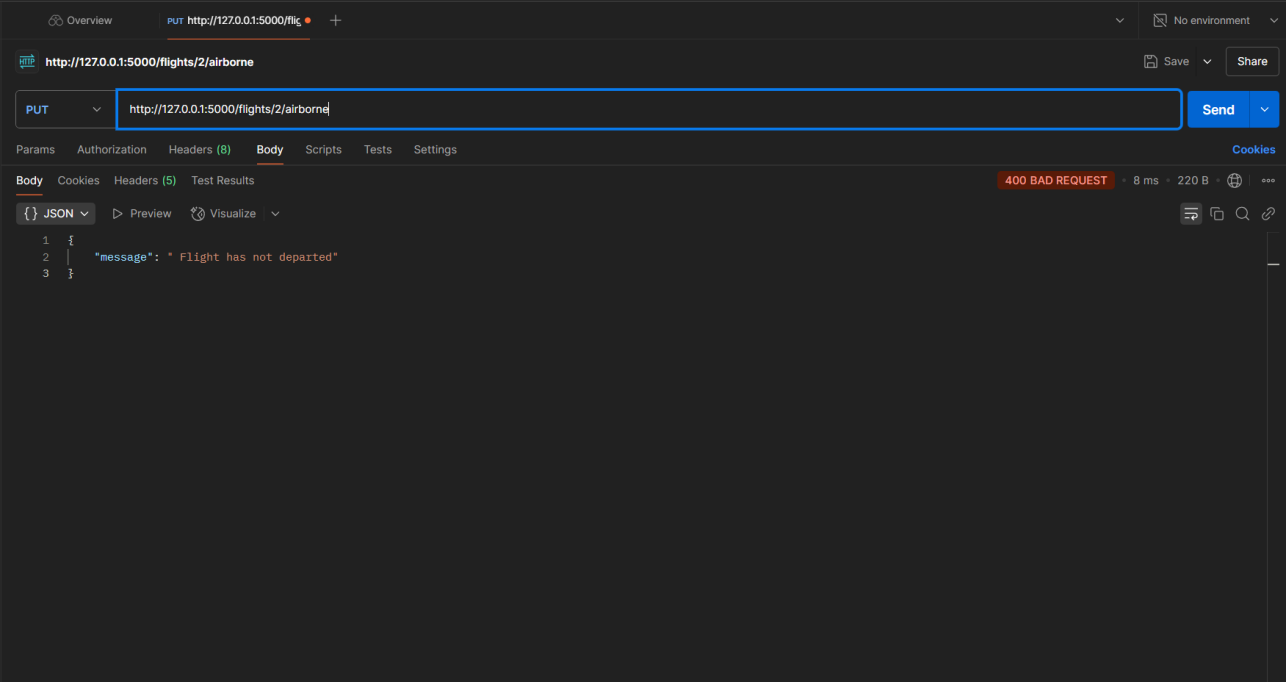

- DELETE
- Successful Flight Arrival

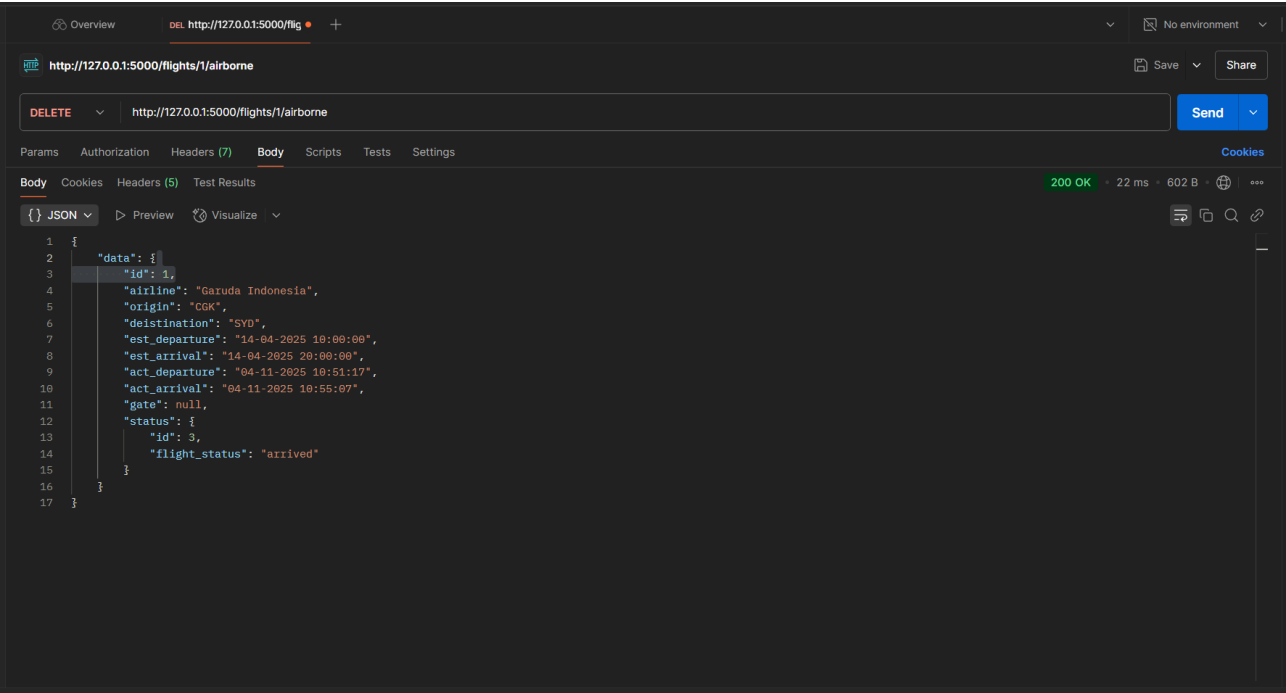

Database Before:

```
flightinfo-> select * from public.flight;
```

id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
2	Qatar Airways	DOH	LHR	2025-04-14 14:00:00	2025-04-14 18:00:00			2025-04-13 20:36:48.409154	2025-04-13 20:36:48.409154		1
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00	2025-04-13 20:38:58		2025-04-13 20:11:24.3916	2025-04-13 20:41:02.000594	2	5

(2 rows)

```
flightinfo-> select * from public.gate;
```

id	number	gate_status	created_at	updated_at
4	4D	available	2025-04-11 21:14:19.421887	2025-04-11 21:14:19.421887
5	5E	available	2025-04-11 21:21:01.137108	2025-04-11 21:21:01.137108
1	1A	available	2025-04-11 19:58:52.953605	2025-04-11 21:22:38.721064
3	3C	available	2025-04-11 19:59:07.123852	2025-04-11 22:25:32.610412
2	2B	available	2025-04-11 19:59:01.925937	2025-04-13 20:41:02.014931

(5 rows)

```
flightinfo-> select * from public.flight_status;
```

id	flight_status	created_at	updated_at
2	departed	2025-04-11 21:04:22.302691	2025-04-11 21:04:22.302691
4	boarding	2025-04-11 21:04:53.498031	2025-04-11 21:04:53.498031
5	in flight	2025-04-11 21:04:57.914692	2025-04-11 21:10:50.830417
1	on time	2025-04-11 21:04:16.4133	2025-04-11 21:11:05.588194
3	arrived	2025-04-11 21:04:48.481402	2025-04-11 22:37:56.519077

(5 rows)

Database After:*note the record was too long for cmd, so it was shown under the id

```
flightinfo-> select * from public.flight;
```

id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status
2	Qatar Airways	DOH	LHR	2025-04-14 14:00:00	2025-04-14 18:00:00			2025-04-13 20:36:48.409154	2025-04-13 20:36:48.409154		
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00	2025-04-13 20:38:58	2025-04-13 20:42:34	2025-04-13 20:11:24.3916	2025-04-13 20:42:34.197506		

(2 rows)

```
flightinfo-> select * from public.gate;
```

id	number	gate_status	created_at	updated_at
4	4D	available	2025-04-11 21:14:19.421887	2025-04-11 21:14:19.421887
5	5E	available	2025-04-11 21:21:01.137108	2025-04-11 21:21:01.137108
1	1A	available	2025-04-11 19:58:52.953605	2025-04-11 21:22:38.721064
3	3C	available	2025-04-11 19:59:07.123852	2025-04-11 22:25:32.610412
2	2B	available	2025-04-11 19:59:01.925937	2025-04-13 20:41:02.014931


(5 rows)

```
flightinfo-> select * from public.flight_status;
```

id	flight_status	created_at	updated_at
2	departed	2025-04-11 21:04:22.302691	2025-04-11 21:04:22.302691
4	boarding	2025-04-11 21:04:53.498031	2025-04-11 21:04:53.498031
5	in flight	2025-04-11 21:04:57.914692	2025-04-11 21:10:50.830417
1	on time	2025-04-11 21:04:16.4133	2025-04-11 21:11:05.588194
3	arrived	2025-04-11 21:04:48.481402	2025-04-11 22:37:56.519077

(5 rows)


- Flight is not airborne and cannot be set to 'arrived'

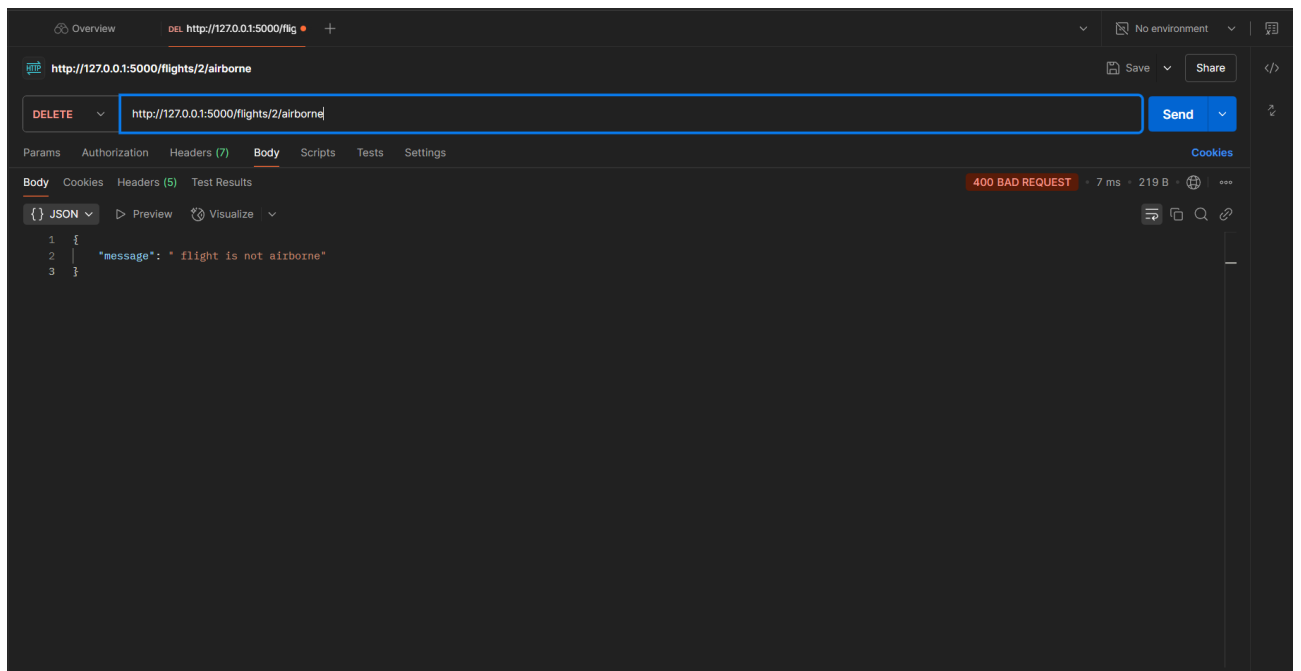


GATES TESTING

/gates


- **GET**
 - Successful get list of gates

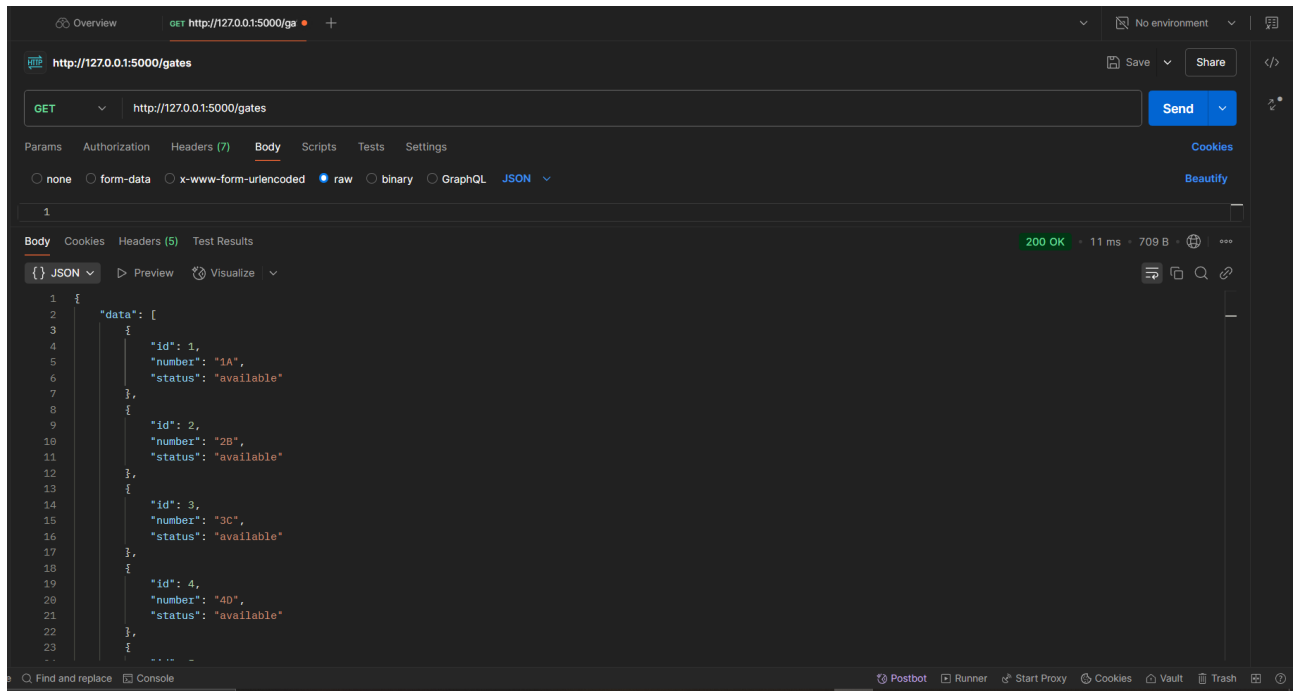

- No gate records

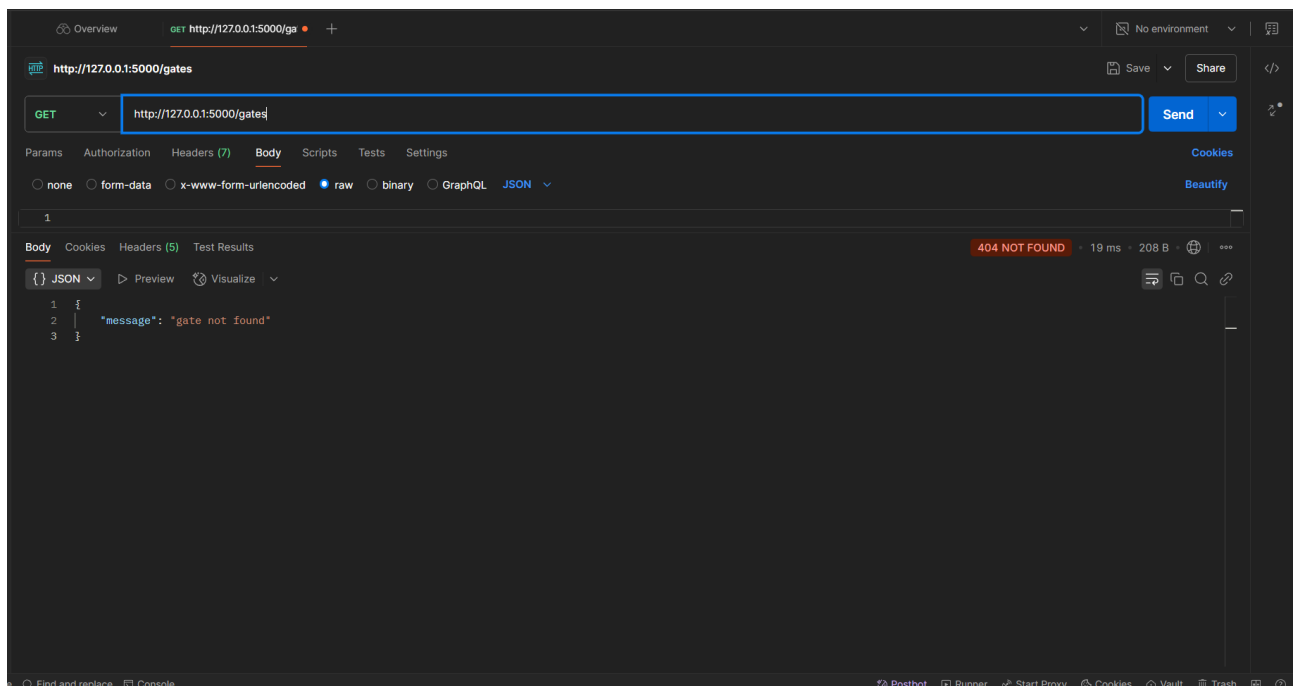

- **POST**
- Successful gate post

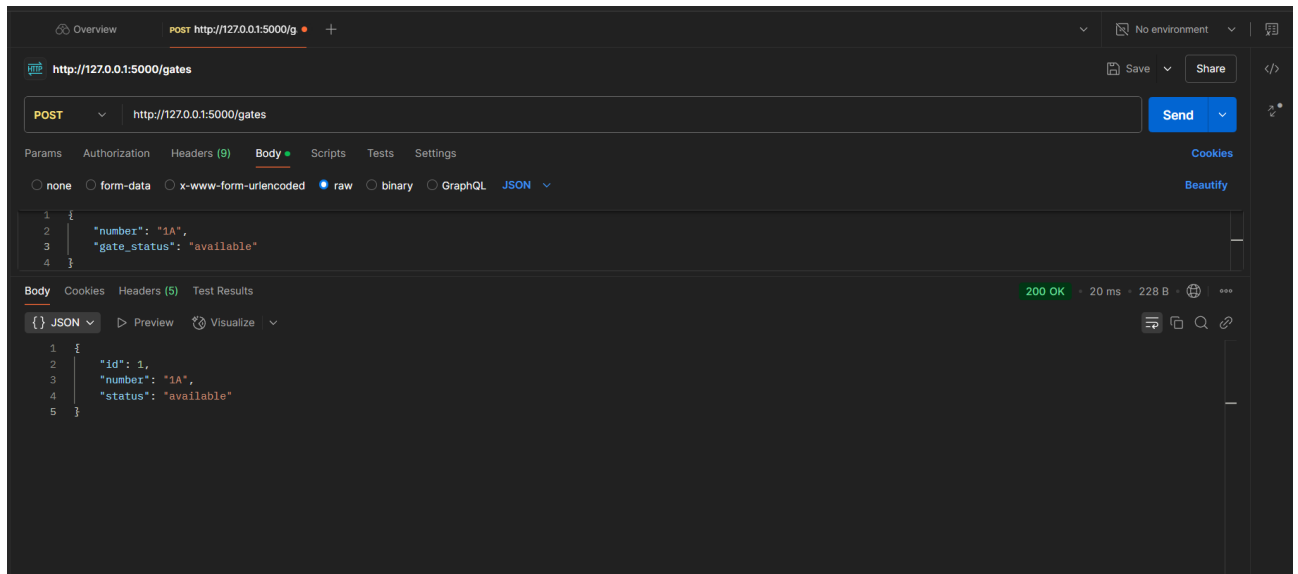


Database Before and After:

```
flightinfo=> select * from public.gate;
 id | number | gate_status | created_at | updated_at
-----+-----+-----+-----+-----
(0 rows)

flightinfo=> select * from public.gate;
 id | number | gate_status | created_at | updated_at
-----+-----+-----+-----+-----
  1 | 1A     | available   | 2025-04-13 20:55:13.363621 | 2025-04-13 20:55:13.363621
(1 row)
```

- Post attempt with existing gate

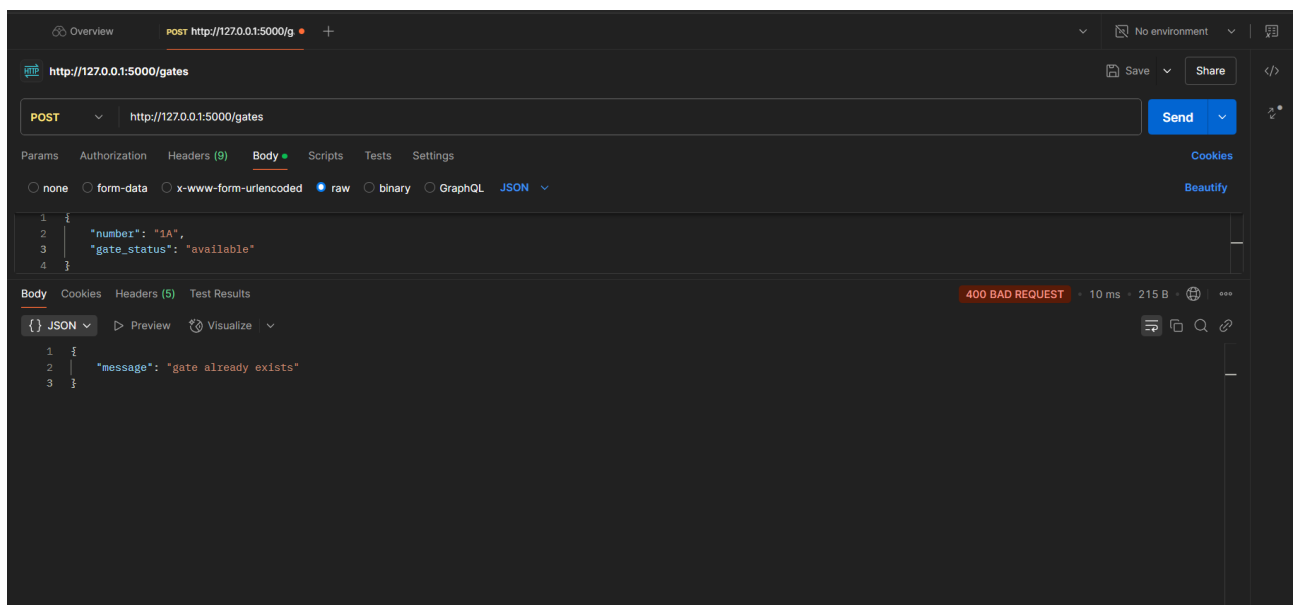


=====


/gates/<id>

=====

- **GET**
 - Successful get gate with id

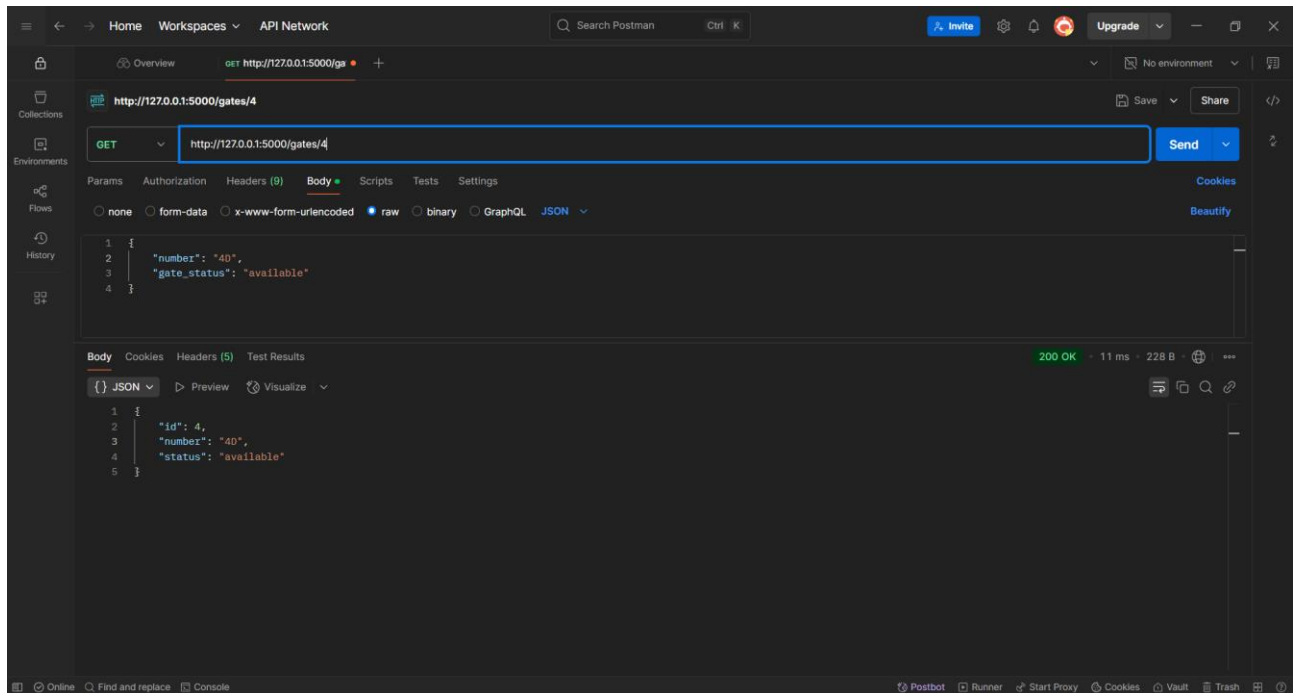

- No gates found

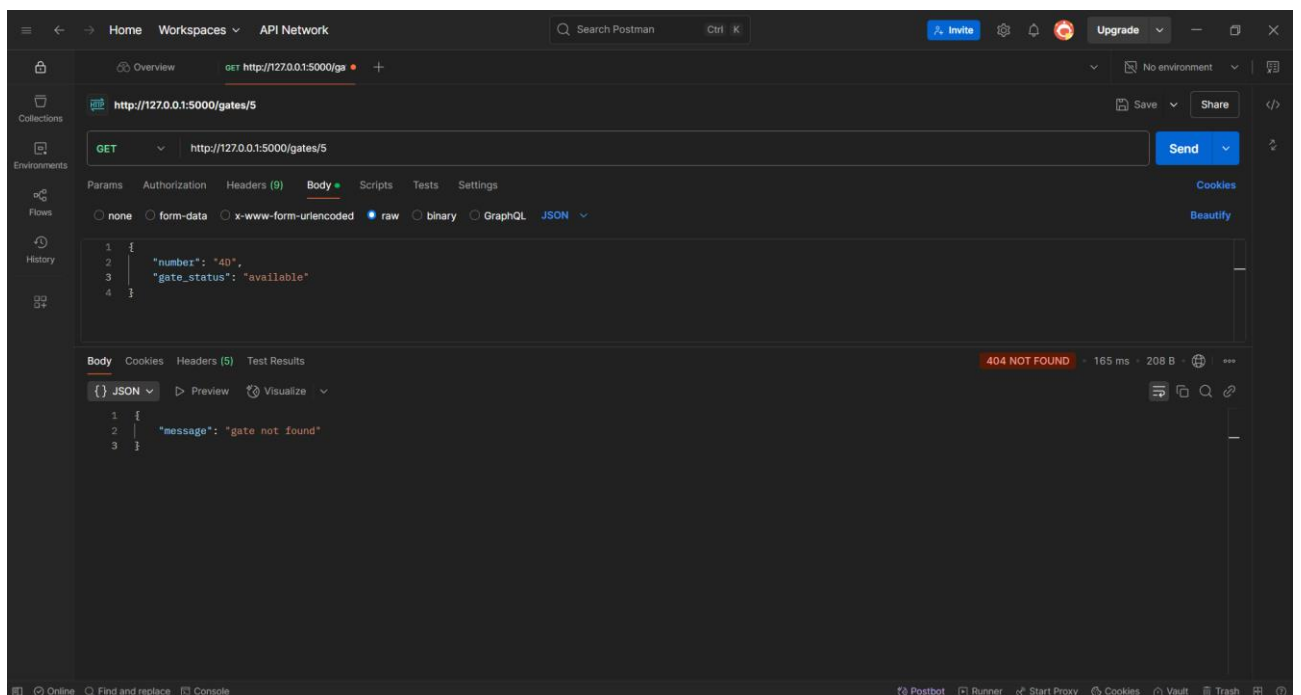


=====

/gates/<gid>/assign/<fid>

=====

- PUT
 - Successful assignment of gate on flight

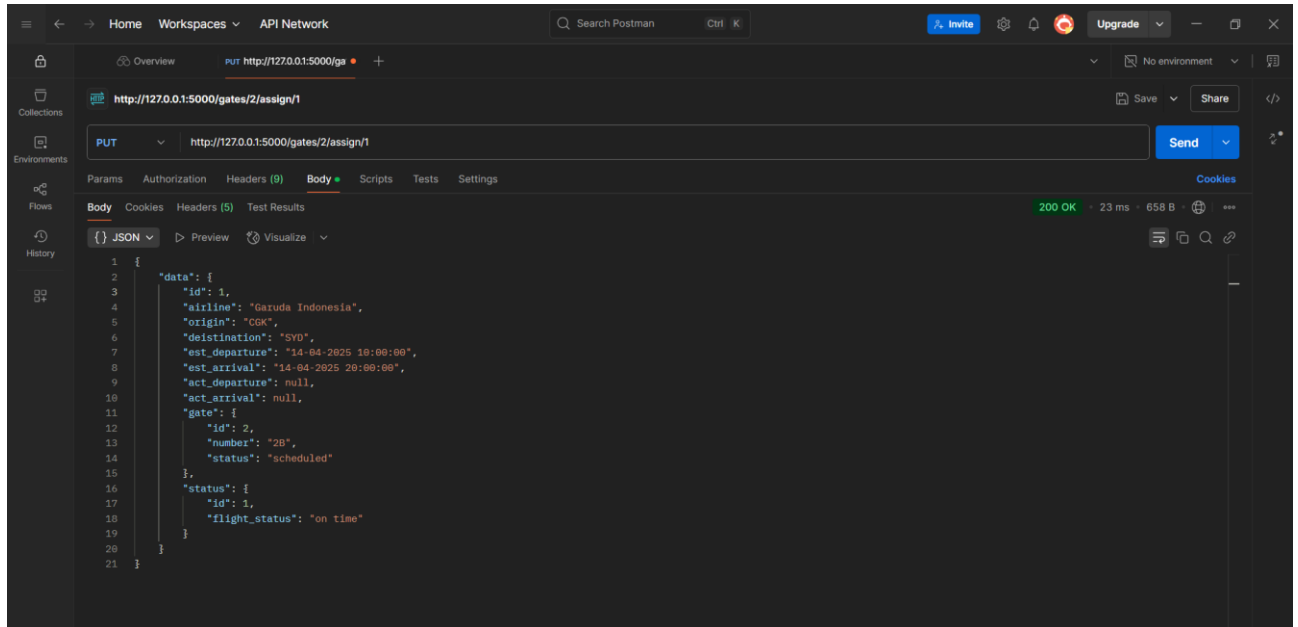

Database Before and After:

```
flightinfo=> select * from public.flight;
```

id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00			2025-04-13 20:11:24.3916	2025-04-13 20:16:19.516423	1	1


(1 row)

```
flightinfo=> select * from public.flight;
```


id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00			2025-04-13 20:11:24.3916	2025-04-13 20:16:31.171187	2	1

(1 row)

- Gate already in use

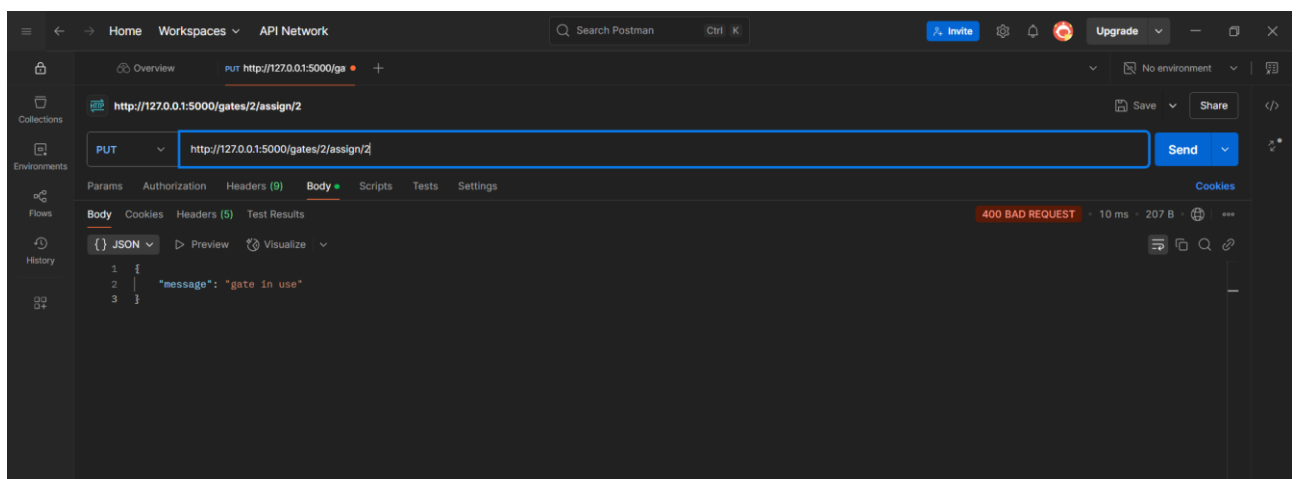

- **DELETE**
- Successful un-assignment of gate on flight

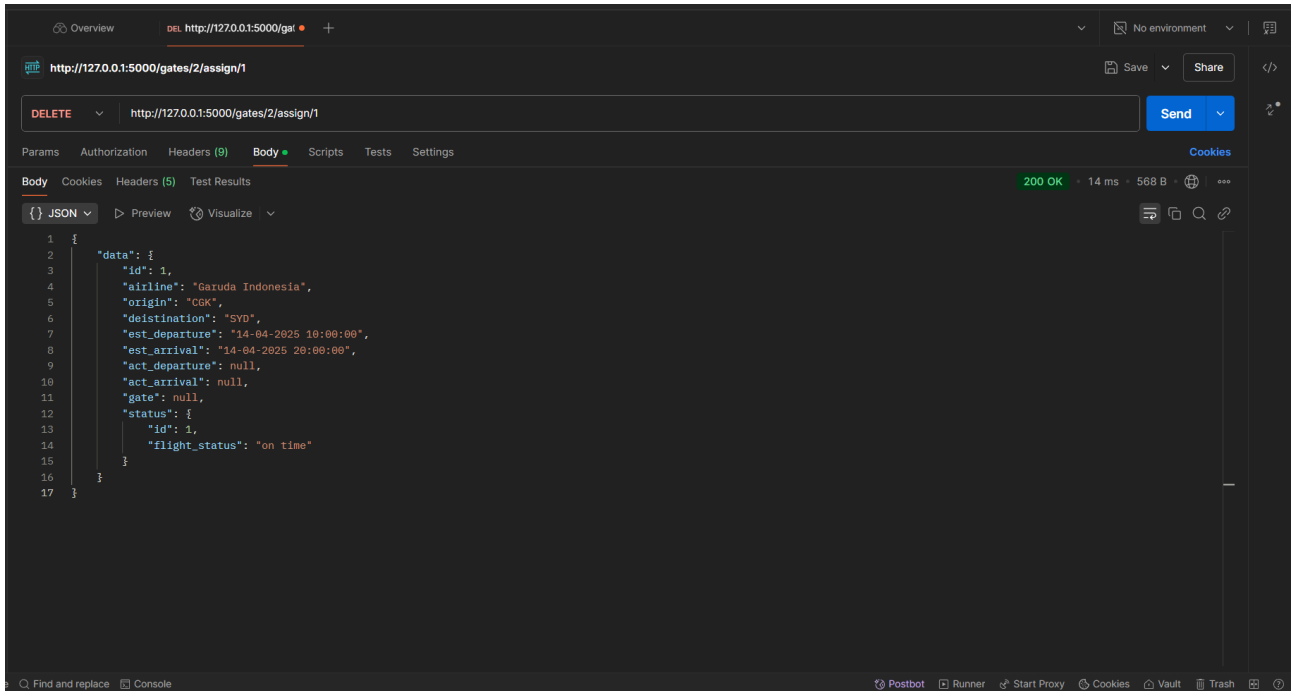

Database Before and After:

```
flightinfo=> select * from public.flight;
```

id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00			2025-04-13 20:11:24.3916	2025-04-13 20:16:31.171187	2	1


(1 row)

```
flightinfo=> select * from public.flight;
```

id	airline	origin	destination	est_departure	est_arrival	act_departure	act_arrival	created_at	updated_at	gate_id	status_id
1	Garuda Indonesia	CGK	SYD	2025-04-14 10:00:00	2025-04-14 20:00:00			2025-04-13 20:11:24.3916	2025-04-13 20:19:51.553247		1


(1 row)

- Gate was not assigned to the list

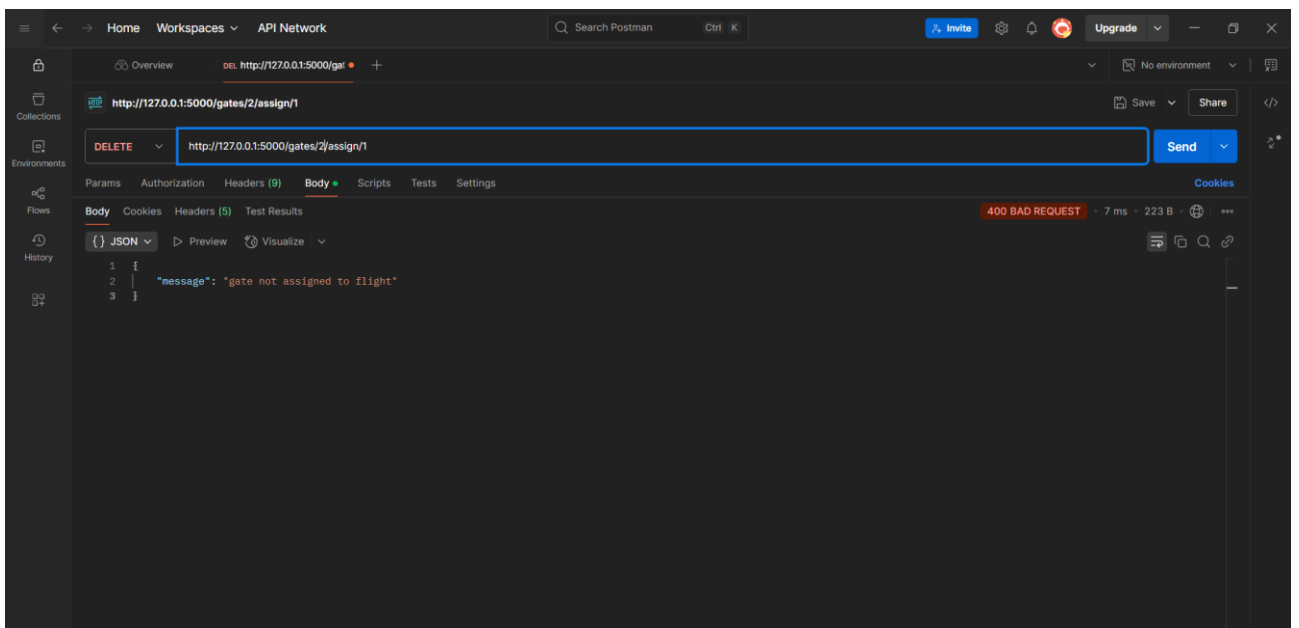


/gates/available

- **GET**
- List of Gates that are available

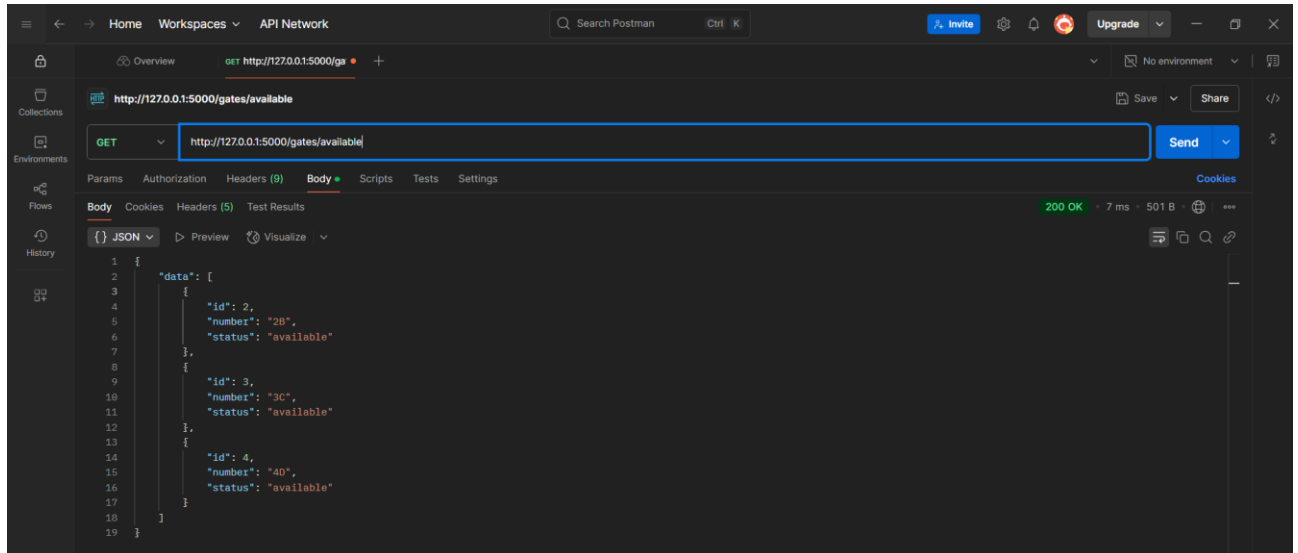


/status

- **GET**
- Successful get list of flight status

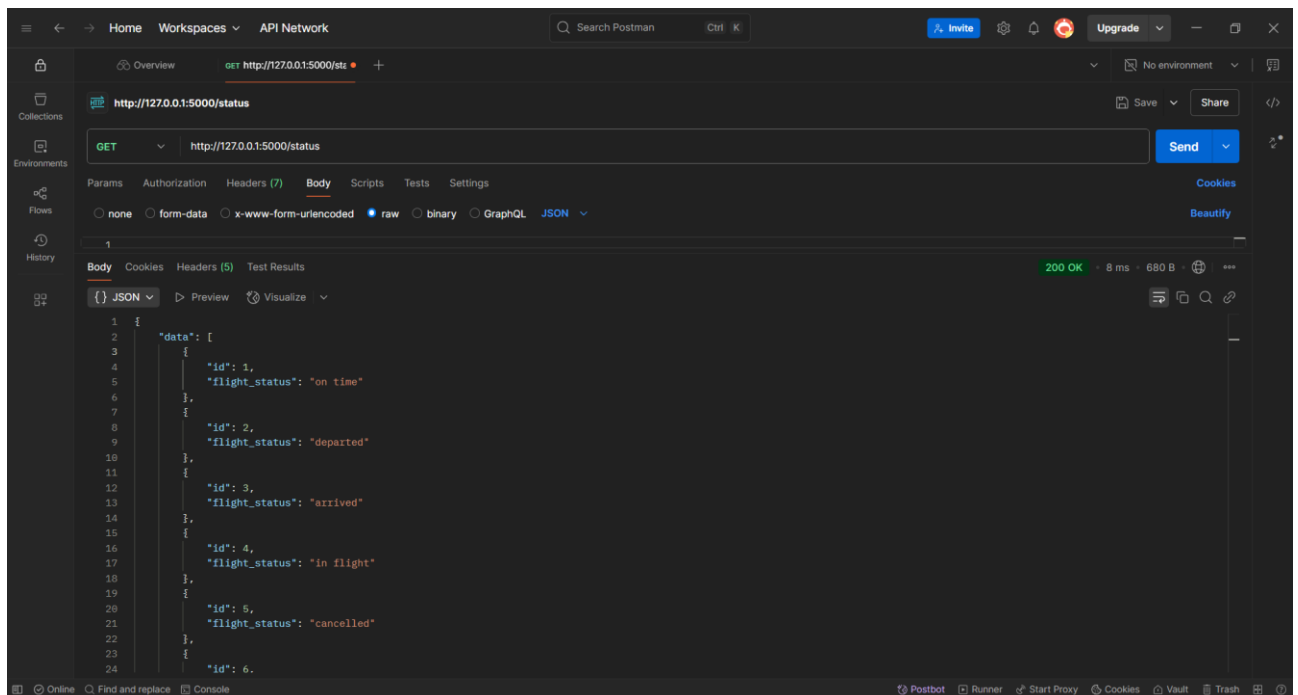

- **POST**
- Successful status post

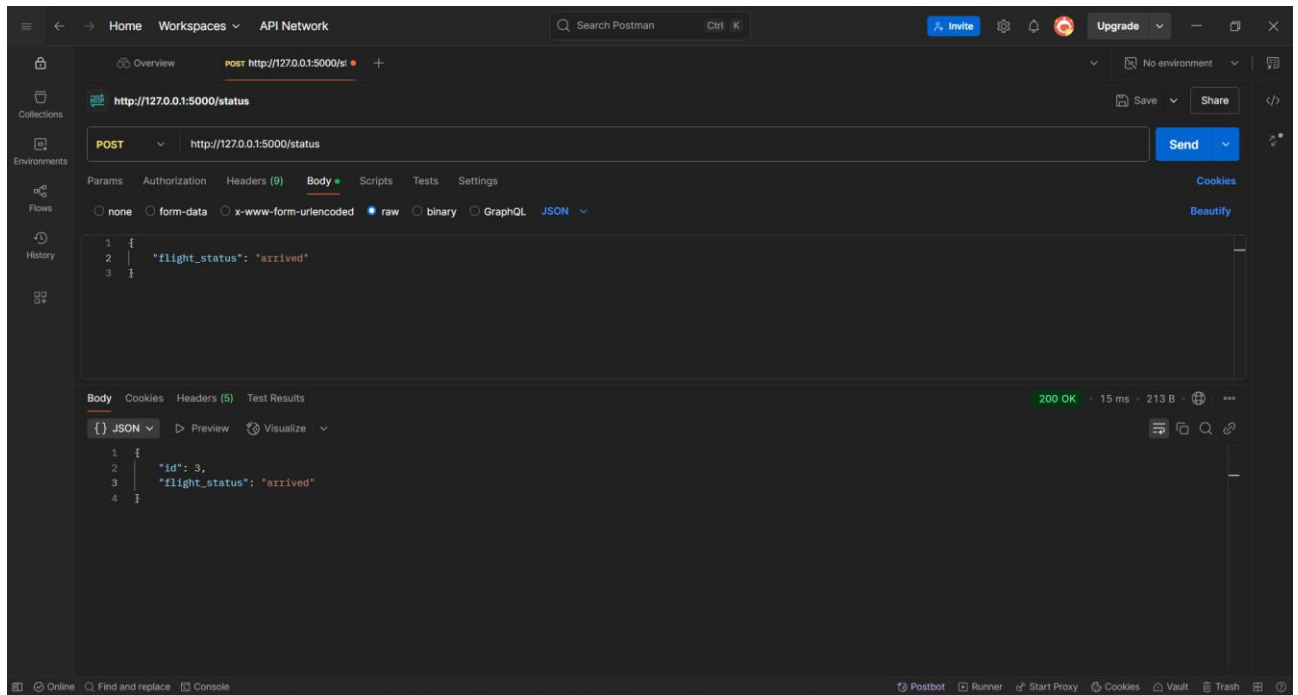


Database Before and After:

```
flightinfo=> select * from public.flight_status;
id | flight_status |          created_at          |          updated_at
-----+-----+-----+-----
 1 | on time      | 2025-04-13 21:00:10.586315 | 2025-04-13 21:00:10.586315
 2 | departed    | 2025-04-13 21:00:15.925305 | 2025-04-13 21:00:15.925305
(2 rows)
```

```
flightinfo=> select * from public.flight_status;
id | flight_status |          created_at          |          updated_at
-----+-----+-----+-----
 1 | on time      | 2025-04-13 21:00:10.586315 | 2025-04-13 21:00:10.586315
 2 | departed    | 2025-04-13 21:00:15.925305 | 2025-04-13 21:00:15.925305
 3 | arrived     | 2025-04-13 21:00:45.850098 | 2025-04-13 21:00:45.850098
(3 rows)
```

- Post attempt with existing status

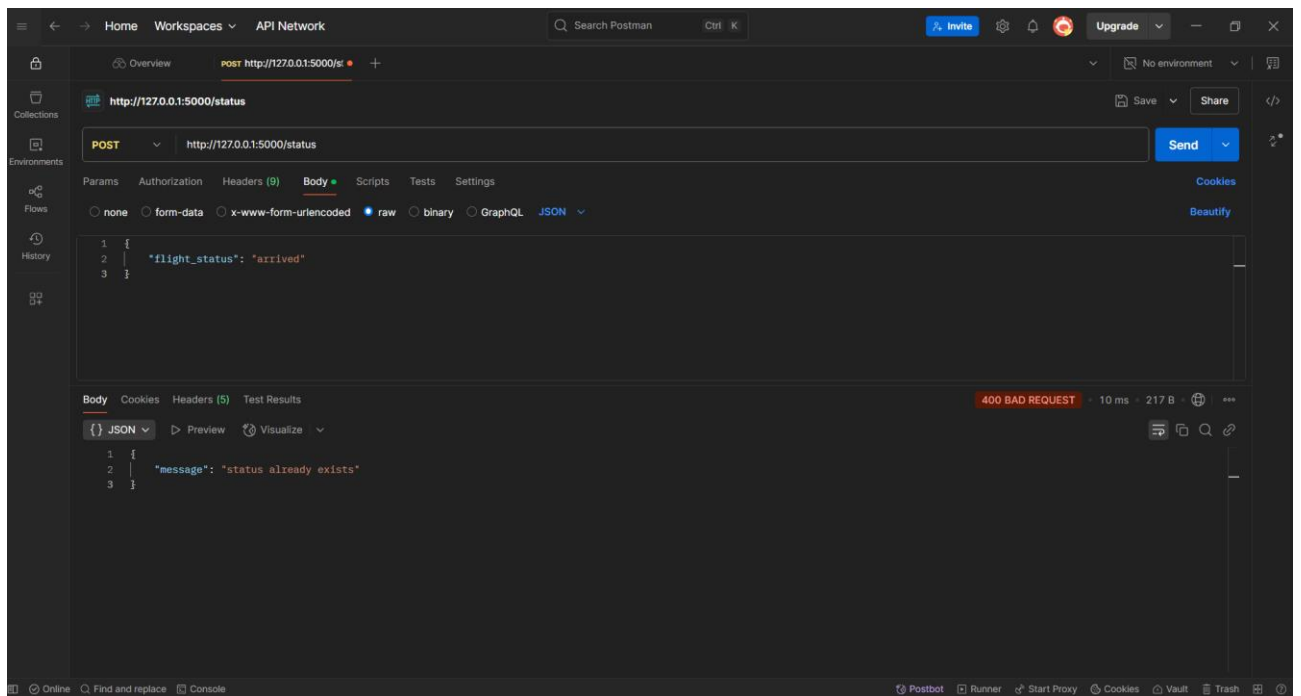


=====

/status/<id>

=====

- PUT
- Flight_status changed from delayed to rescheduled

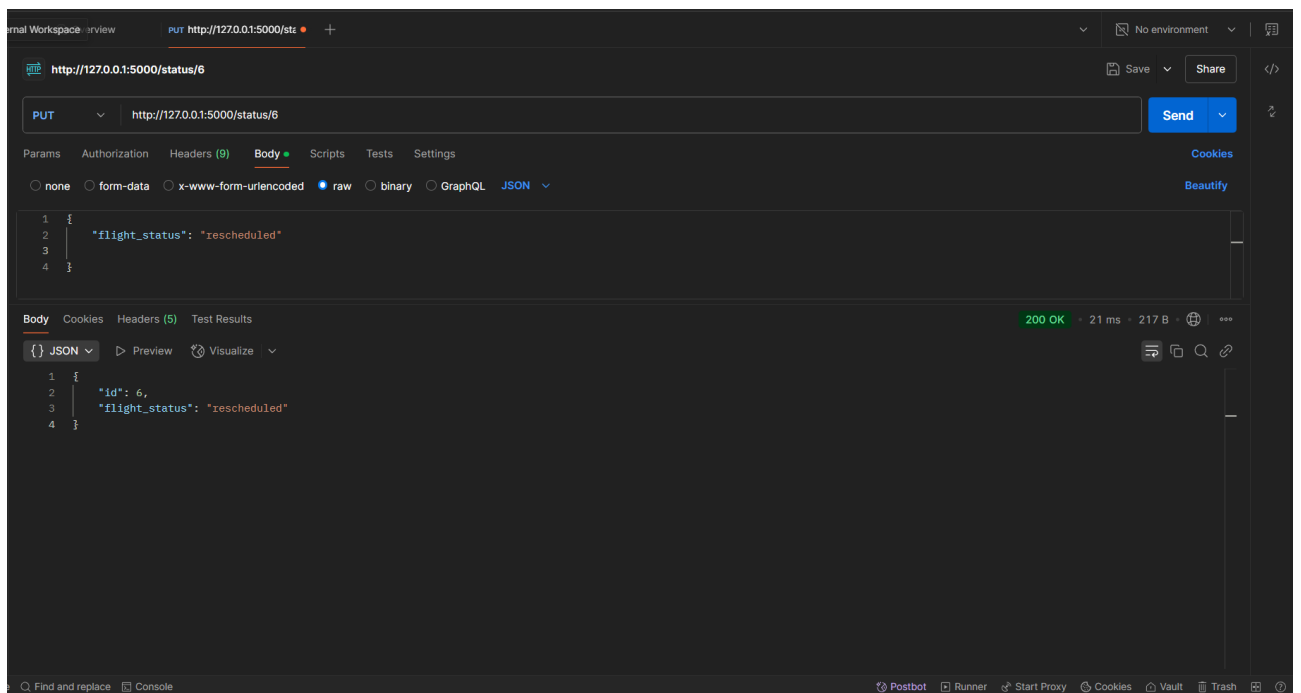


Database Before and After:

```
flightinfo=> select * from flight_status;
id | flight_status |          created_at          |          updated_at
-----+-----+-----+-----
 1 | on time      | 2025-04-13 21:00:10.586315 | 2025-04-13 21:00:10.586315
 2 | departed    | 2025-04-13 21:00:15.925305 | 2025-04-13 21:00:15.925305
 3 | arrived     | 2025-04-13 21:00:45.850098 | 2025-04-13 21:00:45.850098
 4 | in flight   | 2025-04-13 21:02:33.935643 | 2025-04-13 21:02:33.935643
 5 | cancelled   | 2025-04-13 21:02:37.92933  | 2025-04-13 21:02:37.92933
 6 | delayed     | 2025-04-13 21:02:41.966962 | 2025-04-13 21:04:18.134771
(6 rows)
```

```
flightinfo=> select * from flight_status;
id | flight_status |          created_at          |          updated_at
-----+-----+-----+-----
 1 | on time      | 2025-04-13 21:00:10.586315 | 2025-04-13 21:00:10.586315
 2 | departed    | 2025-04-13 21:00:15.925305 | 2025-04-13 21:00:15.925305
 3 | arrived     | 2025-04-13 21:00:45.850098 | 2025-04-13 21:00:45.850098
 4 | in flight   | 2025-04-13 21:02:33.935643 | 2025-04-13 21:02:33.935643
 5 | cancelled   | 2025-04-13 21:02:37.92933  | 2025-04-13 21:02:37.92933
 6 | rescheduled | 2025-04-13 21:02:41.966962 | 2025-04-13 21:04:50.666782
(6 rows)
```

- **DELETE**

- Successfully deleted flight status = 4

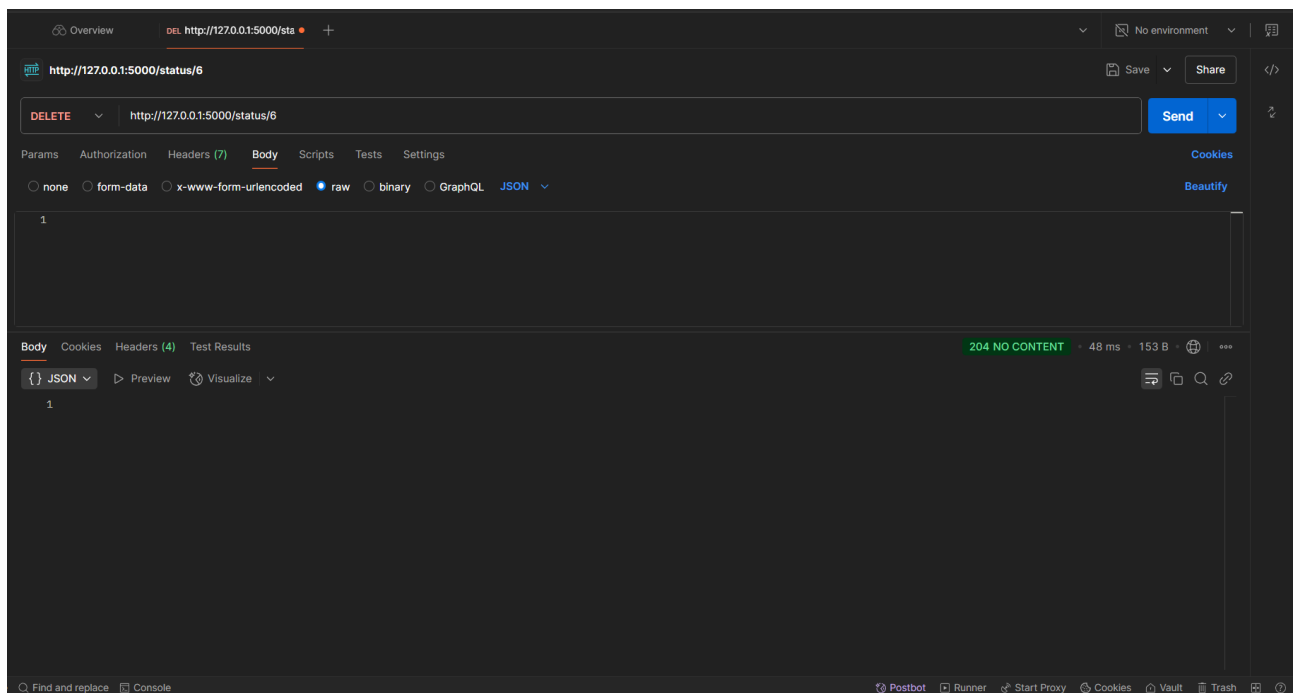

Database Before and After:

```
flightinfo=> select * from flight_status;
```

id	flight_status	created_at	updated_at
1	on time	2025-04-13 21:00:10.586315	2025-04-13 21:00:10.586315
2	departed	2025-04-13 21:00:15.925305	2025-04-13 21:00:15.925305
3	arrived	2025-04-13 21:00:45.850098	2025-04-13 21:00:45.850098
5	cancelled	2025-04-13 21:02:37.92933	2025-04-13 21:02:37.92933
6	rescheduled	2025-04-13 21:02:41.966962	2025-04-13 21:04:50.666782
4	cancelled	2025-04-13 21:02:33.935643	2025-04-13 21:05:42.648791

(6 rows)


```
flightinfo=> select * from flight_status;
```

id	flight_status	created_at	updated_at
1	on time	2025-04-13 21:00:10.586315	2025-04-13 21:00:10.586315
2	departed	2025-04-13 21:00:15.925305	2025-04-13 21:00:15.925305
3	arrived	2025-04-13 21:00:45.850098	2025-04-13 21:00:45.850098
5	cancelled	2025-04-13 21:02:37.92933	2025-04-13 21:02:37.92933
6	rescheduled	2025-04-13 21:02:41.966962	2025-04-13 21:04:50.666782

(5 rows)

- Prevents deleting restricted flight status

The screenshot shows a REST client interface with the following details:

- URL:** `http://127.0.0.1:5000/status/2`
- Method:** `DELETE`
- Body:** `1`
- Response:** `403 FORBIDDEN` (3.19 s, 258 B)
- JSON Body:**

```
{
  "message": "Cannot delete flight status 'departed' because it is restricted."
}
```