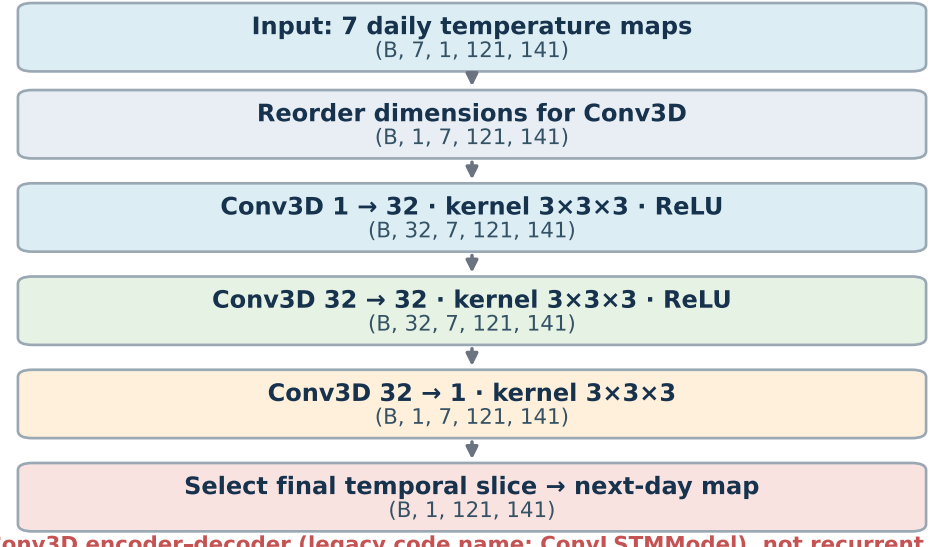
Implemented model architecture
29,441 trainable parameters · no recurrent gates, hidden state, or cell state
Input: 7 daily temperature maps
(B, 7, 1, 121, 141)
Reorder dimensions for Conv3D
(B, 1, 7, 121, 141)
Conv3D 1 → 32 · kernel 3×3×3 · ReLU
(B, 32, 7, 121, 141)
Conv3D 32 → 32 · kernel 3×3×3 · ReLU
(B, 32, 7, 121, 141)
Conv3D 32 → 1 · kernel 3×3×3
(B, 1, 7, 121, 141)
Select final temporal slice → next-day map
(B, 1, 121, 141)
This is a Conv3D encoder–decoder (legacy code name: ConvLSTMModel), not recurrent ConvLSTM.