
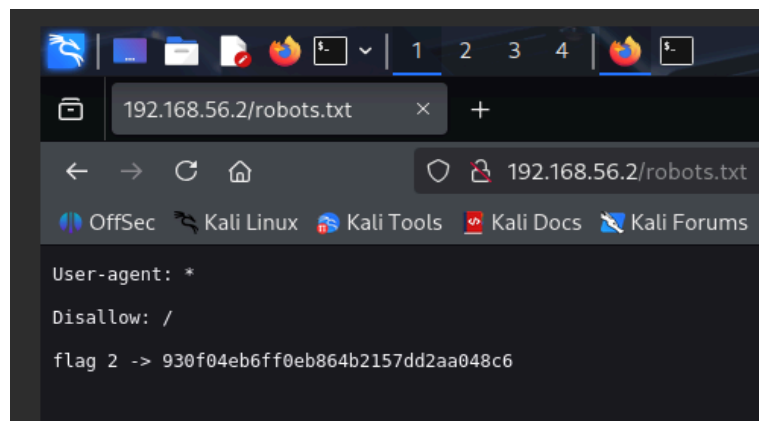
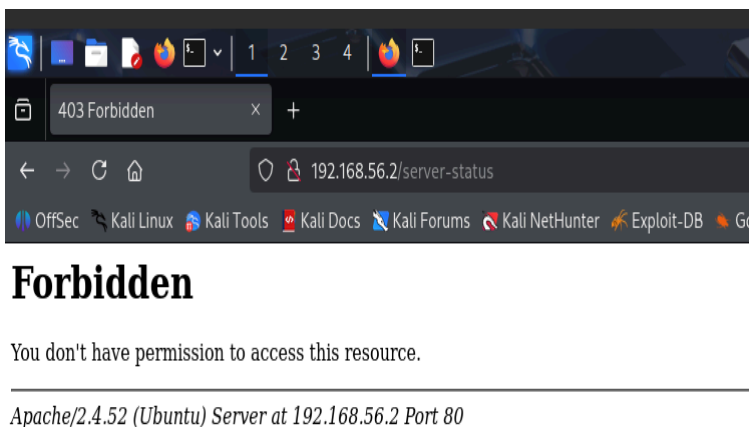
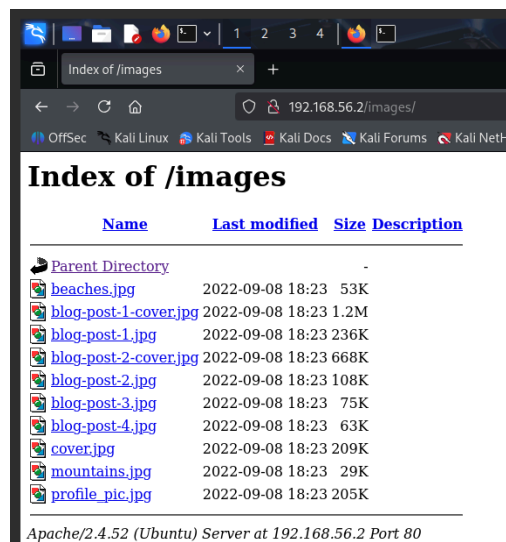
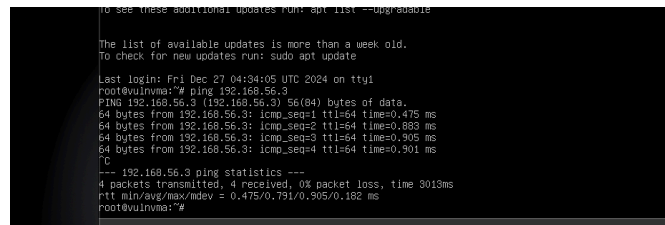
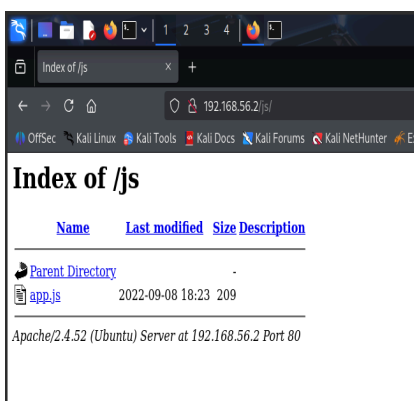


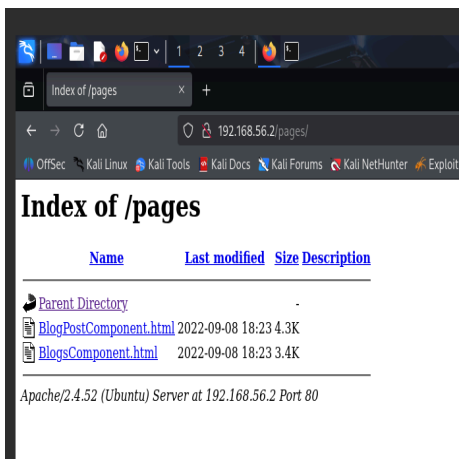


```
Disallow: /
flag 2 -> 930f04eb6ff0eb864b2157dd2aa048c6
```

```
49 <div class="clear-div"></div>
50
51 <footer class="footer">
52   <!-- flag 3 --> b35e7489cf89d4188c85d921a2f79821 -->
53 </footer>
54
55 <script src="../../js/app.js"></script>
56 </body>
57 </html>
```

[illegible][illegible]

DIRB v2.22
By The Dark Raver

```
START_TIME: Sun Sep 21 05:35:23 2025
URL_BASE: http://192.168.56.2/
WORDLIST_FILES: /usr/share/wordlists/dirb/big.txt
```

GENERATED WORDS: 20458

— Scanning URL: http://192.168.56.2/ —

⇒ DIRECTORY: <http://192.168.56.2/4dm1n/>

```
⇒ DIRECTORY: http://192.168.56.2/css/
```

```
⇒ DIRECTORY: http://192.168.56.2/images/
```

```
⇒ DIRECTORY: http://192.168.56.2/js/
```

```
⇒ DIRECTORY: http://192.168.56.2/pages/  
+ http://192.168.56.2/robots.txt (CODE:200|SIZE:71)  
+ http://192.168.56.2/server-status (CODE:403|SIZE:277)
```

```
--- Entering directory: http://192.168.56.2/4dm1n/ ---
```

```

— Entering directory: http://192.168.56.2/css/ —
(!) WARNING: Directory IS LISTABLE. No need to scan it.
(Use mode '-w' if you want to scan it anyway)

```

```
— Entering directory: http://192.168.56.2/images/ —
(!) WARNING: Directory IS LISTABLE. No need to scan it.
(Use mode '-w' if you want to scan it anyway)
```

```

— Entering directory: http://192.168.56.2/js/ —
(!) WARNING: Directory IS LISTABLE. No need to scan it.
(Use mode '-w' if you want to scan it anyway)





```

```

— Entering directory: http://192.168.56.2/pages/ —
(!) WARNING: Directory IS LISTABLE. No need to scan it.
(Use mode '-w' if you want to scan it anyway)

```

```
END_TIME: Sun Sep 21 05:36:01 2025
DOWNLOADED: 40916 - FOUND: 2
```
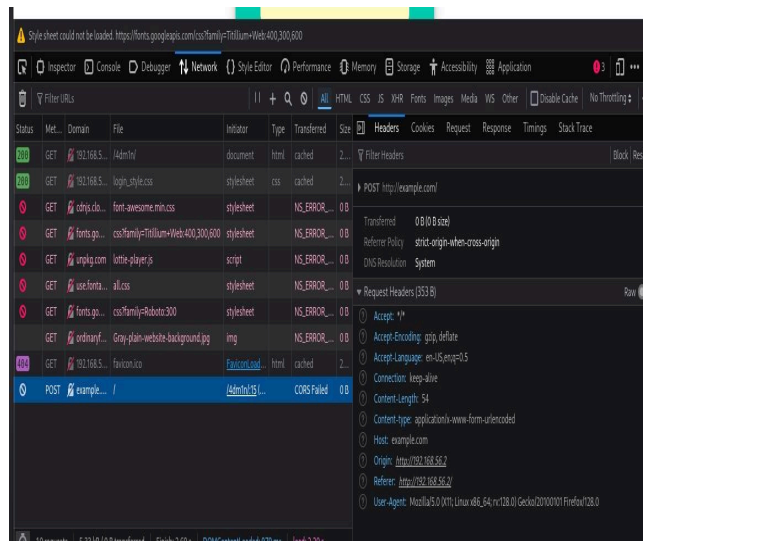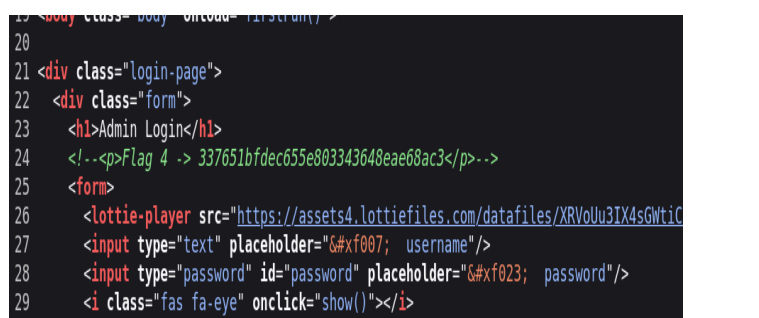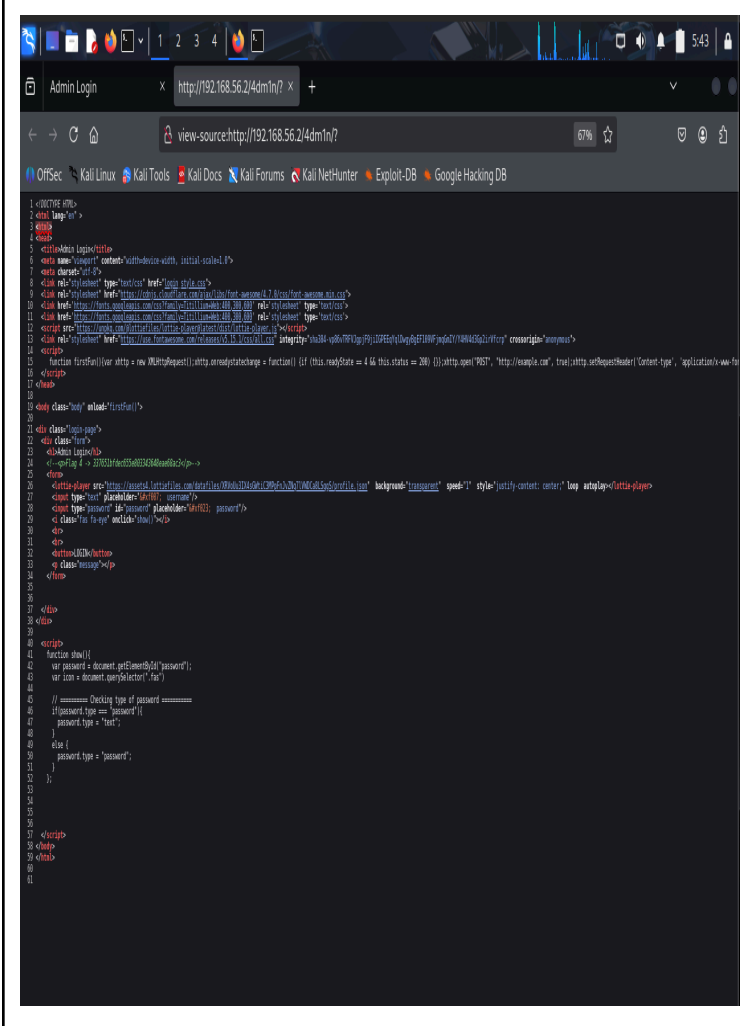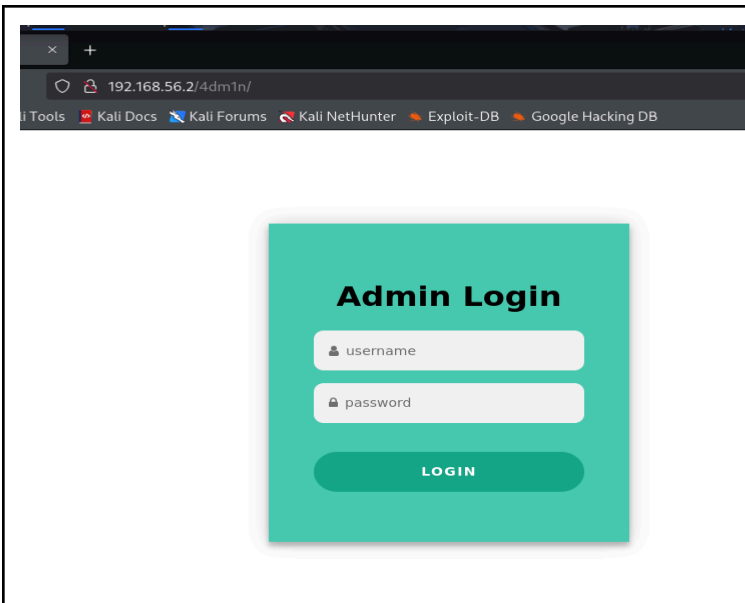
```
File Actions Edit View Help
(kalimainusers@kali)~$ ftp 192.168.56.2
Connected to 192.168.56.2.
220 (vsFTPD 3.0.5)
Name (192.168.56.2:kalimainusers): anonymous
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>
```

```
(kalimainusers@kali)~$ ftp 192.168.56.2
Connected to 192.168.56.2.
220 (vsFTPD 3.0.5)
Name (192.168.56.2:kalimainusers): anonymous
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> put newFile.txt
local: newFile.txt remote: newFile.txt
229 Entering Extended Passive Mode (|||26880|)
ftp: Can't connect to '192.168.56.2:26880': Connection timed out
200 EPRT command successful. Consider using EPSV.
550 Permission denied.
ftp>
```

```
421 Timeout.
(kalimainusers@kali)~$ cat flag1.txt
bd923112d59c477a94c9998379152258
(kalimainusers@kali)~$
```

```
File Actions Edit View Help
zsh: corrupt history file /home/kalimainusers/.zsh_history
(kalimainusers@kali)~$ ftp 192.168.56.2
Connected to 192.168.56.2.
220 (vsFTPD 3.0.5)
Name (192.168.56.2:kalimainusers): anonymous
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
229 Entering Extended Passive Mode (|||29543|)
ftp: Can't connect to '192.168.56.2:29543': Connection timed out
200 EPRT command successful. Consider using EPSV.
150 Here comes the directory listing.
-rw-r--r-- 1 0 0 33 Sep 06 2022 flag1.txt
226 Directory send OK.
ftp> get flag1.txt
local: flag1.txt remote: flag1.txt
200 EPRT command successful. Consider using EPSV.
150 Opening BINARY mode data connection for flag1.txt (33 bytes).
100% |*****| 33 7.27 KiB/s 00:00 ETA
226 Transfer complete.
33 bytes received in 00:00 (5.56 KiB/s)
ftp> exit
```

```
250 Directory successfully changed.
ftp> ls -la
200 EPRT command successful. Consider using EPSV.
150 Here comes the directory listing.
drwxr-xr-x 2 0 0 4096 Sep 06 2022 .
drwxr-xr-x 2 0 0 4096 Sep 06 2022 ..
```

```
File Actions Edit View Help
zsh: corrupt history file /home/kalimainusers/.zsh_history
(kalimainusers@kali)~$ burpsuite
[warning] /usr/bin/burpsuite: No JAVA_CMD set for run_java, falling back to J
AVA_CMD = java
Your JRE appears to be version 21.0.7 from Debian
Burp has not been fully tested on this platform and you may experience proble
ms.
```

Connection Settings

Configure Proxy Access to the Internet

No proxy

Auto-detect proxy settings for this network

Use system proxy settings

Manual proxy configuration

HTTP Proxy127.0.0.1Port8080

☒ Also use this proxy for HTTPS

HTTPS Proxy127.0.0.1Port8080

SOCKS HostPort0

SOCKS v4

SOCKS v5

Automatic proxy configuration URL

Reload

No proxy for

Example: .mozilla.org, .net.nz, 192.168.1.0/24

Connections to localhost, 127.0.0.1/8, and ::1 are never proxied.

☐ Do not prompt for authentication if password is saved

☐ Proxy DNS when using SOCKS v4

☒ Proxy DNS when using SOCKS v5

Cancel

OK

The top screenshot shows the Burp Suite interface with the 'Intercept' toggle set to 'off'. The message 'Intercept is off' is displayed, along with a note: 'If you turn Intercept on, messages between Burp's browser and your target servers are held here. This enables you to analyze and modify these messages, before you forward them.' There are 'Learn more' and 'Open browser' buttons.

The bottom screenshot shows the same interface but with the 'Intercept' toggle set to 'on'. The message 'Intercept is on' is displayed, along with the same explanatory note and buttons. A red arrow points to the 'Intercept' toggle button in the top left of the interface.

Screenshot: Simulated Web Application Pen Testing N.S 7

