



LETTER OF AGREEMENT

between

Polish VACC
Warszawa FIR

and

VATSIM Scandinavia
Sweden FIR

Content

1. General.....	3
1.1. Purpose.....	3
1.2. Distribution.....	3
1.3. Validity.....	3
2. Areas of Responsibility & Sectorization	4
2.1. Areas of Responsibility.....	4
2.1.1. Warszawa FIR	4
2.1.2. Sweden FIR	4
2.2. Sectorization.....	5
2.2.1. Sector Map	5
2.2.2. Sectors Warszawa FIR	6
2.2.3. Sectors Sweden FIR.....	8
3. Delegated airspace	10
3.1. Airspace delegated from FIR Warszawa to Sweden FIR.....	10
3.1.1. Delegation of ATS from FIR Warszawa (EPWW) to Malmö AoR (ESMM).....	10
3.2. Airspace delegated from Sweden FIR to FIR Warszawa	10
4. Procedures for Coordination.....	11
4.2. Special Procedures.....	11
4.2.1. Flights from Sweden FIR to Polish VACC.....	11
4.2.2. Flights from Polish VACC to Sweden FIR.....	12
4.3. FRA	14
4.4 . VFR Flights	14
5. Transfer of Control and Transfer of Communications	15
5.1. Transfer of Control	15
5.2. Transfer of Communications	15
5.2.1 . Flights from Sweden AoR to Polish VACC.....	15
5.2.2. Flights from Polish VACC to Sweden FIR.....	15
6. Radar Based Coordination Procedures	16
6.1. SSR Code Assignment.....	16
6.2. Radar Coordination Procedures.....	16
6.2.1. Transfer of Radar Control.....	16
6.2.2. Silent Transfer of Radar Control.....	16

1. General

1.1. Purpose

The purpose of this Letter of Agreement (LoA) is to define the coordination procedures to be applied between Polish VACC and Sweden FIR when providing ATS on the VATSIM network.

1.2. Distribution

All operationally significant information and procedures contained in this Letter of Agreement shall be distributed by the appropriate means to all concerned controllers.

1.3. Validity

This Letter of Agreement becomes effective 19 FEB 2026 and supersedes the Letter of Agreement between Polish VACC and Sweden FIR dated 17 APR 2025.

Dawid Kalinowski
Warszawa FIR, Director
Polish VACC

Martin Loxbo
Sweden FIR, Director
VATSIM Scandinavia

2. Areas of Responsibility & Sectorization

2.1. Areas of Responsibility

2.1.1. Warszawa FIR

Lateral limits:	Warszawa FIR as described in AIP Poland
Vertical limits:	GND – FL660


2.1.2. Sweden FIR

Lateral limits:	Sweden FIR as described in AIP Sweden
Vertical limits:	GND – UNL

2.2. Sectorization

For detailed coordinates and sector ownerships refer to GNG, AIP Poland or AIP Sweden.

2.2.1. Sector Map

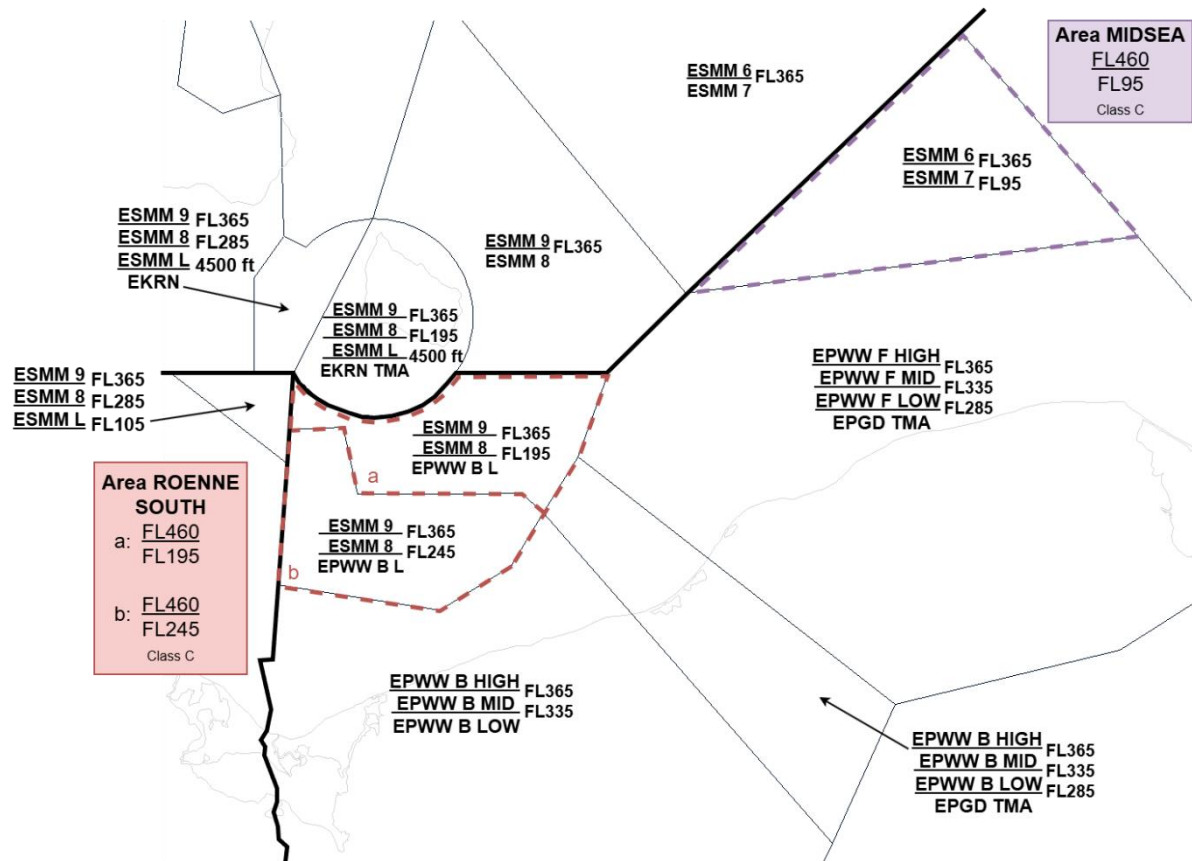

2.2.2. Sectors Warszawa FIR

Detailed ATS units AoR available [here](#).

Sector Gdańsk Approach (AGD):

Lateral limits: UTMA and TMA EPGD

Vertical limits: GND - FL285

Responsible ATS unit: EPGD_APP (Gdańsk Approach) 127.280

Sector Warszawa B LOW (BWW):

Lateral limits: ACC Warszawa sector B

Vertical limits: FL95 - FL365

Sector Warszawa B MID (BWW):

Lateral limits: ACC Warszawa sector B

Vertical limits: FL335 - FL365

Sector Warszawa B HIGH (BWW):

Lateral limits: ACC Warszawa sector B

Vertical limits: FL365 - FL660

Sector Warszawa F LOW (FWW):

Lateral limits: ACC Warszawa sector F

Vertical limits: FL95 - FL335

Above AGD: FL285 - FL335

Sector Warszawa F MID (FWW):

Lateral limits: ACC Warszawa sector F

Vertical limits: FL335 - FL365

Sector Warszawa F MID (FWW):

Lateral limits: ACC Warszawa sector F

Vertical limits: FL365 - FL660

2.2.3. Sectors Sweden FIR

Sector Rönne TWR:

Lateral limits:	Rönne TMA		
Vertical limits:	GND – 4500 ft AMSL		
	Responsible ATS unit		
	EKRN_TWR	(Rönne Tower)	118.330

Sector ESMM L:

Lateral limits:	Rönne TMA		
Vertical limits:	4500 ft AMSL – FL195		
	Responsible ATS unit		
	ESMS_APP	(Sweden Control)	134.980

Sector ESMM 6:

Lateral limits:	East of E016.14.00		
Vertical limits:	FL365 - UNL		
	Responsible ATS unit		
	ESMM_6_CTR	(Sweden Control)	135.805

Sector ESMM 7:

Lateral limits:	East of E016.14.00		
Vertical limits:	GND – FL365		
	Responsible ATS unit		
	ESMM_7_CTR	(Sweden Control)	124.155

Sector ESMM 8:

Lateral limits:	West of E016.14.00		
Vertical limits:	GND – FL365		
	Responsible ATS unit		
	ESMM_8_CTR	(Sweden Control)	128.180

Sector ESMM 9:

Lateral limits: West of E016.14.00

Vertical limits: FL365 - UNL

Responsible ATS unit

ESMM_9_CTR (Sweden Control) 135.985

3. Delegated airspace

3.1. Airspace delegated from FIR Warszawa to Sweden FIR

3.1.1. Delegation of ATS from FIR Warszawa (EPWW) to Malmö AoR (ESMM)

3.1.1.1. Area MIDSEA

Lateral limits: 555100N 0173300E - 551724N 0182353E -
550801N 0161410E - 555100N 0173300E
Vertical limits: FL95 - FL460
Airspace classification: C

3.1.1.2. Area RÖNNE SOUTH a

Lateral limits: 545500N 0142127E - along SWEDEN FIR border eastward to -
545500N 0155200E - 544106N 0154309E -
543154N 0153312E - 543509N 0152654E -
543500N 0151400E - 543500N 0143945E -
544600N 0143530E - 544534N 0142012E -
545500N 0142127E
Vertical limits: FL195 - FL460
Airspace classification: C

3.1.1.2. Area RÖNNE SOUTH b

Lateral limits: 544600N 0143530E - 543500N 0143945E -
543500N 0151400E - 543509N 0152654E -
543154N 0153312E - 542306N 0152346E -
541545N 0150321E - 542000N 0141650E -
544534N 0142012E - 544600N 0143530E
Vertical limits: FL245 - FL460
Airspace classification: C

3.2. Airspace delegated from Sweden FIR to FIR Warszawa

Not applicable

4. Procedures for Coordination

4.1. ATS Routes and Flight Level Allocation

Standard flight level allocation is to be used on all routes.

Note: Standard flight level allocation (in RVSM airspace) means that aircraft on eastbound routes (magnetic track 360°-179°) are to use odd flight levels and westbound flights (magnetic track 180°-359°) are to use even flight levels.

4.2. Special Procedures

Note: A “release” is an authorization for the accepting unit to climb, descend or turn (by not more than 45°) a specific aircraft before the transfer of control.

4.2.1. Flights from Sweden FIR to Polish VACC

4.2.1.1. Flights from Malmö AoR (ESMM) to Warszawa FIR/UIR (EPWW)

EPGD arrivals

ESMM shall clear traffic with destination EPGD via COP MOTAD and RIVDI to FL270 to cross COP or abeam at FL280 or below, or at cruise level if lower. Transfer of communication shall be made to EPGD APP. The traffic is released to EPGD APP for descent and turn with regard to known traffic and activated D-areas.

Traffic with destination EPGD via COP ELPOL and RUMAR shall be transferred at FL330, or at RFL if lower. Traffic between FL290 and FL330 is released by ESMM to EPWW for descent and turns 20 NM from AoR boundary with regard to known traffic and activated D-areas.

EPSC arrivals

Traffic with destination EPSC via COP XELOL will be cleared by ESMM to FL190, or at cruise level if lower, to cross COP or abeam at FL290 or below.

EKCH and ESMS departures

Traffic from EKCH and ESMS shall be cleared by ESMM to FL350, or RFL if lower. Traffic may be transferred climbing to the coordinated level. Traffic at, or climbing to, FL350 is released to EPWW for climb to FL360 with regard to known traffic and activated D-areas.

Note: *ESMM must effect coordination with EPWW B/F Low, if split from EPWW B/F Mid, if the Low sector is affected. If the Low and Mid sectors are controlled by the same position, coordination is not required*

EKRN Departures

ESMM shall coordinate a level with EPWW for EKRN departures. Unless otherwise requested by EPWW, traffic may be transferred climbing to the coordinated level.

4.2.1.2 General Directs

ESMM may use the following general direct routes without prior coordination provided traffic passes the AoR boundary at least 2.5 NM from the lateral border of both the transferring and receiving sector and the waypoint is in the FPL route of the aircraft:

ADES	General Direct
EPWA	SORIX
EPGD	OGDAV

Additionally, ESMM may clear other traffic towards EPWW direct any waypoint within EPWW FIR provided that the waypoint is in the FPL route of the aircraft.

4.2.2. Flights from Polish VACC to Sweden FIR

4.2.2.1. Flights from Warszawa FIR/UIR (EPWW) to Malmö AoR (ESMM)

EPGD departures

Departing traffic from EPGD via COP MOTAD shall be cleared to FL260 or cruise level if lower. The traffic is released to ESMM for climb to FL280 and turn with regard to known traffic and activated D-areas. Further climb and turn shall be coordinated with EPWW.

Departing traffic from EPGD via COP DEVEL and RUMAR shall be cleared by EPWW to FL320 or cruise level if lower. This traffic is released to ESMM for climb and turn with regard to known traffic and activated D-areas.

***Note:** ESMM must effect coordination with EPWW B/F Mid, if split from EPWW B/F Low, before issuing climb above FL330. ESMM must effect coordination with EPWW B/F High, if split from EPWW B/F Mid, before issuing climb above FL360. If the relevant sectors are controlled by the same position, traffic is released for climb to RFL upon transfer.*

Northbound traffic filed via L617 and M70

Northbound traffic filed via L617 and M70 shall be regarded as one flow of traffic. Required radar separation shall be constant or increasing measured from KOLOB.

North- and northwestbound traffic

North- and northwestbound traffic is released to ESMM for turn 20 NM before the AoR boundary with regard to known traffic and activated D-areas.

EKCH and ESMS Arrivals

Traffic to EKCH and ESMS shall be transferred to ESMM at FL360, or RFL if lower. Traffic is released for turn and descent 20 NM before the AoR boundary with regard to known traffic and activated D-areas.

***Note:** In case traffic is coordinated to be transferred to ESMM at levels above FL360, it is only released for descent to FL370 if EPWW B/F Mid are split from EPWW B/F High. For ESMM to issue descent below FL370, coordination must be effected with the appropriate Mid sector. For ESMM to issue descent below FL340, coordination must be effected with the appropriate Mid and Low sector. If the relevant sectors are controlled by the same position, coordination is not required.*

EKRN Arrivals

EPWW shall coordinate a level with ESMM for EKRN Arrivals. Unless otherwise requested by ESMM, traffic may be transferred descending to the coordinated level

4.2.2.2 General Directs

EPWW may use the following general direct routes without prior coordination provided traffic passes the AoR boundary at least 2.5 NM from the lateral border of both the transferring and receiving sector and the waypoint is in the FPL route of the aircraft:

ADES	General Direct
ESSA	ANFEV, NILUG
ESSB	ANFEV, INWIQ
ESKN	ANFEV, PELUP
EKCH, EKRK, ESMS	ROE
ESGG	NILEN
ENGM	XENTA, KSD
ENTO	REPKU

Additionally, other traffic towards ESMC may, by EPWW or EPGD APP, be given clearance direct to the respective waypoint below provided that the waypoint is in the FPL route of the aircraft:

GOSOT, KOLOB, GORPI, LUSID, PENOR, ROE

4.3. FRA

4.3.1. Poland

Free Route Airspace (FRA) applies within FIR Warszawa above FL95, excluding TMAs.

4.3.2. Sweden

Free Route Airspace (FRA) applies within Denmark-Sweden Functional Airspace Block (DK-SE FAB) above FL285. Eligible flights shall use the Entry/Exit - points below.

Entry/Exit:

AMROR, GORPI, GOSOT, KOLOB, LARMA, LUSID, PENOR, POKEN, RUMAR

4.4. VFR Flights

For controlled VFR flights coordination, transfer of control and transfer of communications shall take place as for IFR flights. Uncontrolled VFR flights shall be transferred to the appropriate sector, if in radio contact.

5. Transfer of Control and Transfer of Communications

5.1. Transfer of Control

Transfer of Control takes place at the AoR boundary.

5.2. Transfer of Communications

5.2.1. Flights from Sweden FIR to Polish VACC

5.2.1.1. Flights from Malmö AoR (ESMM) to Warszawa FIR/UIR (EPWW)

Transfer of communications shall take place not later than the transfer of control.

5.2.2. Flights from Polish VACC to Sweden FIR

5.2.2.1. Flights from Warszawa FIR/UIR (EPWW) to Malmö AoR (ESMM)

Transfer of communications shall take place **not later than 20 NM before the AoR boundary**.

The transferring ATS unit shall make an approval request to the receiving ATS unit about which frequency to be used before the transfer of communications for aircraft that are not equipped with 8.33 kHz spacing capability.

6. Radar Based Coordination Procedures

6.1. SSR Code Assignment

Both ATS units shall transfer aircraft on verified discrete SSR codes or Mode-S A1000.

Any change of SSR code by EPWW or EPGD APP may only take place after the transfer of control point.

Any change of SSR code by ESMM may take place at the earliest 20 NM before the AoR boundary.

6.2. Radar Coordination Procedures

6.2.1. Transfer of Radar Control

Transfer of radar control may be effected after prior verbal coordination provided the minimum distance between the aircraft does not fall below 5 NM.

6.2.2. Silent Transfer of Radar Control

Transfer of radar control may be effected without prior verbal coordination provided the minimum distance between successive aircraft about to be transferred is 10 NM and constant or increasing.

Note: When using Mach-number speed control, pilots concerned shall be instructed to report their assigned Mach-number to the accepting ATS unit upon initial contact.