
Demo Store API Documentation : A Sample Rest API for E-commerce Applications

Idorenyin Okon 2 min read · Jan 16, 2026

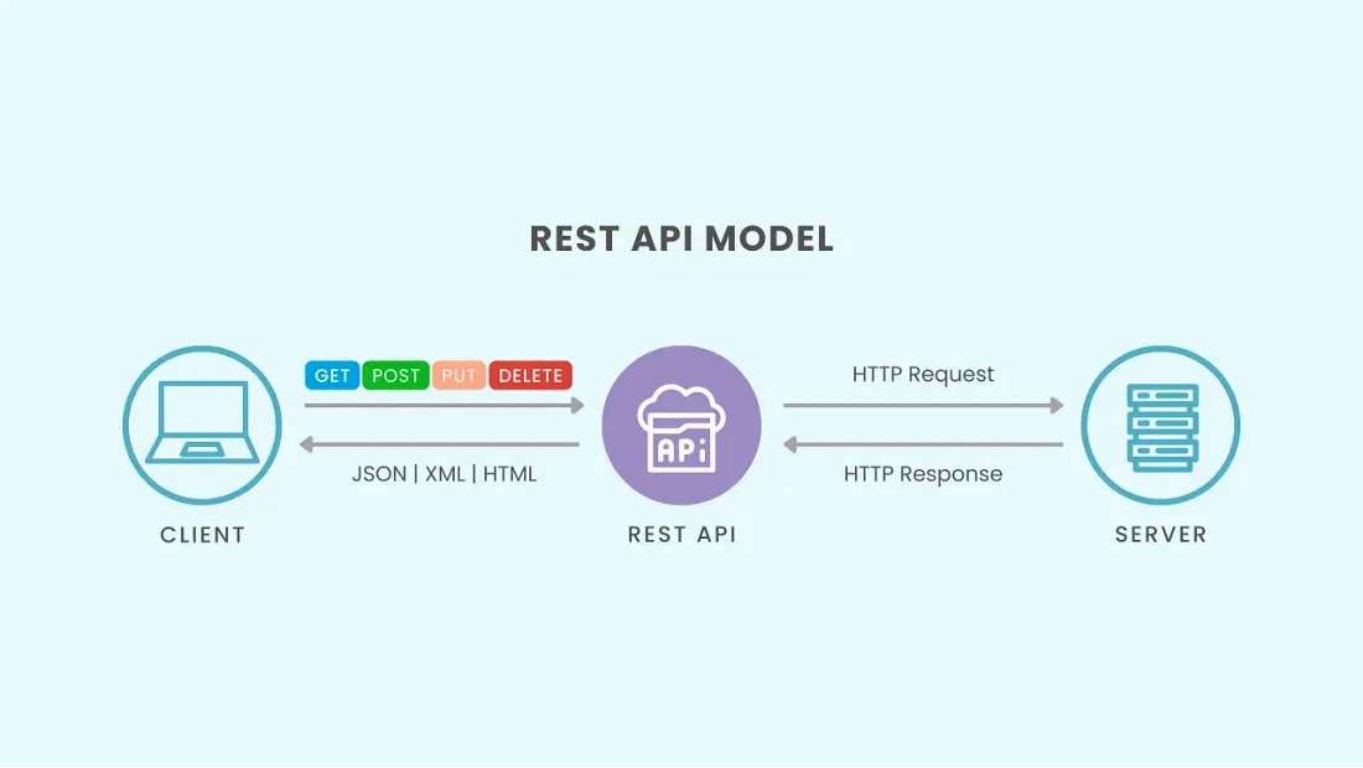

This article demonstrates how to document a REST API clearly for developer use.
The Demo Store API provides sample e-commerce data and is used here to showcase API documentation best practices, including authentication, endpoints, and request/response examples.

For a start, let's see what an API is:

What is an API

An API (Application Programming Interface) is a set of rules, endpoints, and data formats that allows different software systems to communicate with each other programmatically, without exposing their internal implementation.

Having known that, let's get into the Demo Store API Documentation!

Overview

The Demo Store API is a public REST API that provides sample data for e-commerce applications.
It allows developers to retrieve products, categories, carts, and user data for testing, learning, and demonstration purposes.
This documentation is written for developers integrating a store backend into web or mobile applications.

Base URL

```
https://fakestoreapi.com
```

All API request are made to this base URL.

Authentication

The Demo Store API uses token-based authentication (JWT) for protected endpoints.

Login

```
POST /auth/login
```

Request Body

```
{
  "username": "mor_2314",
  "password": "83r5^_"
}
```

Response

```
{
  "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9..."
}
```

Include the token in the request header

```
Authorization: Bearer <token>
```

Quick Start

Fetch all Products

```
curl https://fakestoreapi.com/products
```

Response

```
[
  {
    "id": 1,
    "title": "Fjallraven Backpack",
    "price": 109.95,
    "category": "men's clothing"
  }
]
```

Endpoints

GET/products

Retrieve all products.

Use case: Display a product list on a store homepage.

```
curl https://fakestoreapi.com/products
```

GET /products/{id}

Retrieve a product by ID.

Path Parameter

Name: id

Type: number

Description: Product ID

Request

```
curl https://fakestoreapi.com/products/1
```

GET /products/categories

Retrieve all product categories.

Request

```
curl https://fakestoreapi.com/products/categories
```

POST /carts

Create a new cart.

Authentication: Required

Request

```
curl -X POST https://fakestoreapi.com/carts \
-H "Content-Type: application/json" \
-H "Authorization: Bearer <token>" \
-d '{
  "userId": 1,
  "date": "2026-01-08",
  "products": [
    { "productId": 1, "quantity": 2 }
  ]
}'
```

Error Handling

- **200 OK**— Request Successful
- **400 Bad Request**—Invalid request data
- **401 unauthorized**—Missing or invalid authentication token
- **404 Not found**—Resource does not exist
- **500 Internal Server Error**—Server Error

Data Models

Product

```
{
  "id": 1,
  "title": "Product name",
  "price": 109.95,
  "description": "Product description",
  "category": "category",
  "image": "image_url"
}
```

Cart

```
{
  "id": 1,
  "userId": 1,
  "products": [
    {
      "productId": 1,
      "quantity": 2
    }
  ]
}
```

Limitations

- This API is intended for demo and testing purposes
- Data may change without notice
- Not suitable for production use

Conclusion

The Demo Store API enables developers to simulate common e-commerce workflows such as browsing products and managing carts.

This documentation demonstrates clear, structured API reference writing for developer audiences.

Written by Idorenyin Okon

8 followers · 15 following

Technical Writer | DevOps | Web3 | Contact me okonidorenyin73@gmail.com