TLE / ICT 9

First Quarter

Lesson 4

Grade 9 Daily Task

Fidelity

INPUT TYPE TAGS

HTML 5 features input controls and validation that were enhanced. The tag ***<input>*** is used to declare an input control. Below are the different input type and the descriptions:

Input Type	Description
color	Selects color from a color picker.
date	Defines a date control.
email	Defines a field for an email address.
month	Defines a month and year control.
datetime	Allows you to select a date and time.

Input Type	Description
number	Defines a numeric field.
range	Defines a control for entering a number whose exact value is not important.
search	Defines a search field.
time	Allows the user to select a time.
url	Used for input fields that should contain a URL address
tel	Defines a field for entering a telephone number

```
<html>
    <head>
        <title>Forms</title>
    </head>
    <body>
    <h2>Customer Information Form </h2>
        <form action="process.html" method="post">
            Username: <input name="textbox1" type="text">
            <br><br>
            Password: <input name="password1" type="password">
            <br><br>
            <input type="radio" name="radio1" checked>Male<br>
            <input type="radio" name="radio1">Female<br>
            <br>
            <input type="checkbox" name="checkboxCS">Computer
            Science<br>
            <input type="checkbox" name="checkboxIT">Information
            Technology<br>
            <input type="checkbox" name="checkboxIS">Information
            Systems<br>
            <br>
            Select City:<br>
            <select name="select1" size="1">
                <option value="quezoncity">Quezon City</option>
                <option value="pasigcity" selected>Pasig City</option>
                <option value="mandcity">Mandaluyong City</option>
            </select><br>
            <br>
            Tell us about yourself:<br>
            <textarea name="tellus" rows="5" cols="30" wrap="hard">Feel
            free to tell us more about yourself here.
            </textarea><br><br>
            <input type="submit" value="SUBMIT">
            <input type="reset" value="CLEAR">
        </form>
    </body>
</html>
```

Text box

Radio button

Check box

Drop-down list

Text area

Submit and Clear buttons

Customer Information Form

Text box → Username:

Password:

Radio button →
- Male
- Female

Check box →
- Computer Science
- Information Technology
- Information Systems

Select City:

Drop-down list → Pasig City

Tell us about yourself:

Large text area →

```
Feel
                free to tell us
more about yourself here.
```

Submit and Clear buttons → SUBMIT CLEAR

Sample code:

```
<!DOCTYPE html>
<html>
<head><title>Form</title></head>
<body>
<form action=”demo_form.asp”>
Select your department color:  <input type=“color” name=“deptcolor”><br>
Date of birth: <input type=“date” name=“bday”><br>
Email: <input type=“email” name=“emailadd”><br>
Date of hiring (month & year): <input type=“month” name=“hired”><br>
Salary Range: <(Php 18,000-Php 30,000): <input type=“number” name=“quantity”
min=“18000” max=“30000”><br>
Performance Appraisal Result
<input type=“range” name=“points” min=“1.00” max=“10.00”><br>
Search Facebook: <input type=“search” name=“facebooksearch”><br>
Official Time-in: <input type=“time” name=“timein”><br>
Make it homepage: <input type=“url” name=“homepage”><br>
Week of Choice: <input type=“week” name=“week_year”><br>
<input type=“submit”>
</form>
</body>
</html>
```

9:28 PM Wed Jul 2

form2.html

Select your department color:

Date of birth:

Email:

Date of hiring (month & year):

Salary Range: <(Php 18,000-Php 30,000):

Performance Appraisal Result

Search Facebook:

Official Time-in:

Make it homepage:

Week of Choice:

Submit

Form and Input Attributes

New attributes of forms, as well as inputs in HTML 5 would make filling out forms and data in the Web a lot easier. Note that in this lesson, the processing upon submission is already beyond HTML5 (usually done in ASP and PHP).

ASP - Active Server Pages or Application Service Provider. Active Server Pages is a Microsoft technology for building dynamic web pages, while Application Service Provider is a business model where companies offer software applications over the internet.

PHP - is a widely-used, open-source scripting language primarily for web development. It's known for its ability to generate dynamic content on web pages and is often embedded within HTML. PHP originally stood for "Personal Home Page," but now the acronym is recursive, standing for "PHP: Hypertext Preprocessor".

Autocomplete and No Validation

Autocomplete – is applicable both on form and input. When it is turned on, the browser automatically completes values based on user's previous inputs. The specific input tags can have their separate autocomplete – either on or off.

Novalidate – the attribute that expresses that the input need not be verified in terms of format.

Sample code:

```
<!DOCTYPE html>
<html>
<head><title>Form</title></head>
<body>
<form action=”autocomplete_form.asp” autocomplete=“on” novalidate>
Fullname: <input type=“text” name=“fullname”><br>
Email: <input type=“email” name=“email”><br>
PIN: <input type=“text” name=“pin” autocomplete=“off”><br>
<input type=“submit”>
</form>
<p>Note: Autocomplete is “on” for the form, but “off” for the PIN
field.</p>
</body>
</html>
```

7:46 PM Wed Jul 2

form.html

Fullname:

Email:

PIN:

Submit

Input Attributes

These are the other input attributes that can be placed aside from the ones given in the previous lessons:

Input Attribute	Description
autofocus	Cursor appears at the assigned textbox
formaction	indicates the URL that will process the input once submitted
formenctype*	declares the manner of encoding of form-data upon submitting

Input Attribute	Description
formmethod*	specifies the HTTP method of transmission of form-data to the action URL. HTTP - Hypertext Transfer Protocol, is a fundamental protocol for transmitting information over the internet. It acts as a set of rules that govern how web browsers and servers communicate, enabling users to access and interact with websites.
formnovalidate	same function with the novalidate attribute

Input Attribute	Description
formtarget	denotes a name or a keyword indicating the display location of the response received during form submission
height & width	exclusive in input type image; sets image size
multiple	allows more than one entry
pattern	Standard value of comparison with respect to the input value; usually applied to text, search, email addresses and passwords

Input Attribute	Description
placeholder	provides a short clue on the expected value of an input
required	Declares that the certain input is filled out with information before submission.

Note: * can be used along with type="submit" and type="image"

Test your Coding Skills

Sample code:

```
<!DOCTYPE html>
<html>
<head><title>Form</title></head>
<body>
<form action=”hiring.asp” method=“get”>
Employee ID: <input type=“number” name=“eid” step=1 min=1 autofocus
required<<br>
Fullname:  <input type=“text” name=“fname” placeholder=“Complete Name”><br>
Email: <input type=“text” name=“email”><br><br>
<p>You have a two choices in submission:</p><br>
Click the image to Submit: <input type=“image” src=“giraffe.gif” height=“100”
width=“50” value=“submit”><br><br>
<input type=“submit” formaction=“hiring.asp” value=“Submit as admin”
formtarget=“_blank”
</form>
</body>
</html>
```

SUMMARY

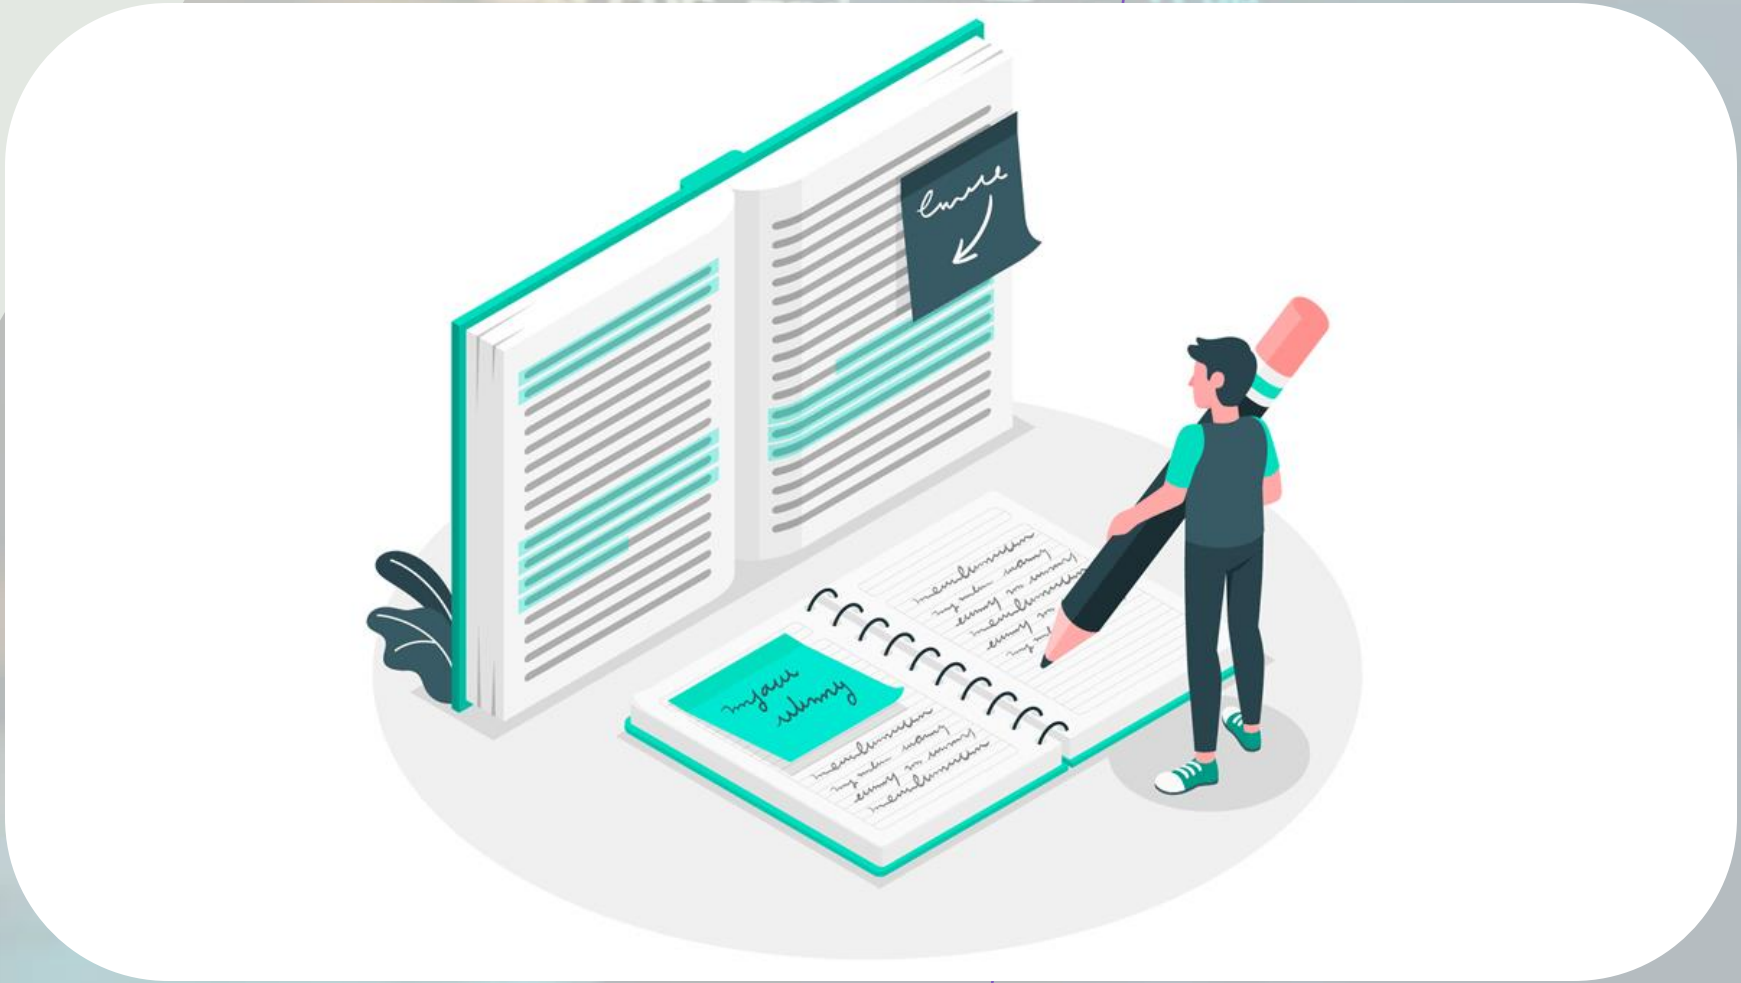

Where / How can you apply the lesson in your life as a student ?

ANY QUESTIONS?

See You Next Time!