TLE / ICT 9

First Quarter

Lesson 5

Grade 9 Daily Task

Fidelity

INPUT ELEMENT

The input element of form defined by the empty tag <input> is used for making textboxes, password boxes, check boxes, radio buttons, submit buttons and reset buttons depending on the value of the type attribute which can be text, password, checkbox, radio, submit and reset.

Attributes for <input>

Attribute Name	Description	Values
name	Assigns a name to the input field. The name can be used for various purposes and is required in most circumstances. *<input name="textArea1">*	any text (without spaces)

Attributes for <input>

Attribute Name	Description	Values
type	Indicates the type of input field. *<input name="textArea1" type="text>*	text, password, checkbox, radio, submit, reset
size	Indicates the size of the input field. *<input name="textArea1" type="text" size="30">*	any number

Attributes for <input>

Attribute Name	Description	Values
value	Indicates the initial value of the input field. Indicates the label for the submit and reset buttons. *<input name="textArea1" type="text" value="Input text here">*	any text

Attributes for <input>

Attribute Name	Description	Values
checked	Indicates if by default, the input field (radio button or check box) is selected *<input name="checkBox1" type="checkbox" value="Dog" checked>*	none

The checked attribute needs no value. It just needs to be present in the tag in order for it to provide its effect.

Input Type	Example
color	<input type="color" name="favcolor">
date	<input type="date" name="bday">
datetime	<input type="datetime" name="bdaytime">
email	<input type="email" name="useremail>
month	<input type="month" name="bdaymonth">
number	<input type="number" name="qty" min="1" max="10">
range	<input type="range" name="points" min="1" max="5">
search	<input type="search" name="google">

Input Type	Example
tel	<input type="tel" name="usertel">
time	<input type="time" name="usertime">
URL	<input type="url" name="homepage">

Other inputs like "text", "password", "radio", "checkbox", "button", "reset", "submit", "hidden", "image" and "file". Add attributes like size, name and value.

Example: <input type="password" size="15" maxlength="20" name="password" value="jemma">

CREATING A TEXTBOX

Textboxes are single line text input boxes. Usually, text boxes are used for username input and other single line texts such as names, email addresses and others. Textbox can be made by keying in *text* as the value of the *type* attribute of <*input*>. Example: <*input type*="*text*"> Additionally, you can use the *value* attribute to set an initial text input. The *size* attribute then indicates the length of the textbox.

CREATING A TEXTBOX

Use your gadgets to create the browser output using the sample codes.

Sample code 1:

```
<!DOCTYPE html>
<html>
<head><title>Textbox</title></head>
<body>
<form action="https://www. myserver.com/myscript.cgi"
method="post">
<h1 align="center">Customer Survey Form</h1>
<hr align="left">
<h3>Name:  <input type="text"></h3>
</form>
</body>
</html>
```

CREATING A LARGE TEXT AREA

You can create an input field that can span several rows and columns to allow the readers to enter their feedback, requests, instructions, opinions or any communication.

Text areas are made via the container tag *<textarea></textarea>*. The content of this tag will be displayed in the text area by default.

Example: *<textarea name="textarea1">This is a text area.</textarea>*

Sample code 2:

```
<!DOCTYPE html>
<html>
<head><title>Textarea</title></head>
<body>
<form action="https://www. myserver.com/myscript.cgi" method="post">
<h1 align="center">Customer Survey Form</h1>
<hr align="left">
<h3>Name:  <input type="text"></h3>
<p>To help us better serve you, please write your comments<br>
<textarea name="feedback" rows="15 cols="40"></textarea>
</p>
</form>
</body>
</html>
```

SUMMARY

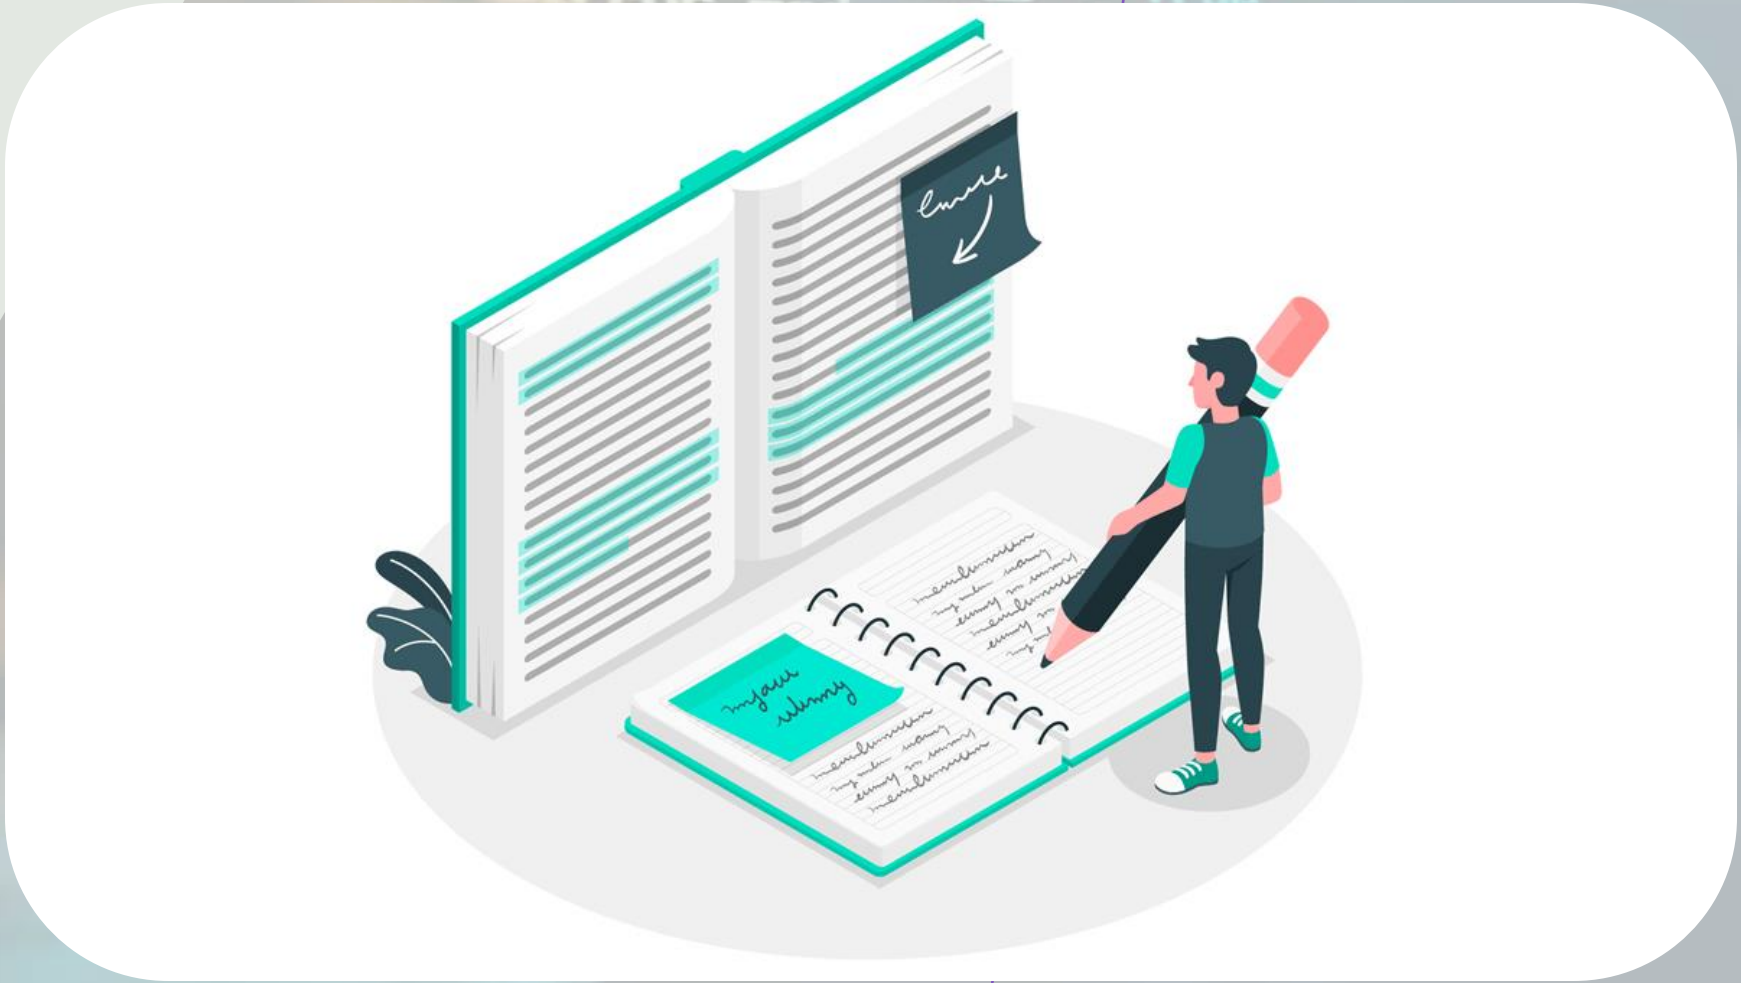

Where / How can you apply the lesson in your life as a student ?

Test your Coding Skills

ANY QUESTIONS?

See You Next Time!