TLE / ICT 9

First Quarter

Lesson 6

Creating Radio Buttons

- Radio buttons provide the users a variety of choices where only one can be selected.
- Radio buttons can be made by keying in ***radio*** as the value of the ***type*** attribute ***<input>***.

  Example: *<input type="radio" name="gender">*
- In a set of radio buttons, only one can be chosen; the ***name*** attribute is also to indicate which set that radio button belongs.

Creating Radio Buttons

- Radio buttons of the same group have similar values for their name attribute.
- The ***checked*** attribute is applicable for radio buttons to indicate a default selected option.
- Radio buttons are usually used when the choices are only few.

Radio.txt

File Edit View H1

```
<!DOCTYPE html>
<html>
<head><title>Radio</title></head>
<body background="brands.png">
<form action="http://myserver.com/myscript.cgi" method="post">
<p align="center"><font size="7"><b><i>Customer Information Form</i></b></font></p>
<hr align="center" color="red">
<font face="Arial" color="red" size="6">
<p align="center">Please select your preferred brand:</p><br><br>
</font>
<font size="5" color="purple">
<input name="info" type="radio" value="cross">Apple<br>
<input name="info" type="radio" value="cross">Samsung<br>
<input name="info" type="radio" value="cross">Motorola<br>
<input name="info" type="radio" value="cross">Huawei<br>
<input name="info" type="radio" value="cross">Oppo<br>
</font>
</form>
</body>
</html>
```

Radio
File C:/Users/username/Desktop/Grade%209%20files/codes/Lesson%206/Radio.html

Customer Information Form

Please select your preferred brand:

- Apple
- Samsung
- Motorola
- Huawei
- Oppo

Activate Windo
Go to Settings to acti

CLICK ME

Radio2.txt

File Edit View

```
<!DOCTYPE html>
<html>
<head><title>Radio</title></head>
<body bgcolor="beige">
<form action="http://localhost/echo.pl" method="get">
<p align="center"><font size="7">Choose only one answer:</font></p>
<hr align="center" color="red" height="2000">
<font face="Arial" color="purple" size="6">
<p align="center">What kind of language is HTML?</p><br><br>
</font>
<font size="5" color="purple">
Scripting<input type="radio" name="definition"  value="script"><br>
Markup<input type="radio" name="definition"  value="script"><br>
Programming<input type="radio" name="definition"  value="script"><br>
No Idea<input type="radio" name="definition"  value="script"><br>
</font>
</form>
</body>
</html>
```

Choose only one answer:

What kind of language is HTML?

Scripting
Markup
Programming
No Idea

Creating Check Boxes

- Unlike radio buttons, check boxes offer users a variety of choices where none, only one or many may be selected.
- Check boxes can be made by keying in ***checkbox*** as the value of the ***type*** attribute of ***<input>***.

  Example: <input type="checkbox" name="chkbox">
- The ***checked*** attribute is applicable for check boxes to indicate default selected options.

Checkbox.txt

File Edit View

```
<!DOCTYPE html>
<html>
<head><title>Checkbox</title></head>
<body background="computer.jpg">
<form action="http://myserver.com/myscript.cgi" method="post">
<p align="center"><font size="7" color="yellow"><b><i>Customer Information Form</i></b></font></p>
<hr align="center" color="beige">
<font face="Arial" color="white" size="6">
<p align="center">Please select your preferred brand:</p><br><br>
</font>
<font size="5" color="yellow">
<input name="chkbox" type="checkbox" value="cross">Apple<br>
<input name="chkbox" type="checkbox" value="cross">Samsung<br>
<input name="chkbox" type="checkbox" value="cross">Motorola<br>
<input name="chkbox" type="checkbox" value="cross">Huawei<br>
<input name="chkbox" type="checkbox" value="cross">Oppo<br>
</font>
</form>
</body>
</html>
```

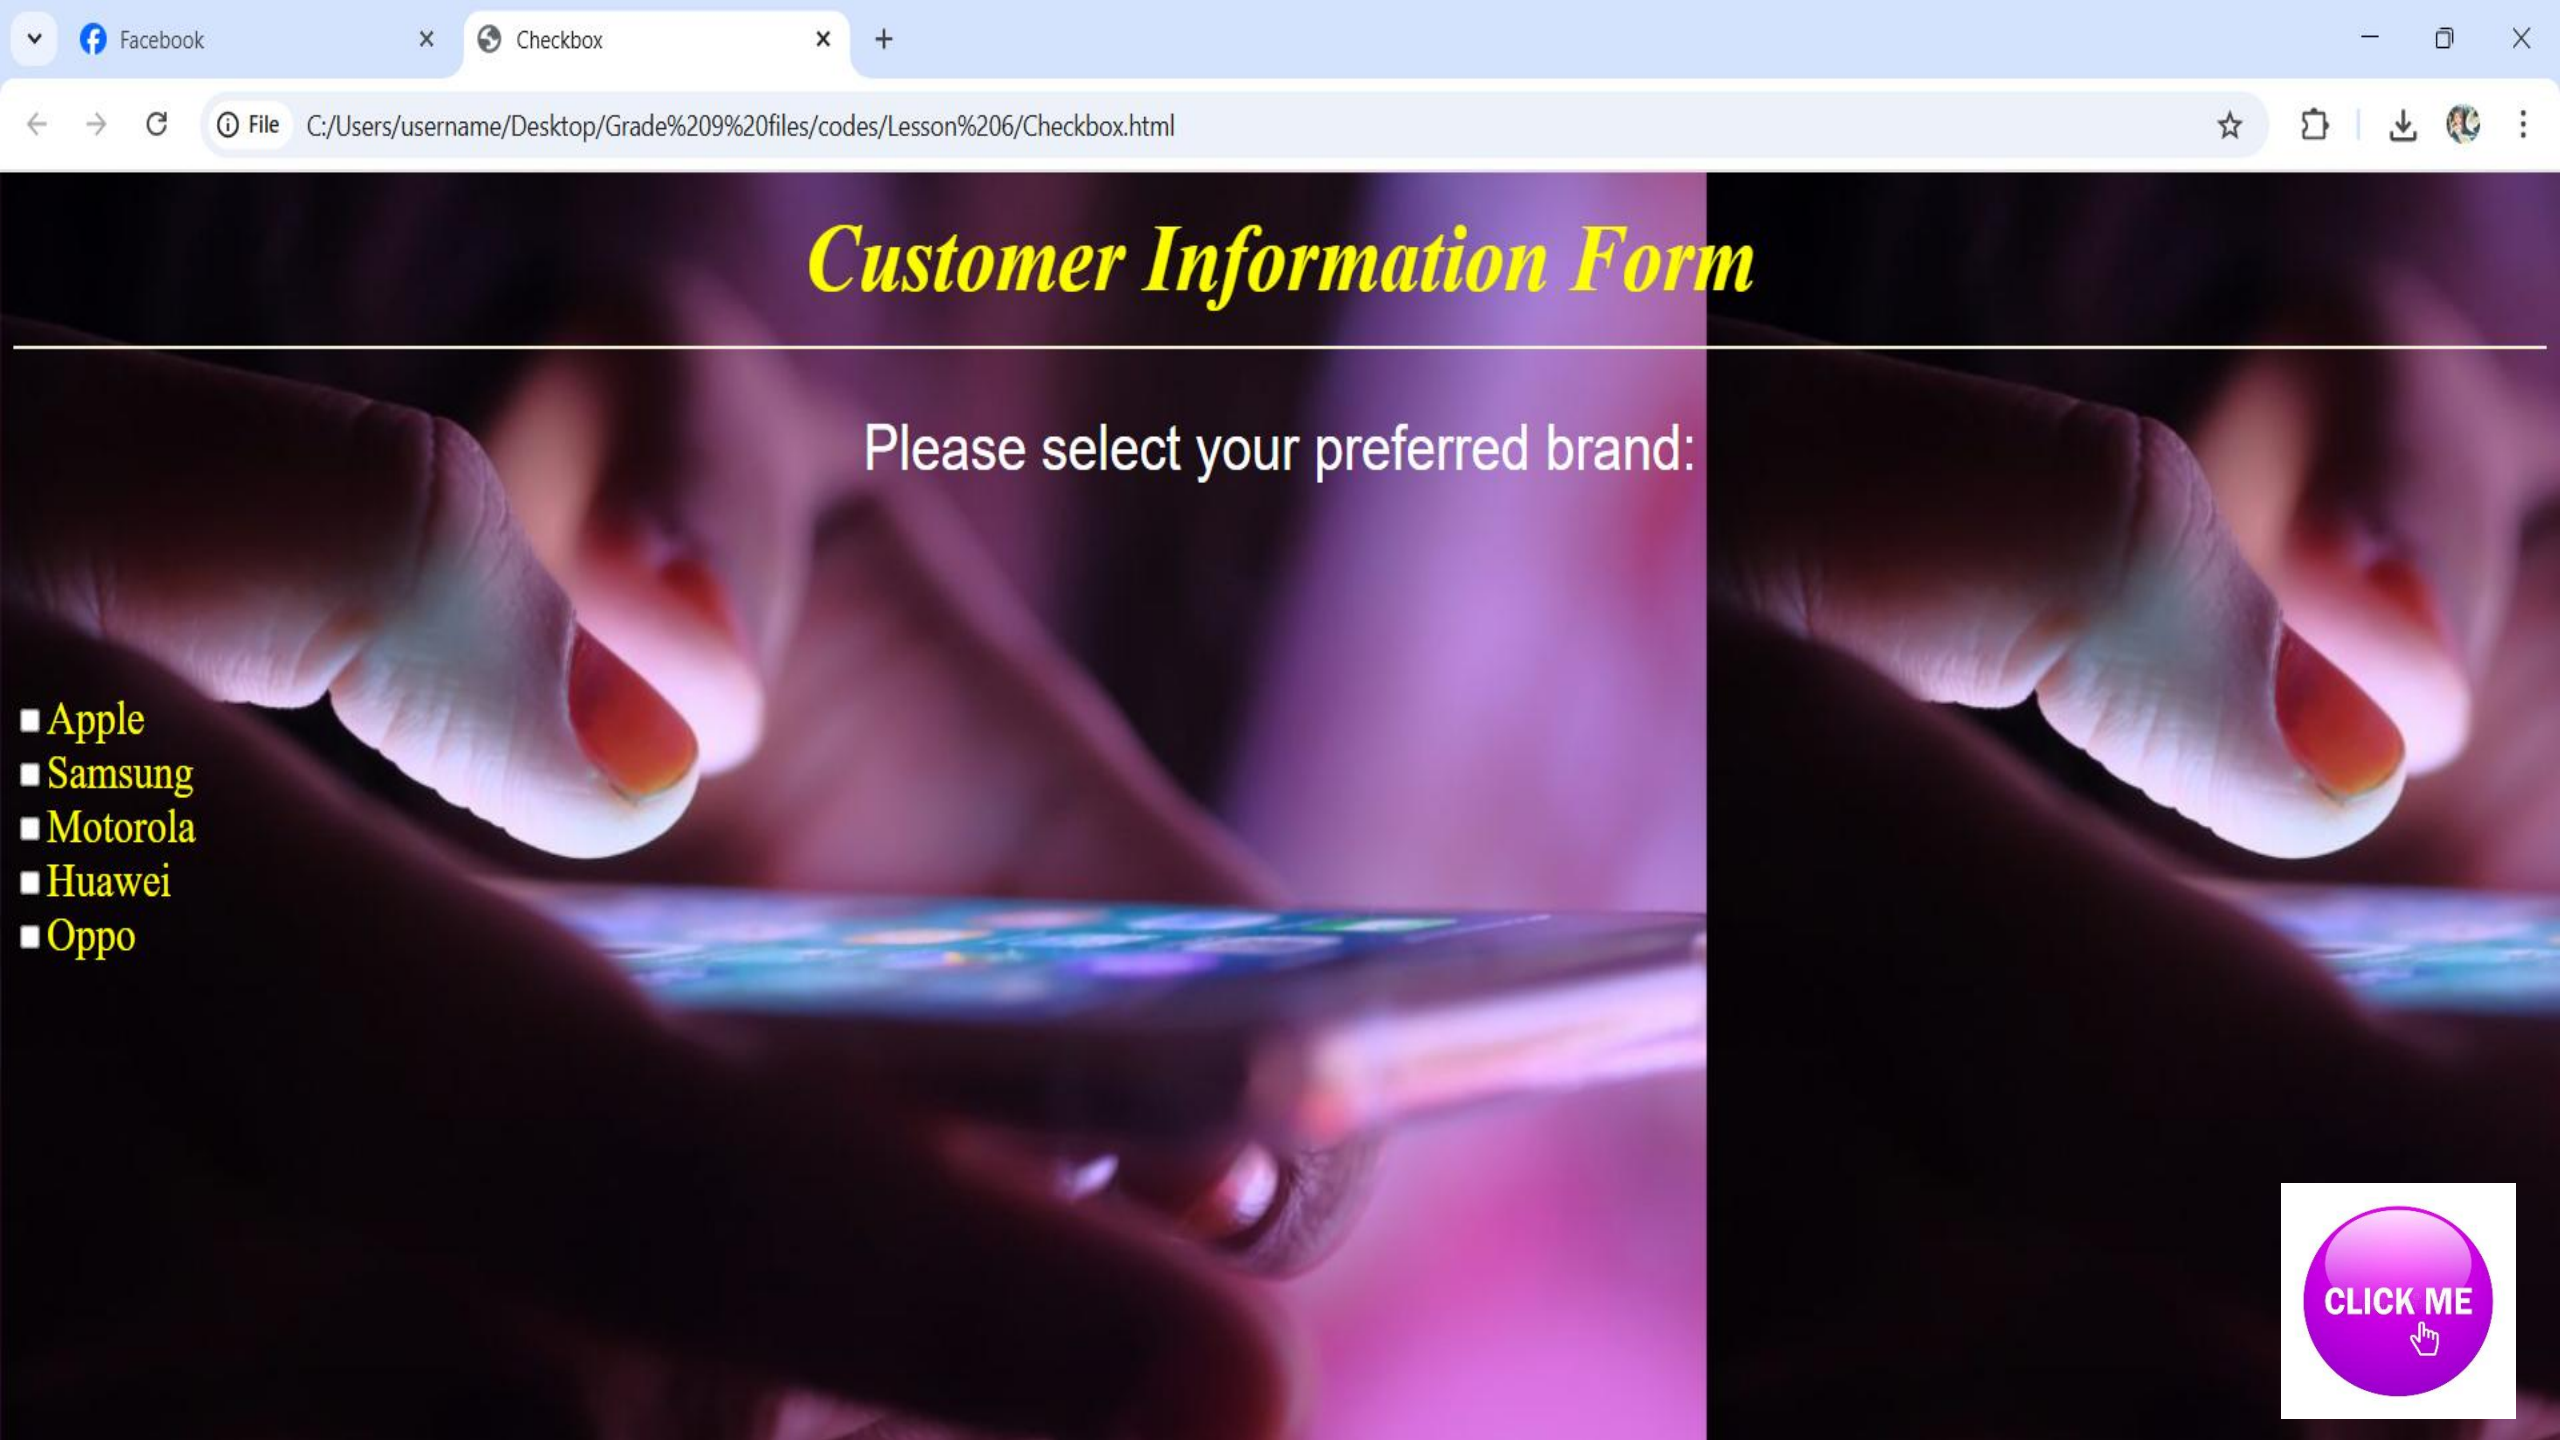
Facebook
Checkbox
File
C:/Users/username/Desktop/Grade%209%20files/codes/Lesson%206/Checkbox.html
Customer Information Form
Please select your preferred brand:
Apple
Samsung
Motorola
Huawei
Oppo
CLICK ME

Checkbox2.html

File Edit View

```
<!DOCTYPE html>
<html>
<head><title>Checkbox</title></head>
<body bgcolor="beige">
<form action="http://localhost/echo.pl" method="get">
<p><font size="5">Would you like to subscribe?</font></p>
<input name="chk" type="radio" value="opt">Yes<br>
<input name="chk" type="radio" value="opt">No<br>
<hr align="center" color="beige">
<font face="Arial" color="black" size="3">
<p align="left">Activities of Interest:</p><br><br>
</font>
<font size="5" color="blue">
Sailing<input name="box" type="checkbox" value="cross"><br>
Walking<input name="chkbox" type="checkbox" value="cross"><br>
Driving<input name="chkbox" type="checkbox" value="cross"><br>
Ski-ing<input name="chkbox" type="checkbox" value="cross"><br>
Jogging<input name="chkbox" type="checkbox" value="cross"><br>
Eating<input name="chkbox" type="checkbox" value="cross">
</font>
</form>
</body>
</html>
```

Facebook | Checkbox

File C:/Users/username/Desktop/Grade%209%20files/codes/Lesson%206/Checkbox2.html

Would you like to subscribe?

- Yes
- No

Activities of Interest:

Sailing
Walking
Driving
Ski-ing
Jogging
Eating

Creating Drop-down Menus

- Like radio buttons, drop-down lists or drop-down menus offer users a variety of choices where only one can be selected.
- Drop-down menus are made via container tag ***<select></select>***.

Attributes for <select></select>		
Attribute	**Definition**	**Values**
name	Assigns a name to the dropdown menu. The name can be used for various purposes and is required in most circumstances. Ex. <select name="dropdown1"></select>	Any text (without spaces)

Attributes for <select></select>		
Attribute	**Definition**	**Values**
size	Indicates the number of visible items (lines). Ex. <select name="dropdown1" size="4"></select>	Any number

Moreover, individual items in drop-down menus are defined by the container tag ***<option></option>***. The content of the tag will be the item in the menu.

Attributes for <option></option>		
Attribute	**Definition**	**Values**
value	Assigns a name to the dropdown menu item. The name can be used for various purposes and is required in most circumstances. Ex. <option value="qc">Quezon City</option>	Any text (without spaces)

Attributes for <option></option>		
Attribute	**Definition**	**Values**
selected	Indicates if by default, the item is selected. Ex. <option value="qc" selected>Quezon City</option>	None

The ***selected*** attribute is used in dropdown menus to indicate a default selected option.

Dropdown.html

File Edit View

```
<!DOCTYPE html>
<html>
<head><title>Dropdown</title></head>
<body bgcolor="purple">
<form action="http://myserver.com/myscript.cgi" method="post">
<p align="center"><font size="7" color="yellow"><b><i>Student Information Form</i></b></font></p>
<hr align="center" color="brown" width="50%">
<font face="Arial" color="white" size="3">
Please choose your residence:
<select name="place" size="1"><br>
<option></option>
<option>Mandaluyong</option>
<option>Pasay</option>
<option>Pasig</option>
<option>Bacoor</option>
<option>Las Pinas</option>
<option>Imus</option>
</font>
</form>
</body>
</html>
```

Activate Windows
Go to Settings to activate Windows.

Facebook

Dropdown

File C:/Users/username/Desktop/Grade%209%20files/codes/Lesson%206/Dropdown.html

Student Information Form

Please choose your residence: