

TrioDocs

Version: 0.4.0
Date: October 30, 2026

Download the latest version on:
https://triodocs.org

Fork and Prepare your Trio Repository

Fork and Prepare Trio Repository

Fork `Trio`

Important Decision: Personal Account or Organization?

Before you fork, decide whether to use a GitHub organization. This affects where you store your secrets.

Use a GitHub Organization if you:

- ✓ Plan to build multiple apps (Trio + LoopFollow)
- ✓ Want to enter secrets once for all apps
- ✓ Might try customized versions or development builds

Use Personal Account if you:

- Only building Trio (no other apps planned)
- Prefer simpler setup (fewer concepts to learn)

📖 **Haven't decided?** Review Create a Free GitHub Organization ↗ first, then come back here.

Changing Your Mind Later

You can switch to an organization later if needed, but it's easier to decide now.

Section Summary (click to open/close)

Fork https://github.com/nightscout/Trio into your account.


⏭ To skip the detailed instructions, click on Validate `Secrets`

Existing Fork


If you already have a fork of `Trio`, click on Already Have Trio to decide what to do. That section provides links to return you to these instructions.

Create the `Fork`

1. Click this link https://github.com/nightscout/Trio to open the `Trio` repository owned by `nightscout`
2. At the upper right side of the screen, click on the word `Fork`

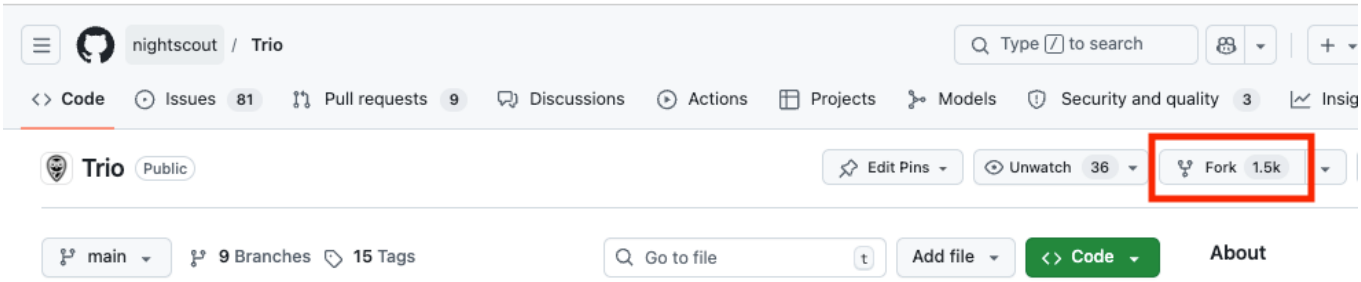


3. Refer to the GIF below - note this GIF is for LoopWorkspace - but the actions you take are the same for Trio:
    - If you created a free organization (strongly recommended), you will see the display shown in the GIF below where you will choose your organization as the owner
        - If you did not set up a free organization, `my-name` will be automatically filled in as the owner (`Owner`)
    - If you already have a fork, you should not proceed, see Already Have Trio
    - The repository name is already filled in
        - **Do not rename the repository to something else**
        - It needs to **match the original repository name** or **automatic building will not work**
    - Leave the selection that says " `Copy the main branch only` " checked
    - Click on the green `Create fork` button

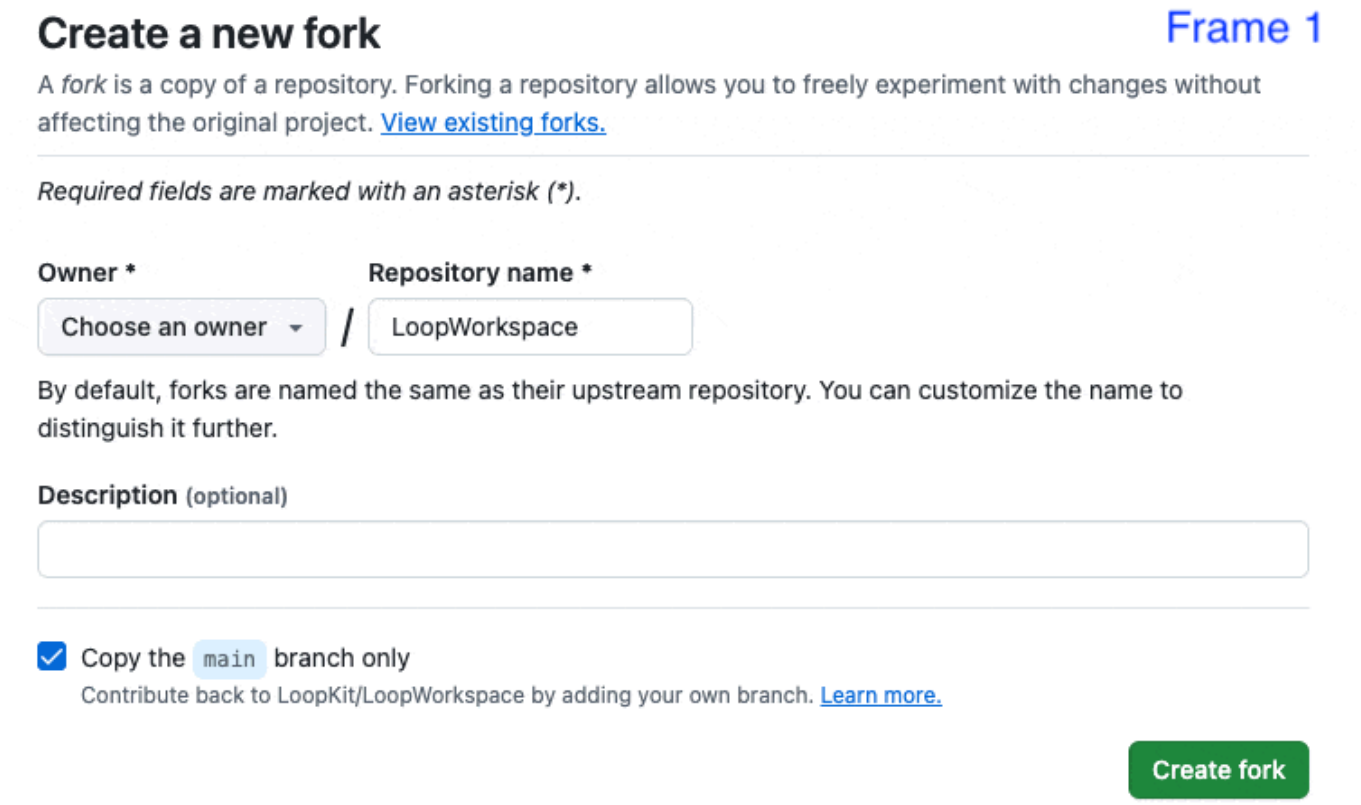

Successful Fork

After creating the fork, your screen should be similar to the next graphic.

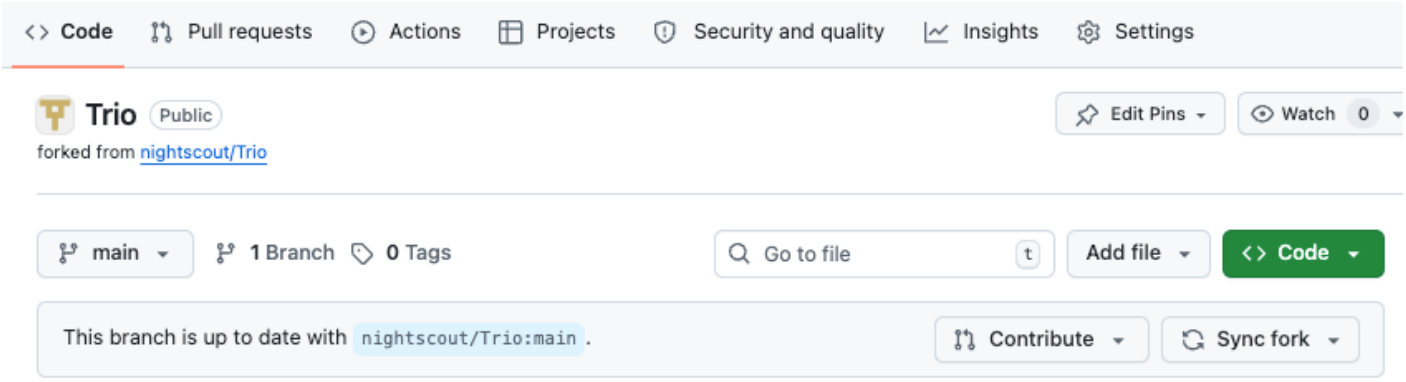

Carefully examine your screen paying attention to the bullets below.

- Note that your internet address (URL) is `https://github.com/my-name-org/Trio` or `https://github.com/my-name/Trio` where `my-name` is the name you chose
- The comment on the second row indicates where the fork came from (that is a clickable link)
- The branch that is selected is `main`
- The message says "`This branch is up to date with nightscout/Trio:main`"

Configure `Secrets`

If you set up a GitHub organization (strongly recommended), follow this set of instructions.

If you decided to not to use a GitHub organization, skip ahead to Personal Account: Prepare to Enter `Secrets`.


What if I already have a bunch of forks in my personal account?

You do not have to switch to an organization. But if you want to make the move, follow instructions here Switch to a GitHub Organization


Prepare to Enter `Secrets`

You will be adding `Secrets` and `Variables` to your organization. This makes them available to any app you decide to build as long as you set up your free *GitHub* organization as the owner of the fork.


1. Tap on this *GitHub* link to see your organizations. (If you don't see a screen similar to the graphic below - you are not logged in to *GitHub*).

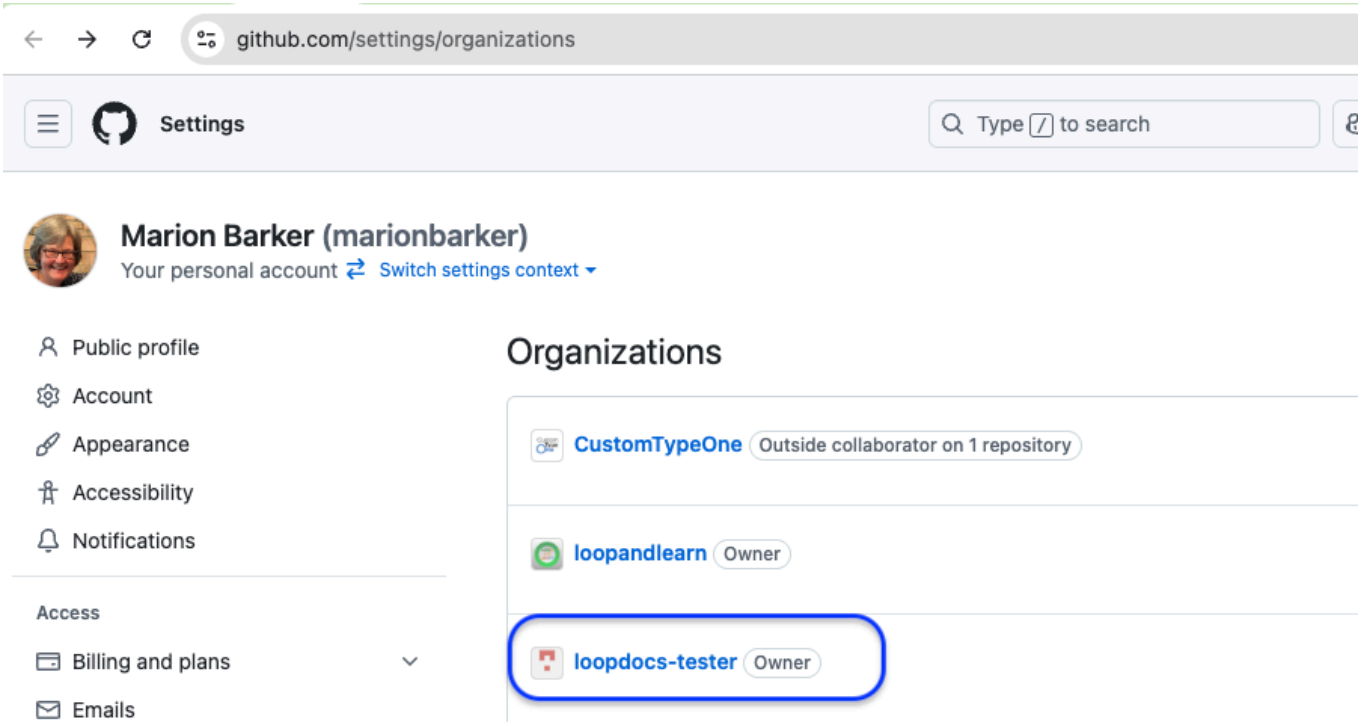

2. Choose your organization name from the list (most people will only see one organization)
    - I chose `loopdocs-tester` as my organization, so you will see that name in the URL for graphics in this section.

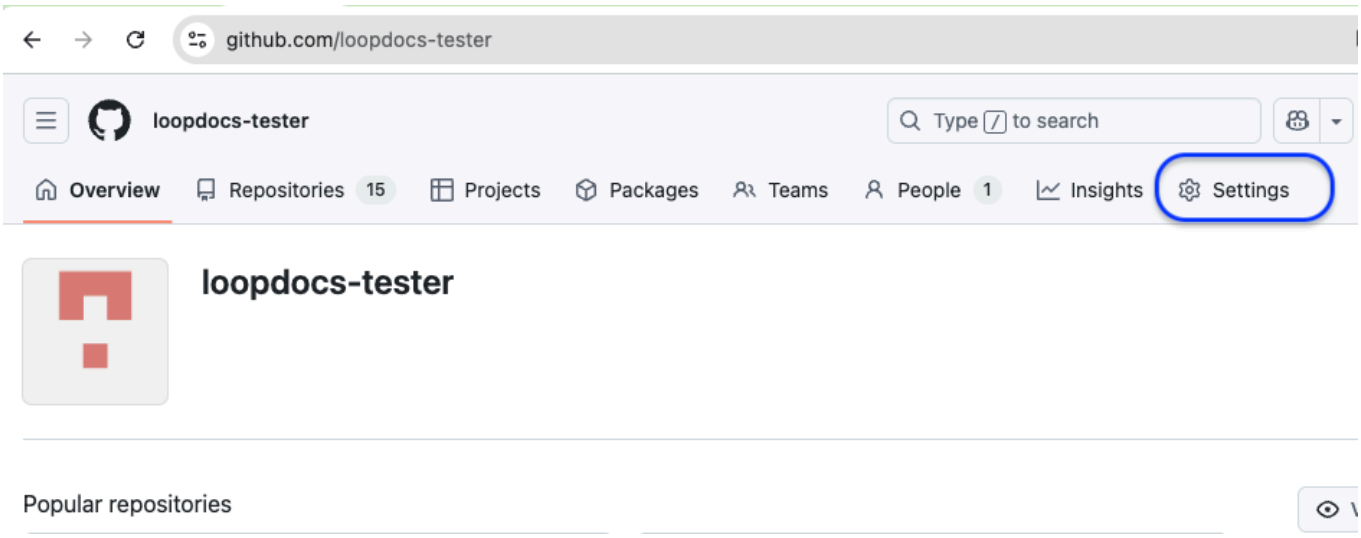

3. Click on the Settings Icon near the top right
    - If you don't see ⚙️ `Settings`, make your browser wider or scroll to the right
    - After you click on ⚙️ `Settings`, your screen will show a lot of menu items on the left side of the screen.
    - Scroll down until you can see the `Security` section with `Secrets and variables` drop down.
    - Click on the dropdown icon and then select `Actions`

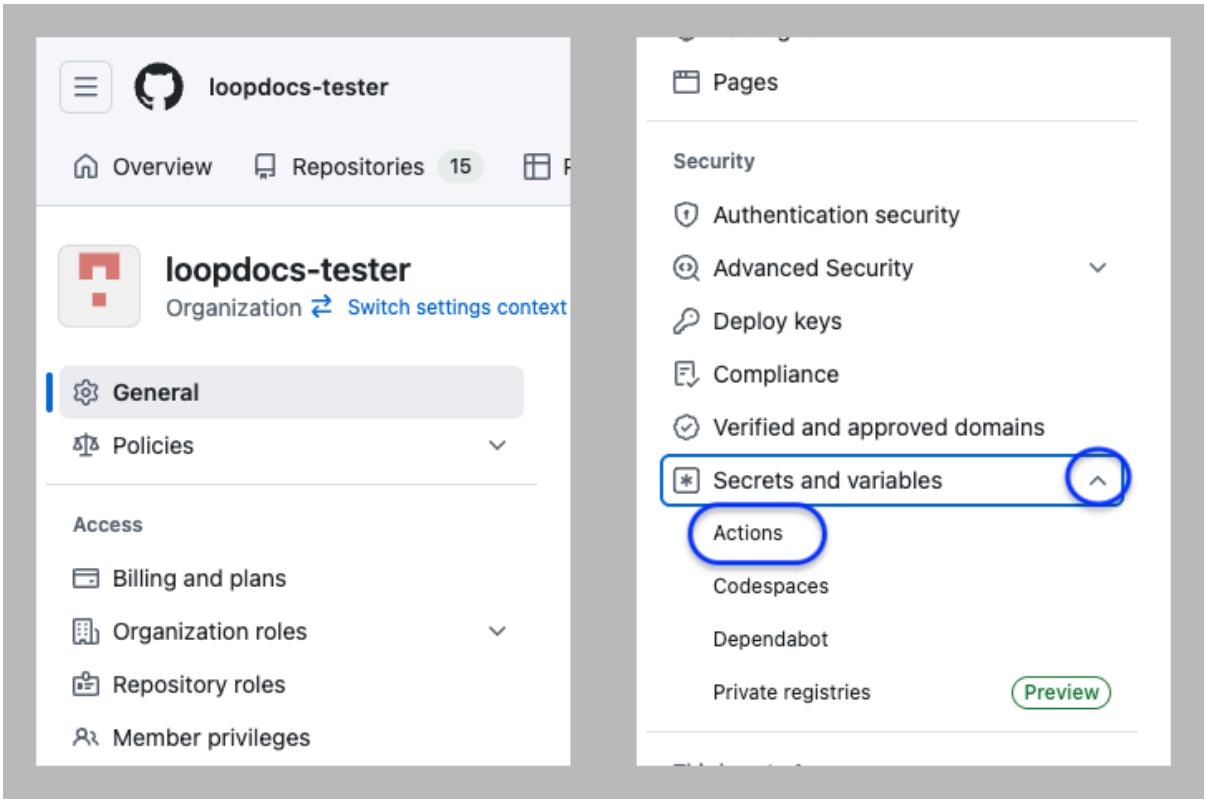

The next steps are identical whether you are configuring your organizations `Secrets` and `Variables` or doing this for every repository in a personal account.


- Skip ahead to Enter the Secrets

Personal Account: Prepare to Enter `Secrets`


> This section is only if you are using a personal *GitHub* account to build. Using an organization is recommended. If you are using an organization, skip ahead to Enter the Secrets.

Log into *GitHub*.

1. Return to your forked copy of `Trio`
   - Click on your personal icon at the upper right to see the dropdown menu and select "`Your repositories`"

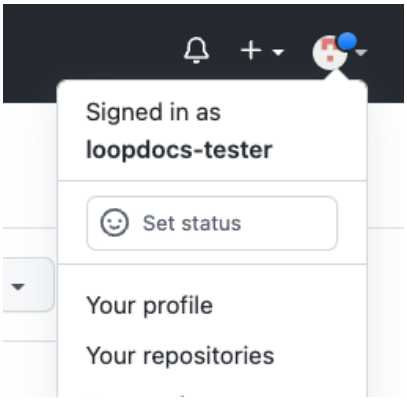


2. Click on `Trio` to open that repository
   - You should see a bar of icons across the top with Settings on the far right




3. Click on the Settings Icon near the top right of your Trio

- If you don't see ⚙️ `Settings`, make your browser wider or scroll to the right
- If you still don't see ⚙️ `Settings`, then you are **not** on your fork or you need to sign in to your *GitHub* account
- After you click on ⚙️ `Settings`, the left side of your screen should resemble the graphic below

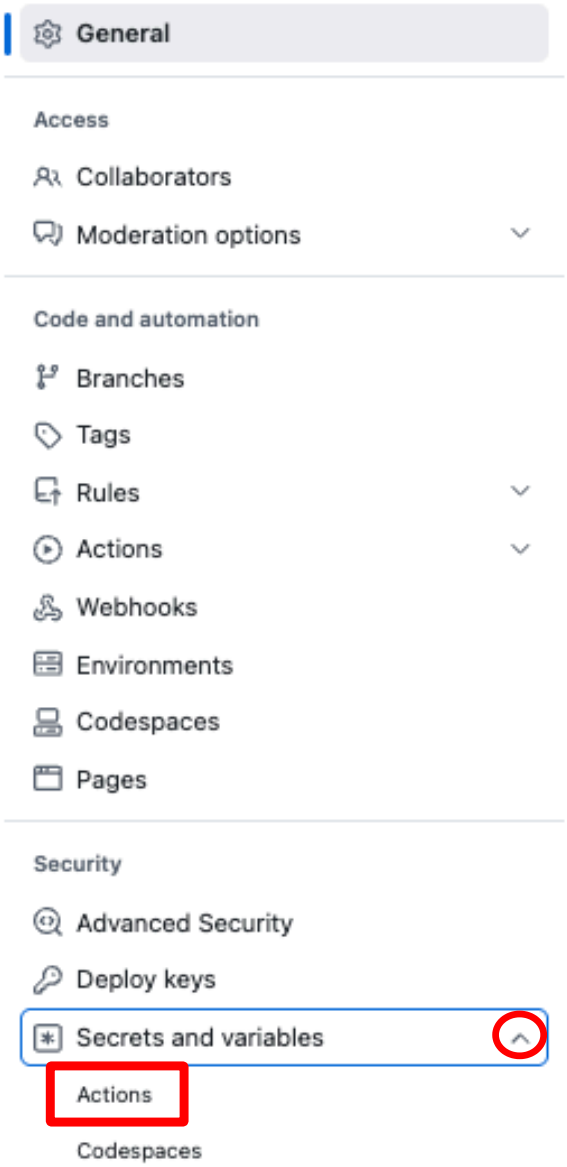

4. Refer to the graphic above:

- On the left side, find the `Secrets and variables` dropdown (red circle)
- Tap on `Actions` (red rectangle)

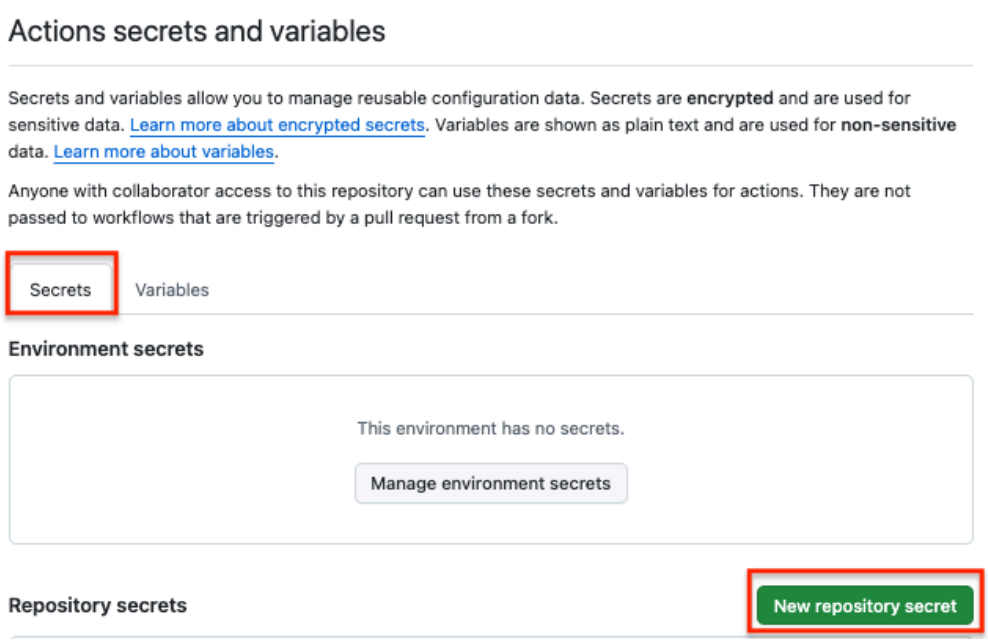


At this point the instructions are the same whether you are using an organization or a personal account.


Enter the `Secrets`

The steps to enter the `Secrets` and `Variables` are identical whether you are configuring these in your organization account or repeating this for every repository in a personal account. Your screen should look like one of the graphics below. If not head back to Configure Secrets.


If you are using a *GitHub* organization, tap on the green button for `New organization secret`:

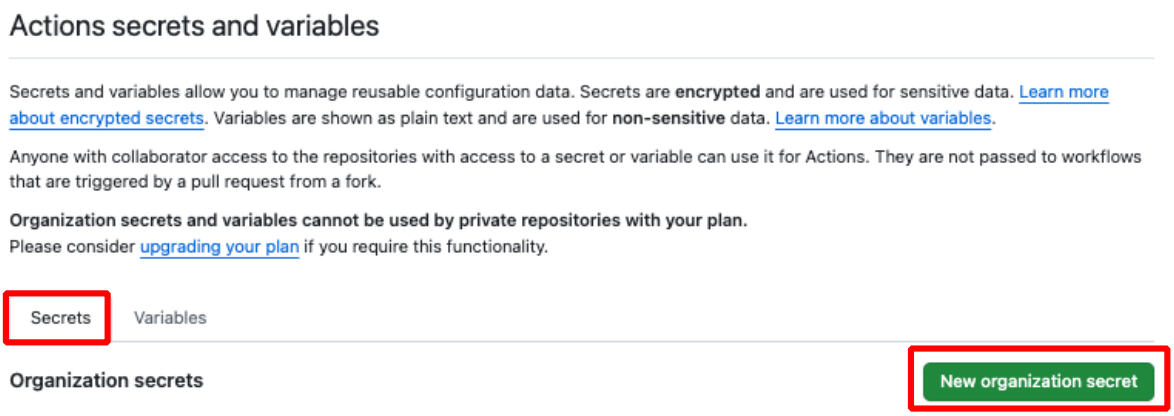


If you are using a personal account, tap on the green button for `New repository secret`:

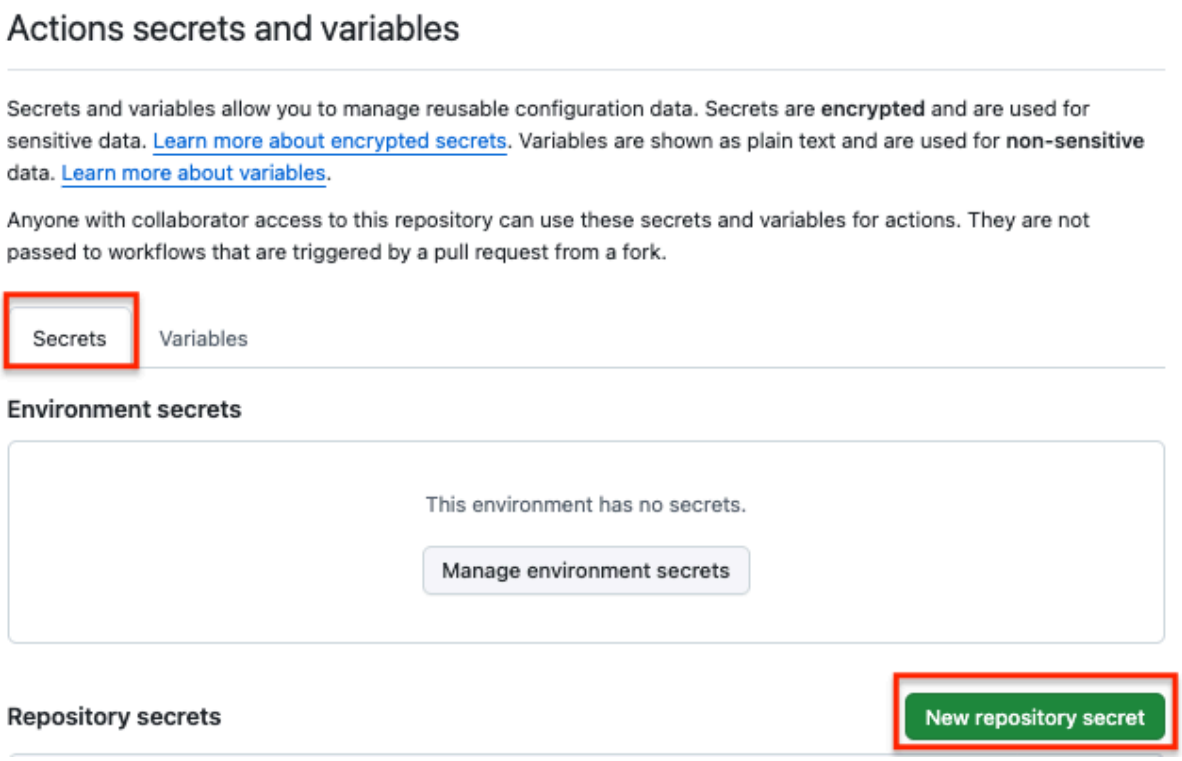

1. After you tap on the `New secret` button
    - A new screen appears as shown in the first graphic below
    - Do not do anything until reading the sub-bullets, examining the graphics, and proceeding to the next section where each `Secret` name is provided for you to copy and paste
        - Under `Name *`, click on `YOUR_SECRET_NAME` and paste one of the 6 secret names, as directed in Enter Each Secret
        - Click inside the `Secret *` box and paste the value for that secret
        - Once you click on `Add Secret`, the secret will be added
        - The second graphic below shows `TEAMID` added and ready for save

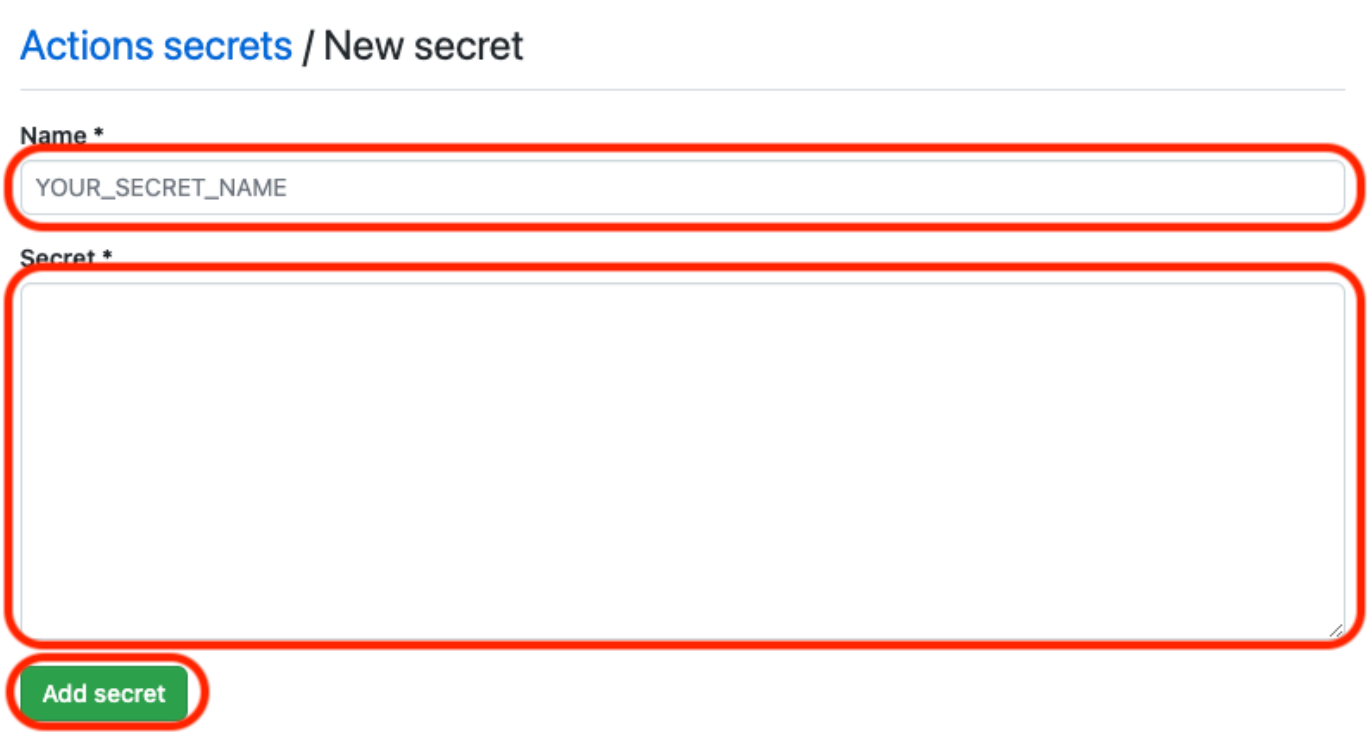

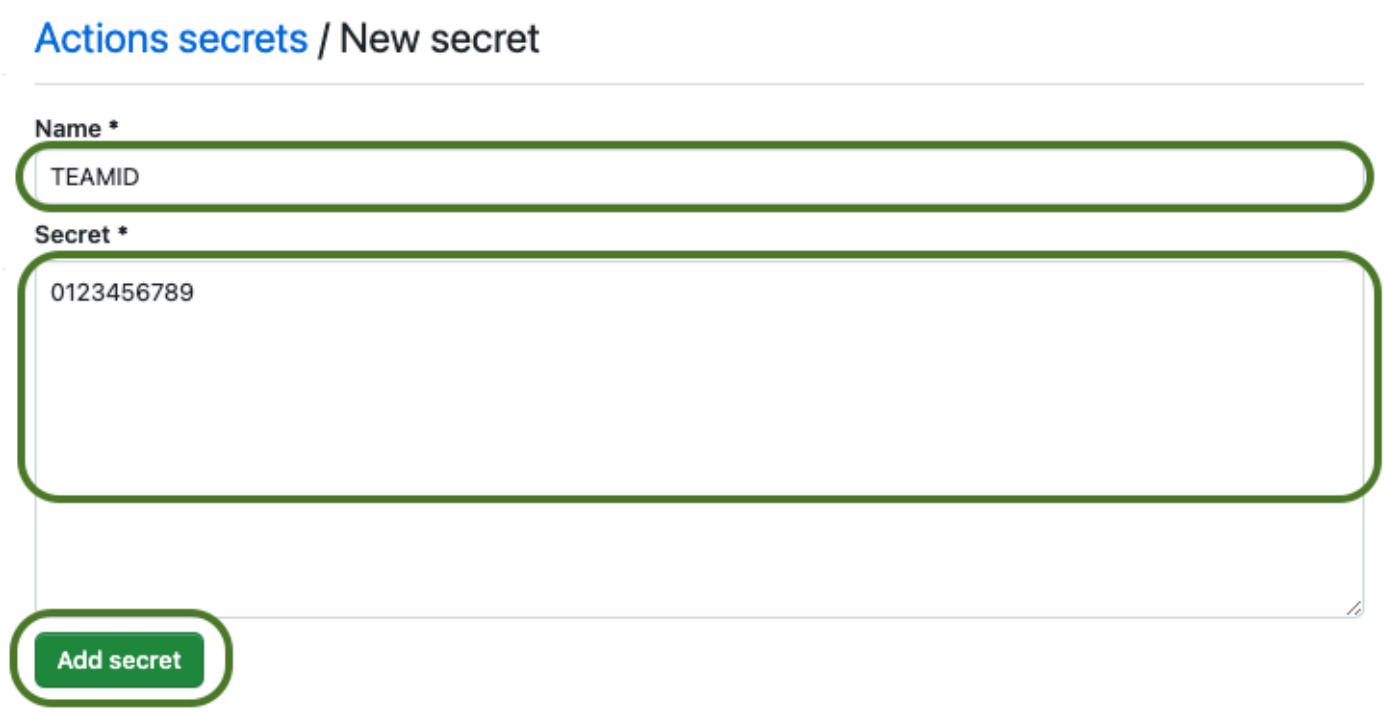

Enter Each Secret

Enter the name of each `Secret` found in Save Your Information and your value for that `Secret`.

- Once you save a secret value, you will not be able to view what you entered, so check carefully before you hit `Add Secret`
  - You can replace the value for any secret later - but you can't view the saved value
- Be especially careful with your `TEAMID`

    - If `TEAMID` is incorrect, the initial `Actions` will succeed but `Build Trio` will fail and you will have some clean-up to do
- You can copy the names of the `Secrets` by hovering to the right of each word below until you see the copy button (⧉). Click on the button to copy the `Secret` name and paste it into *GitHub* where you see `YOUR_SECRET_NAME`. This avoids spelling errors.

    ```
    TEAMID
    ```

    ```
    FASTLANE_ISSUER_ID
    ```

    ```
    FASTLANE_KEY_ID
    ```

    ```
    FASTLANE_KEY
    ```

    ```
    GH_PAT
    ```

    ```
    MATCH_PASSWORD
    ```


- For the `FASTLANE_KEY` value, copy the entire contents from
  `-----BEGIN PRIVATE KEY-----`
  through
  `-----END PRIVATE KEY-----`
- For `MATCH_PASSWORD` value - if you did not already make up a password and save it with your other `Secrets`, do it now
    - The `MATCH_PASSWORD` must be the same for any repository using this method

Once you add all six `Secrets`, your screen should look similar to the one of the two examples in the graphic below.

> An organization account (top half of graphic) has a column for Visibility which is not seen in a personal account (bottom half of the graphic). The default setting for visibility is `Public repositories`. If yours says anything else, you should update the visibility by tapping on the pencil icon.

- Check that all of your `Secrets` are spelled correctly
- If one is misspelled, delete it and add a `New secret` with the correct name



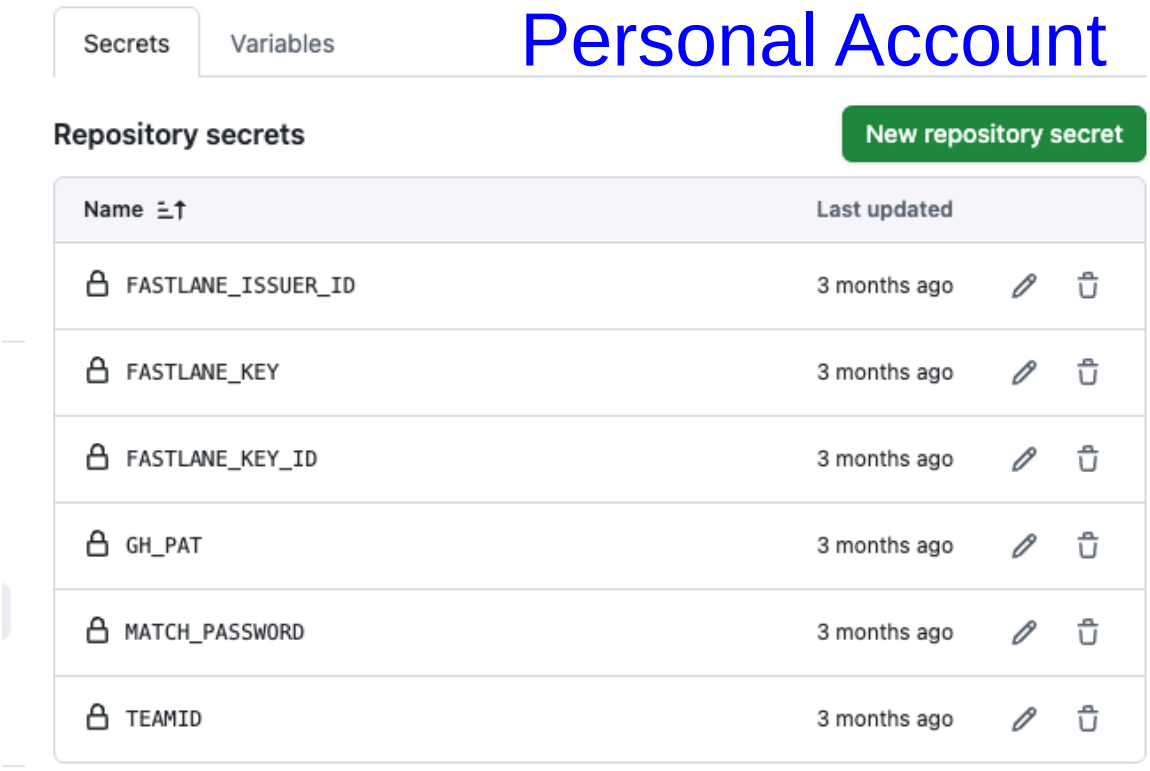

Add Variable

This variable (**not** a secret) provides automatic renewal of certificates, which expire once per year.

1. While in the same screen where you enter the `Secrets`, click on the `Variables` tab to the right of the `Secrets` tab

- If you aren't at the screen:
  - ***GitHub*** **organization account**: go to your organization page and select Settings; scroll down, select `Secret and Variable` and then select `Actions`
  - ***GitHub*** **personal account**: go to your repository for the app you are building, select Settings; scroll down, select `Secret and Variable` and then select `Actions`

2. Select new variable and give it the name the `ENABLE_NUKE_CERTS` and enter `true` as the value


```
ENABLE_NUKE_CERTS
```

What will this accomplish?


- Certificates will be automatically updated if you have configured this `Variable`
- As long as your *Apple* developers license is valid and all agreements are signed: **you can skip the steps to create or renew your certificates**!

Not sure how to get to the Variables screen? Review the two graphics.


This graphic shows how to access Variables for a repository (similar steps required for an organization).

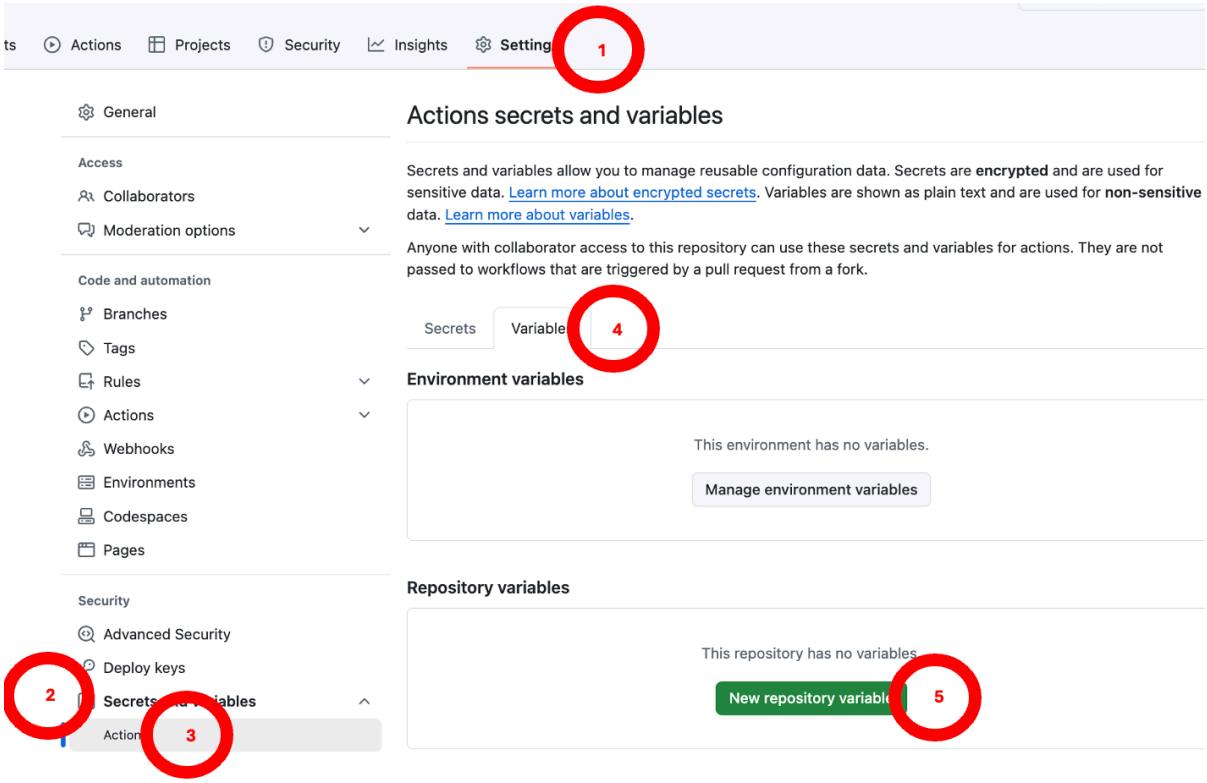

This next graphic shows filling out the variable for a repository that is not part of an organization.

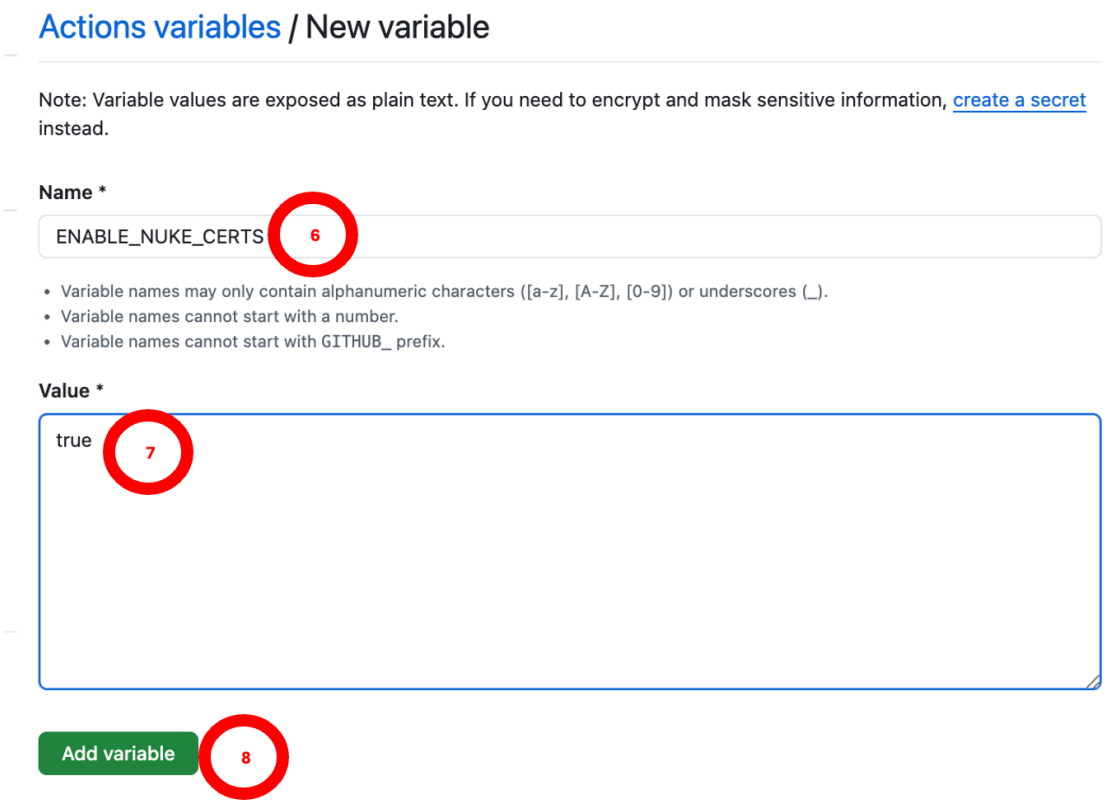

This final graphic shows how to add the `ENABLE_NUKE_CERTS` to an organization. Be sure that Repository access is set to `Public repositories`. When adding this to a repository, that option is not shown.

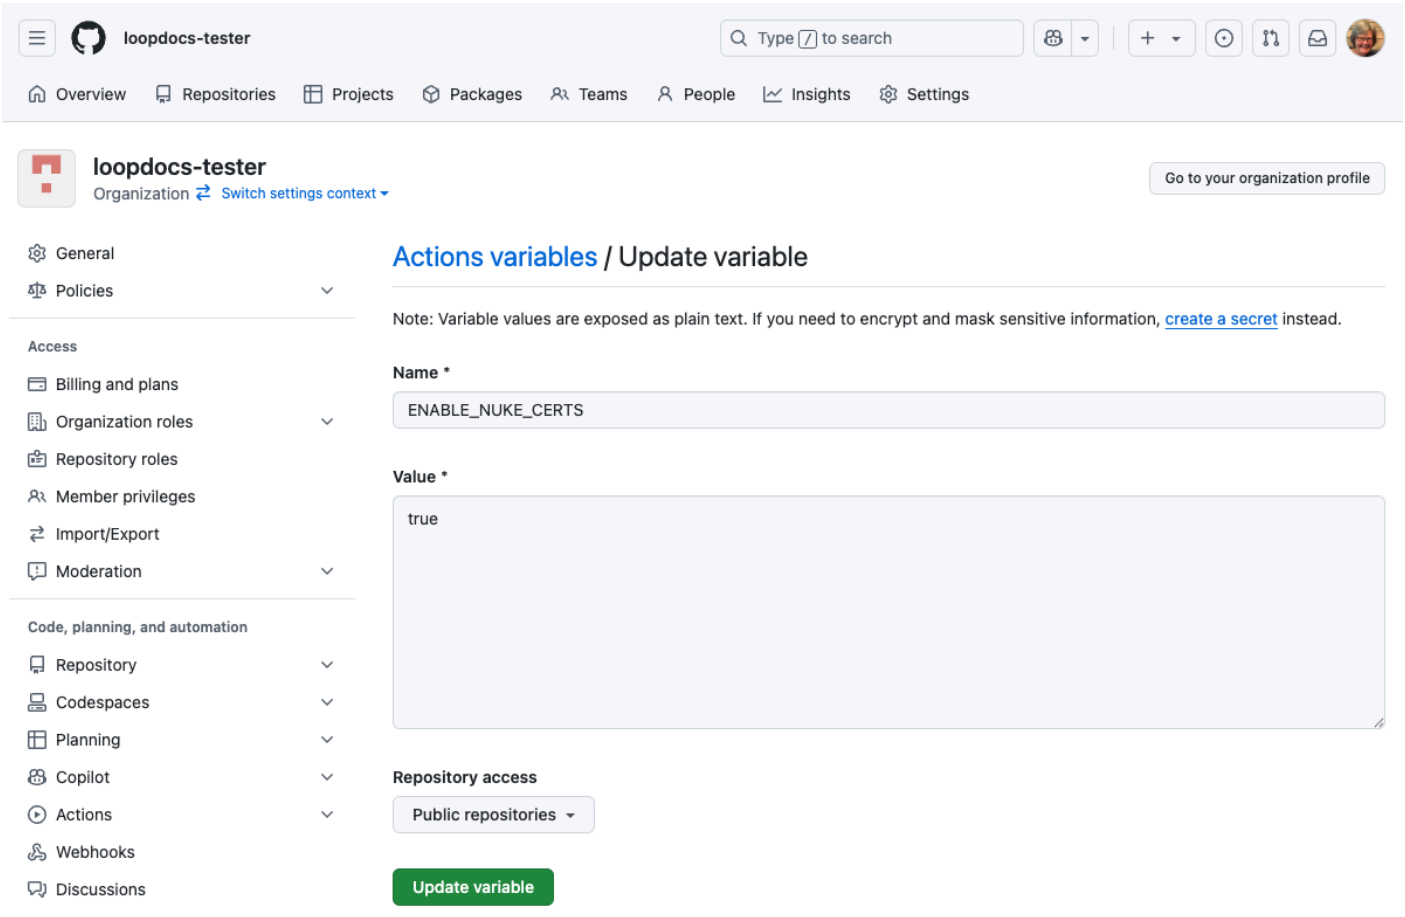

Next Step

Secrets are configured! Now let's validate them:

→ **Validate Secrets**

Navigation: ← Back: Collect Apple Secrets | Next: Validate Secrets →

Switch to a *GitHub* Organization

If you are someone who already has a lot of forks in your personal account and want to switch to using a *GitHub* organization. Here's how:

1. Follow the steps to create your organization
   - Create a Free *GitHub* Organization
2. Add the `Secrets` and the `Variable` to your *GitHub* organization as explained in Prepare to Enter `Secrets`
3. Fork all the repos you normally use, but this time, set your organization as the owner
4. For each repository in your organization:
   - Tap on the Actions tab
   - Enable Actions
   - Run the Create Certificates Action and wait for success
   - Run the Build Action
     - WHAT??
     - That's right - all the setup is done on the *Apple* side and you already did that
     - If you successfully built with your private *GitHub* account, everything is already configured
     - The one thing you might want to do is copy customizations from your personal account fork to the organization fork
5. Return to your private *GitHub* account
   - Your choice: either delete the forks in your personal account or at least disable the building from your personal account

Important

> Your personal *GitHub* account is still needed. The free organization points to your personal account as a member. If you delete your personal *GitHub* account, you lose access to your organization account too.

Already Have Trio?

Some people may already have a copy (`fork`) of `Trio` .

If your copy (`fork`) is **not** from `nightscout` , follow the Delete and Start Fresh directions.

If your copy (`fork`) is from `nightscout` :

- Open your `Trio` repository (`https://github.com/my-name-org/Trio`) where you use your version of `my-name` in the URL
- Review the graphic in the Configure: Successful Fork section
    - Make sure all the items highlighted by red rectangles are correct with the possible exception of your fork being up to date
- If you see a message that your *fork* is not up to date - tap on the `Sync fork` button and follow the instructions
- Continue with Validate Secrets

Delete and Start Fresh

If your fork is not from `nightscout` :

- Delete your Trio repository
    - Instructions to delete a repository are found at *GitHub* Docs
- Return to Fork Trio and follow all the instructions