



TrioDocs

Version: 0.4.0

Date: August 13, 2026

Download the latest version on:  
<https://triodocs.org>

# Build Dev with Browser

## Summary of Tasks to Build Trio `dev`

### Use for `dev` or feature branch

This page is useful for building the `dev` branch or any other feature branch found in Trio. Where you see `dev` just replace with `branch-name` where `branch-name` is the branch you want.

These steps assume:

- You previously built Trio using *GitHub* Actions (Browser Build)
- You confirmed your *Apple* Developer license agreements are up to date

These are the new steps for you to follow:


1. [Configure Fork with `dev` branch](#)
  - Optional: [Configure the `dev` branch as default](#)
2. If new Identifiers are required: [Update Identifiers](#)
3. If Time Sensitive Notifications hasn't been enabled yet: [Enable Time Sensitive Notifications](#)
4. Optional: [Update Certificates](#) ; this is included in Build Trio
5. [Build Trio `dev`](#)

### Configure Fork with `dev` branch

- If you do not have a `dev` branch you must first configure one following these directions.
- If you already have a `dev` branch, skip ahead to [Update Branch](#) and be sure to select the `dev` branch when you update your fork .


### Add Branch

First, you need to get to your fork of the Trio repository and tap on the branch icon. (Do not worry about how many branches you have.):

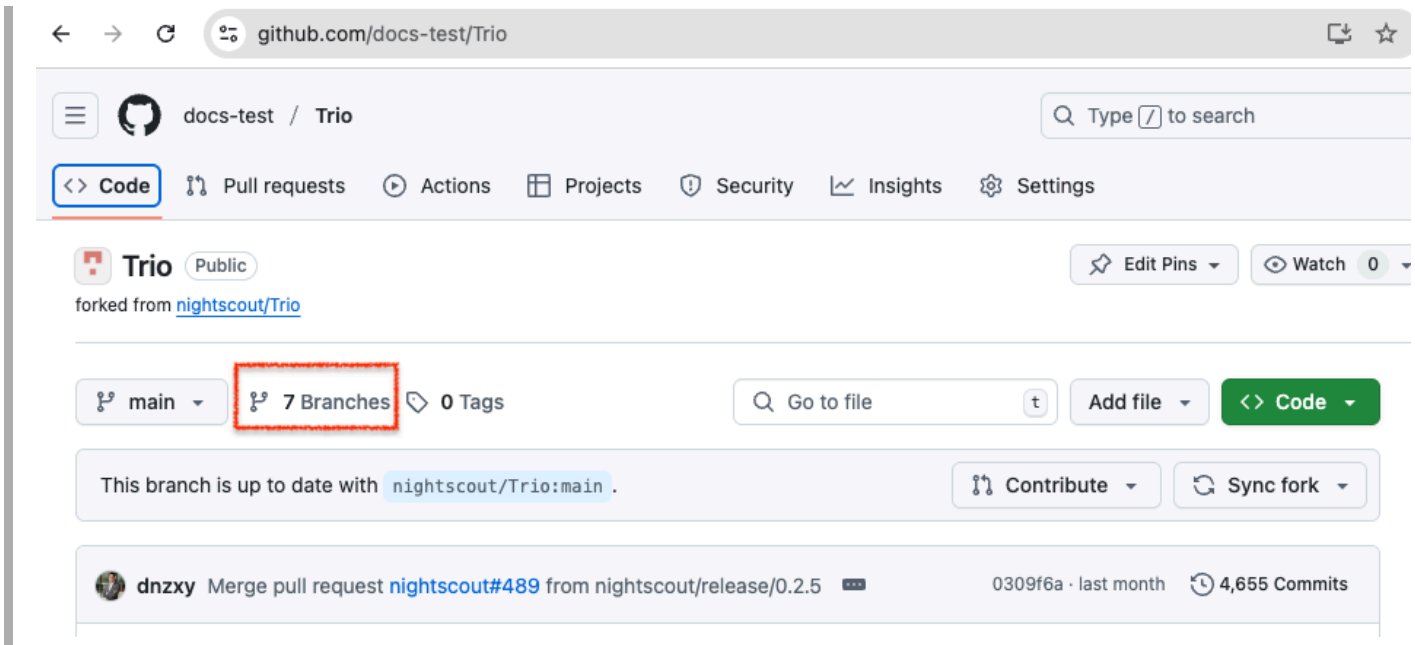


The next screen displays the branches you currently have.

- If the branch you want is already there - click on it so you can make sure it is in sync with Trio
- If the branch you want is not there, tap on the `New branch` button on upper right
  - If there is not a `New branch` button in the upper right, you are not logged in

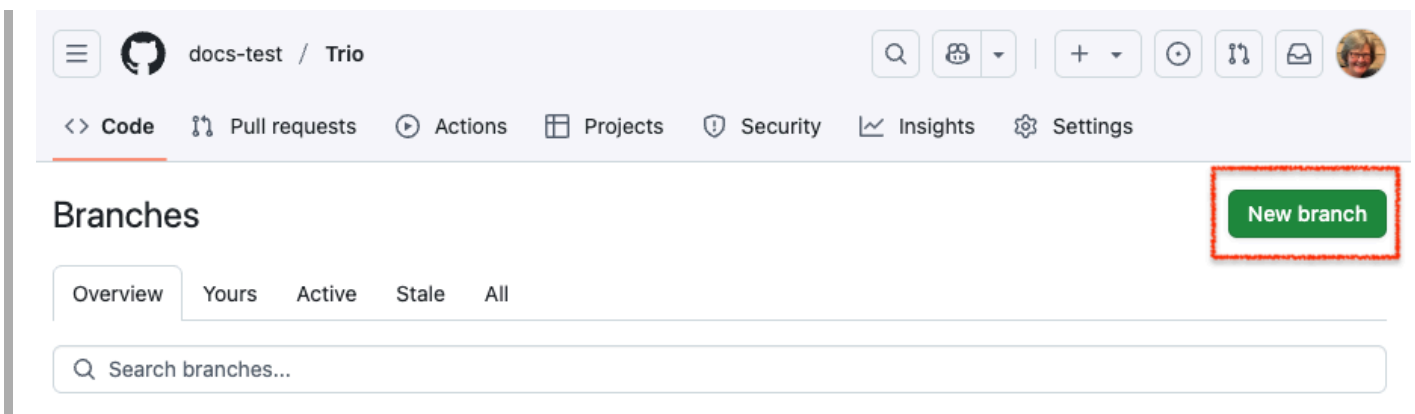

Each step in the list below matches with the number in the graphic. On the left half of the graphic is the default selections for your `fork` when `main` is the default branch. The right side shows the display after making the indicated selections:

1. Click on the drop-down menu labeled 1 in the graphic and choose `nightscout/Trio`
2. Click on the drop-down menu labeled 2 in the graphic and choose `dev`
3. Click on the `Branch` name box labeled 3 in the graphic and type `dev`
  - The branch name in your `fork` should always match the branch name you are adding; check that you type it correctly
4. Review the dialog items to make sure everything is correct, and then tap on `Create branch`

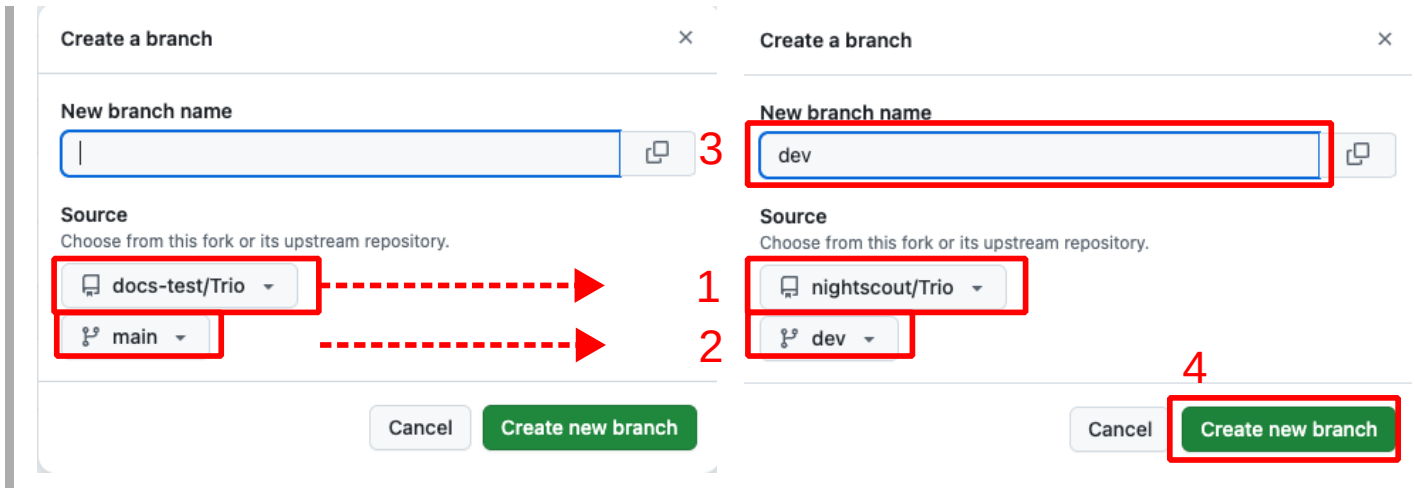

## Configure the `dev` branch as default

This recommendation is only for expert testers who are using `dev` or a feature branch for their personal use. Typically only developers configure the `dev` branch as their default branch.

- By making the `dev` branch your default, you will get automatic build of any `dev` updates weekly
- You will no longer get automated builds of the `main` branch, but can run those manually


These are the steps to modify the default branch.

For this example, we show how to change from a default branch of `main` to a default branch of `dev`. Note — only the owner of the repository can take this action and they must be logged in. Otherwise the Settings tab does not appear.

For the numbered steps below, refer to the graphic found under each group of steps.

### 1. Click on the Settings Icon near the top right of your Trio repository


- You may need to scroll down to see the `Default Branch` as shown in the graphic
- Do not tap on the Branches tab to the left under Code and Automation, that is not the correct menu

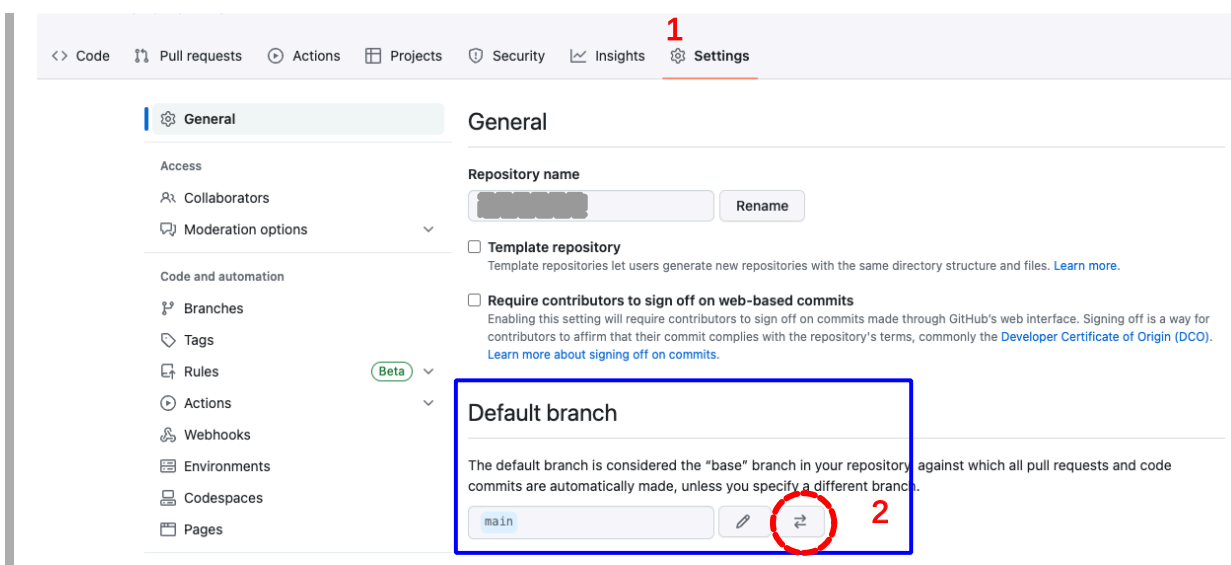

### 2. To the right of the default branch name there is a pencil and a left-right arrow icon (⇄)

- Tap on the left-right arrow icon (⇄) to bring up the `Switch default branch to another branch` dialog

3. Click on the dropdown next to the current default branch, in this example, `main`

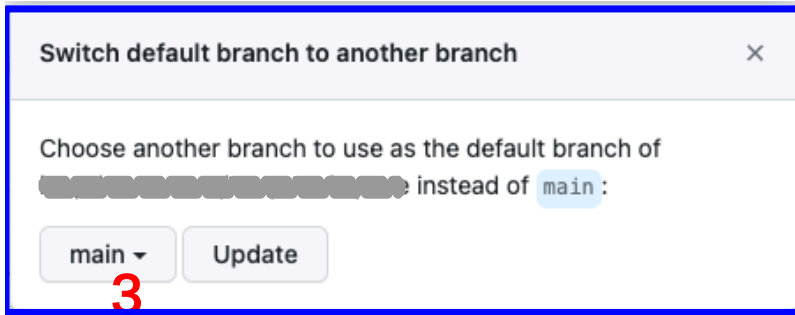

1. Select the desired default branch, in this example, `dev` was selected

2. Click on the `Update` button

3. You will be presented with an are-you-sure question.

- Click on the red `I understand, update the default branch.` button


Your default branch has been changed.

### Update Branch

The `dev` branch of the `nightscout/Trio` repository will be updated frequently. This is how you know if your fork needs to be updated as well. As long as the automatic runs are happening weekly for your repository – you will not need these manual instructions, unless you want to manually build an update sooner.

Tap the `Code` button (upper left) and ensure this branch in your fork is up to date.

- Select the desired branch in the dropdown menu (this graphic shows `main` branch, to get 0.5 (or newer), you must choose `dev` branch)
- If the message indicates this branch is "behind", tap on the sync fork button and then the `Update branch` button

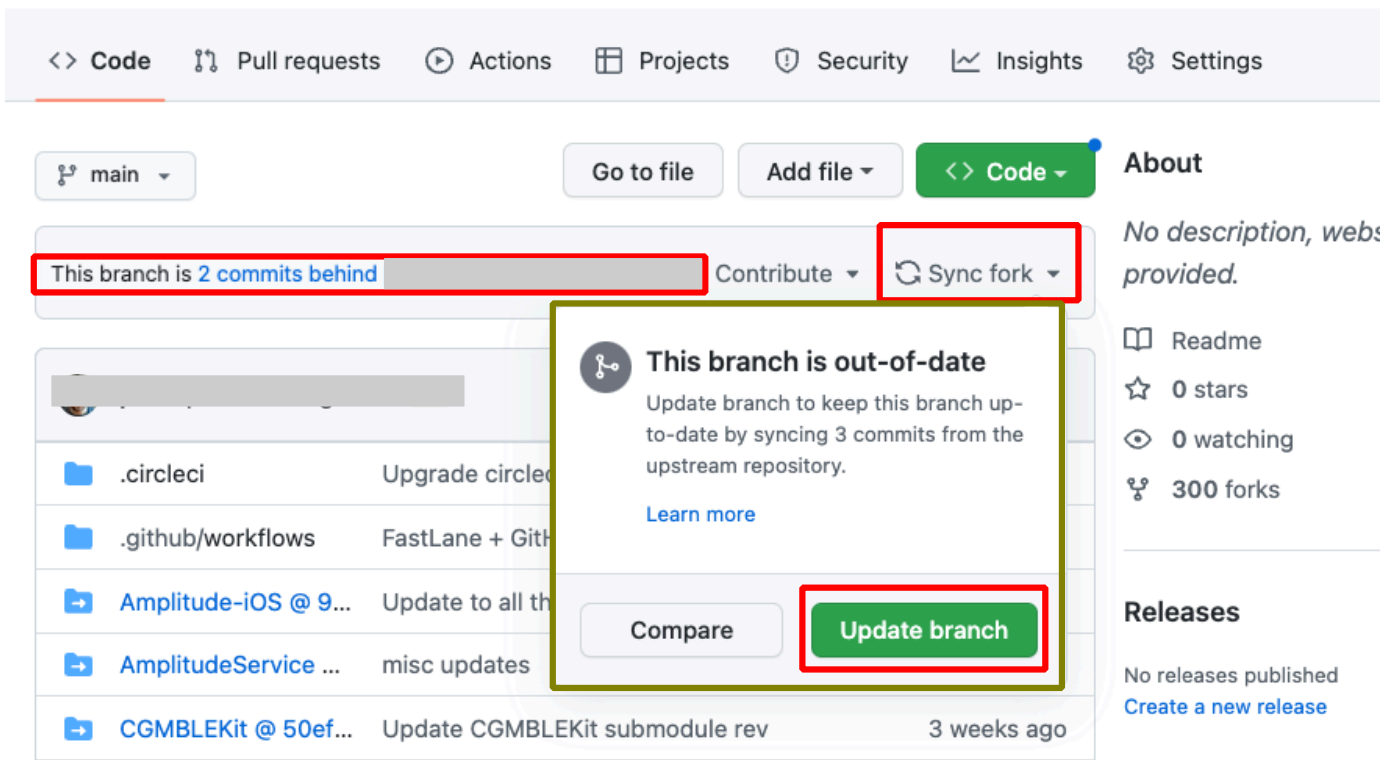


## Update Identifiers

If identifiers are added to the `dev` or feature branch you are using, this will be required, otherwise you can skip this.

Refer to the graphic below for the numbered steps:

1. Click on the `Actions` tab of your Trio repository
2. On the left side, click on `2. Add Identifiers`
3. On the right side, click `Run Workflow` to show a dropdown menu
  - You will see your default branch (typically this is `main`)
  - **To update the `Identifiers` found in `dev` but not `main`, you must select `dev`**
4. Tap the green button that says `Run workflow`.

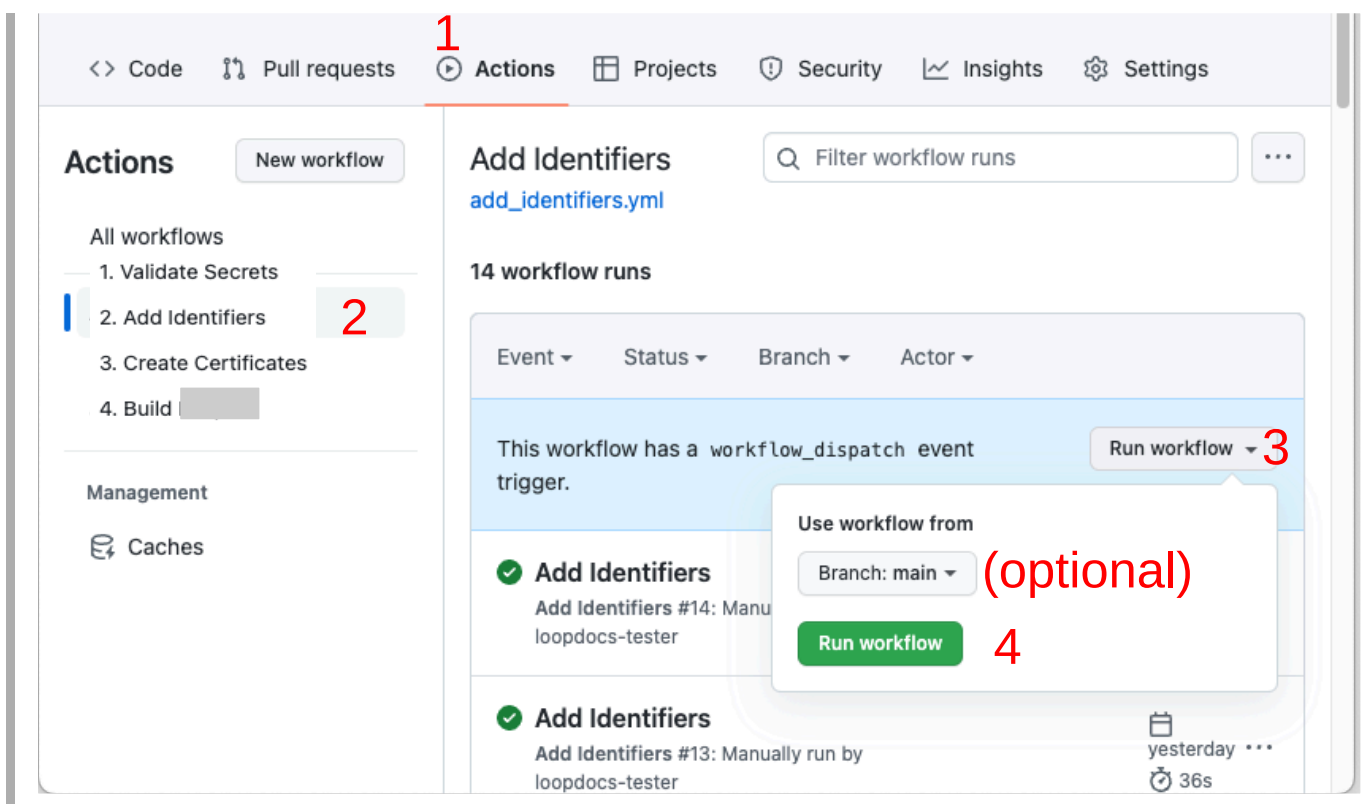

### Be Patient

- Refresh the browser if you are unsure if the action started
- Do not start a new action until the first one completes

The `Add Identifiers` Action should succeed or fail in a few minutes. Do not continue to the next step until this one succeeds.

## Enable Time Sensitive Notifications

`Trio dev` version 0.8.4.3 added the requirement for the Time Sensitive Notifications capability to be enabled for your `Trio` Identifier. If you already enabled it, you can skip this step.

- This is a one-time manual step in your *Apple Developer* account - the `Add Identifiers` action does not enable this capability for you
- If the capability is not enabled, the `Build Trio` action fails


Follow the directions at [Enable Time Sensitive Notifications](#), then return to this page and continue with [Build the App](#).

- You do not need to run any extra actions after checking the box - `Build Trio` includes the Create Certificates step, which updates your provisioning profile to include the new capability

## Build the App

If you completed all the steps on this page successfully (got a green checkmark ) , you are ready to run Action: Build Trio.

If you choose to build a different branch than your default branch, there is an extra step when you `Build Trio` . In addition to the normal steps 1, 2, and 3 in the graphic below, you must also do the (optional) step. Select the `dev` branch in the branch dropdown menu before continuing to step 4 and tapping on the green Run workflow button:

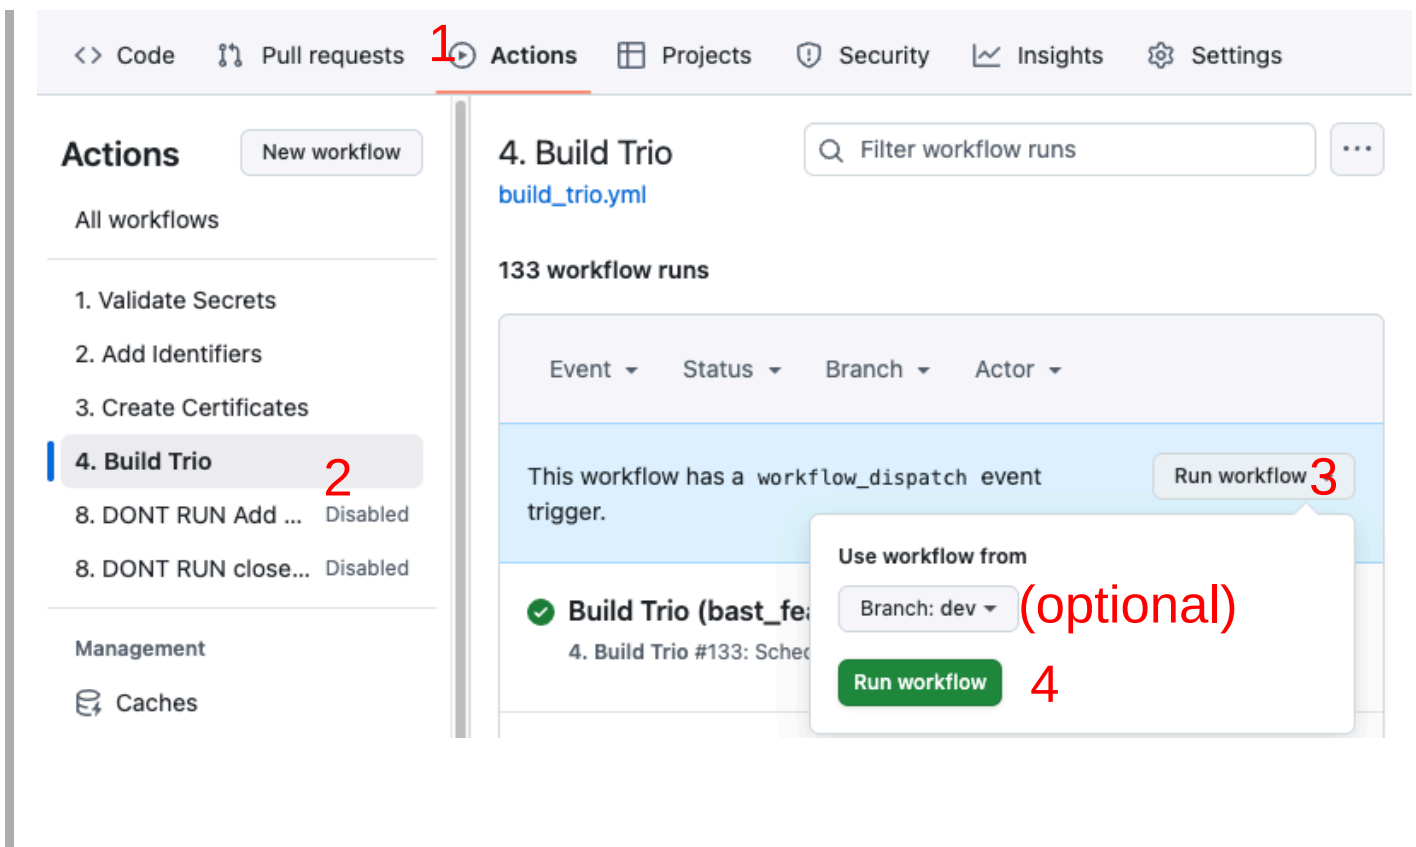

## Refresh, Do Not Repeat

### Hit Refresh

After you tap the green Run workflow button, GitHub can be slow to update.

- Refresh the browser if you are unsure if the action started
- Do not start a new action until the first one completes

## Update Build Errors

Read the **build action annotations** if you see an error.

### Time Sensitive Notifications Error

If you did not [Enable Time Sensitive Notifications](#) for your `Trio` Identifier, the `Build Trio` action fails with an error similar to this:

```
error: Provisioning profile "match AppStore org.nightscout.***.trio" doesn't include the
com.apple.developer.usernotifications.time-sensitive entitlement.
```

**Solution:** [Enable Time Sensitive Notifications](#) and then run `Build Trio` again - make sure you select the `dev` branch.

### Identifiers Error

This example is from the past when Push Notifications were added to the `dev` branch.

#### Example Error

#### Annotations

2 errors and 1 warning

✖

**Build**  
Process completed with exit code 1.

✖

**Build: Trio.xcodeproj#L0**  
Provisioning profile "match AppStore org.nightscout.\*\*\*.trio" doesn't support the Push Notifications capability. (in target 'Trio' from project 'Trio')  
[Show less](#)

If you decide to look at the action **log**, instead of reading the annotations, you may see an **error** similar to the two graphics below.

```
691 [23:27:00]: Called from Fastfile at line 138
692 [23:27:00]: ```
693 [23:27:00]:   136:       )
694 [23:27:00]:   137:
695 [23:27:00]: => 138:       gym(
696 [23:27:00]:   139:           export_method: "app-store",
697 [23:27:00]:   140:           scheme: "Trio",
698 [23:27:00]: ```
699 [23:27:00]: Error building the application - see the log above
700
701 +-----+
702 | fastlane summary |
```



```
from project 'Firebase'
518 [23:27:00]: ▶ ::error file=/Users/runner/work/Trio-dev/Trio-dev/Trio.xcodeproj::Provisioning profile "match AppStore org.nightscout.***.trio" doesn't
support the Push Notifications capability. (in target 'Trio' from project 'Trio')
519 [23:27:00]: ▶ /Users/runner/work/Trio-dev/Trio-dev/Trio.xcodeproj: error: Provisioning
profile "match AppStore org.nightscout.***.trio" doesn't include the aps-environment
entitlement. Profile qualification is using entitlement definitions that may be out of
date. Connect to network to update. (in target 'Trio' from project 'Trio')
520 [23:27:00]: ▶ note: Disabling previews because SWIFT_VERSION is set and
SWIFT_OPTIMIZATION_LEVEL=-O, expected -Onone (in target 'Trio' from project 'Trio')
521 [23:27:00]: ▶ note: Run script build phase 'Swiftformat' will be run during every build
because the option to run the script phase "Based on dependency analysis" is unchecked.
```

## Solution

1. **Update Identifiers** - make sure you select `dev` branch
2. **Build the App** - make sure you select `dev` branch