



TrioDocs

Version: 0.4.0

Date: August 13, 2026

Download the latest version on:  
<https://triodocs.org>

# Create GitHub Account

# Create a GitHub Account

» If you already have a *GitHub* Account, skip ahead to [Create GitHub Personal Access Token](#).

## New *GitHub* Account

If you do not already have a *GitHub* account, you need to create one. Be sure to record the email, password, and username for your *GitHub* account.

Decide on a couple of usernames that you will be happy with - this will get embedded into your *GitHub* URL. Your first choice might not be available, so be prepared with several candidates. Your personal URL will be:

`https://github.com/username`.

- Click on this link to sign up for a free account: [GitHub account signup](#)
  - You will need to enter the **email** you want associated with your *GitHub* account
  - You will be asked to enter a **password**
  - You will be asked to enter a **username**
  - You will be asked if you want to receive email, ok to say **N** for no - you still get important account information with that email
  - Solve the puzzle to prove you're a person
  - Check the associated **email** to get the code and enter the code into `github.com` to confirm your account
- You should get the Welcome to *GitHub* screen
  - Indicate it is "Just me" on your team and Continue
  - Don't check anything on the next screen, just tap `Continue`
  - Select the `Free` option by selecting `Continue for Free`

The free level comes with plenty of storage and compute time to build the *Trio* app.

## Create `GitHub Personal Access Token`



### Section Summary (click to open/close)

Log into your *GitHub* account to create a personal access token, which you will save as `GH_PAT`.

Click to create a new `personal access token`:

- Enter a name for your token, use "FastLane Access Token"
- Change the Expiration selection to `No expiration`
- Select the `workflow permission scope` (`repo` will be automatically selected)
  - This step enables automatic building
- Click "Generate token"
- Copy the token and record it. It will be used below as `GH_PAT`

➤ To skip the detailed instructions, click on [Make up a Password](#).




### Default Settings

These instructions are a prerequisite for automatic update and automatic build.

You must be logged into your *GitHub* account before starting this step. If you are continuing, you are already logged in.

1. You will be creating a new *GitHub* `Personal Access Token` and giving it the name "FastLane Access Token"
2. Open this link: <https://github.com/settings/tokens/new>
  - Referring to the graphic
    - Note that `Tokens (classic)` is highlighted
    - Most people use the `classic Token`
      - If you are a developer who needs to use fine-grained `tokens`, that is fine
    - Edit the note box to be `FastLane Access Token`
  - The default Expiration time is 30 days - but you should select `No expiration` (use the dropdown menu to select)
    - *GitHub* will show a yellow warning when you do this
    - It is ok to ignore the warning
  - Add a check beside the `workflow permission scope`
  - A check will automatically appear in the `repo` scope as well - this is normal
  - Scroll all the way to the bottom and click `Generate token` (it's a long way, ignore all other settings, do not check anything else)

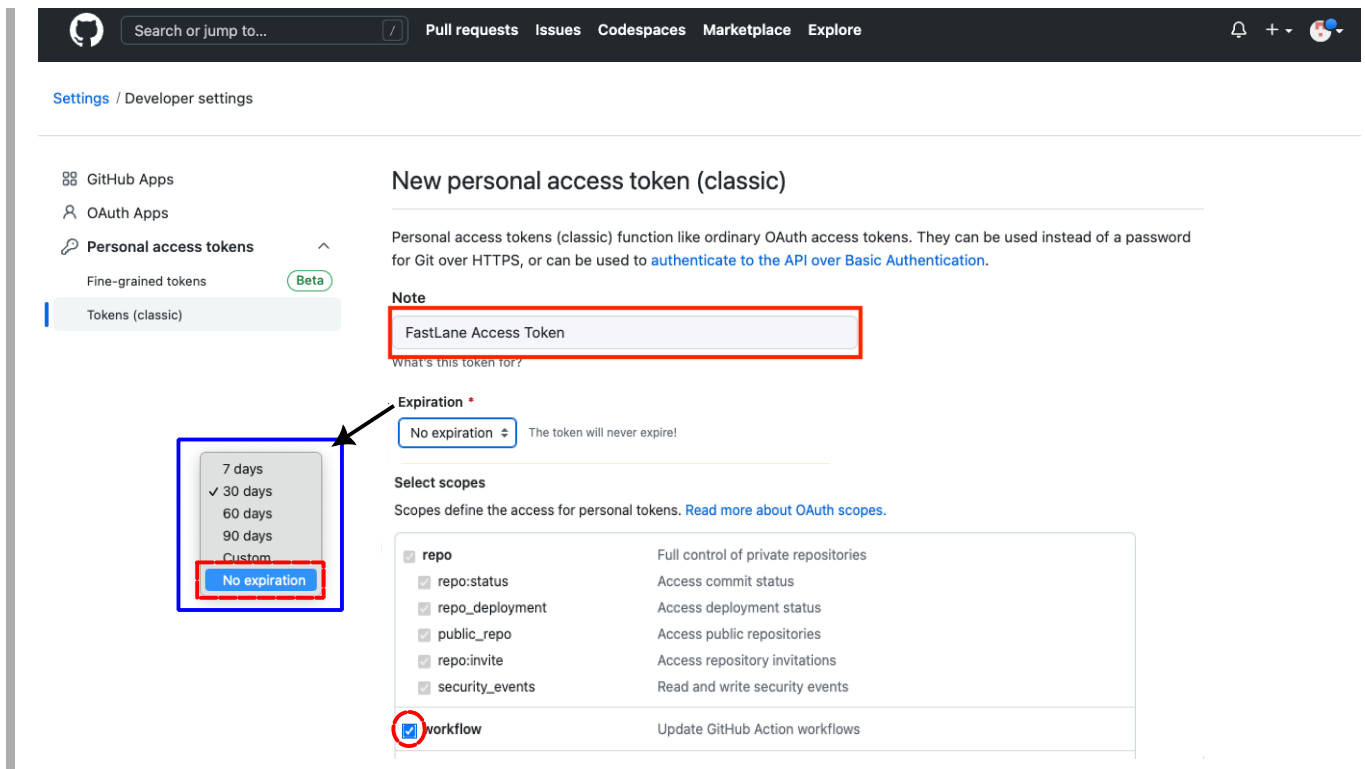

### What does `repo` and `workflow` do?

- `repo` : enables manual build actions
- `workflow` : enables `repo` and automatic build actions

### 3. A new screen appears showing your access token

- Copy the `token` and record it - once you leave this screen you can't see it again
- You will use this for `GH_PAT` when you set up your Secrets
- You can regenerate a Personal Access Token for `GH_PAT` if you lose it, but then you have to update that in the `Secrets` for your organization or in all repositories using `GitHub` Build if you don't use an organization

## Create a Free `GitHub` Organization

This step is optional but it can save you a lot of time and is strongly recommended.

Prerequisite: You need a personal `GitHub` account. If you do not already have a personal `GitHub` account, click on [New `GitHub` Account](#).

In the instructions below, use your `GitHub` username instead of `my-name`.

### 1. Follow the directions below to create a new `GitHub` organization account with a username of `my-name-org` (of course naming is up to you)

- `GitHub` provides documentation at this link, [New `GitHub` Organization](#) , or you can follow the bullets below
- Log into `my-name` and click on your icon (at upper right) and choose Settings
- On the left side-bar, click on Organizations

- In the new view, click on New Organization and choose Free for the plan by clicking on `Create a free organization`.
- In the `Set up your organization` screen:
  - Enter `my-name-org` into the `Organization name` box
  - Enter the same email you use for `my-name` account
  - Select this organization belongs to `My personal account`
  - Check the box to accept the terms of service
  - Tap on the next button

2. You now see a Welcome screen

- Unless you plan to collaborate with others, just tap `Complete setup`
- You can always add others at a later time

3. Confirm access by entering the same password as you use for `my-name`

#### **GH\_PAT comes from personal `my-name` account**

The `GitHub` personal access token used as one of the 6 `Secrets` is associated with your personal account (`my-name`); so if you already have one, you just keep using it.

**Your personal `GitHub` account is still needed. The free organization points to your personal account as a member. Please do not delete your personal `GitHub` account after creating an organization. If you do that - you will no longer have access to your organization.**

## Make up a Password

If you have not already made up a password, do it now and record it as `MATCH_PASSWORD`. Note that if you build more than one app, you use the same `MATCH_PASSWORD` for all the apps. Every app needs to have the same 6 Secrets.

#### **What is this Password used for?**

The `MATCH_PASSWORD` is a special password called a *passphrase* that is used to encrypt and decrypt your certificates from *Apple* so they can be used when building with `GitHub`; it helps keeps your certificates secret and safe.

A *passphrase* is a little different from a regular password. A password is what you usually use to log in to a website or game. A *passphrase* is a secret code that helps protect important files by adding an extra layer of security when files are encrypted.

## Passphrase Suggestions

To make a *passphrase* that is hard to guess and keeps your certificates safe:

- Use at least 15 characters (20 is even better) and you can include spaces
- Mix in big letters, small letters, numbers, and symbols like \$ or #

- Don't use words or numbers that people might guess, like your name or birthday

If you already created a `MATCH_PASSWORD` that does not meet the criteria listed above, no worries, you are protecting an *Apple* developer certificate - not the family fortune. That information is provided for new builders who want guidance.

---

**Navigation:** [← Back to Introduction to Secrets](#) | [Next: Collect Apple Secrets →](#)