

Anthology Dashboard Application

Functional Specfication - Wireframe

Summary

This document specifies the user interface flow and user-facing interactive elements of the Anthology Dashboard application. Development of aaplication must be carried out to this specification. Functional testing of the application must be traceable to the behaviours described in this specification.

Combined with the Data Model specification of compatible version number (refer to the version history table below), this provides a total functional specification of the Anthology Dashboard application.

Version History

Version #	Data Model Version #	Summary of Changes
1.0	1.0	Initial draft

Page 2 - Login

Where
"CONSTANTS" refer to fields defined in the Data Model document
"BODY" refers to the content of an HTTP POST request

Where
"SESSION" describes the cached attributes associated with the Django
user session

GET https://[CONSTANTS.HOSTNAME]/login

REDIRECT → GET https://[CONSTANTS.SSO_HOSTNAME]/[CONSTANTS.SSO_LOGIN_URI]

POST https://[CONSTANTS.HOSTNAME]/[CONSTANTS.SSO_CALLBACK_URI]
BODY : XML (SAMLResponse)

Does any value in BODY
SAML Attribute "MemberOf" start with "
[CONSTANTS.PERMISSION_PREFIX]"

No REDIRECT

GET https://[CONSTANTS.HOSTNAME]/forbidden

[3C]

Yes

SET
SESSION.USER_DISPLAY_NAME = BODY SAML Attribute "displayName"
SESSION.USER_ID = BODY SAML Attribute "userPrincipalName"

Does any value in BODY
SAML Attribute "MemberOf" match "
[CONSTANTS.PERMISSION_PREFIX]/-
[CONSTANTS.PERMISSION_SUFFIX_ADMIN]"

Yes

SET
SESSION.USER_ROLE = [1] "ADMIN"
SESSION.USER_REGIONS = []
SESSION.USER_SITES = []

No

Does any value in BODY
SAML Attribute "MemberOf" match "
[CONSTANTS.PERMISSION_PREFIX]/-
[CONSTANTS.PERMISSION_SUFFIX_QA]"

Yes

SET
SESSION.USER_ROLE = [2] "APPROVER"
SESSION.USER_REGIONS = []
SESSION.USER_SITES = []

No

SET
SESSION.USER_ROLE = [3] "VIEWER"
SESSION.USER_REGIONS = []
SESSION.USER_SITES = []


[3A]

[3B]

Page 3 - Login (2)

Where
"CONSTANTS" refer to fields defined in the Data Model document
"BODY" refers to the content of an HTTP POST request

Where
"SESSION" describes the cached attributes associated with the Django user session

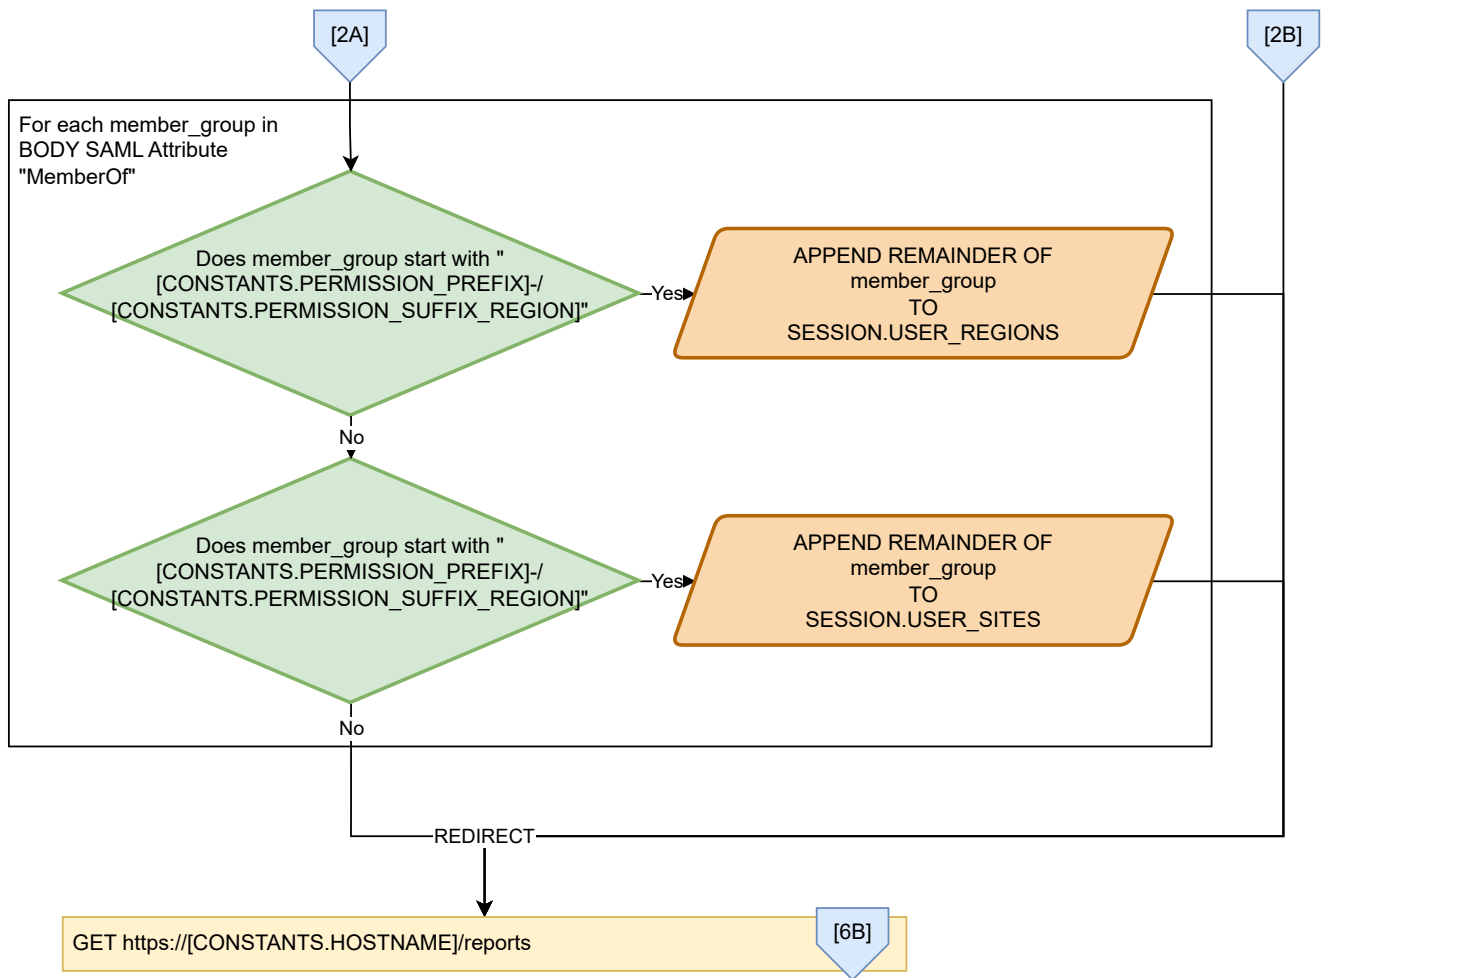

[3C] GET https://[CONSTANTS.HOSTNAME]/forbidden

[5A "Banner"]

Forbidden

██████████ ██████████ ████████████████████
██████████ ██████████ ████████████████████ ████████████████████
██

Request Access

mailto:[CONSTANTS.ACCESS_APPROVER_EMAIL]

Page 4 - Login (3)

Where
"CONSTANTS" refer to fields defined in the Data Model document

Where
"SESSION" describes the cached attributes associated with the Django user session

[4A] GET https://[CONSTANTS.HOSTNAME]/logout

SET
SESSION.USER_DISPLAY_NAME = None
SESSION.USER_ID = NONE
SESSION.USER_ROLE = [0] "UNAUTHENTICATED"
SESSION.USER_REGIONS = []
SESSION.USER_SITES = []

REDIRECT → GET https://[CONSTANTS.SSO_HOSTNAME]/[CONSTANTS.SSO_LOGOUT_URI]

[4B] REQUIRES LOGIN

ANY
SESSION.USER_ROLE is Unset
SESSION.USER_ROLE is None
SESSION.USER_ROLE = [0] "UNAUTHENTICATED"

Yes REDIRECT



GET https://[CONSTANTS.SSO_HOSTNAME]/[CONSTANTS.SSO_LOGIN_URI]

No

PASS


Where
"CONSTANTS" refer to fields defined in the Data Model document

Where
"SESSION" describes the cached attributes associated with the Django user session

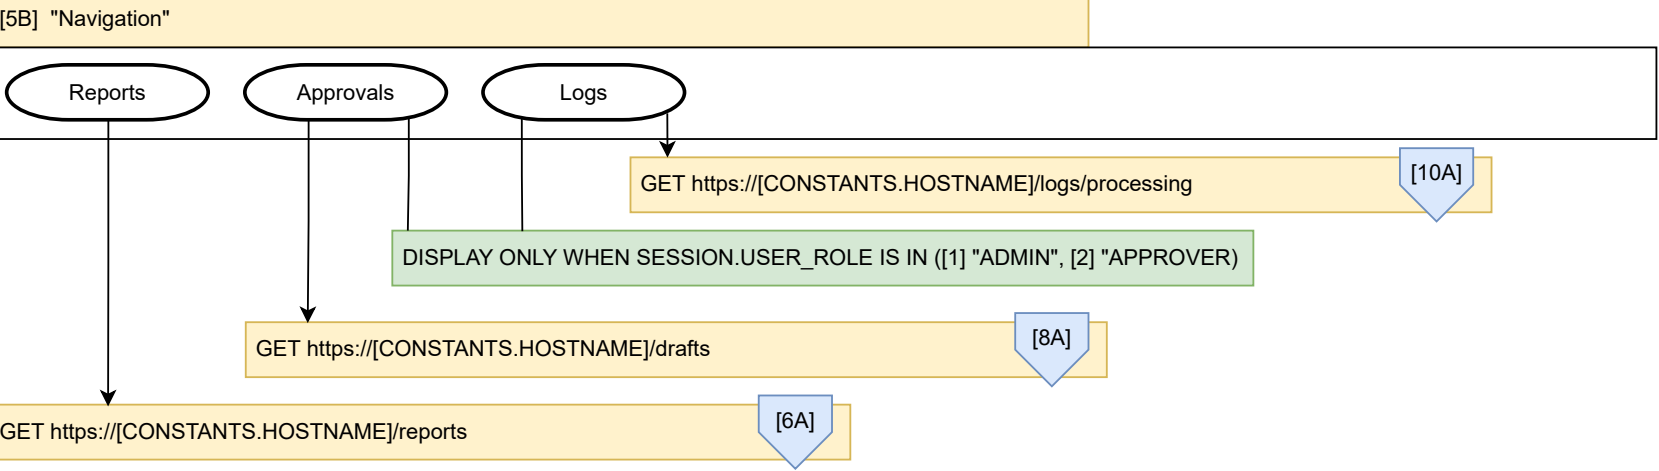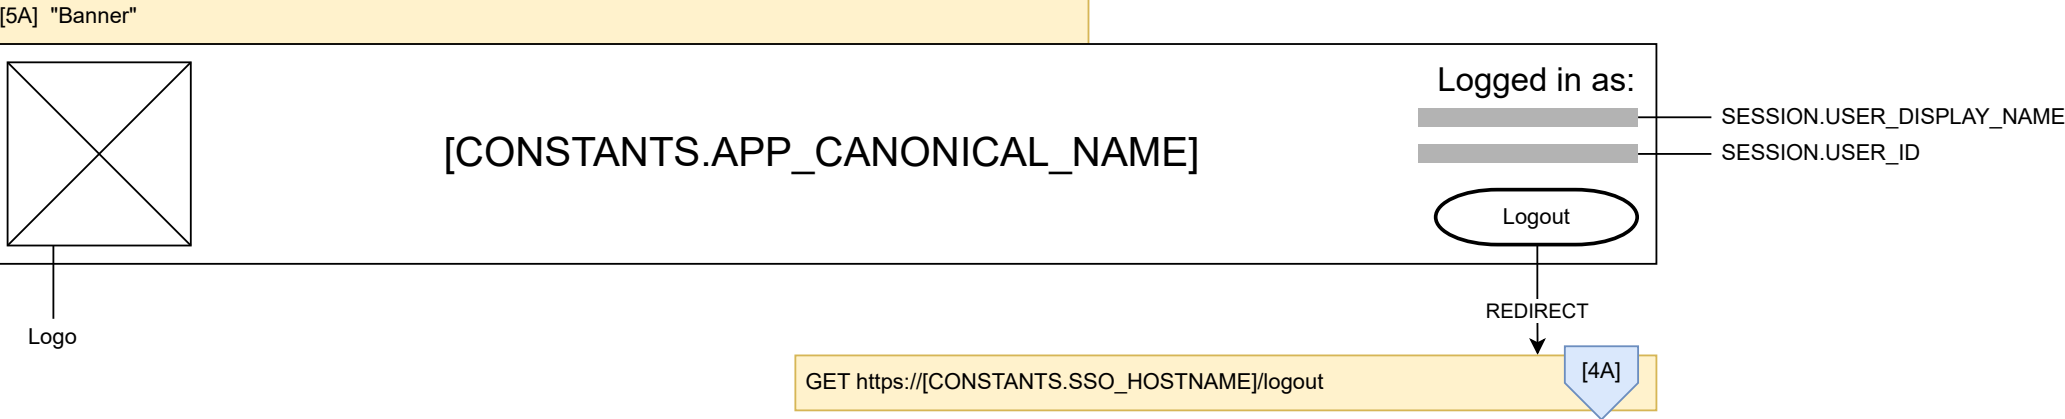

Page 6 - Reports

Where
"CONSTANTS" refer to fields defined in the Data Model document

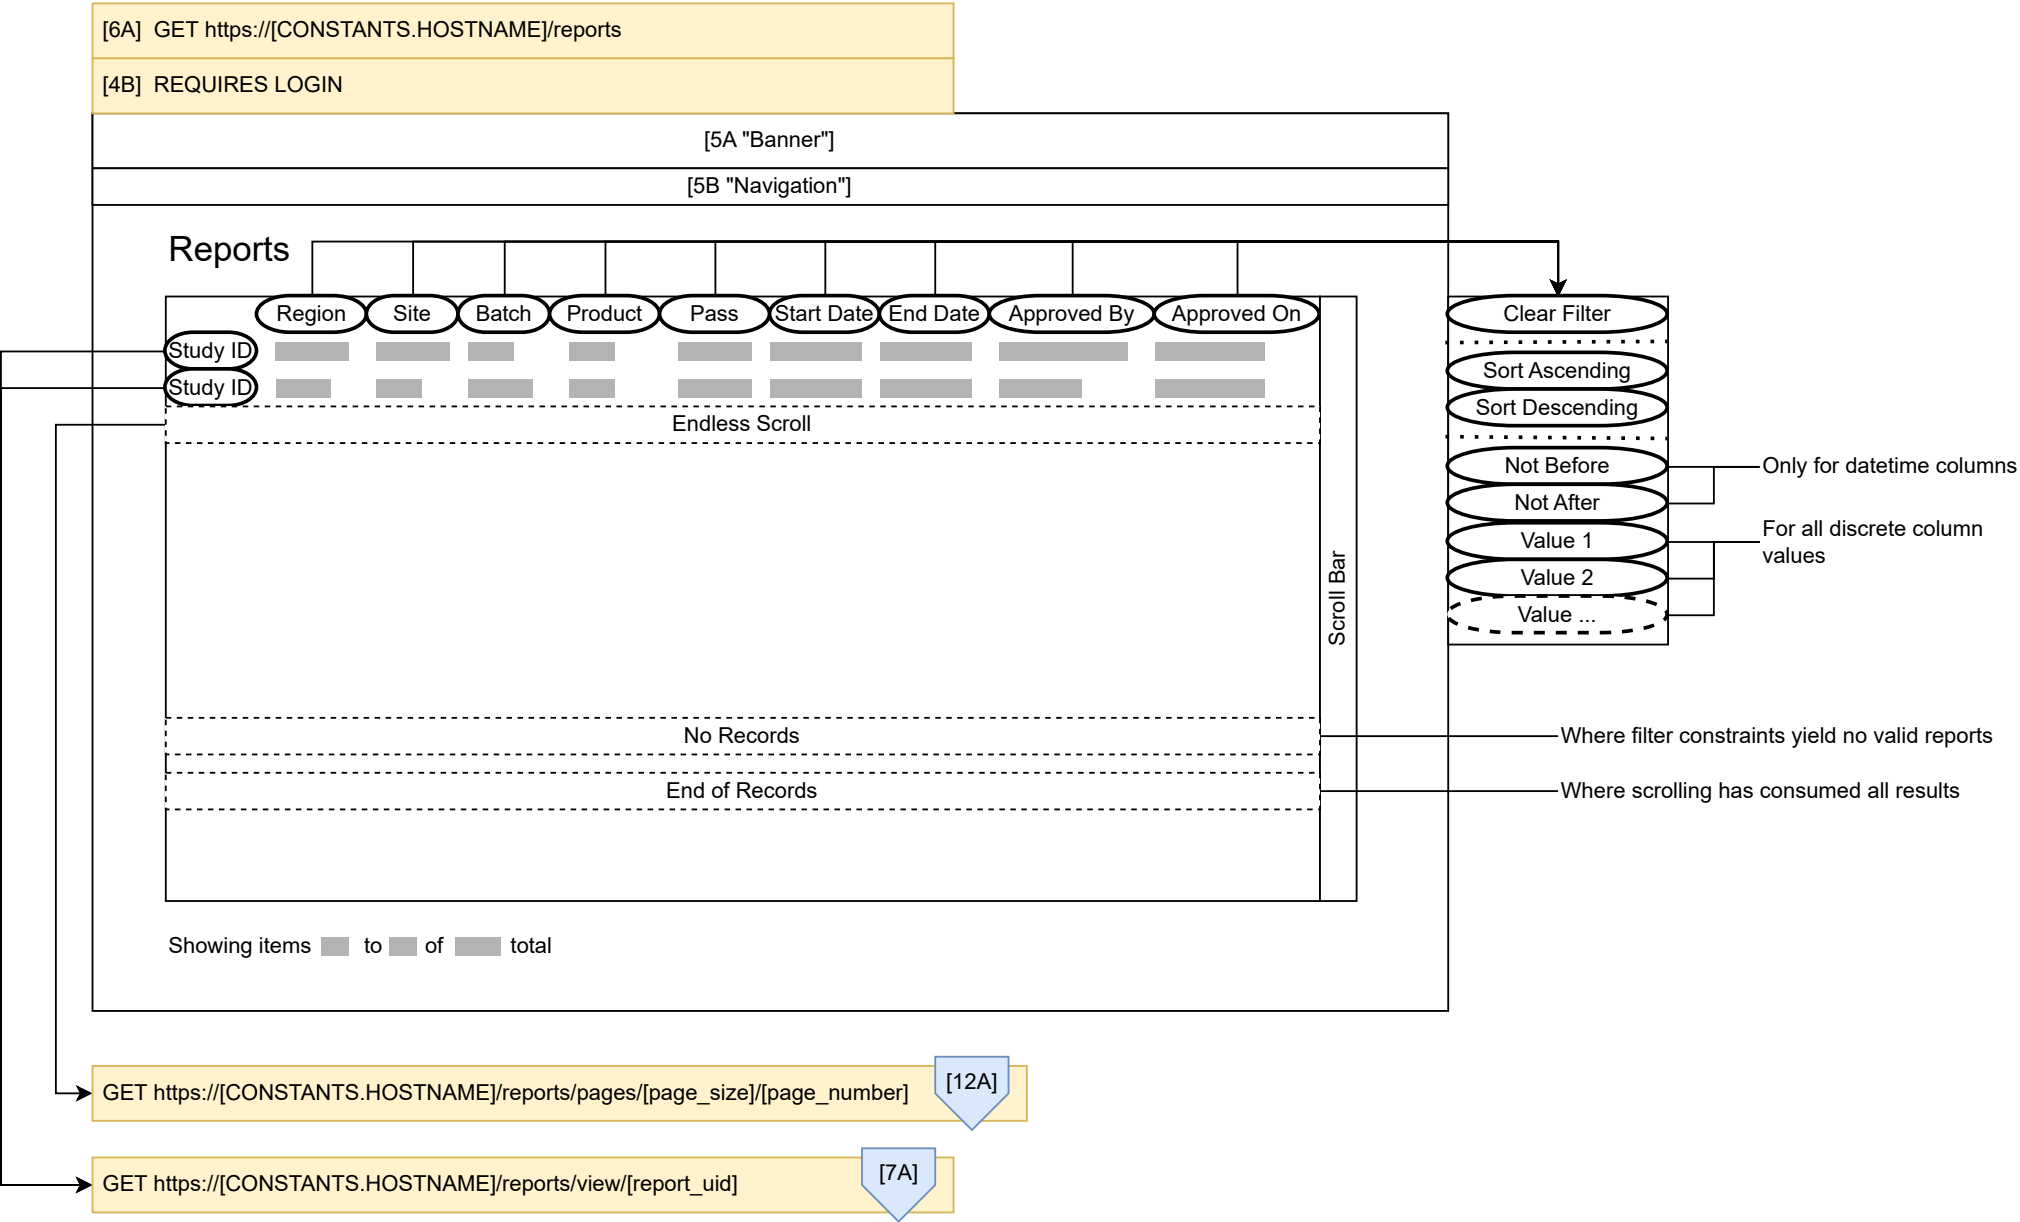


Where

"CONSTANTS" refer to fields defined in the Data Model document


"SESSION" describes the cached attributes associated with the Django user session

"REPORT" refers to the Report record as described in the Data Model document with an ID matching the value of 'report_uid' provided

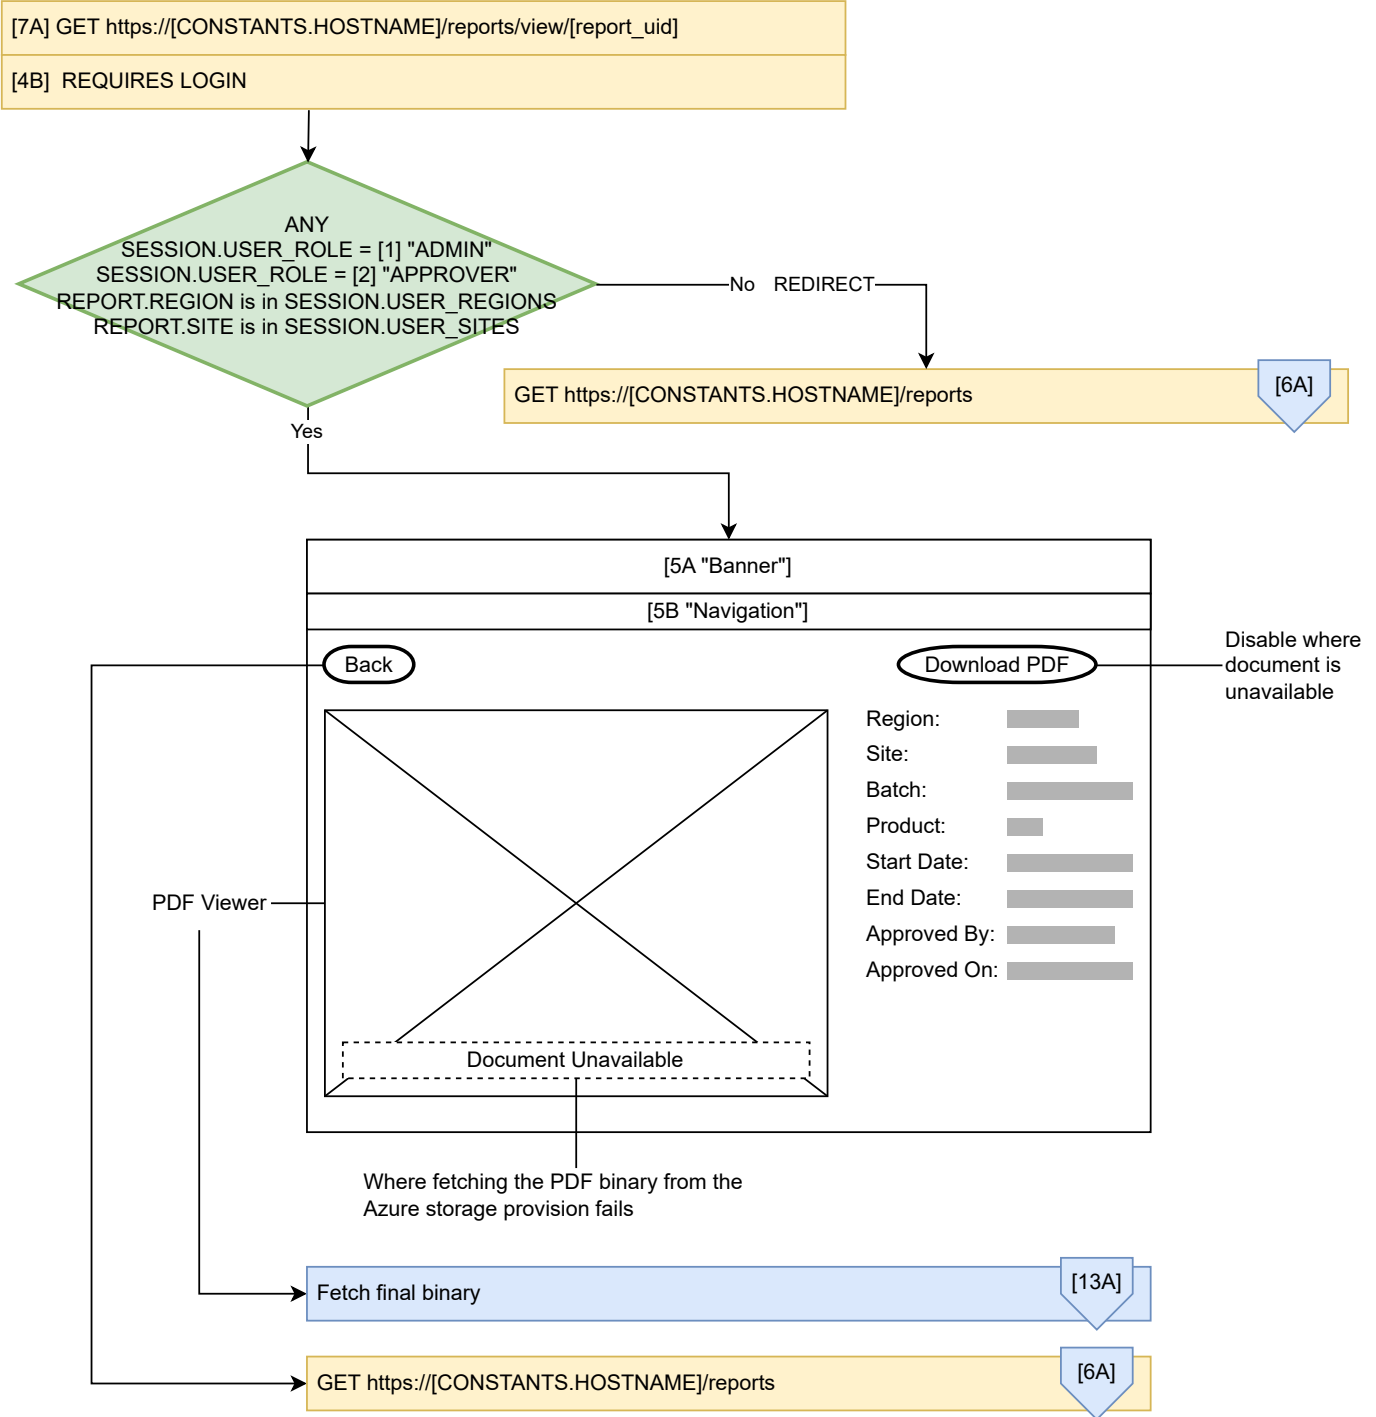


Page 8 - Approvals

Where
"CONSTANTS" refer to fields defined in the Data Model document
"SESSION" describes the cached attributes associated with the Django user session

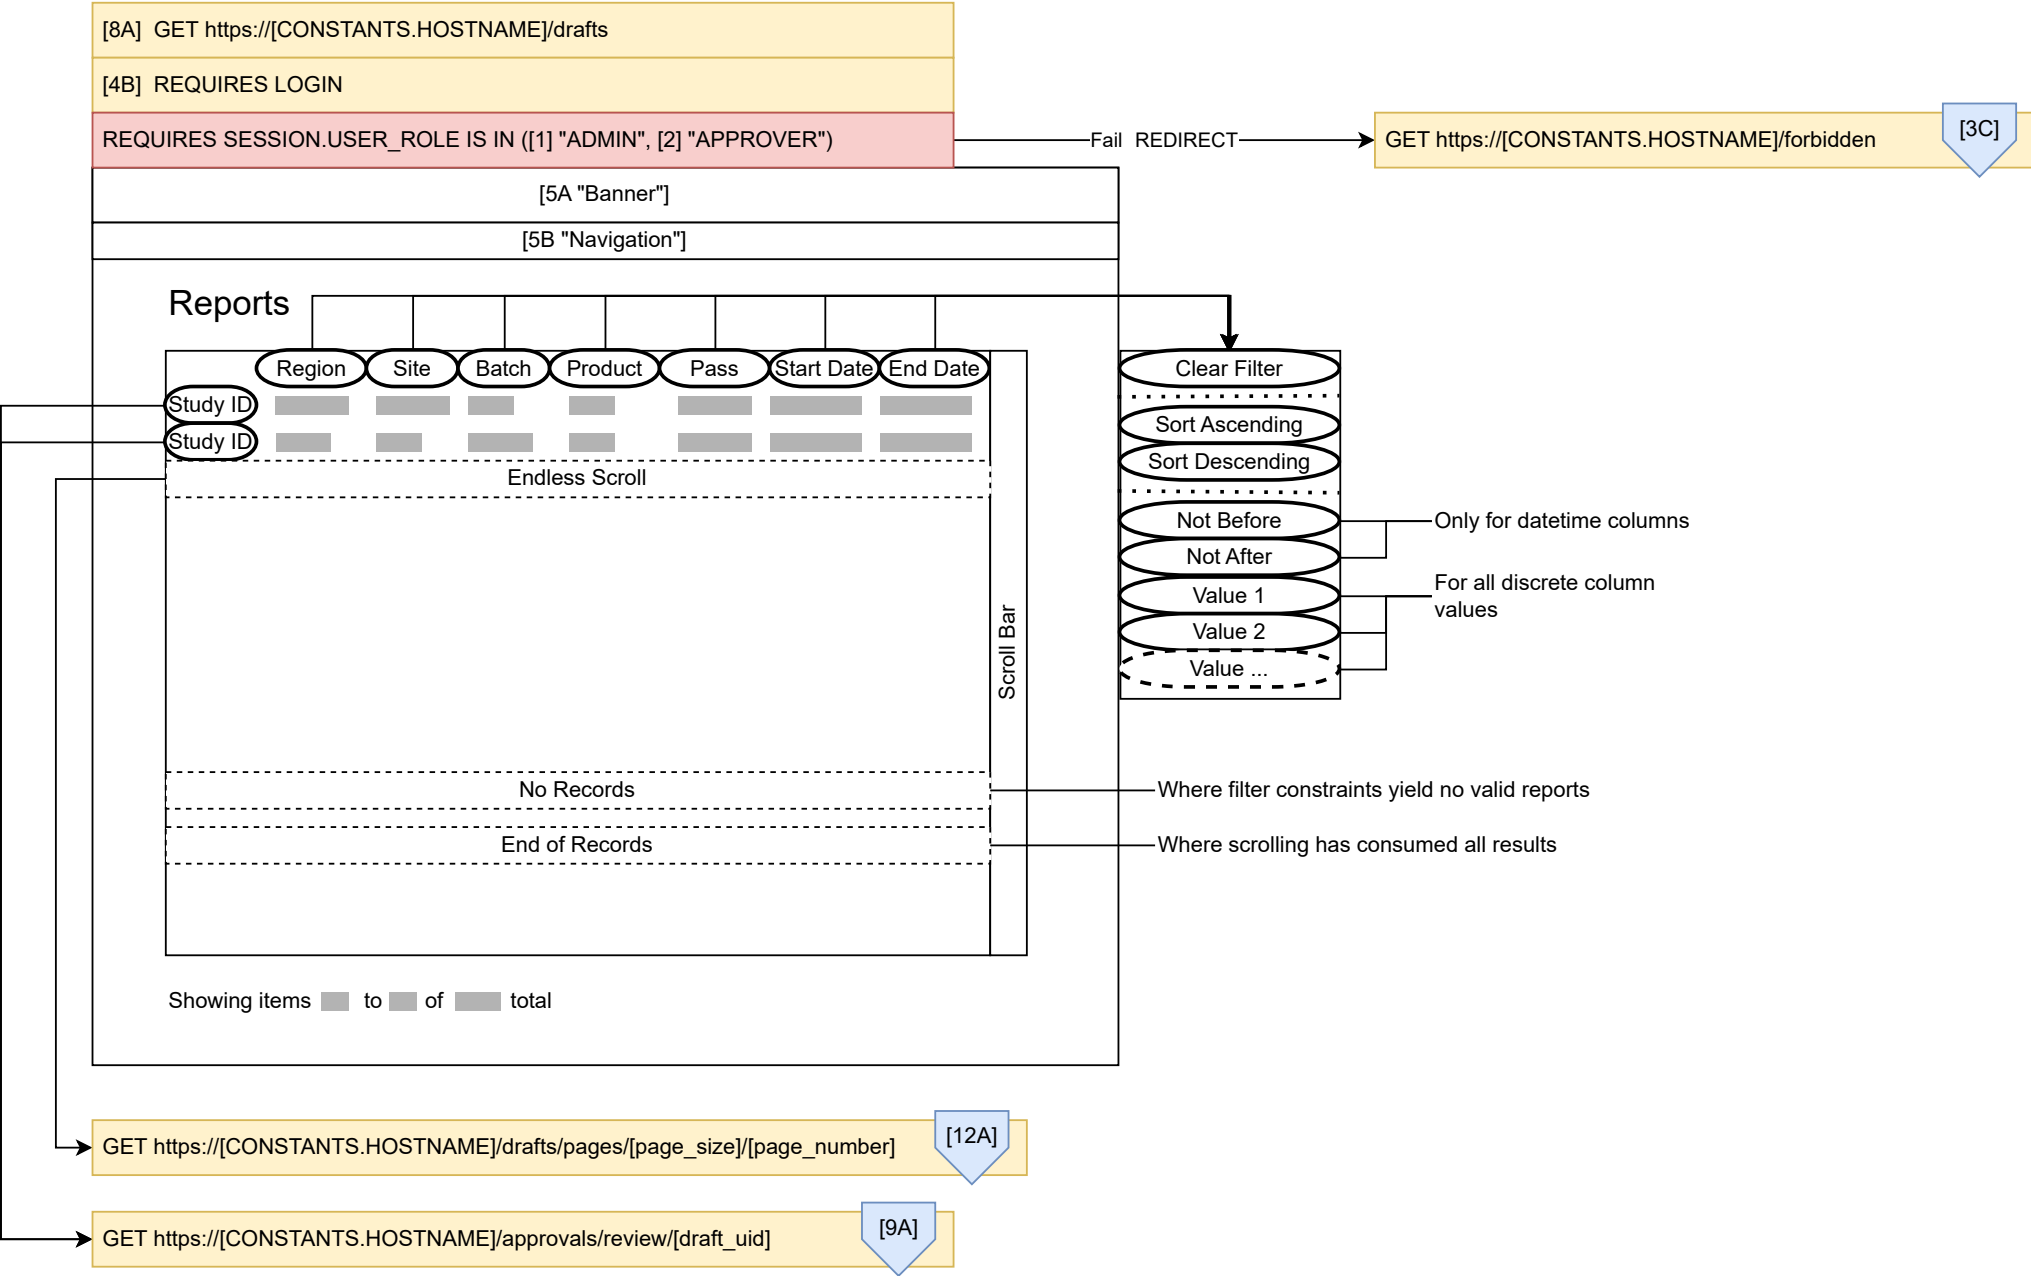


Page 9 - Approvals (2)


Where
"CONSTANTS" refer to fields defined in the Data Model document
"SESSION" describes the cached attributes associated with the Django user session

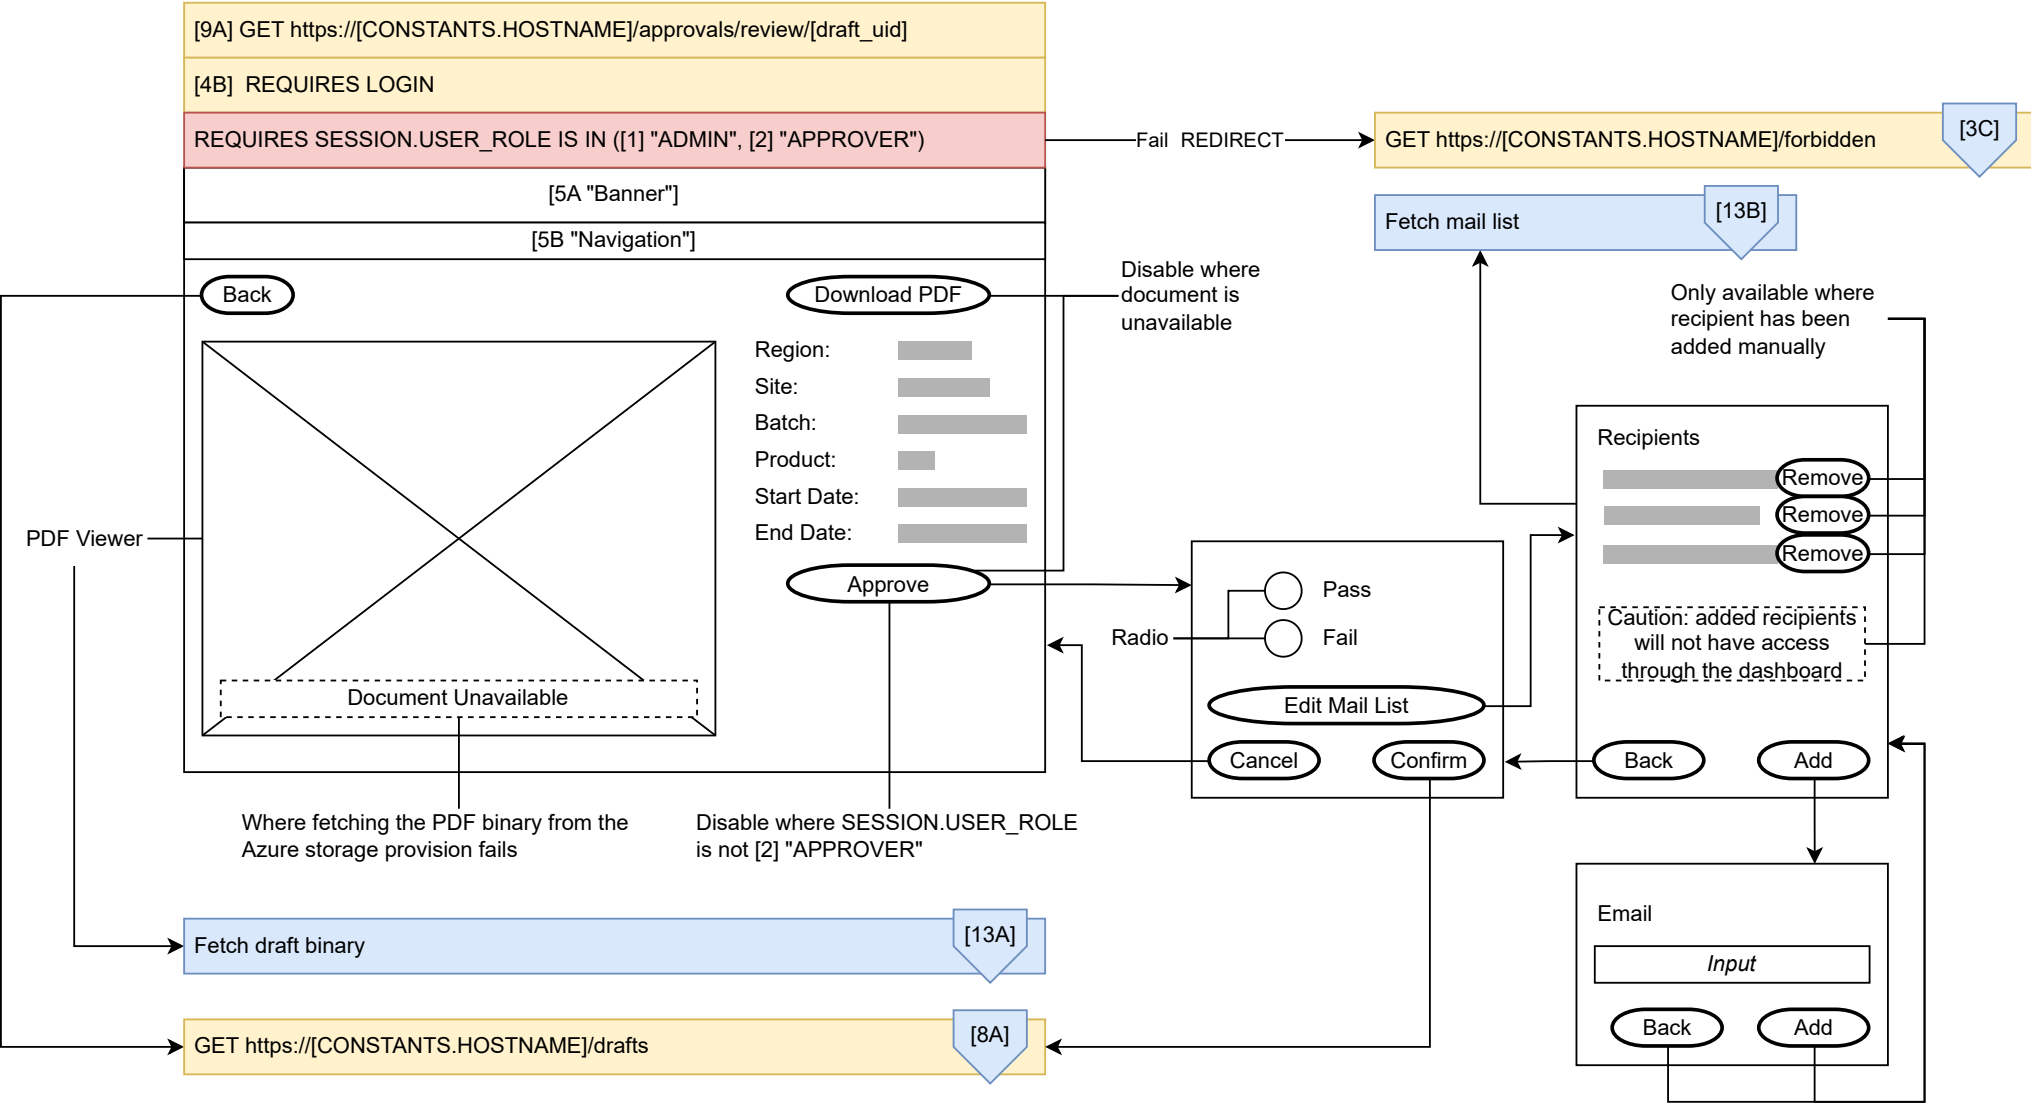

Where
"CONSTANTS" refer to fields defined in the Data Model document
"SESSION" describes the cached attributes associated with the Django user session

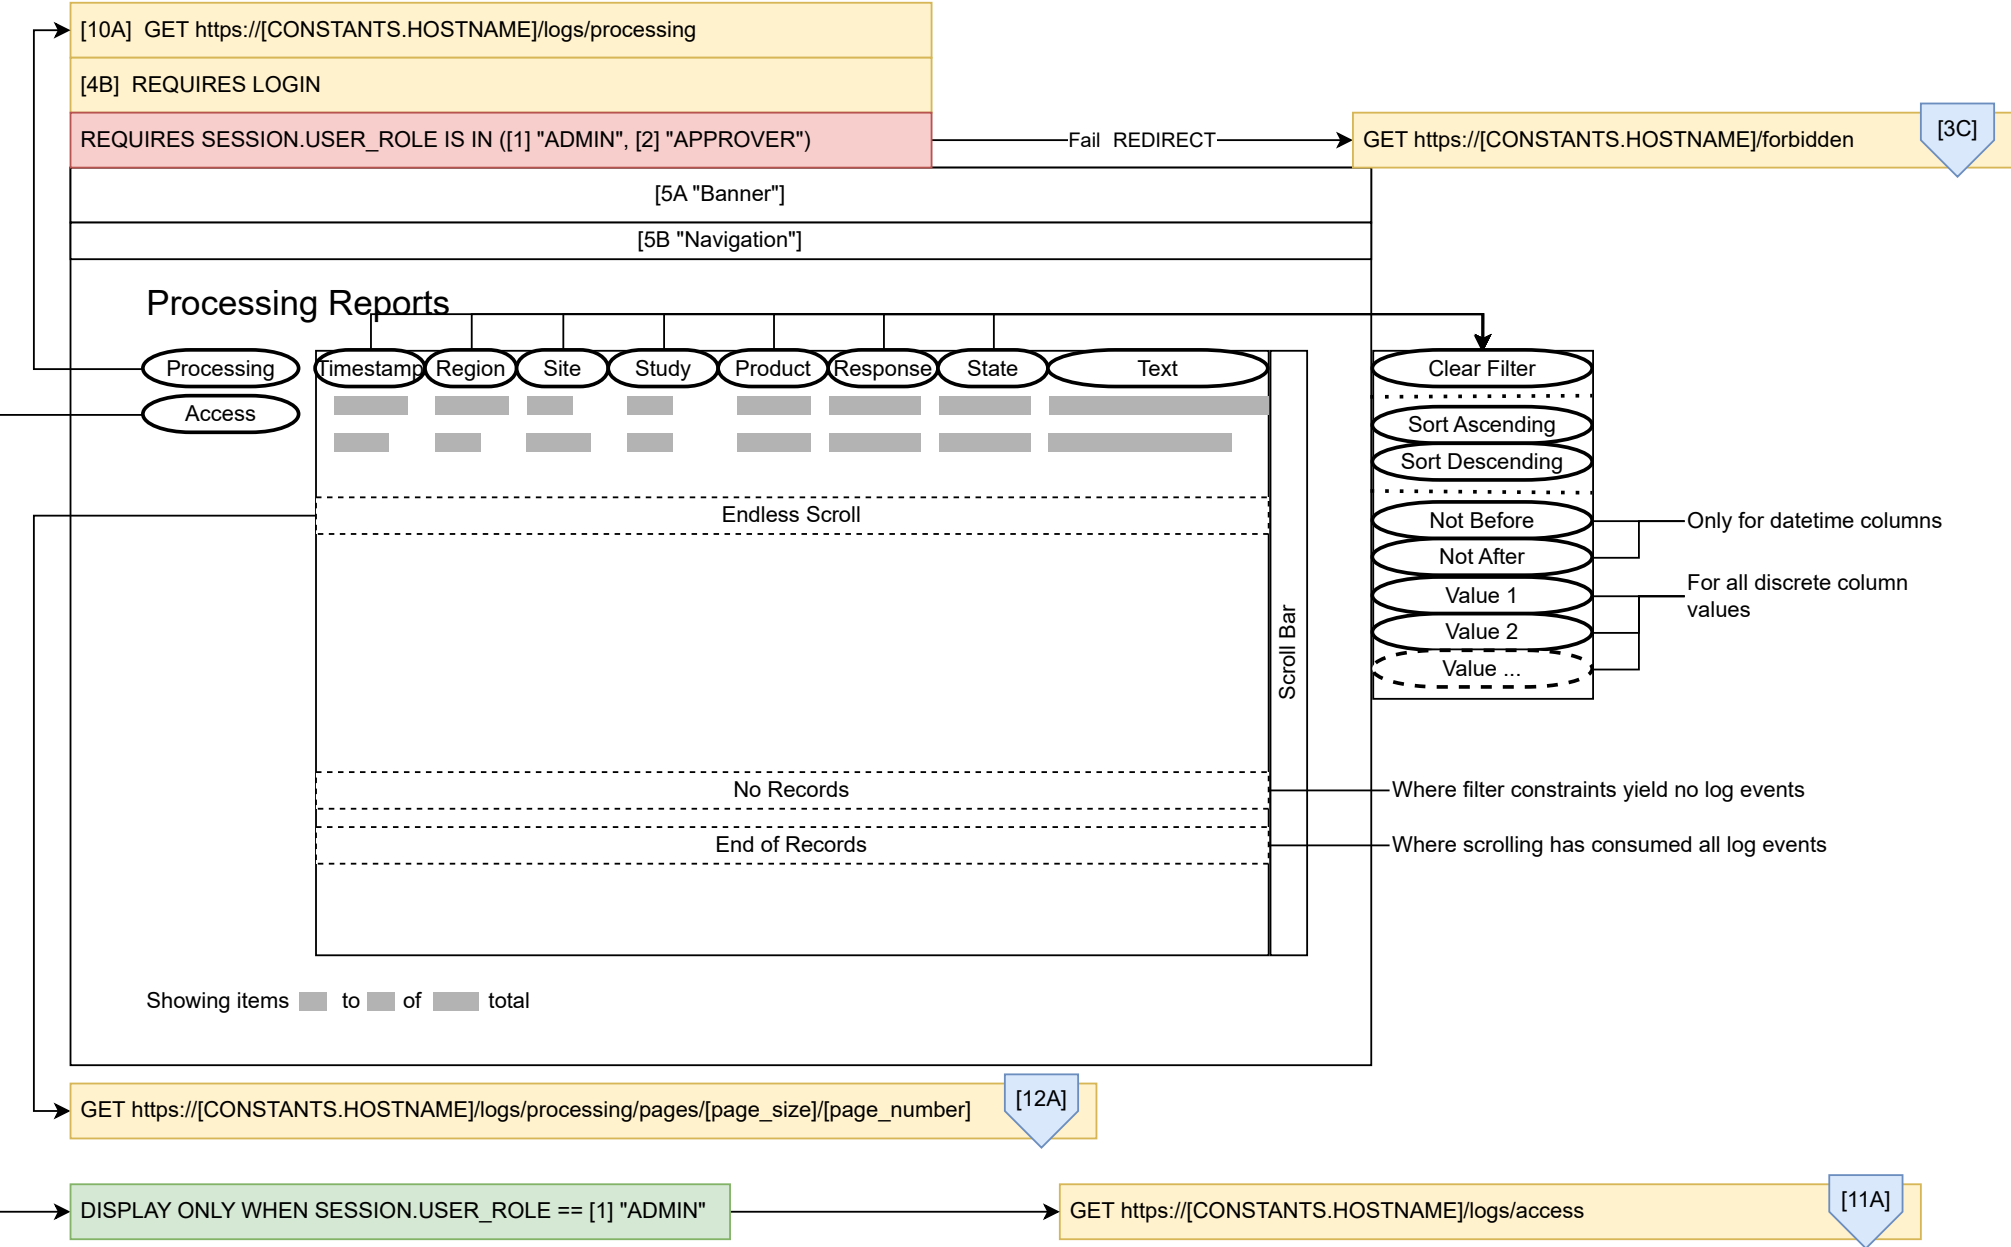

Where
"CONSTANTS" refer to fields defined in the Data Model document
"SESSION" describes the cached attributes associated with the Django user session

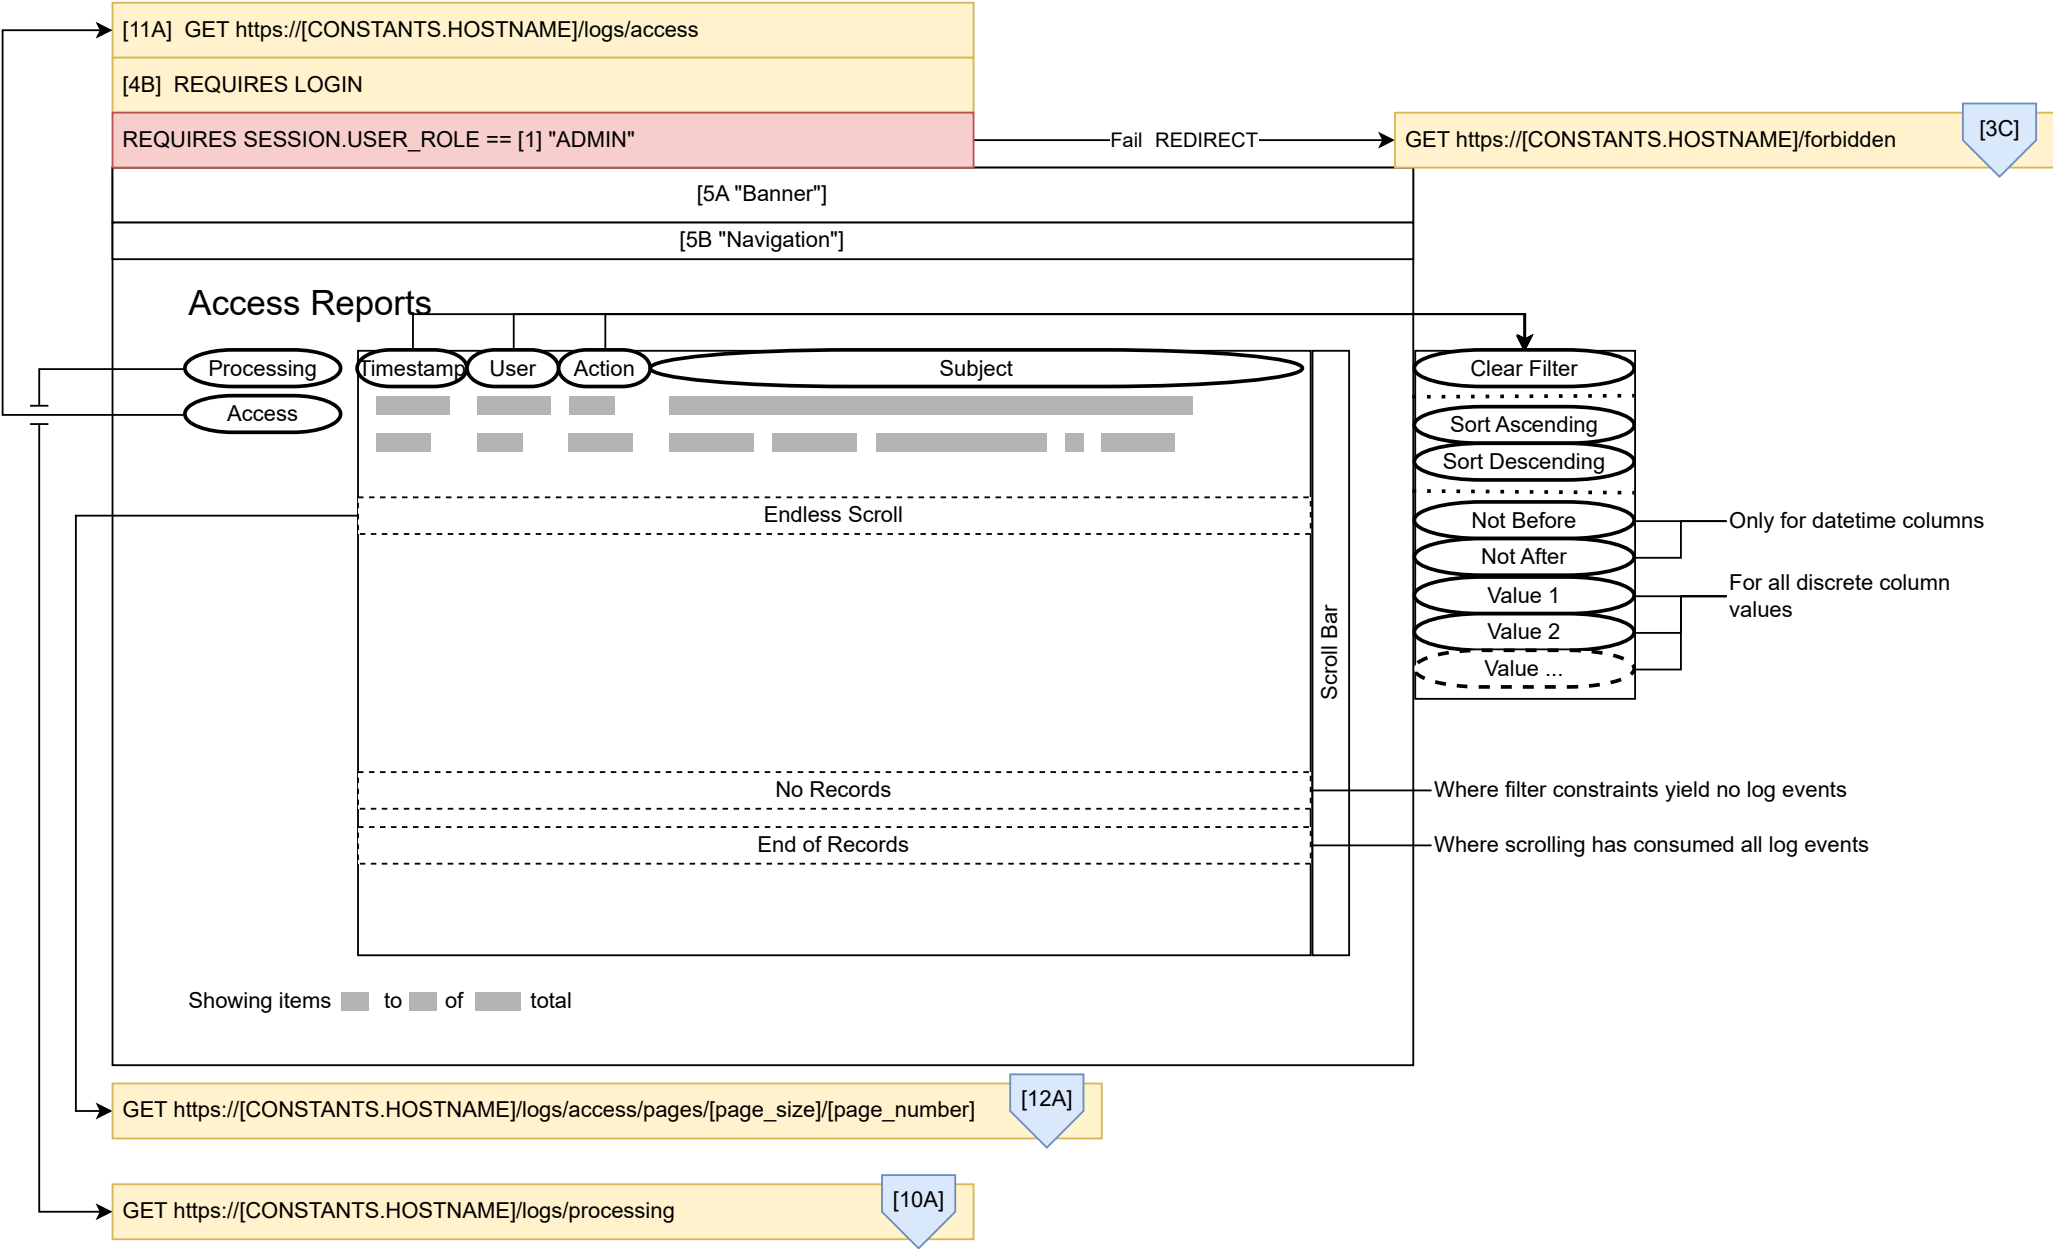

Page 12 - Filter Logic

Where

- "CONSTANTS" refer to fields defined in the Data Model document
- "SESSION" describes the cached attributes associated with the Django user session
- "subject" can be any of 'reports', 'drafts', 'logs/processing', or 'logs/access'
- "page_size" is the maximum number of objects to return
- "page_number" is used with the page_size to determine what sort index to begin returning objects
- "filter_parameters" and "sort_order" are used to specify the objects to return and may be implemented as RESTful uri path values, query string parameters, or custom HTTP headers at the developer's discretion
- Django models described at label %pagenumber%B are defined in the Data Model document

[12A] GET https://[CONSTANTS.HOSTNAME]/[subject]/pages/[page_size]/[page_number]/...[filter_parameters]?...[sort_order]?

[4B] REQUIRES LOGIN

FOR VALUE OF subject:

'reports' => PASS

'drafts' => REQUIRES SESSION.USER_ROLE IS IN ([1] "ADMIN", [2] "APPROVER")

'logs/processing' => REQUIRES SESSION.USER_ROLE IS IN ([1] "ADMIN", [2] "APPROVER")

'logs/access' => REQUIRES SESSION.USER_ROLE == [1] "ADMIN"

Fail REDIRECT

GET https://[CONSTANTS.HOSTNAME]/forbidden

[3C]

SET model BY VALUE OF subject:
'reports' => Django Model "Final Report"
'drafts' => Django Model "Draft Report"
'logs/processing' => Django Model "Process Log"
'logs/access' => Django Model "Access Log"

Does
model equal "Final Report"
and
SESSION.USER_ROLE equal [3] "VIEWER"

Yes

FILTER model BY
model.site IS IN SESSION.USER_SITES
OR
model.region IS IN SESSION.USER_REGIONS

No

FILTER model BY
[filter_parameters]

ORDER model BY
[sort_order]

RETURN SLICE OF model
FROM ([page_number] - 1) * [page_size]
TO [page_number] * [page_size]

Page 13 - Remote Resources

Where "CONSTANTS" refer to fields defined in the Data Model document "SECRETS" refer to fields defined in the Data Model document "report_type" may be either of 'final' or 'draft'	Where "REPORT" is the selected report object following the Django Model described in the Data Model document for the corresponding report type. ('Draft Report' or 'Final Report')
--	---

[13A] Fetch [report_type] Binary

Recommended implementation
using Python SDK for Azure

GET https://[CONSTANTS.AZ_STORAGE_HOSTNAME]/[AZ_STORAGE_[report_type]_URI]/[REPORT.filename]?[AZ_TOKEN]

[13B] Fetch mail list

SET mail_list TO [] (empty list)

Does REPORT.pass
equal True?

APPEND TO mail_list

ldaps://[CONSTANTS.LDAP_IDP_HOSTNAME]
Authenticate with: SECRETS.LDAP_USER
Base Search: ou=people,dc=int,dc=pg,dc=com
Filter Search: objectClass=person,memberOf=[CONSTANTS.PERMISSION_PREFIX]-
[CONSTANTS.PERMISSION_SUFFIX_REGION]-[REPORT.region]
Fetch Attributes: 'cn', 'givenName'

APPEND TO mail_list

ldaps://[CONSTANTS.LDAP_IDP_HOSTNAME]
Authenticate with: SECRETS.LDAP_USER
Base Search: ou=people,dc=int,dc=pg,dc=com
Filter Search: objectClass=person,memberOf=[CONSTANTS.PERMISSION_PREFIX]-
[CONSTANTS.PERMISSION_SUFFIX_SITE]-[REPORT.site]
Fetch Attributes: 'cn', 'givenName'

RETURN mail_list