# Отчет по отладке приложения Бабкин Никита Андреевич

## Оглавление

1 Ошибки конфигурации ..... 2
1.1 Ошибки ..... 2
1.2 Причины ..... 3
1.3 Решения ..... 4
2 Ошибки обработки данных ..... 5
2.1 Ошибки ..... 5
2.2 Причины ..... 5
2.3 Решения ..... 5
3 Ошибки API ..... 6
3.1 Ошибки ..... 6
3.2 Причины ..... 6
3.3 Решения ..... 7
4 Ошибки типизации ..... 8
4.1 Ошибки ..... 8
4.2 Причины ..... 8
4.3 Решения ..... 9
5 Ошибки проектирования (DRY) ..... 10
5.1 Ошибки ..... 10
5.2 Решения ..... 10
Итог ..... 11

# 1 Ошибки конфигурации

## 1.1 Ошибки

При первичном запуске приложения возникает следующая ошибка:

1) во время инициализации настроек приложения в файле app/config.py возникло исключение:

```
pydantic_core.pydantic_core.ValidationError: 1 validation error for Settings
database_url
Extra inputs are not permitted [type=extra_forbidden].
```

Представлено на рисунках 1-2.

```
baben@MacBook-Pro-Nikita selectest-api % docker compose up --build
 [+] Building 1.1s (12/12) FINISHED
  => [internal] load local bake definitions                                                    0.0s
  => => reading from stdin 549B                                                                0.0s
  => [internal] load build definition from Dockerfile                                          0.0s
  => => transferring dockerfile: 297B                                                          0.0s
  => [internal] load metadata for docker.io/library/python:3.11-slim                           0.8s
  => [internal] load .dockerignore                                                             0.0s
  => => transferring context: 2B                                                               0.0s
  => [internal] load build context                                                             0.0s
  => => transferring context: 1.64kB                                                           0.0s
  => [1/5] FROM docker.io/library/python:3.11-slim@sha256:c8271b1f627d0068857dce5b53e14a9558603b527e46f1f9  0.0s
  => => resolve docker.io/library/python:3.11-slim@sha256:c8271b1f627d0068857dce5b53e14a9558603b527e46f1f9  0.0s
  => CACHED [2/5] WORKDIR /app                                                                 0.0s
  => CACHED [3/5] COPY requirements.txt /app/                                                  0.0s
  => CACHED [4/5] RUN pip install --no-cache-dir -r requirements.txt                           0.0s
  => CACHED [5/5] COPY . /app/                                                                 0.0s
  => exporting to image                                                                        0.0s
  => => exporting layers                                                                       0.0s
  => => exporting manifest sha256:8ac02099a655cbf584c9e92f5e4f1a9f1596ebb5b49f50334422c4e2d54167cc  0.0s
  => => exporting config sha256:49ac24b94118b06bb6233c92114cae7024b9d921e8bdacd9c194779444dae694  0.0s
  => => exporting attestation manifest sha256:a8632302fa146265e6a14cd2ca06146ec0f851c79d0e109ab16462e0f789  0.0s
  => => exporting manifest list sha256:612c72b81bd7849f77bc2e3ddeeec8fbd15695731e2fd435e4ceb12c7b32a374  0.0s
  => => naming to docker.io/library/selectest-api-app:latest                                   0.0s
  => => unpacking to docker.io/library/selectest-api-app:latest                                0.0s
  => resolving provenance for metadata file                                                    0.0s
 [+] Running 2/2
  ✔ selectest-api-app              Built                                                       0.0s
  ✔ Container selectest-api-app-1  Recreated                                                   0.1s
Attaching to app-1, db-1
db-1  |
db-1  | PostgreSQL Database directory appears to contain a database; Skipping initialization
db-1  |
db-1  | 2026-03-03 18:00:42.623 UTC [1] LOG:  starting PostgreSQL 16.12 (Debian 16.12-1.pgdg13+1) on aarch64-unknown-linux-gnu, compiled by gcc (Debian 14.2.0-19) 14.2.0, 64-bit
db-1  | 2026-03-03 18:00:42.623 UTC [1] LOG:  listening on IPv4 address "0.0.0.0", port 5432
db-1  | 2026-03-03 18:00:42.623 UTC [1] LOG:  listening on IPv6 address "::", port 5432
db-1  | 2026-03-03 18:00:42.625 UTC [1] LOG:  listening on Unix socket "/var/run/postgresql/.s.PGSQL.5432"
db-1  | 2026-03-03 18:00:42.628 UTC [29] LOG:  database system was shut down at 2026-03-03 17:56:08 UTC
db-1  | 2026-03-03 18:00:42.632 UTC [1] LOG:  database system is ready to accept connections
```

Рисунок 1 – Сборка и запуск docker контейнера.

```
app-1  | Traceback (most recent call last):
app-1  |   File "/usr/local/bin/alembic", line 8, in <module>
app-1  |     sys.exit(main())
app-1  |              ^^^^^^
app-1  |   File "/usr/local/lib/python3.11/site-packages/alembic/config.py", line 1047, in main
app-1  |     CommandLine(prog=prog).main(argv=argv)
app-1  |   File "/usr/local/lib/python3.11/site-packages/alembic/config.py", line 1037, in main
app-1  |     self.run_cmd(cfg, options)
app-1  |   File "/usr/local/lib/python3.11/site-packages/alembic/config.py", line 971, in run_cmd
app-1  |     fn(
app-1  |   File "/usr/local/lib/python3.11/site-packages/alembic/command.py", line 483, in upgrade
app-1  |     script.run_env()
app-1  |   File "/usr/local/lib/python3.11/site-packages/alembic/script/base.py", line 545, in run_env
app-1  |     util.load_python_file(self.dir, "env.py")
app-1  |   File "/usr/local/lib/python3.11/site-packages/alembic/util/pyfiles.py", line 116, in load_python_file
app-1  |     module = load_module_py(module_id, path)
app-1  |              ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
app-1  |   File "/usr/local/lib/python3.11/site-packages/alembic/util/pyfiles.py", line 136, in load_module_py
app-1  |     spec.loader.exec_module(module)  # type: ignore
app-1  |     ^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^^
app-1  |   File "<frozen importlib._bootstrap_external>", line 940, in exec_module
app-1  |   File "<frozen importlib._bootstrap>", line 241, in _call_with_frames_removed
app-1  |   File "/app/alembic/env.py", line 8, in <module>
app-1  |     from app.core.config import settings
app-1  |   File "/app/app/core/config.py", line 20, in <module>
app-1  |     settings = Settings()
app-1  |                ^^^^^^^^^
app-1  |   File "/usr/local/lib/python3.11/site-packages/pydantic_settings/main.py", line 242, in __init__
app-1  |     super().__init__(**__pydantic_self__.__class__._settings_build_values(sources, init_kwargs))
app-1  |   File "/usr/local/lib/python3.11/site-packages/pydantic/main.py", line 250, in __init__
app-1  |     validated_self = self.__pydantic_validator__.validate_python(data, self_instance=self)
app-1  |                      ^^^^^^^^^^^^^^^^^^^
```

2) при запуске фоновой задачи парсинга вакансий было обнаружено, что задача выполняется каждые 5 секунд, хотя по требованиям она должна запускаться раз в 5 минут, представлено на рисунке 3.

```
app-1  | 2026-03-04 10:28:13,680 | INFO | app.services.parser | Старт парсинга вакансий
app-1  | 2026-03-04 10:28:14,424 | INFO | httpx | HTTP Request: GET https://api.selectel.ru/proxy/public/employee/api/public/vacancies?per_page=1000&page=1 "HTTP/1.1 200 OK"
app-1  | 2026-03-04 10:28:14,444 | INFO | app.services.parser | Парсинг завершен, новых вакансий: 0
app-1  | 2026-03-04 10:28:14,444 | INFO | apscheduler.executors.default | Job "_run_parse_job (trigger: interval[0:00:05], next run at: 2026-03-04 10:28:18 UTC)" executed su
ccessfully
```

Рисунок 3 – Некорректная настройка интервала задачи планировщика.

## 1.2 Причины

Ошибка 1 возникает из-за того, что в конфигурацию Settings передавался параметр database_url, который не был объявлен в модели настроек Pydantic, представлено на рисунке 4.

```
selectest-api > app > core > config.py > ...
1   from pydantic import Field
2   from pydantic_settings import BaseSettings, SettingsConfigDict
3
4
5   class Settings(BaseSettings):
6       model_config = SettingsConfigDict(
7           env_file=".env",
8           env_file_encoding="utf-8",
9           case_sensitive=False,
10      )
11
12      database_url: str = Field(
13          "postgresql+asyncpg://postgres:postgres@db:5432/postgres_typo",
14          validation_alias="DATABASE_URL",
15      )
16      log_level: str = "INFO"
17      parse_schedule_minutes: int = 5
18
19
20  settings = Settings()
21
```

Рисунок 4 – класс Settings.

Ошибка 2 возникает из-за того, что в конфигурацию Sheduler передавался параметр parse_shedule_minutes в качестве секундных интервалов, а сама переменная хранит минуты, представлено на рисунке 5.

```
selectest-api > app > services > scheduler.py > ...
1   from typing import Awaitable, Callable
2
3   from apscheduler.schedulers.asyncio import AsyncIOScheduler
4
5   from app.core.config import settings
6
7
8   def create_scheduler(job: Callable[[], Awaitable[None]]) -> AsyncIOScheduler:
9       scheduler = AsyncIOScheduler()
10      scheduler.add_job(
11          job,
12          trigger="interval",
13          seconds=settings.parse_schedule_minutes,
14          coalesce=True,
15          max_instances=1,
16      )
17      return scheduler
18
```

Рисунок 5 – настройки планировщика.

### 1.3 Решения

1) исправить опечатку в классе `Settings()`:

```
database_url: str = Field(

"postgresql+asyncpg://postgres:postgres@db:5432/postgres_typo",
        validation_alias="DATABSE_URL",
    )
```

`validation_alias="DATABSE_URL"` должно быть равно имени переданному в из .env, то есть `DATABASE_URL`.

2) исправить настройки планировщика:

Исправить секунды на минуты:

```
minutes=settings.parse_schedule_minutes
```

## 2 Ошибки обработки данных

### 2.1 Ошибки

При первичном парсинге вакансий при старте приложения возникает следующая ошибка:

– ошибка обработки данных API в файле app/services/parser.py:

```
ExternalVacancyItem(id=1449, title='Team Lead Команды сопровождения и развития инфраструктуры Объектного хранилища', timetable_mode=ExternalTimetableMode(id=1, name='Гибкий'), tag=ExternalTag(id=3, name='admin', description='Системное администрирование'), city=None, published_at=datetime.datetime(2025, 9, 25, 12, 36, 28, 714166, tzinfo=TzInfo(10800)), is_remote_available=True, is_hot=False)] items_per_page=1000 page=1 page_count=1

AttributeError: 'NoneType' object has no attribute 'name'
```

### 2.2 Причины

Ошибка возникает при попытке обработать название города, указанного в вакансии. В некоторых записях, полученных из API, поле city отсутствовало и имело значение None.

При обращении к item.city.name происходила попытка доступа к атрибуту name у объекта None, что приводило к исключению AttributeError.

### 2.3 Решения

Добавлена функция safe_name, которая безопасно извлекает и нормализует поле name, представлено на рисунке 6.

```python
def safe_name(obj: object | None) -> str | None:
    if obj is None:
        return None

    name = getattr(obj, "name", None)
    if not name:
        return None

    return str(name).strip()
```

Рисунок 6 – функция безопасной обработки атрибута name.

## 3 Ошибки API

### 3.1 Ошибки

Ошибка семантики HTTP-ответа неправильный статус-код, представлено на рисунке 5.

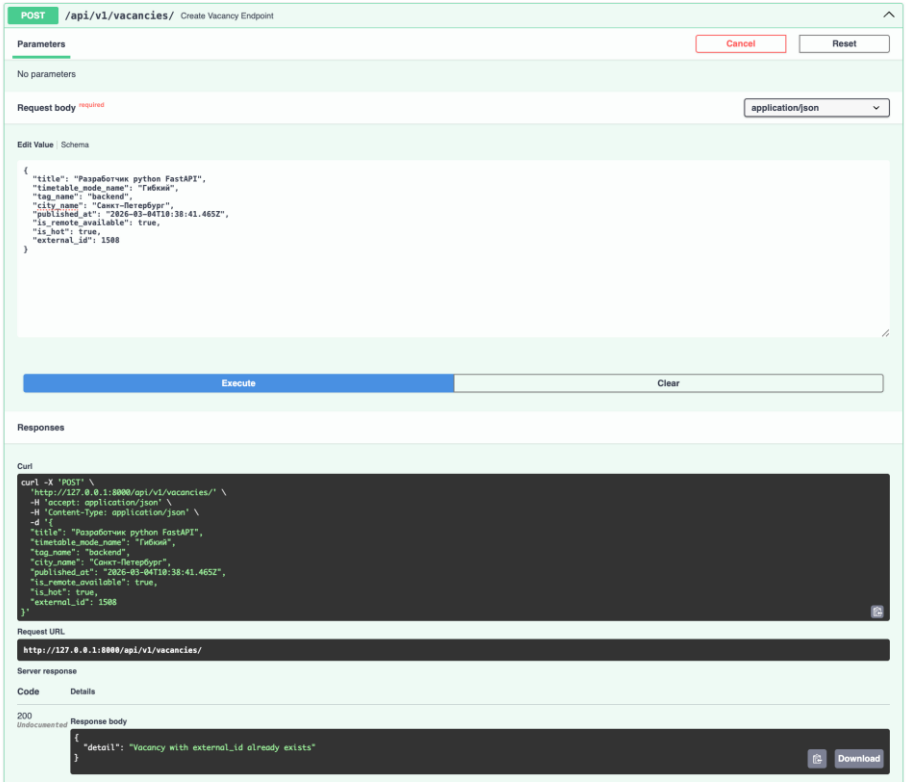


Рисунок 7 – Некорректный status code ответа.

### 3.2 Причины

В POST Endpoint api/v1/vacancies/ при попытке добавить запись с уже существующим external_id возвращался статус: 200 OK, при этом в теле ответа передавалось сообщение об ошибке, представлено на рисунке 8.

```
@router.post("/", response_model=VacancyRead, status_code=status.HTTP_201_CREATED)
async def create_vacancy_endpoint(
    payload: VacancyCreate, session: AsyncSession = Depends(get_session)
) -> VacancyRead:
    if payload.external_id is not None:
        existing = await get_vacancy_by_external_id(session, payload.external_id)
        if existing:
            return JSONResponse(
                status_code=status.HTTP_200_OK,
                content={"detail": "Vacancy with external_id already exists"},
            )
    return await create_vacancy(session, payload)
```

Рисунок 8 – Неверный статус ответа API при дублировании записи.

### 3.3 Решения

Рри обнаружении существующей записи стал возвращать корректный HTTP-ответ через исключение, представлено на рисунке 9.

```
@router.post("/", response_model=VacancyRead, status_code=status.HTTP_201_CREATED)
async def create_vacancy_endpoint(
    payload: VacancyCreate, session: AsyncSession = Depends(get_session)
) -> VacancyRead:
    if payload.external_id is not None:
        existing = await get_vacancy_by_external_id(session, payload.external_id)
        if existing:
            raise HTTPException(
                status_code=status.HTTP_409_CONFLICT,
                detail="Vacancy with external_id already exists"
            )
    vacancy = await create_vacancy(session, payload)
    return  VacancyRead.model_validate(vacancy)
```

Рисунок 9 – Обработка конфликта ресурса с использованием HTTP 409 Conflict.

## 4 Ошибки типизации

### 4.1 Ошибки

1) при анализе API-endpoints для получения списка вакансий, вакансии по id и обновление вакансии было обнаружено несоответствие типов возвращаемых данных, представлено на рисунке 10-12.

```
@router.get("/", response_model=List[VacancyRead])
async def list_vacancies_endpoint(
    timetable_mode_name: Optional[str] = None,
    city: Optional[str] = None,
    session: AsyncSession = Depends(get_session),
) -> List[VacancyRead]:
    return await list_vacancies(session, timetable_mode_name, city)
```

Рисунок 10 – Endpoint списка вакансий.

```
@router.get("/{vacancy_id}", response_model=VacancyRead)
async def get_vacancy_endpoint(
    vacancy_id: int, session: AsyncSession = Depends(get_session)
) -> VacancyRead:
    vacancy = await get_vacancy(session, vacancy_id)
    if not vacancy:
        raise HTTPException(status_code=status.HTTP_404_NOT_FOUND, detail="Not found")
    return vacancy
```

Рисунок 11 – Endpoint получения вакансии .

```
@router.put("/{vacancy_id}", response_model=VacancyRead)
async def update_vacancy_endpoint(
    vacancy_id: int,
    payload: VacancyUpdate,
    session: AsyncSession = Depends(get_session),
) -> VacancyRead:
    vacancy = await get_vacancy(session, vacancy_id)
    if not vacancy:
        raise HTTPException(status_code=status.HTTP_404_NOT_FOUND, detail="Not found")
    return await update_vacancy(session, vacancy, payload)
```

Рисунок 12 – Endpoint обновления вакансии.

2) при объявлении зависимости `get_session` использовалась некорректная аннотация типа `AsyncSession`, представлено на рисунке 13.

```
async def get_session() -> AsyncSession:
    async with async_session_maker() as session:
        yield session
```

Рисунок 12 – Endpoint обновления вакансии.

### 4.2 Причины

1) ORM-модели SQLAlchemy не совпадают с Pydantic-схемами API.

Поэтому IDE и инструменты статической типизации отмечали несоответствие типов;

2) Поскольку функция использует оператор yield, она является асинхронным генератором, а не обычной функцией.

**4.3 Решения**

1) Было добавлено преобразование ORM-моделей в Pydantic-схемы, на примере в функции list_vancancies:

```
return [VacancyRead.model_validate(v) for v in vacancies]
```

2) Тип был исправлен на `AsyncGenerator[AsyncSession, None]`, что соответствует фактическому поведению функции и устраняет предупреждение статического анализатора типов.

## 5 Ошибки проектирования (DRY)

### 5.1 Ошибки

Функция создания асинхронной сессии базы данных get_session была объявлена в каждом роутере отдельно. Это приводило к дублированию одинакового кода в нескольких файлах:

```
async def get_session() -> AsyncGenerator[AsyncSession, None]:
    async with async_session_maker() as session:
        yield session
```

### 5.2 Решения

Функция `get_session()` была вынесена в отдельный модуль db/session.py работы с базой данных, представлено на рисунке 14.

```
selectest-api-task > app > db > session.py > ...
1   from typing import AsyncGenerator
2
3   from sqlalchemy.ext.asyncio import AsyncSession, async_sessionmaker, create_async_engine
4
5   from app.core.config import settings
6
7
8   engine = create_async_engine(settings.database_url, pool_pre_ping=True)
9   async_session_maker = async_sessionmaker(
10      engine,
11      class_=AsyncSession,
12      expire_on_commit=False,
13  )
14
15
16  async def get_session() -> AsyncGenerator[AsyncSession, None]:
17      async with async_session_maker() as session:
18          yield session
19
```

Рисунок 14 – Функция `get_session`.

## Итог

Приложение корректно запускается и работает. Весь исходный код выполненного задания можно просмотреть на github – https://github.com/nikBaben/Selectel-test-api/

Быстрое тестирование всех endpoints на postman – https://elements.getpostman.com/redirect?entityId=39888884-c01a6c52-7451-4b7d-8269-c541b826a19e&entityType=collection

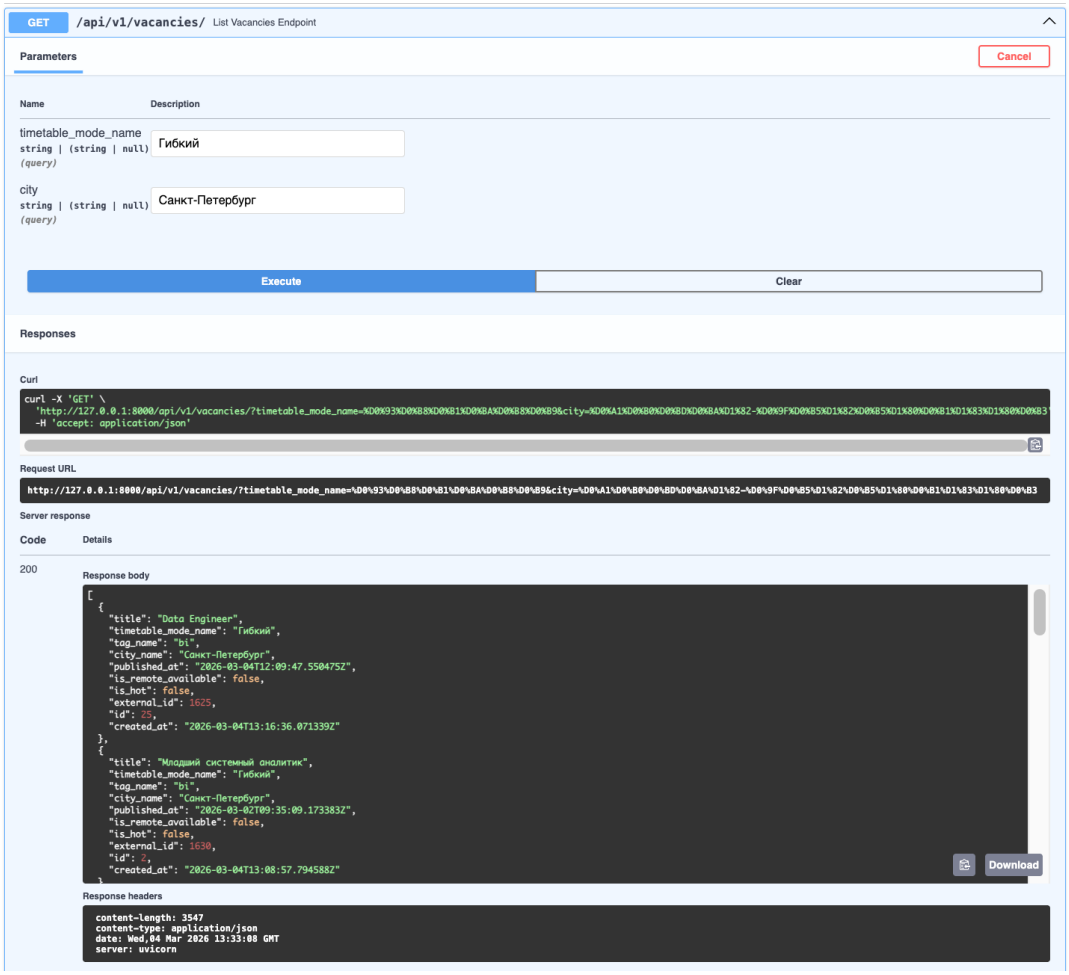

**GET** `/api/v1/vacancies/` List Vacancies Endpoint

**Parameters** Cancel

| Name | Description |
|---|---|
| timetable_mode_name<br>string \| (string \| null)<br>(query) | Гибрид |
| city<br>string \| (string \| null)<br>(query) | Санкт-Петербург |

Execute | Clear

**Responses**

Curl

```
curl -X 'GET' \
  'http://127.0.0.1:8000/api/v1/vacancies/?timetable_mode_name=%D0%93%D0%B8%D0%B1%D1%80%D0%B8%D0%B4&city=%D0%A1%D0%B0%D0%BD%D0%BA%D1%82-%D0%9F%D0%B5%D1%82%D0%B5%D1%80%D0%B1%D1%83%D1%80%D0%B3
  -H 'accept: application/json'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/?timetable_mode_name=%D0%93%D0%B8%D0%B1%D1%80%D0%B8%D0%B4&city=%D0%A1%D0%B0%D0%BD%D0%BA%D1%82-%D0%9F%D0%B5%D1%82%D0%B5%D1%80%D0%B1%D1%83%D1%80%D0%B3
```

Server response

| Code | Details |
|---|---|
| 200 | Response body<br>{}<br>Download<br>Response headers<br>content-length: 2<br>content-type: application/json<br>date: Wed,04 Mar 2026 13:33:45 GMT<br>server: uvicorn |

**POST** `/api/v1/vacancies/` Create Vacancy Endpoint

**Parameters** Cancel Reset

No parameters

**Request body** required — application/json

Edit Value | Schema

```
{
  "title": "Тестировщик Python ",
  "timetable_mode_name": "Фиксированный",
  "tag_name": "QA",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:10:37.864Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 2000
}
```

Execute | Clear

**Responses**

Curl

```
curl -X 'POST' \
  'http://127.0.0.1:8000/api/v1/vacancies/' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/json' \
  -d '{
  "title": "Тестировщик Python ",
  "timetable_mode_name": "Фиксированный",
  "tag_name": "QA",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:10:37.864Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 2000
}'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/
```

Server response

| Code | Details |
|---|---|
| 201 | Response body<br>{<br>"title": "Тестировщик Python ",<br>"timetable_mode_name": "Фиксированный",<br>"tag_name": "QA",<br>"city_name": "Санкт-Петербург",<br>"published_at": "2026-03-04T13:10:37.864000Z",<br>"is_remote_available": true,<br>"is_hot": true,<br>"external_id": 2000,<br>"id": 24,<br>"created_at": "2026-03-04T13:11:19.725292Z"<br>}<br>Download<br>Response headers<br>content-length: 309<br>content-type: application/json<br>date: Wed,04 Mar 2026 13:11:19 GMT<br>server: uvicorn |

POST /api/v1/vacancies/ Create Vacancy Endpoint

Parameters

Cancel Reset

No parameters

Request body required

application/json

Edit Value | Schema

```
{
  "title": "Тестировщик Go ",
  "timetable_mode_name": "Фиксированный",
  "tag_name": "QA",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:10:37.864Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 2000
}
```

Execute Clear

Responses

Curl

```
curl -X 'POST' \
  'http://127.0.0.1:8000/api/v1/vacancies/' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/json' \
  -d '{
  "title": "Тестировщик Go ",
  "timetable_mode_name": "Фиксированный",
  "tag_name": "QA",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:10:37.864Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 2000
}'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/
```

Server response

| Code | Details |
|---|---|
| 409 *Undocumented* | Error: Conflict |

Response body

```
{
  "detail": "Vacancy with external_id already exists"
}
```

Download

Response headers

```
content-length: 52
content-type: application/json
date: Wed,04 Mar 2026 13:13:10 GMT
server: uvicorn
```

GET /api/v1/vacancies/{vacancy_id} Get Vacancy Endpoint

Parameters

Cancel

| Name | Description |
| --- | --- |
| vacancy_id * required<br>integer<br>(path) | 1 |

Execute | Clear

Responses

Curl

```
curl -X 'GET' \
  'http://127.0.0.1:8000/api/v1/vacancies/1' \
  -H 'accept: application/json'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/1
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body |


```
{
  "title": "Data Engineer",
  "timetable_mode_name": "Гибкий",
  "tag_name": "bi",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T12:09:47.550475Z",
  "is_remote_available": false,
  "is_hot": false,
  "external_id": 1625,
  "id": 1,
  "created_at": "2026-03-04T13:08:57.794588Z"
}
```


Download

Response headers

```
content-length: 279
content-type: application/json
date: Wed,04 Mar 2026 13:13:36 GMT
server: uvicorn
```

GET /api/v1/vacancies/{vacancy_id} Get Vacancy Endpoint

Parameters

Cancel

| Name | Description |
| --- | --- |
| vacancy_id * required<br>integer<br>(path) | 25 |

Execute | Clear

Responses

Curl

```
curl -X 'GET' \
  'http://127.0.0.1:8000/api/v1/vacancies/25' \
  -H 'accept: application/json'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/25
```

Server response

| Code | Details |
| --- | --- |
| 404<br>Undocumented | Error: Not Found<br>Response body |


```
{
  "detail": "Not found"
}
```


Download

Response headers

```
content-length: 22
content-type: application/json
date: Wed,04 Mar 2026 13:13:58 GMT
server: uvicorn
```

PUT /api/v1/vacancies/{vacancy_id} Update Vacancy Endpoint

Parameters

Cancel Reset

| Name | Description |
| --- | --- |
| vacancy_id * required<br>integer<br>(path) | 1 |

Request body required

application/json

Edit Value | Schema


```
{
  "title": "ML Engineer",
  "timetable_mode_name": "Гибкий",
  "tag_name": "DS",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:14:17.587Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 1625
}
```


Execute Clear

Responses

Curl

```
curl -X 'PUT' \
  'http://127.0.0.1:8000/api/v1/vacancies/1' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/json' \
  -d '{
  "title": "ML Engineer",
  "timetable_mode_name": "Гибкий",
  "tag_name": "DS",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:14:17.587Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 1625
}'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/1
```

Server response

| Code | Details |
| --- | --- |
| 200 | Response body |


```
{
  "title": "ML Engineer",
  "timetable_mode_name": "Гибкий",
  "tag_name": "DS",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:14:17.587000Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 1625,
  "id": 1,
  "created_at": "2026-03-04T13:08:57.794588Z"
}
```


Download

Response headers

```
content-length: 275
content-type: application/json
date: Wed,04 Mar 2026 13:15:32 GMT
server: uvicorn
```

**PUT** `/api/v1/vacancies/{vacancy_id}` Update Vacancy Endpoint

Parameters

Cancel | Reset

| Name | Description |
|---|---|
| vacancy_id * required<br>integer<br>(path) | 26 |

Request body required — application/json

Edit Value | Schema

```
{
  "title": "ML Engineer",
  "timetable_mode_name": "Гибкий",
  "tag_name": "DS",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:14:17.587Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 1625
}
```

Execute | Clear

Responses

Curl

```
curl -X 'PUT' \
  'http://127.0.0.1:8000/api/v1/vacancies/26' \
  -H 'accept: application/json' \
  -H 'Content-Type: application/json' \
  -d '{
  "title": "ML Engineer",
  "timetable_mode_name": "Гибкий",
  "tag_name": "DS",
  "city_name": "Санкт-Петербург",
  "published_at": "2026-03-04T13:14:17.587Z",
  "is_remote_available": true,
  "is_hot": true,
  "external_id": 1625
}'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/26
```

Server response

| Code | Details |
|---|---|
| 404<br>*Undocumented* | Error: Not Found<br>Response body<br>`{ "detail": "Not found" }` Download<br>Response headers<br>`content-length: 22`<br>`content-type: application/json`<br>`date: Wed,04 Mar 2026 13:15:53 GMT`<br>`server: uvicorn` |

**DELETE** `/api/v1/vacancies/{vacancy_id}` Delete Vacancy Endpoint

Parameters

Cancel

| Name | Description |
|---|---|
| vacancy_id * required<br>integer<br>(path) | 1 |

Execute | Clear

Responses

Curl

```
curl -X 'DELETE' \
  'http://127.0.0.1:8000/api/v1/vacancies/1' \
  -H 'accept: */*'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/1
```

Server response

| Code | Details |
|---|---|
| 204 | Response headers<br>`content-type: application/json`<br>`date: Wed,04 Mar 2026 13:16:06 GMT`<br>`server: uvicorn` |

Responses

**DELETE** `/api/v1/vacancies/{vacancy_id}` Delete Vacancy Endpoint

Parameters | Cancel

| Name | Description |
|---|---|
| vacancy_id * required<br>integer<br>(path) | 26 |

Execute | Clear

Responses

Curl

```
curl -X 'DELETE' \
  'http://127.0.0.1:8000/api/v1/vacancies/26' \
  -H 'accept: */*'
```

Request URL

```
http://127.0.0.1:8000/api/v1/vacancies/26
```

Server response

| Code | Details |
|---|---|
| 404<br>Undocumented | Error: Not Found<br>Response body<br>`{ "detail": "Not found" }` Download<br>Response headers<br>`content-length: 22`<br>`content-type: application/json`<br>`date: Wed,04 Mar 2026 13:16:21 GMT`<br>`server: uvicorn` |

## parser

**POST** `/api/v1/parse/` Parse Endpoint

Parameters | Cancel

No parameters

Execute | Clear

Responses

Curl

```
curl -X 'POST' \
  'http://127.0.0.1:8000/api/v1/parse/' \
  -H 'accept: application/json' \
  -d ''
```

Request URL

```
http://127.0.0.1:8000/api/v1/parse/
```

Server response

| Code | Details |
|---|---|
| 200 | Response body<br>`{ "created": 1 }` Download<br>Response headers<br>`content-length: 13`<br>`content-type: application/json`<br>`date: Wed,04 Mar 2026 13:16:35 GMT`<br>`server: uvicorn` |

Responses

| Code | Description | Links |
|---|---|---|
| 200 | Successful Response<br>Media type: application/json<br>Controls Accept header.<br>Example Value \| Schema<br>`{ "additionalProp1": {} }` | *No links* |

```
app-1  | 2026-03-04 13:13:57,809 | INFO | apscheduler.executors.default | Running job "_run_parse_job (trigger: interval[0:05:00], next run at: 2026-03-04 13:18:57 UTC)" (scheduled at 2026-03-04 13:13:57.805453+00:00)
app-1  | 2026-03-04 13:13:57,811 | INFO | app.services.parser | Старт парсинга вакансий
app-1  | 2026-03-04 13:13:58,673 | INFO | httpx | HTTP Request: GET https://api.selectel.ru/proxy/public/employee/api/public/vacancies?per_page=1000&page=1 "HTTP/1.1 200 OK"
app-1  | 2026-03-04 13:13:58,686 | INFO | app.services.parser | Парсинг завершен, новых вакансий: 0
app-1  | 2026-03-04 13:13:58,686 | INFO | apscheduler.executors.default | Job "_run_parse_job (trigger: interval[0:05:00], next run at: 2026-03-04 13:18:57 UTC)" executed successfully
```