



Сверточные нейронные сети в задачах компьютерного зрения

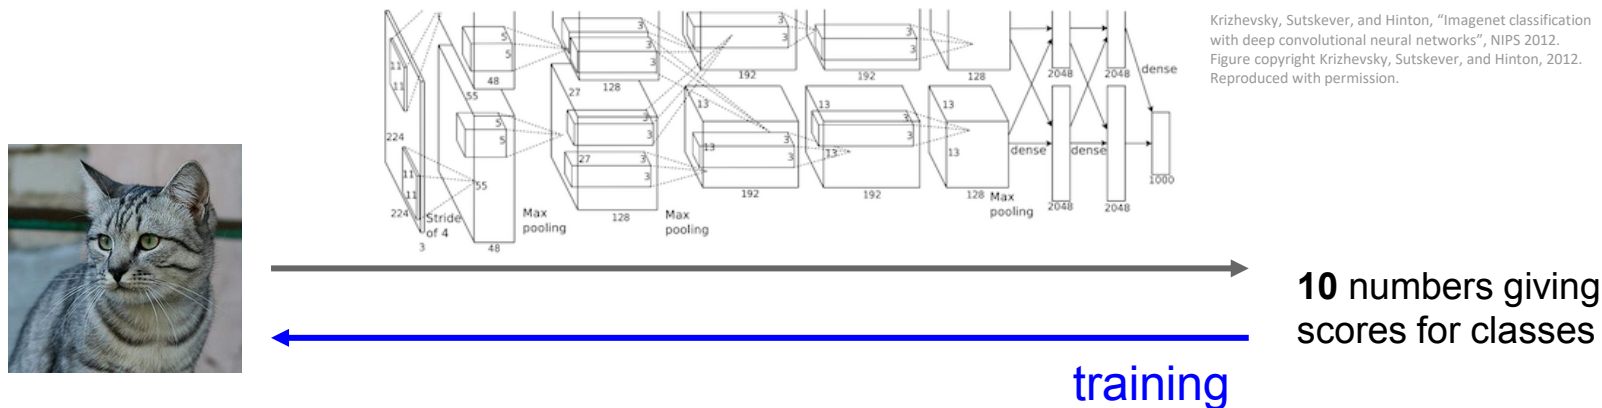


Кафедра
технологий
проектирования
сложных
технических
систем

Recap: Feature Extractors

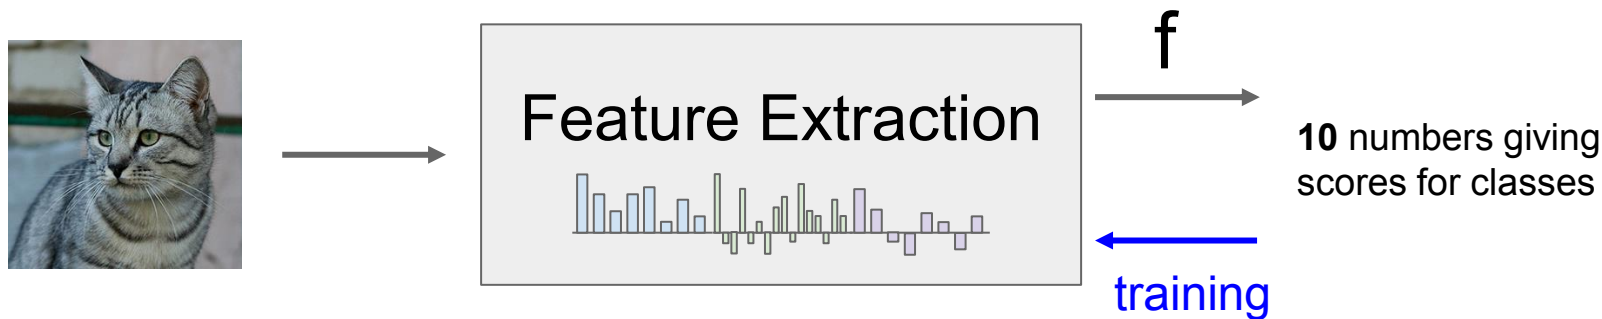

Recap: Convolution

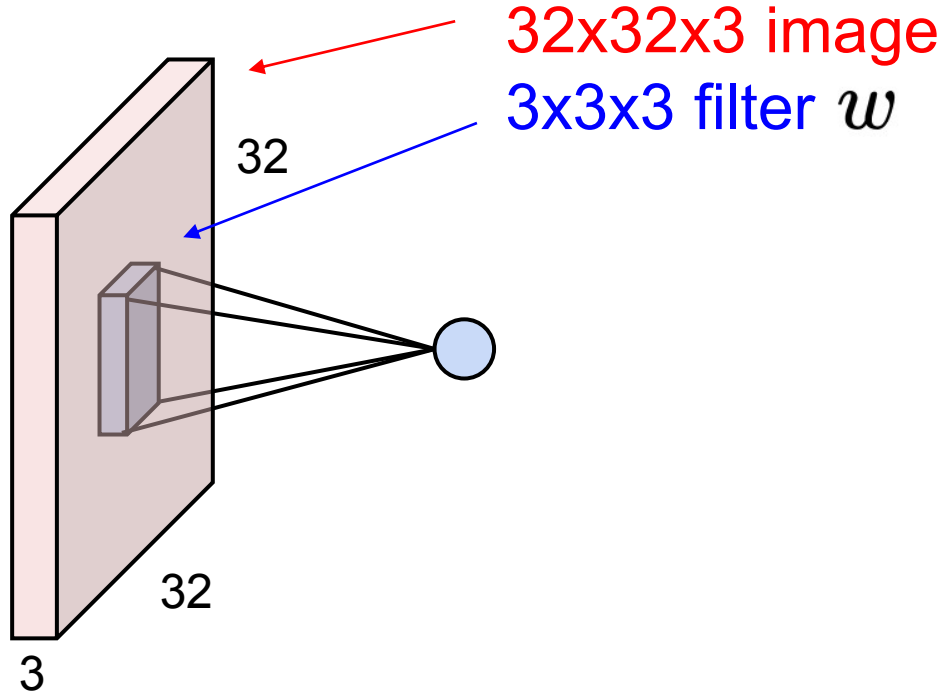

0	0	0	0	0	0				
0									
0									
0									
0									


Stride:
Downsample
output activations

0	0	0	0	0	0				
0									
0									
0									
0									

Padding:
Preserve
input spatial
dimensions in
output activations

Recap: Convolution Layer


3x32x32 image

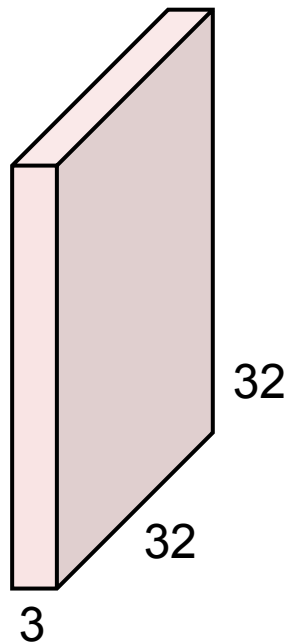


Consider 6 filters,
each 3x5x5

Convolution
Layer

6x3x5x5
filters

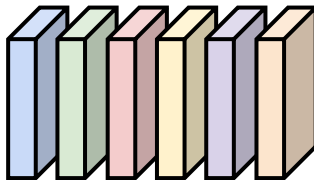

6 activation maps,
each 1x28x28

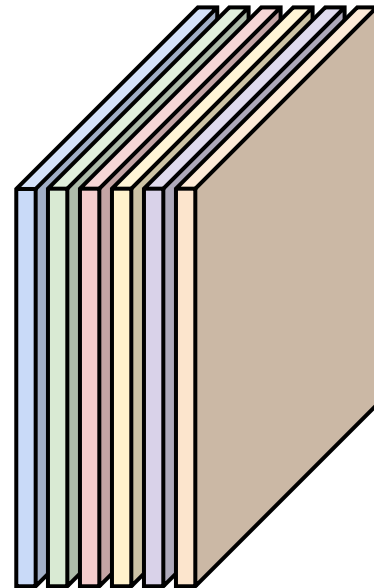


Stack activations to get a
6x28x28 output image!


Slide inspiration: Justin Johnson

Components of CNNs


Convolution Layers




Pooling Layers

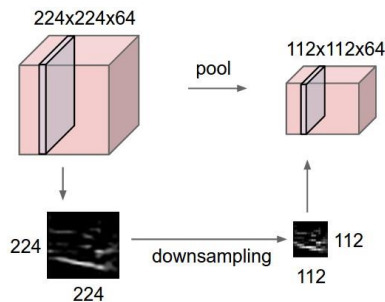

Fully-Connected Layers

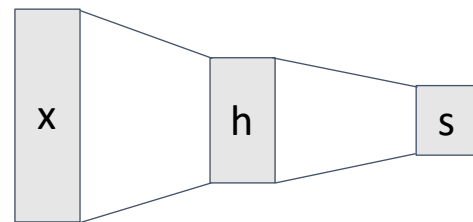


Activation Function



Normalization

$$\hat{x}_{i,j} = \frac{x_{i,j} - \mu_j}{\sqrt{\sigma_j^2 + \varepsilon}}$$

ImageNet Large Scale Visual Recognition Challenge (ILSVRC) winners

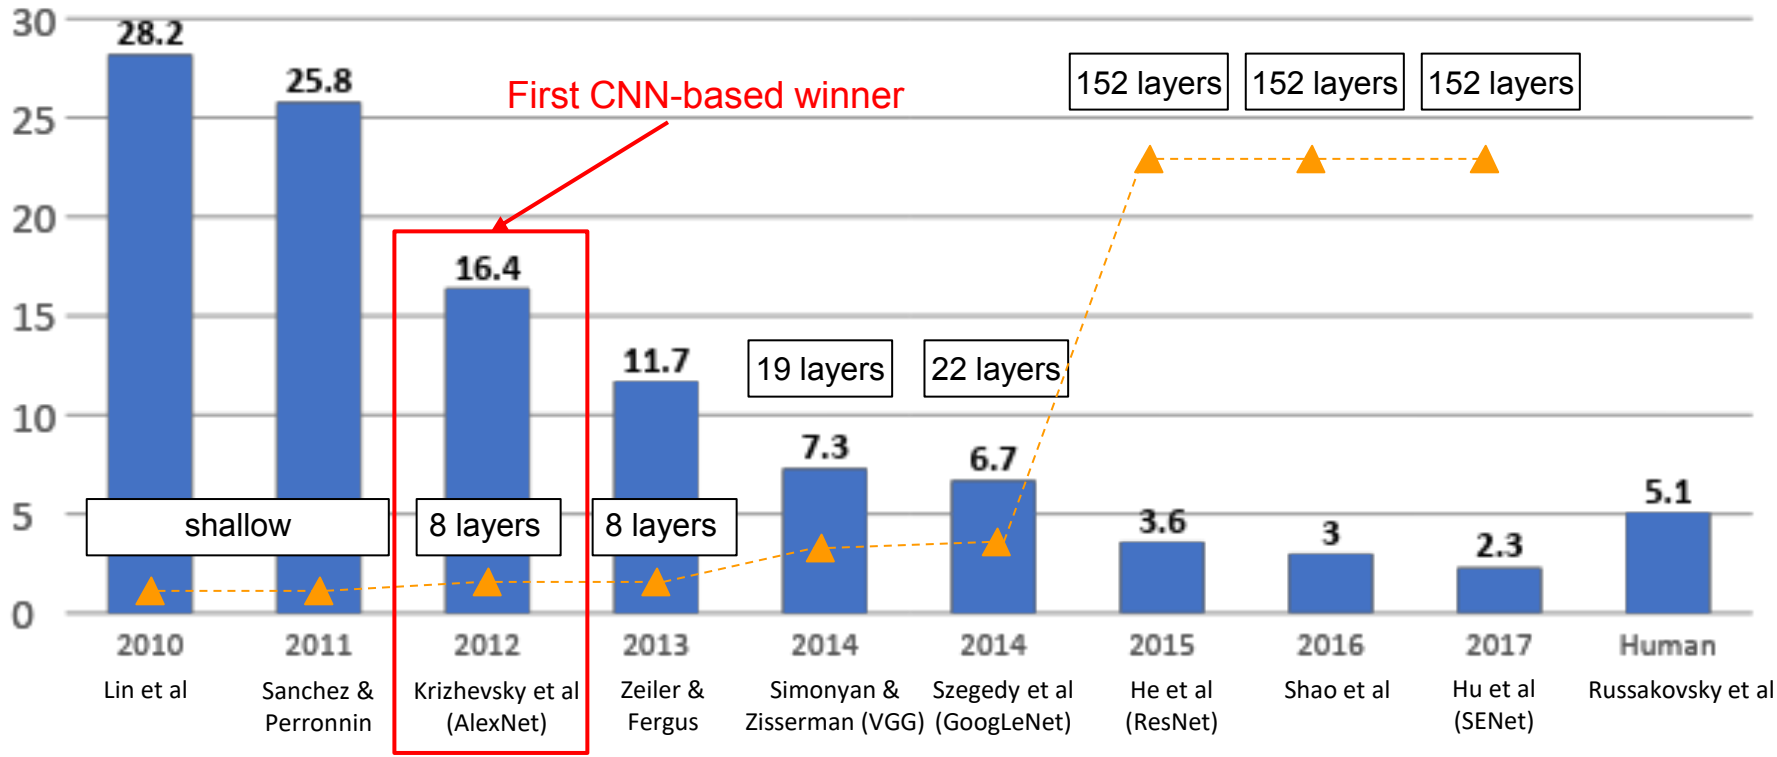

Case Study: AlexNet

[Krizhevsky et al. 2012]

Architecture:

CONV1

MAX POOL1

NORM1

CONV2

MAX POOL2

NORM2

CONV3

CONV4

CONV5

Max POOL3

FC6

FC7

FC8


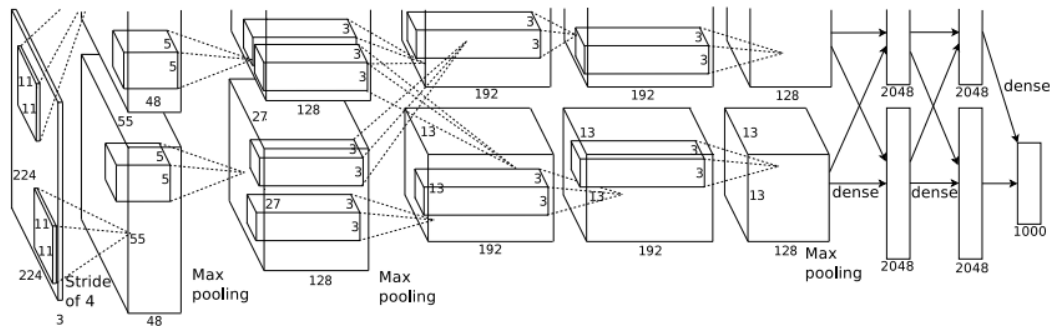


Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

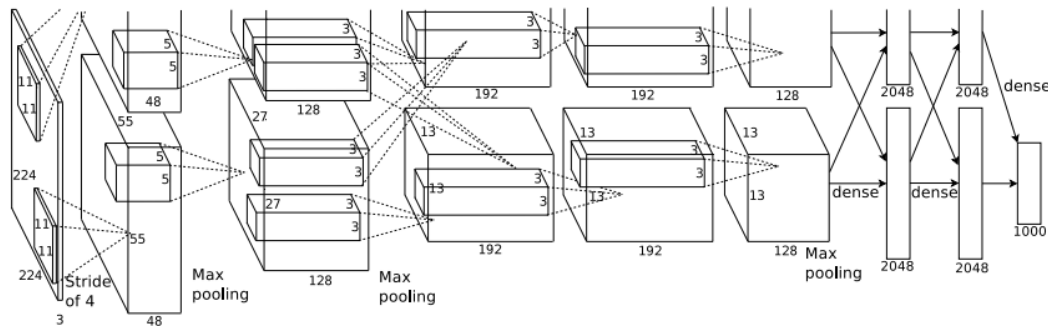

Input: 227x227x3 images

First layer (CONV1): 96 11x11 filters applied at stride 4

=>


Q: what is the output volume size? Hint: $(227-11)/4+1 = 55$

$$W' = (W - F + 2P) / S + 1$$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

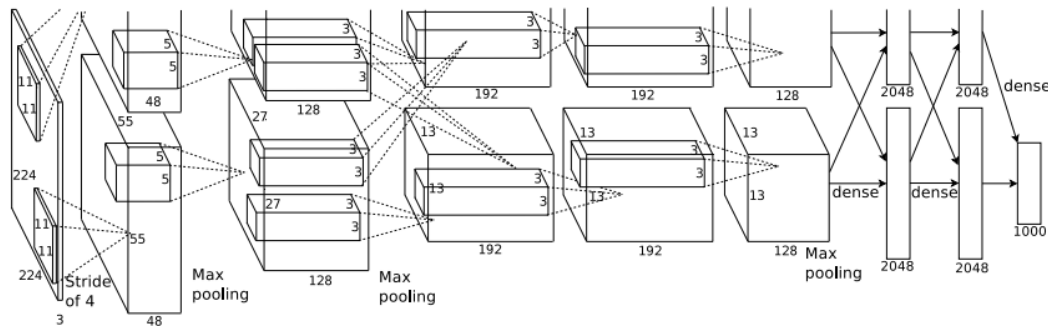

Input: 227x227x3 images

First layer (CONV1): 96 11x11 filters applied at stride 4

=>

Output volume **[55x55x96]**

$$W' = (W - F + 2P) / S + 1$$


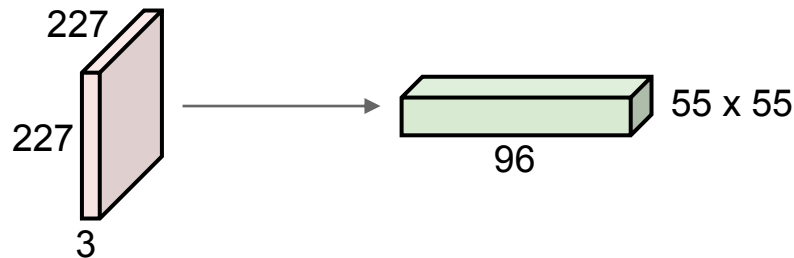


Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

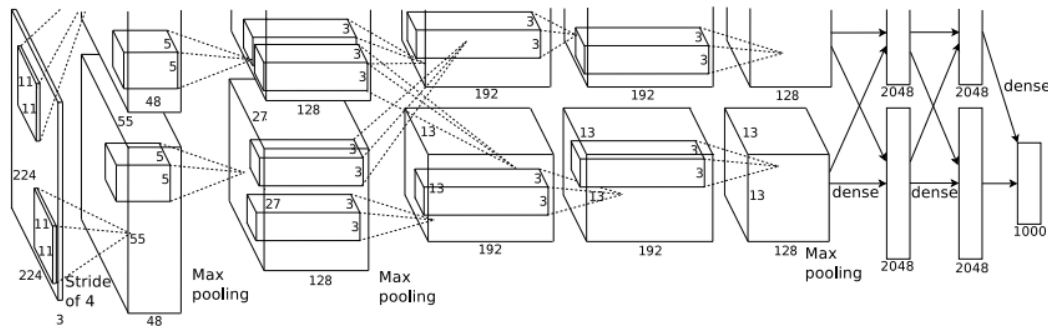

Input: 227x227x3 images

First layer (CONV1): 96 11x11 filters applied at stride 4

=>

Output volume **[55x55x96]**

Q: What is the total number of parameters in this layer?


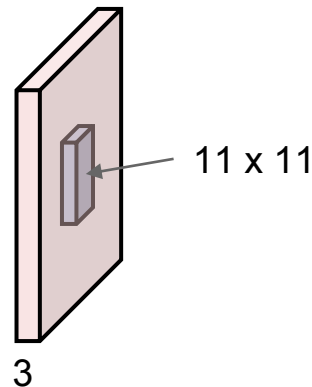


Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

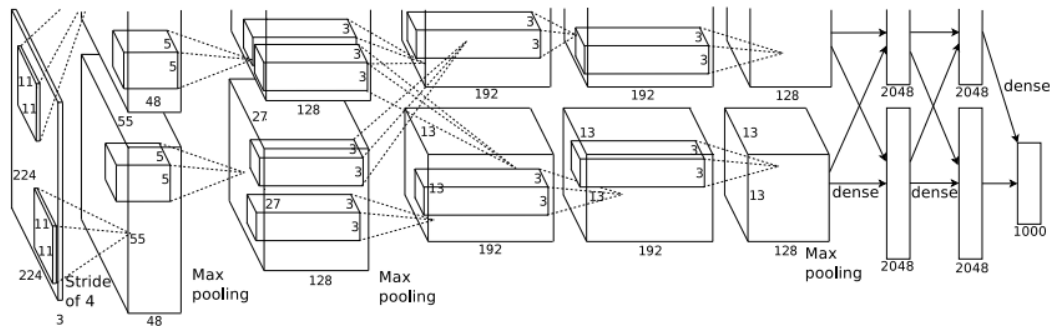

Input: 227x227x3 images

First layer (CONV1): 96 11x11 filters applied at stride 4

=>

Output volume **[55x55x96]**

Parameters: $(11 \cdot 11 \cdot 3 + 1) \cdot 96 = \mathbf{35K}$


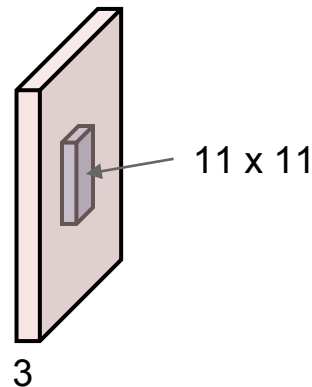


Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

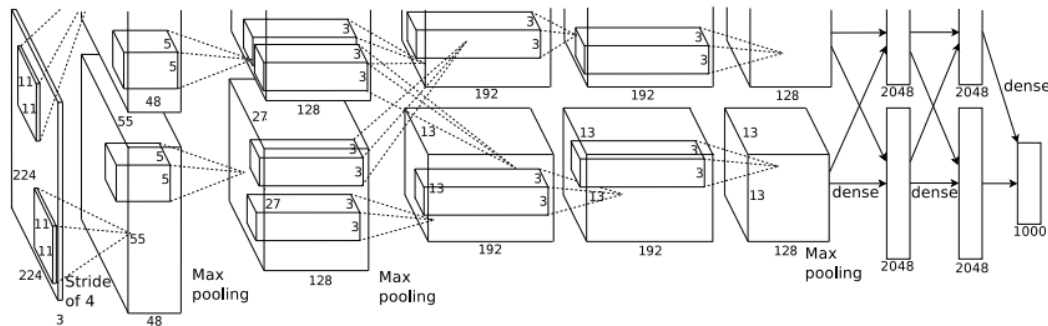

Input: 227x227x3 images

After CONV1: 55x55x96

$$W' = (W - F + 2P) / S + 1$$


Second layer (POOL1): 3x3 filters applied at stride 2

Q: what is the output volume size? Hint: $(55-3)/2+1 = 27$

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

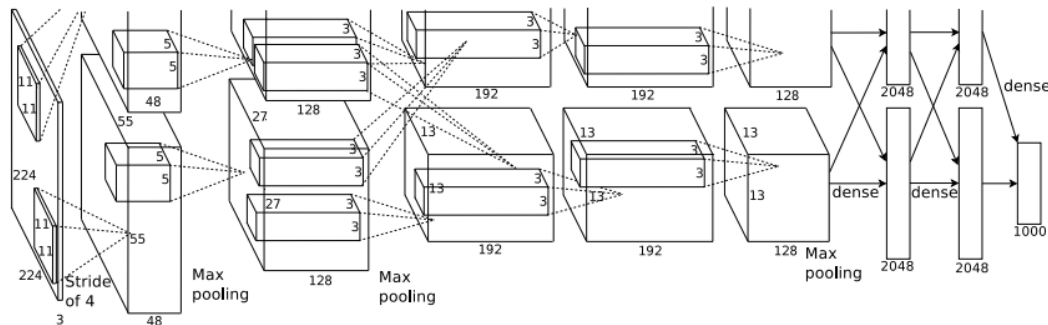

Input: 227x227x3 images

After CONV1: 55x55x96

$$W' = (W - F + 2P) / S + 1$$

Second layer (POOL1): 3x3 filters applied at stride 2


Output volume: 27x27x96

Q: what is the number of parameters in this layer?

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

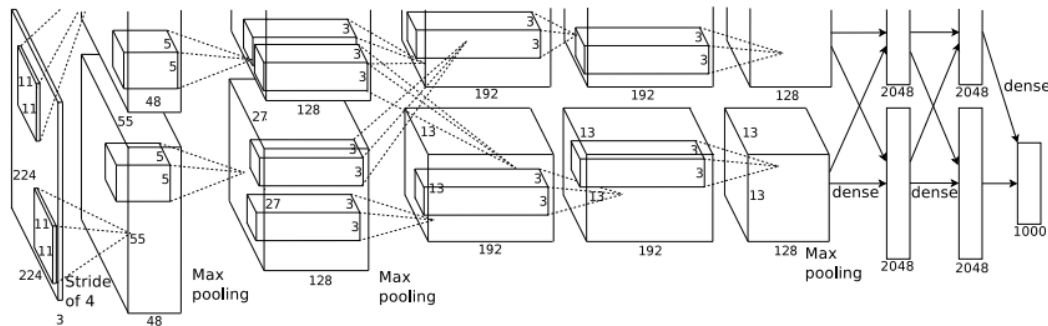

Input: 227x227x3 images

After CONV1: 55x55x96

Second layer (POOL1): 3x3 filters applied at stride 2


Output volume: 27x27x96

Parameters: 0!

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

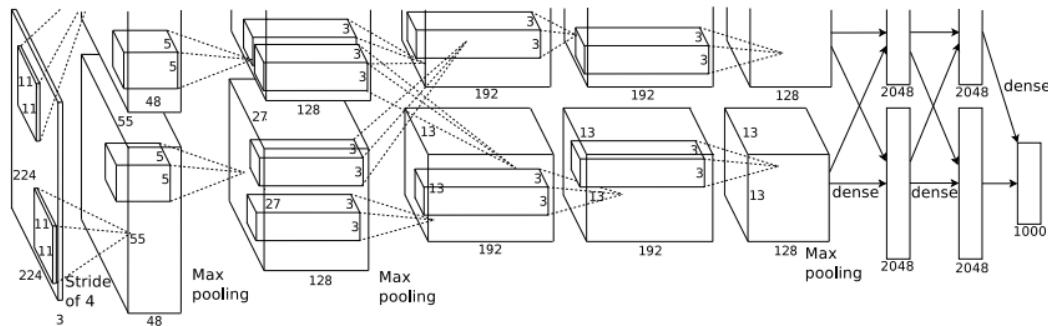

Input: 227x227x3 images

After CONV1: 55x55x96

After POOL1: 27x27x96

...

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

Full (simplified) AlexNet architecture:

[227x227x3] INPUT

[55x55x96] **CONV1**: 96 11x11 filters at stride 4, pad 0

[27x27x96] **MAX POOL1**: 3x3 filters at stride 2

[27x27x96] **NORM1**: Normalization layer

[27x27x256] **CONV2**: 256 5x5 filters at stride 1, pad 2

[13x13x256] **MAX POOL2**: 3x3 filters at stride 2

[13x13x256] **NORM2**: Normalization layer

[13x13x384] **CONV3**: 384 3x3 filters at stride 1, pad 1

[13x13x384] **CONV4**: 384 3x3 filters at stride 1, pad 1

[13x13x256] **CONV5**: 256 3x3 filters at stride 1, pad 1

[6x6x256] **MAX POOL3**: 3x3 filters at stride 2

[4096] **FC6**: 4096 neurons

[4096] **FC7**: 4096 neurons

[1000] **FC8**: 1000 neurons (class scores)

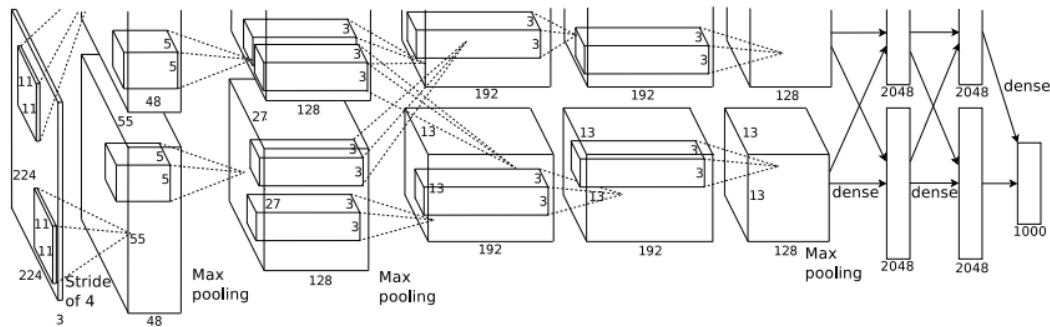


Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

Case Study: AlexNet

[Krizhevsky et al. 2012]

Full (simplified) AlexNet architecture:

[227x227x3] INPUT

[55x55x96] **CONV1**: 96 11x11 filters at stride 4, pad 0

[27x27x96] **MAX POOL1**: 3x3 filters at stride 2

[27x27x96] **NORM1**: Normalization layer

[27x27x256] **CONV2**: 256 5x5 filters at stride 1, pad 2

[13x13x256] **MAX POOL2**: 3x3 filters at stride 2

[13x13x256] **NORM2**: Normalization layer

[13x13x384] **CONV3**: 384 3x3 filters at stride 1, pad 1

[13x13x384] **CONV4**: 384 3x3 filters at stride 1, pad 1


[13x13x256] **CONV5**: 256 3x3 filters at stride 1, pad 1

[6x6x256] **MAX POOL3**: 3x3 filters at stride 2

[4096] **FC6**: 4096 neurons

[4096] **FC7**: 4096 neurons

[1000] **FC8**: 1000 neurons (class scores)

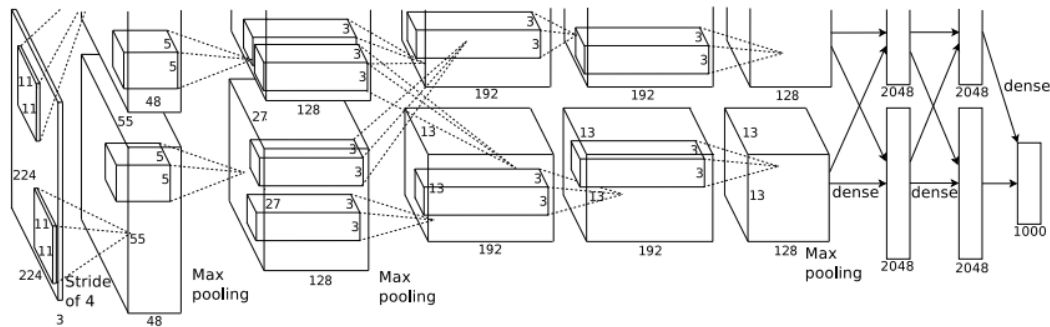


Details/Retrospectives:


- first use of ReLU
- used LRN layers (not common anymore)
- heavy data augmentation
- dropout 0.5
- batch size 128
- SGD Momentum 0.9
- Learning rate 1e-2, reduced by 10 manually when val accuracy plateaus
- L2 weight decay 5e-4
- 7 CNN ensemble: 18.2% -> 15.4%

Figure copyright Alex Krizhevsky, Ilya Sutskever, and Geoffrey Hinton, 2012. Reproduced with permission.

ImageNet Large Scale Visual Recognition Challenge (ILSVRC) winners

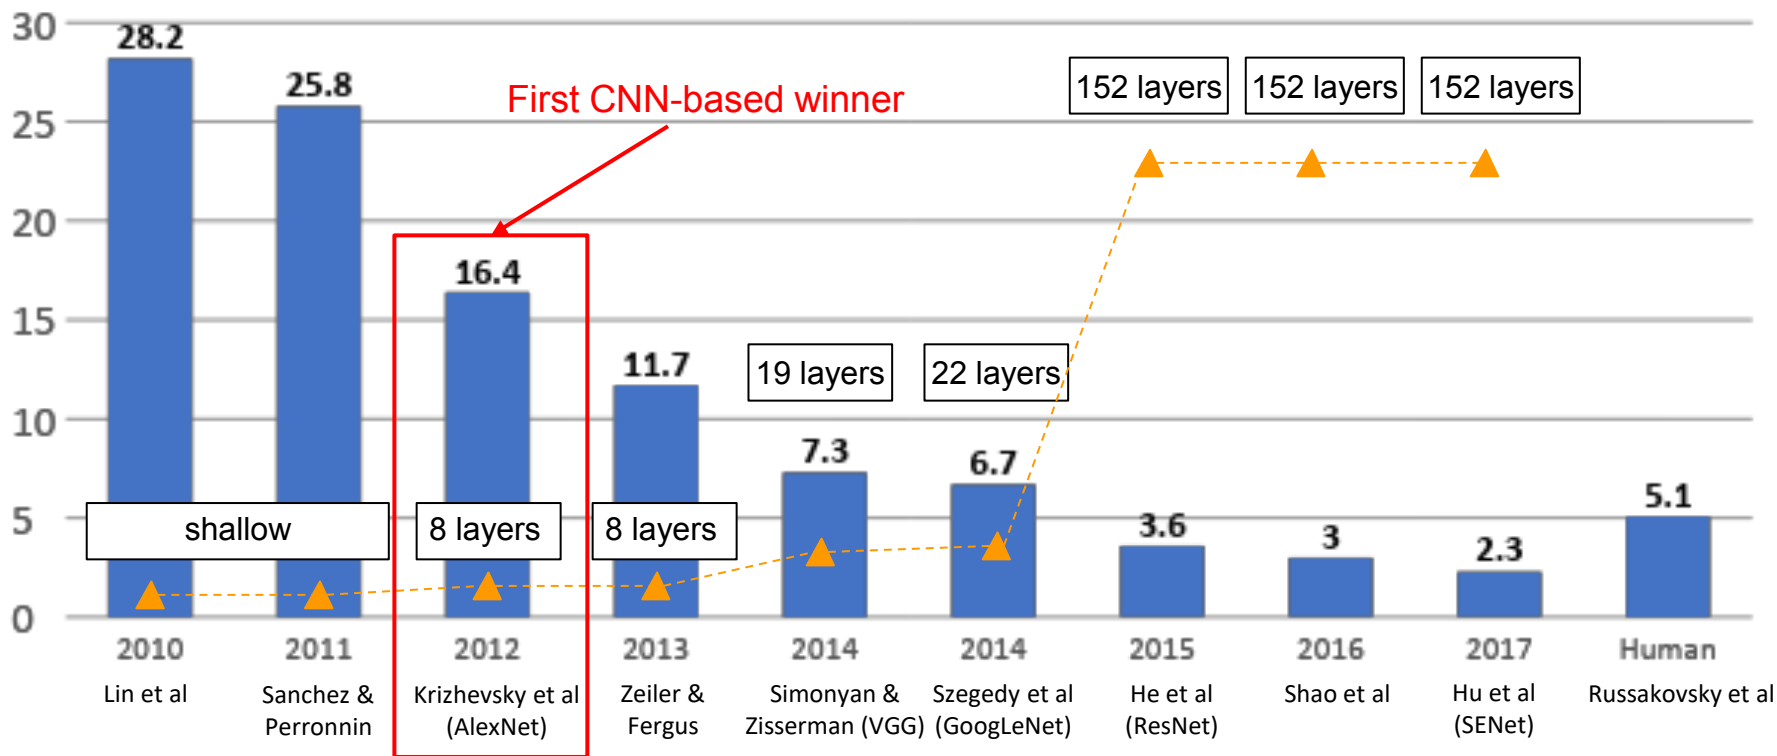

ImageNet Large Scale Visual Recognition Challenge (ILSVRC) winners

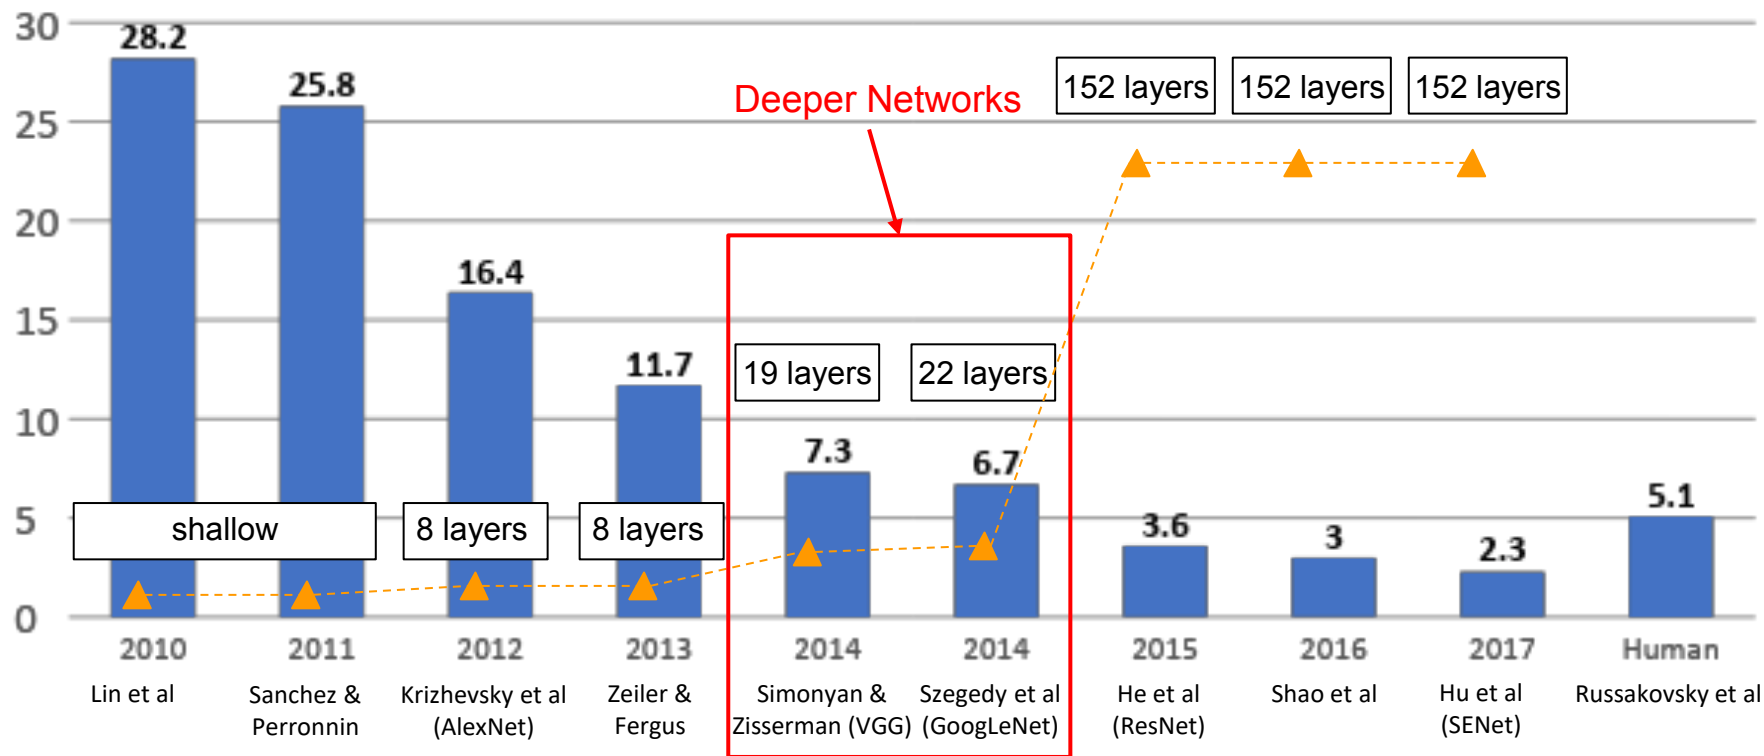

Case Study: VGGNet

[Simonyan and Zisserman, 2014]

Small filters, Deeper networks


8 layers (AlexNet)

-> 16 - 19 layers (VGG16Net)

Only 3x3 CONV stride 1, pad 1
and 2x2 MAX POOL stride 2

11.7% top 5 error in ILSVRC'13
(ZFNet)

-> 7.3% top 5 error in ILSVRC'14

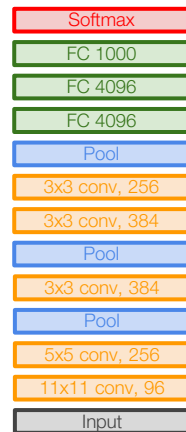

AlexNet




VGG16

VGG19

Case Study: VGGNet

[Simonyan and Zisserman, 2014]

Q: Why use smaller filters? (3x3 conv)

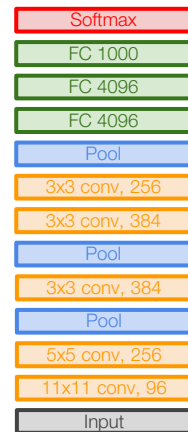

AlexNet



VGG16

VGG19


Case Study: VGGNet

[Simonyan and Zisserman, 2014]

Q: Why use smaller filters? (3x3 conv)

Stack of three 3x3 conv (stride 1) layers has same **effective receptive field** as one 7x7 conv layer

Q: What is the effective receptive field of three 3x3 conv (stride 1) layers?

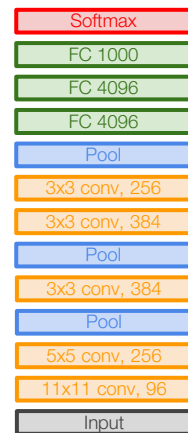

AlexNet




VGG16

VGG19

Case Study: VGGNet

[Simonyan and Zisserman, 2014]


Q: What is the effective receptive field of three 3x3 conv (stride 1) layers?

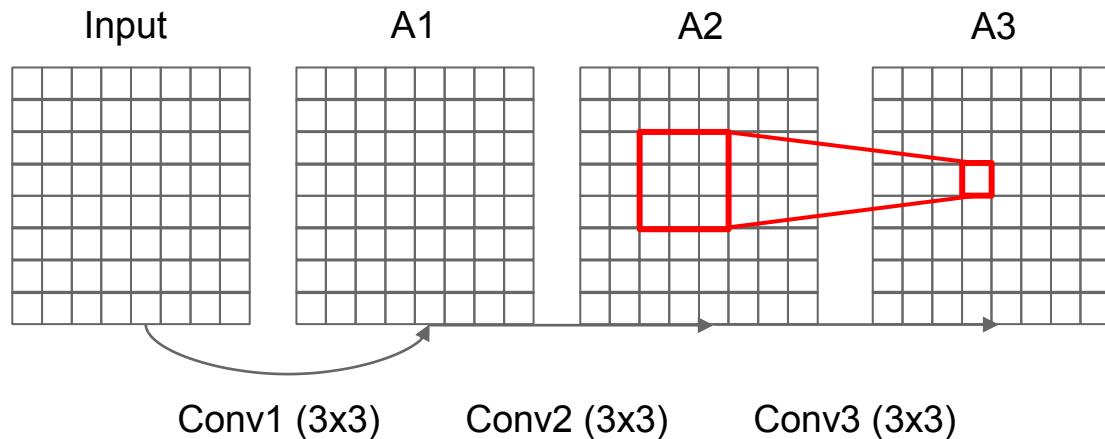

Case Study: VGGNet

[Simonyan and Zisserman, 2014]


Q: What is the effective receptive field of three 3x3 conv (stride 1) layers?

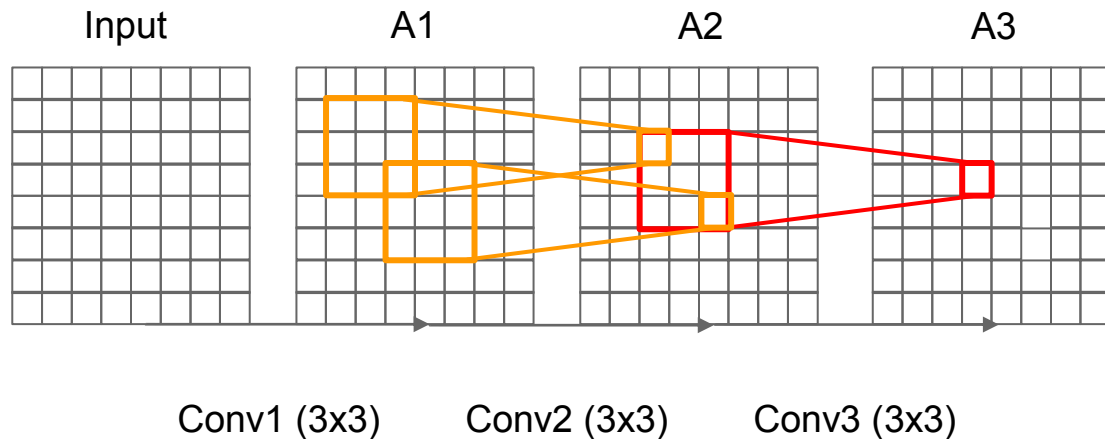

Case Study: VGGNet

[Simonyan and Zisserman, 2014]


Q: What is the effective receptive field of three 3x3 conv (stride 1) layers?

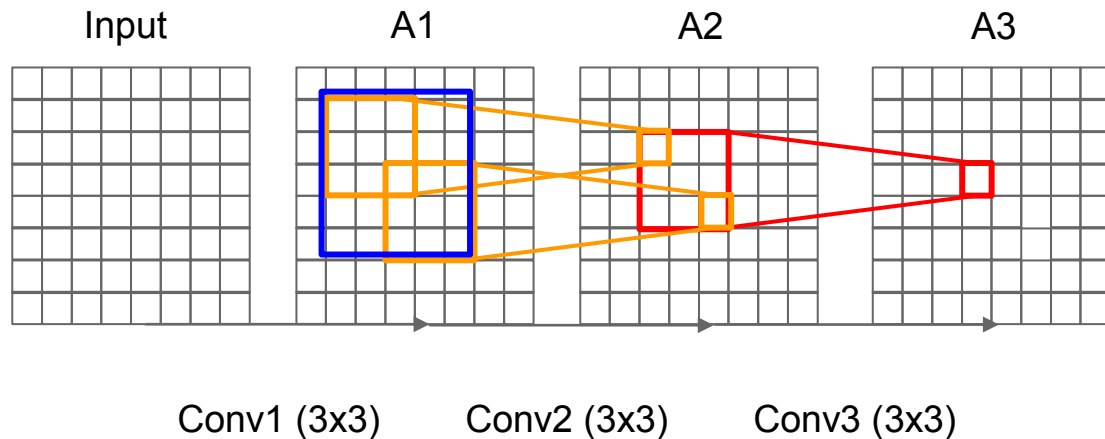

Case Study: VGGNet

[Simonyan and Zisserman, 2014]


Q: What is the effective receptive field of three 3x3 conv (stride 1) layers?

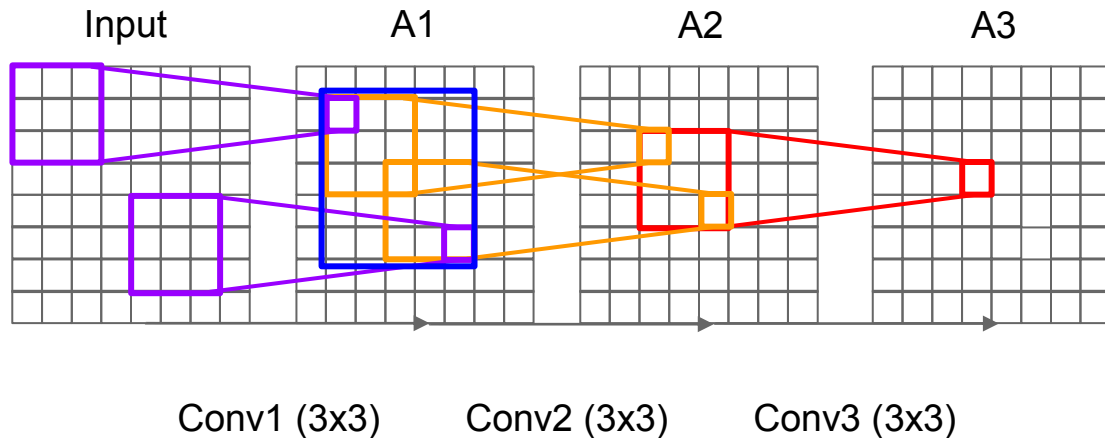

Case Study: VGGNet

[Simonyan and Zisserman, 2014]

Q: What is the effective receptive field of three 3x3 conv (stride 1) layers?

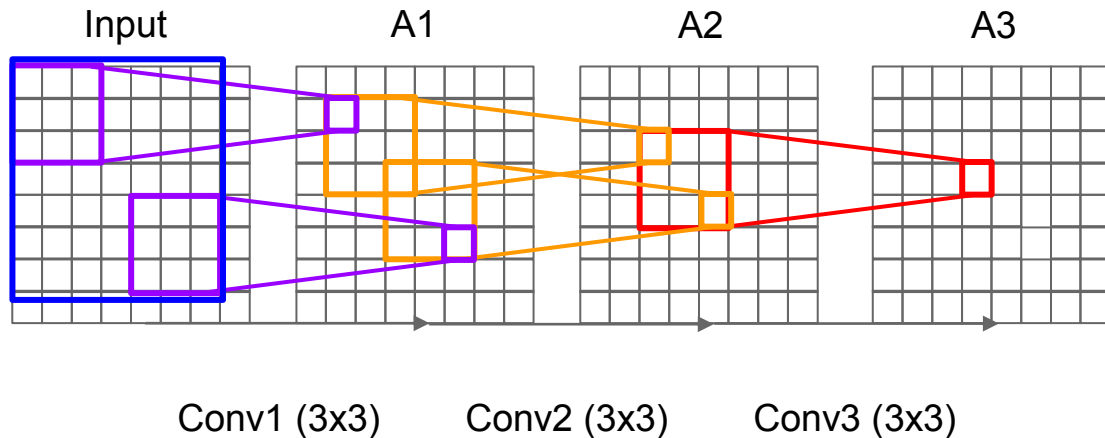


Case Study: VGGNet

[Simonyan and Zisserman, 2014]

Q: Why use smaller filters? (3x3 conv)

Stack of three 3x3 conv (stride 1) layers has same **effective receptive field** as one 7x7 conv layer

[7x7]

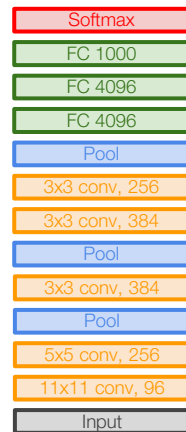

AlexNet



VGG16

VGG19

Case Study: VGGNet


[Simonyan and Zisserman, 2014]

Q: Why use smaller filters? (3x3 conv)

Stack of three 3x3 conv (stride 1) layers has same **effective receptive field** as one 7x7 conv layer

But deeper, more non-linearities

And fewer parameters: $3 * (3^2 C^2)$ vs. $7^2 C^2$ for C channels per layer

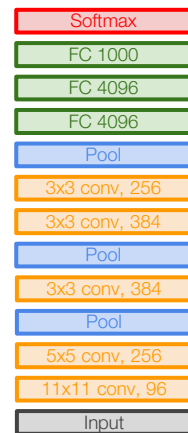

AlexNet



VGG16

VGG19

INPUT: [224x224x3] memory: 224*224*3=150K params: 0 (not counting biases)

CONV3-64: [224x224x64] memory: 224*224*64=3.2M params: $(3*3*3)*64 = 1,728$

CONV3-64: [224x224x64] memory: 224*224*64=3.2M params: $(3*3*64)*64 = 36,864$

POOL2: [112x112x64] memory: 112*112*64=800K params: 0

CONV3-128: [112x112x128] memory: 112*112*128=1.6M params: $(3*3*64)*128 = 73,728$

CONV3-128: [112x112x128] memory: 112*112*128=1.6M params: $(3*3*128)*128 = 147,456$

POOL2: [56x56x128] memory: 56*56*128=400K params: 0

CONV3-256: [56x56x256] memory: 56*56*256=800K params: $(3*3*128)*256 = 294,912$

CONV3-256: [56x56x256] memory: 56*56*256=800K params: $(3*3*256)*256 = 589,824$

CONV3-256: [56x56x256] memory: 56*56*256=800K params: $(3*3*256)*256 = 589,824$

POOL2: [28x28x256] memory: 28*28*256=200K params: 0

CONV3-512: [28x28x512] memory: 28*28*512=400K params: $(3*3*256)*512 = 1,179,648$

CONV3-512: [28x28x512] memory: 28*28*512=400K params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [28x28x512] memory: 28*28*512=400K params: $(3*3*512)*512 = 2,359,296$

POOL2: [14x14x512] memory: 14*14*512=100K params: 0

CONV3-512: [14x14x512] memory: 14*14*512=100K params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: 14*14*512=100K params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: 14*14*512=100K params: $(3*3*512)*512 = 2,359,296$

POOL2: [7x7x512] memory: 7*7*512=25K params: 0

FC: [1x1x4096] memory: 4096 params: $7*7*512*4096 = 102,760,448$

FC: [1x1x4096] memory: 4096 params: $4096*4096 = 16,777,216$

FC: [1x1x1000] memory: 1000 params: $4096*1000 = 4,096,000$



VGG16

INPUT: [224x224x3] memory: $224*224*3=150\text{K}$ params: 0 (not counting biases)

CONV3-64: [224x224x64] memory: $224*224*64=3.2\text{M}$ params: $(3*3*3)*64 = 1,728$

CONV3-64: [224x224x64] memory: $224*224*64=3.2\text{M}$ params: $(3*3*64)*64 = 36,864$

POOL2: [112x112x64] memory: $112*112*64=800\text{K}$ params: 0

CONV3-128: [112x112x128] memory: $112*112*128=1.6\text{M}$ params: $(3*3*64)*128 = 73,728$

CONV3-128: [112x112x128] memory: $112*112*128=1.6\text{M}$ params: $(3*3*128)*128 = 147,456$

POOL2: [56x56x128] memory: $56*56*128=400\text{K}$ params: 0

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*128)*256 = 294,912$

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*256)*256 = 589,824$

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*256)*256 = 589,824$

POOL2: [28x28x256] memory: $28*28*256=200\text{K}$ params: 0

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*256)*512 = 1,179,648$

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*512)*512 = 2,359,296$

POOL2: [14x14x512] memory: $14*14*512=100\text{K}$ params: 0

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

POOL2: [7x7x512] memory: $7*7*512=25\text{K}$ params: 0


FC: [1x1x4096] memory: 4096 params: $7*7*512*4096 = 102,760,448$

FC: [1x1x4096] memory: 4096 params: $4096*4096 = 16,777,216$

FC: [1x1x1000] memory: 1000 params: $4096*1000 = 4,096,000$

TOTAL memory: $24\text{M} * 4 \text{ bytes} \sim 96\text{MB}$ / image (for a forward pass)

TOTAL params: 138M parameters

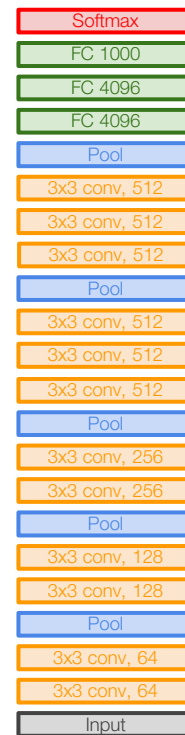

VGG16

INPUT: [224x224x3] memory: $224*224*3=150\text{K}$ params: 0 (not counting biases)

CONV3-64: [224x224x64] memory: $224*224*64=3.2\text{M}$ params: $(3*3*3)*64 = 1,728$

CONV3-64: [224x224x64] memory: $224*224*64=3.2\text{M}$ params: $(3*3*64)*64 = 36,864$

POOL2: [112x112x64] memory: $112*112*64=800\text{K}$ params: 0

CONV3-128: [112x112x128] memory: $112*112*128=1.6\text{M}$ params: $(3*3*64)*128 = 73,728$

CONV3-128: [112x112x128] memory: $112*112*128=1.6\text{M}$ params: $(3*3*128)*128 = 147,456$

POOL2: [56x56x128] memory: $56*56*128=400\text{K}$ params: 0

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*128)*256 = 294,912$

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*256)*256 = 589,824$

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*256)*256 = 589,824$

POOL2: [28x28x256] memory: $28*28*256=200\text{K}$ params: 0

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*256)*512 = 1,179,648$

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*512)*512 = 2,359,296$

POOL2: [14x14x512] memory: $14*14*512=100\text{K}$ params: 0

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

POOL2: [7x7x512] memory: $7*7*512=25\text{K}$ params: 0

FC: [1x1x4096] memory: 4096 params: $7*7*512*4096 = 102,760,448$

FC: [1x1x4096] memory: 4096 params: $4096*4096 = 16,777,216$

FC: [1x1x1000] memory: 1000 params: $4096*1000 = 4,096,000$

TOTAL memory: $24\text{M} * 4 \text{ bytes} \sim 96\text{MB} / \text{image}$ (only forward! ~ 2 for bwd)

TOTAL params: 138M parameters

Note:

Most memory is in
early CONV

Most params are
in late FC

INPUT: [224x224x3] memory: $224*224*3=150\text{K}$ params: 0 (not counting biases)

CONV3-64: [224x224x64] memory: $224*224*64=3.2\text{M}$ params: $(3*3*3)*64 = 1,728$

CONV3-64: [224x224x64] memory: $224*224*64=3.2\text{M}$ params: $(3*3*64)*64 = 36,864$

POOL2: [112x112x64] memory: $112*112*64=800\text{K}$ params: 0

CONV3-128: [112x112x128] memory: $112*112*128=1.6\text{M}$ params: $(3*3*64)*128 = 73,728$

CONV3-128: [112x112x128] memory: $112*112*128=1.6\text{M}$ params: $(3*3*128)*128 = 147,456$

POOL2: [56x56x128] memory: $56*56*128=400\text{K}$ params: 0

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*128)*256 = 294,912$

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*256)*256 = 589,824$

CONV3-256: [56x56x256] memory: $56*56*256=800\text{K}$ params: $(3*3*256)*256 = 589,824$

POOL2: [28x28x256] memory: $28*28*256=200\text{K}$ params: 0

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*256)*512 = 1,179,648$

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [28x28x512] memory: $28*28*512=400\text{K}$ params: $(3*3*512)*512 = 2,359,296$

POOL2: [14x14x512] memory: $14*14*512=100\text{K}$ params: 0

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

CONV3-512: [14x14x512] memory: $14*14*512=100\text{K}$ params: $(3*3*512)*512 = 2,359,296$

POOL2: [7x7x512] memory: $7*7*512=25\text{K}$ params: 0

FC: [1x1x4096] memory: 4096 params: $7*7*512*4096 = 102,760,448$

FC: [1x1x4096] memory: 4096 params: $4096*4096 = 16,777,216$

FC: [1x1x1000] memory: 1000 params: $4096*1000 = 4,096,000$

TOTAL memory: $24\text{M} * 4 \text{ bytes} \sim 96\text{MB}$ / image (only forward! ~ 2 for bwd)

TOTAL params: 138M parameters



VGG16


Common names

Case Study: VGGNet


[Simonyan and Zisserman, 2014]

Details:

- ILSVRC'14 2nd in classification, 1st in localization
- Similar training procedure as Krizhevsky 2012
- No Local Response Normalisation (LRN)
- Use VGG16 or VGG19 (VGG19 only slightly better, more memory)
- Use ensembles for best results
- FC7 features generalize well to other tasks

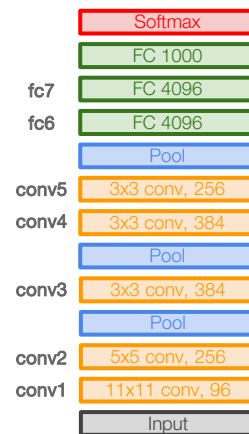


AlexNet

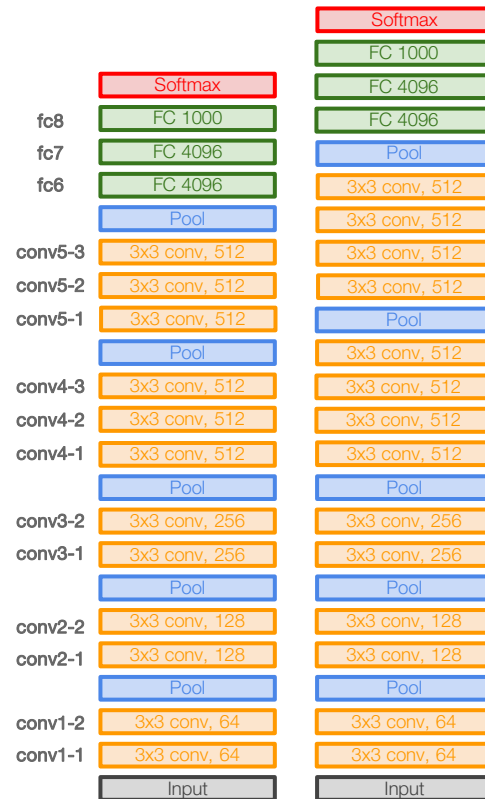


VGG16

VGG19

ImageNet Large Scale Visual Recognition Challenge (ILSVRC) winners

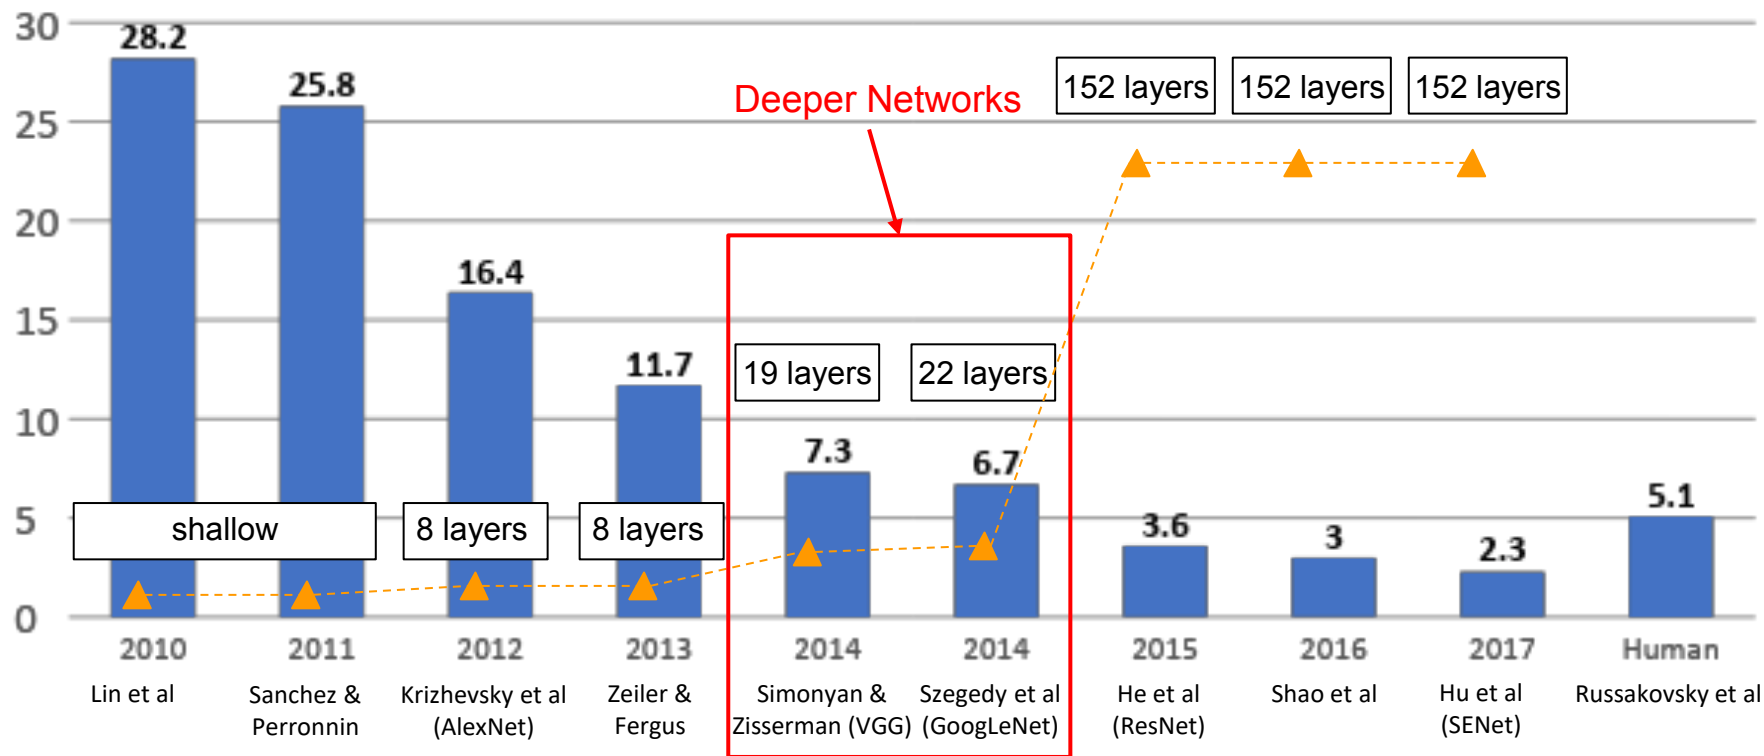

ImageNet Large Scale Visual Recognition Challenge (ILSVRC) winners


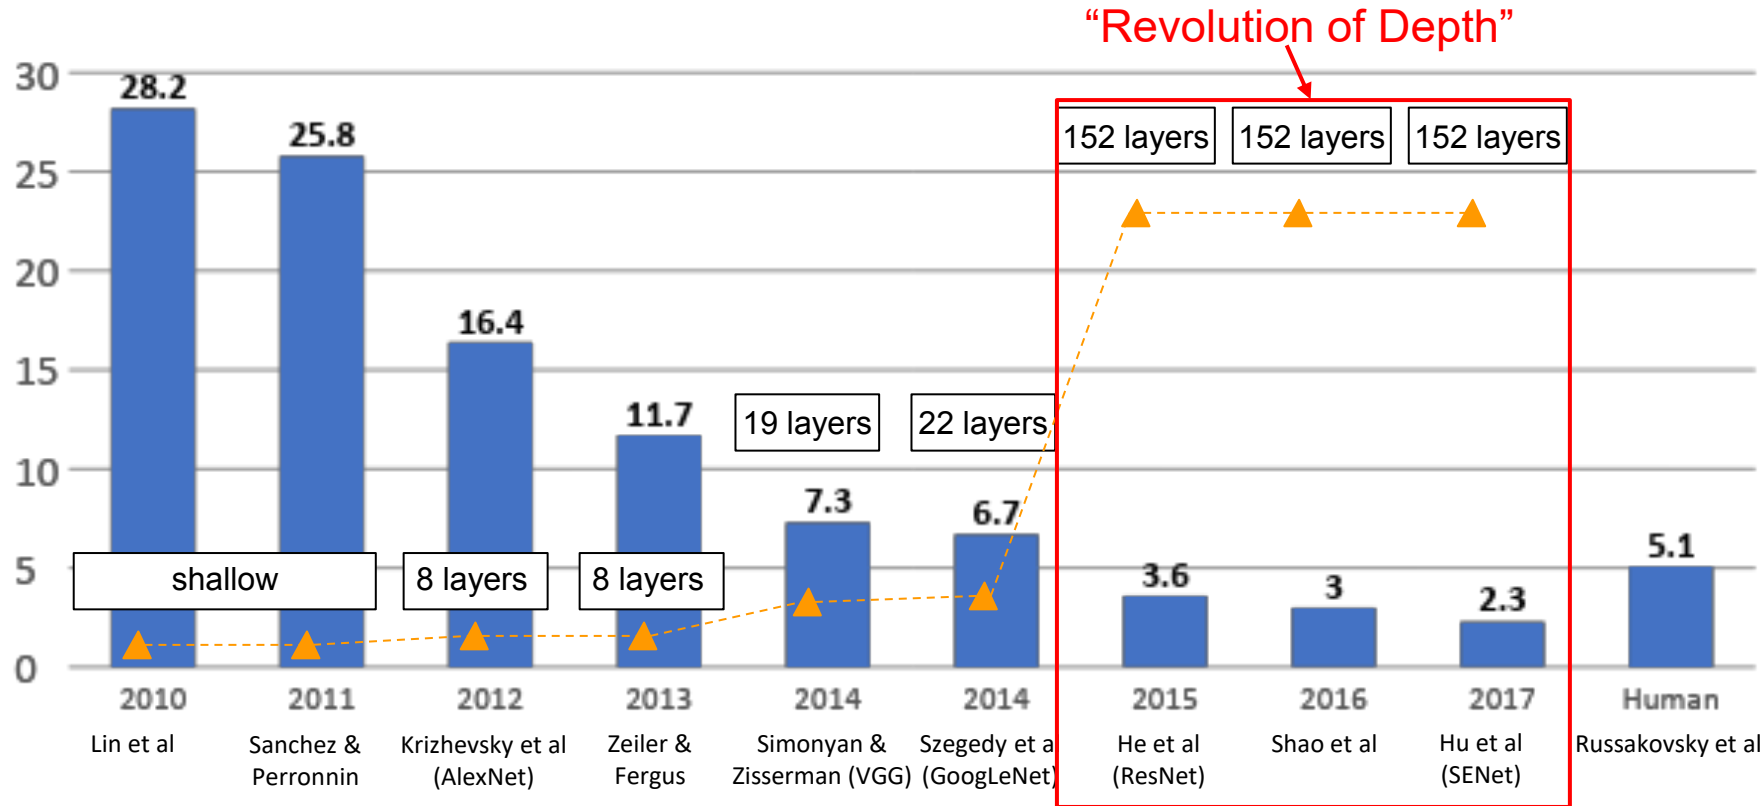


Case Study: ResNet

[He et al., 2015]

Very deep networks using residual connections



- 152-layer model for ImageNet
- ILSVRC'15 classification winner (3.57% top 5 error)
- Swept all classification and detection competitions in ILSVRC'15 and COCO'15!

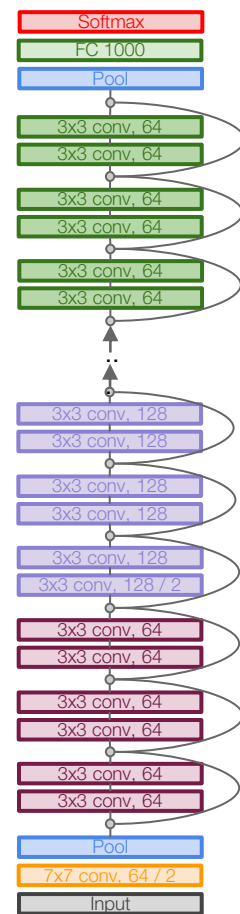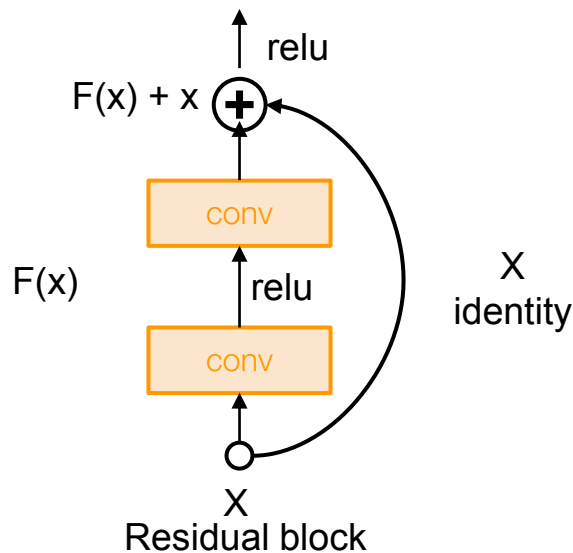

Case Study: ResNet

[He et al., 2015]

What happens when we continue stacking deeper layers on a “plain” convolutional neural network?

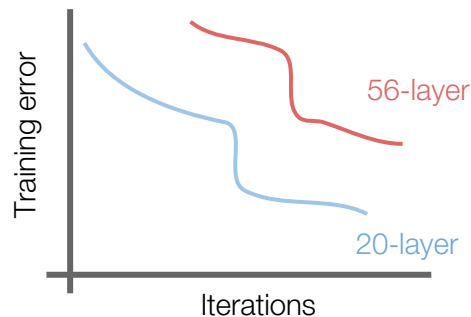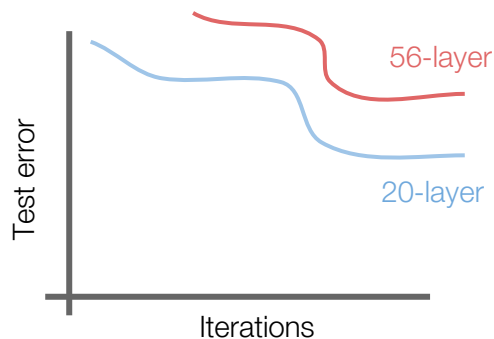

56-layer model performs worse on both test and training error

-> The deeper model performs worse, but it's **not caused by overfitting!**

Case Study: ResNet



[He et al., 2015]

Fact: Deep models have more representation power (more parameters) than shallower models.

Hypothesis: the problem is an *optimization* problem, deeper models are harder to optimize

What should the deeper model learn to be at least as good as the shallower model?


A solution by construction is copying the learned layers from the shallower model and setting additional layers to identity mapping.

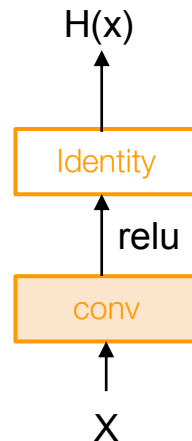

Case Study: ResNet

[He et al., 2015]

Solution: Use network layers to fit a residual mapping instead of directly trying to fit a desired underlying mapping

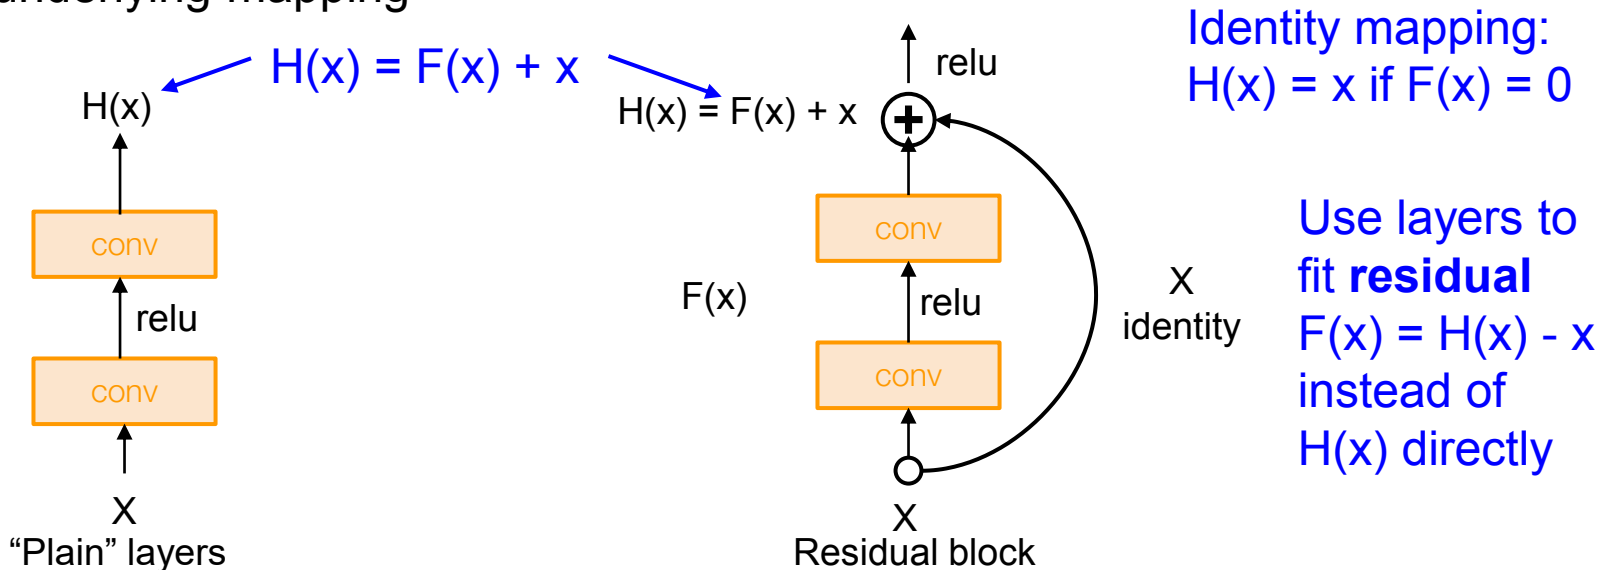


Case Study: ResNet

[He et al., 2015]

Full ResNet architecture:

- Stack residual blocks
 - Every residual block has two 3x3 conv layers
 - Periodically, double # of filters and downsample spatially using stride 2 (/2 in each dimension)
- Reduce the activation volume by half.

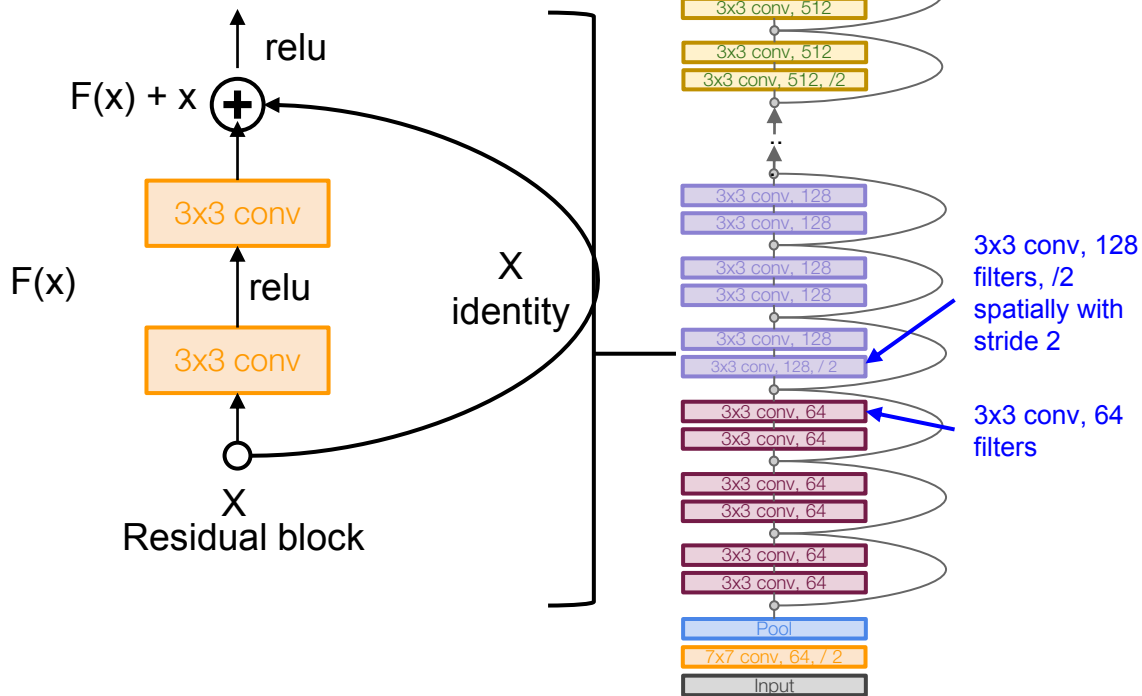


Case Study: ResNet


[He et al., 2015]

Full ResNet architecture:

- Stack residual blocks
- Every residual block has two 3x3 conv layers
- Periodically, double # of filters and downsample spatially using stride 2 (/2 in each dimension)
- Additional conv layer at the beginning (stem)
- No FC layers at the end (only FC 1000 to output classes)
- (In theory, you can train a ResNet with input image of variable sizes)

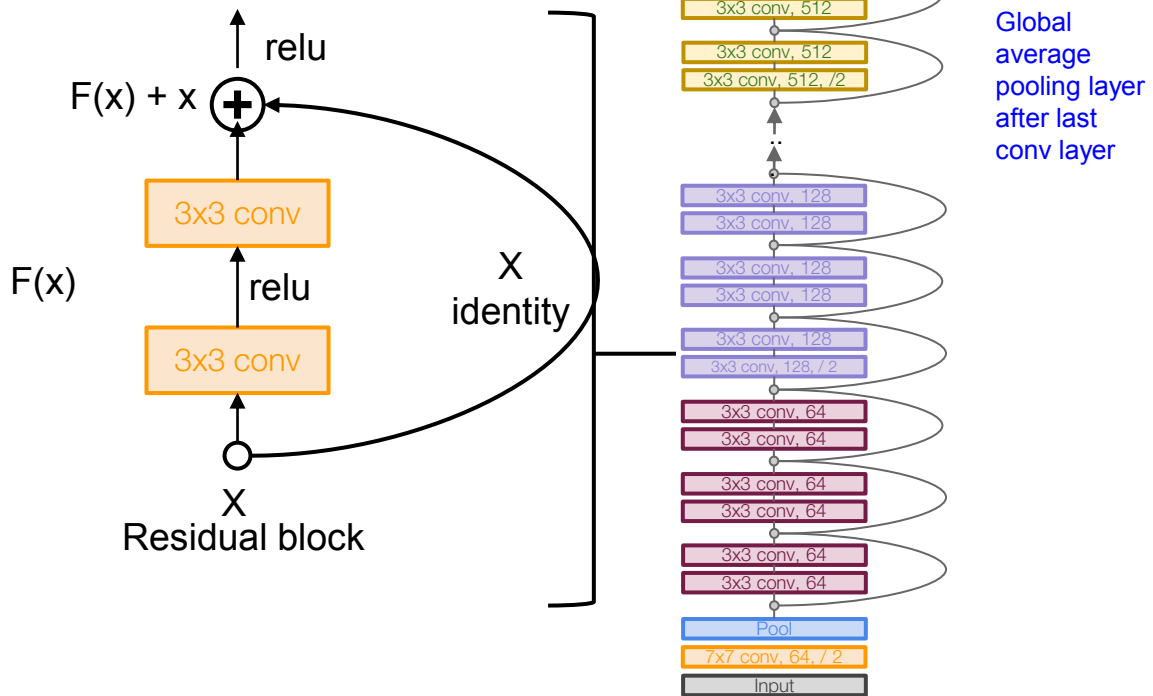


[He et al., 2015]

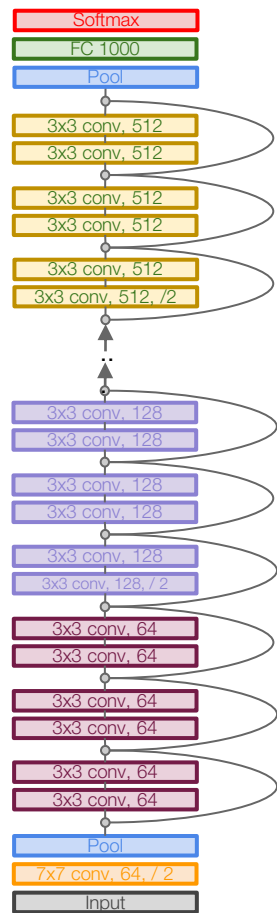

Case Study: ResNet

[He et al., 2015]

For deeper networks (ResNet-50+), use “bottleneck” layer to improve efficiency (similar to GoogLeNet)

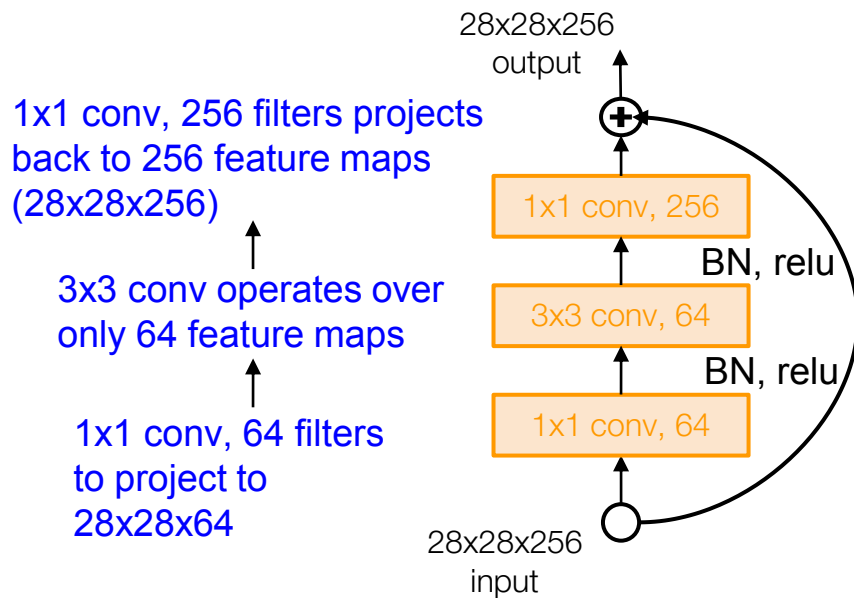

Case Study: ResNet

[He et al., 2015]

Training ResNet in practice:

- Batch Normalization after every CONV layer
- Xavier initialization from He et al.
- SGD + Momentum (0.9)
- Learning rate: 0.1, divided by 10 when validation error plateaus
- Mini-batch size 256
- Weight decay of $1e-5$
- No dropout used

Summary: CNN Architectures

Case Studies

- AlexNet
- VGG
- ResNet

Also.....

- ZFNet
- GoogLeNet
- SENet
- Wide ResNet
- ResNeXT
- DenseNet
- MobileNets
- NASNet

Main takeaways

AlexNet showed that you can use CNNs to train Computer Vision models.

VGG shows that bigger networks work better

ResNet showed us how to train extremely deep networks

- Limited only by GPU & memory!
- Showed diminishing returns as networks got bigger

After ResNet: CNNs were better than the human metric and focus shifted to other topics:

- Efficient Networks: **MobileNet**, **ShuffleNet**
- **Neural Architecture Search** can now automate architecture design


Summary: CNN Architectures

- Many popular architectures are available in model zoos.
- ResNets are good defaults to use.
True for > 8 years!
- Networks have gotten increasingly deep over time.
- Many other aspects of network architectures are also continuously being investigated and improved.



Transfer learning

You need a lot of a data if you want to train/use CNNs?

Transfer Learning with CNNs

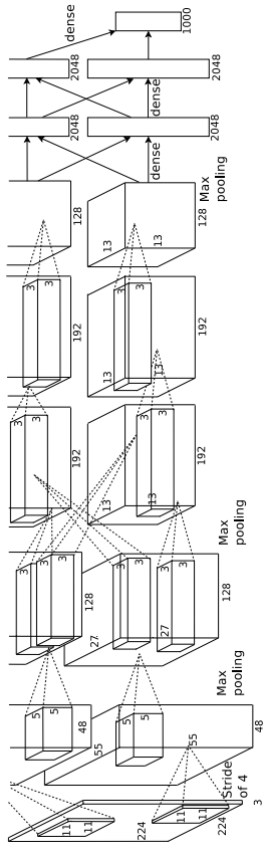

Transfer Learning with CNNs

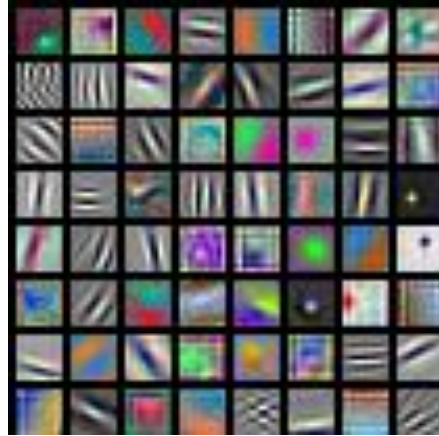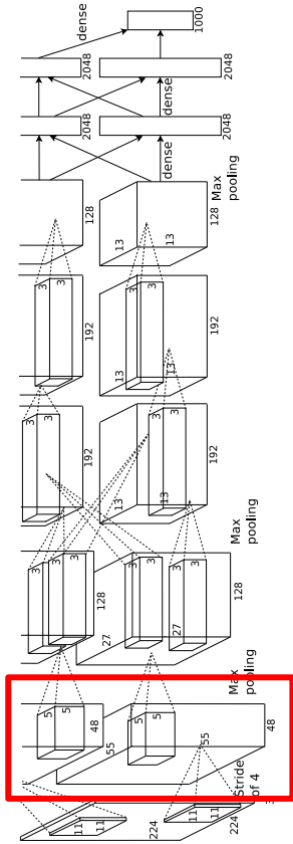

AlexNet:
64 x 3 x 11 x 11

(More on this in Lecture 13)

Test image L2 Nearest neighbors in feature space



(More on this in Lecture 13)

Transfer Learning with CNNs

1. Train on Imagenet




Donahue et al, "DeCAF: A Deep Convolutional Activation Feature for Generic Visual Recognition", ICML 2014
Razavian et al, "CNN Features Off-the-Shelf: An Astounding Baseline for Recognition", CVPR Workshops 2014


Transfer Learning with CNNs

Donahue et al, "DeCAF: A Deep Convolutional Activation Feature for Generic Visual Recognition", ICML 2014
Razavian et al, "CNN Features Off-the-Shelf: An Astounding Baseline for Recognition", CVPR Workshops 2014

1. Train on Imagenet

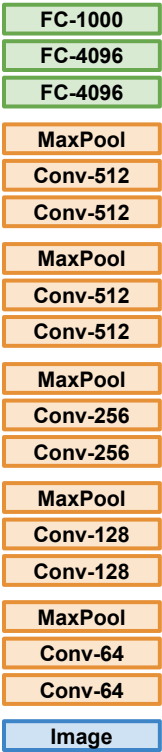

2. Small Dataset (C classes)

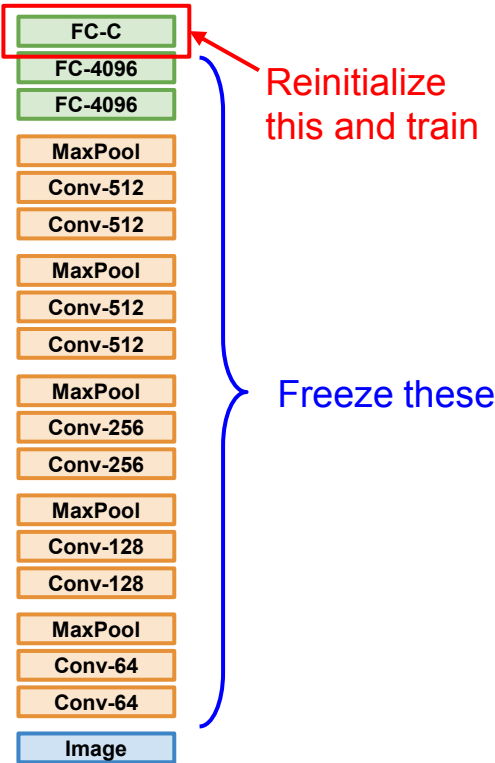


Transfer Learning with CNNs

Donahue et al, "DeCAF: A Deep Convolutional Activation Feature for Generic Visual Recognition", ICML 2014
Razavian et al, "CNN Features Off-the-Shelf: An Astounding Baseline for Recognition", CVPR Workshops 2014


1. Train on Imagenet



2. Small Dataset (C classes)

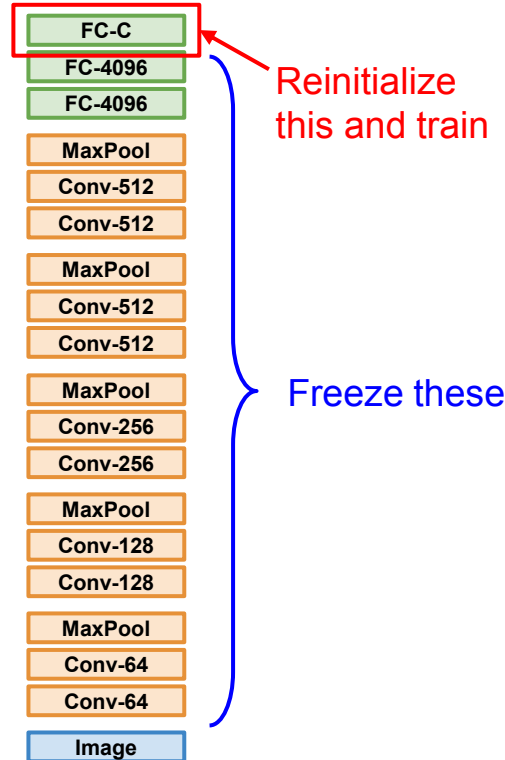

Finetuned from AlexNet

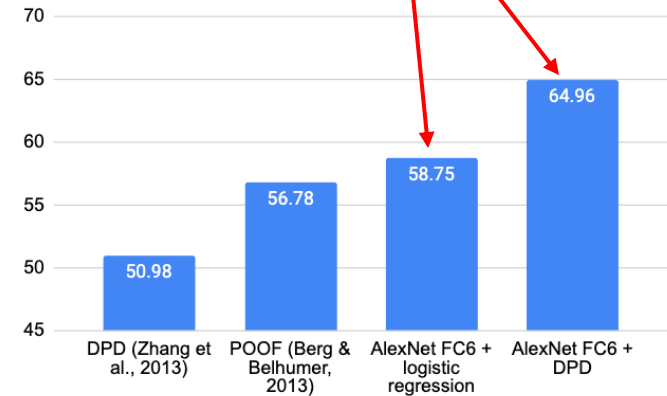


Donahue et al, "DeCAF: A Deep Convolutional Activation Feature for Generic Visual Recognition", ICML 2014


Transfer Learning with CNNs

Donahue et al, "DeCAF: A Deep Convolutional Activation Feature for Generic Visual Recognition", ICML 2014
Razavian et al, "CNN Features Off-the-Shelf: An Astounding Baseline for Recognition", CVPR Workshops 2014


1. Train on Imagenet

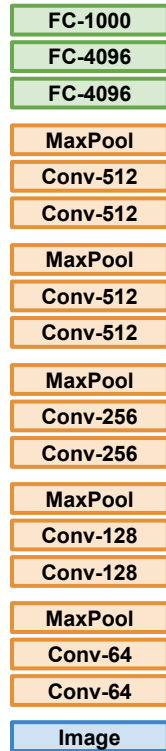

2. Small Dataset (C classes)

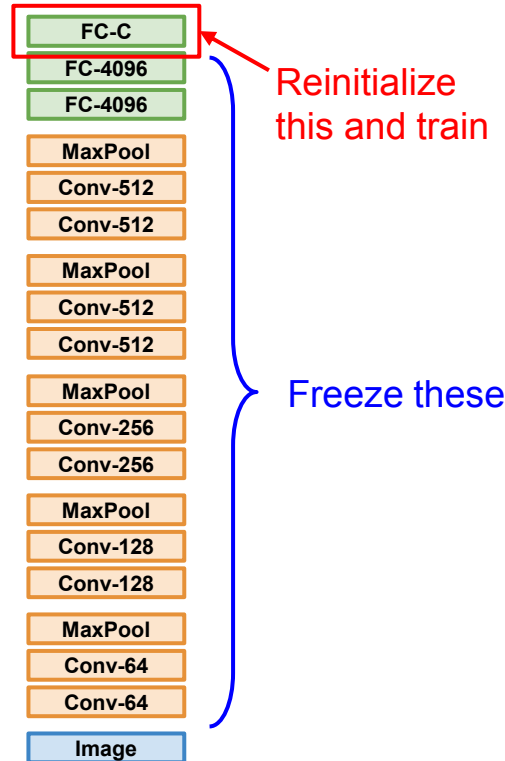

3. Bigger dataset

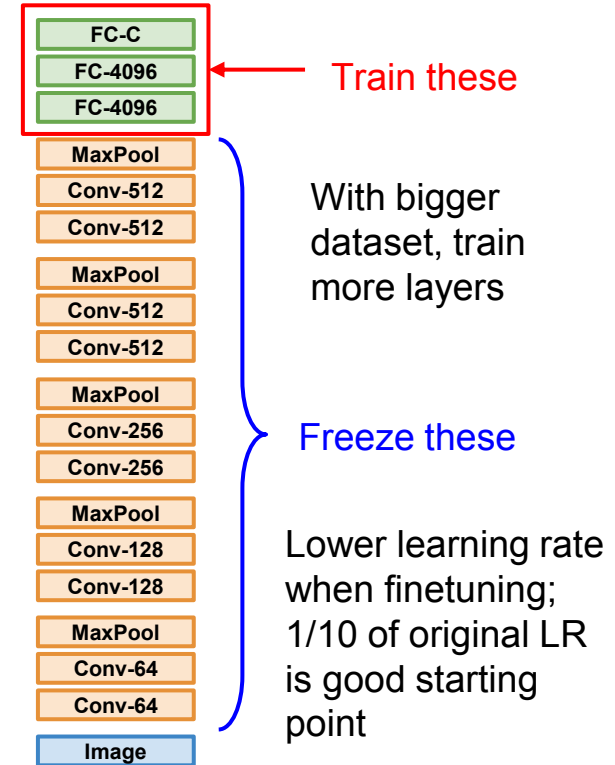



More specific

More generic

	very similar dataset	very different dataset
very little data	?	?
quite a lot of data	?	?



More specific

More generic

	very similar dataset	very different dataset
very little data	Use Linear Classifier on top layer	?
quite a lot of data	Finetune a few layers	?




More specific

More generic

	very similar dataset	very different dataset
very little data	Use Linear Classifier on top layer	You're in trouble... Try linear classifier from different stages
quite a lot of data	Finetune a few layers	Finetune a larger number of layers or start from scratch!


Transfer learning with CNNs is pervasive... (it's the norm, not an exception)

Object Detection (Fast R-CNN)

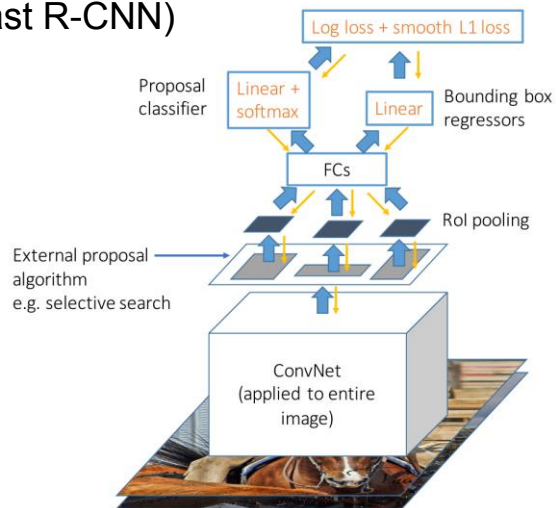

Girshick, "Fast R-CNN", ICCV 2015
Figure copyright Ross Girshick, 2015. Reproduced with permission.


Image Captioning: CNN + RNN

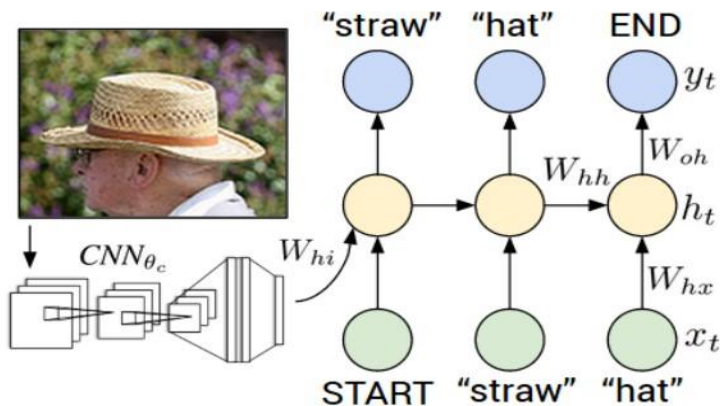

Karpathy and Fei-Fei, "Deep Visual-Semantic Alignments for
Generating Image Descriptions", CVPR 2015
Figure copyright IEEE, 2015. Reproduced for educational purposes.


Transfer learning with CNNs is pervasive... (it's the norm, not an exception)

Object Detection (Fast R-CNN)

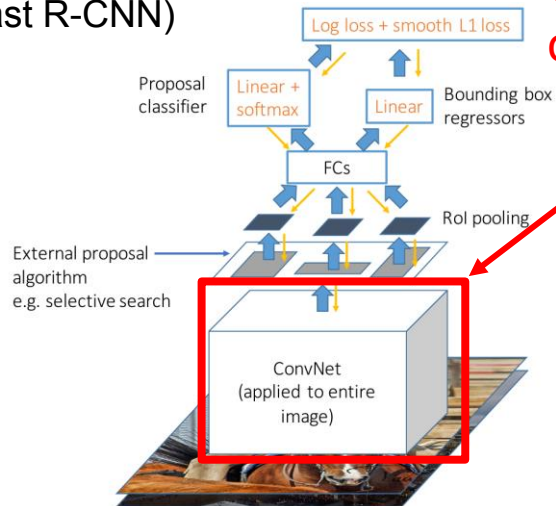

**CNN pretrained
on ImageNet**

Image Captioning: CNN + RNN

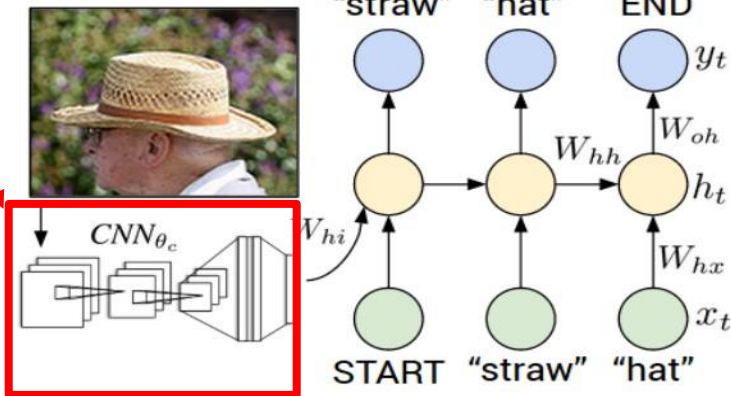


Girshick, "Fast R-CNN", ICCV 2015
Figure copyright Ross Girshick, 2015. Reproduced with permission.

Karpathy and Fei-Fei, "Deep Visual-Semantic Alignments for
Generating Image Descriptions", CVPR 2015
Figure copyright IEEE, 2015. Reproduced for educational purposes.


Transfer learning with CNNs is pervasive... (it's the norm, not an exception)

Object Detection (Fast R-CNN)

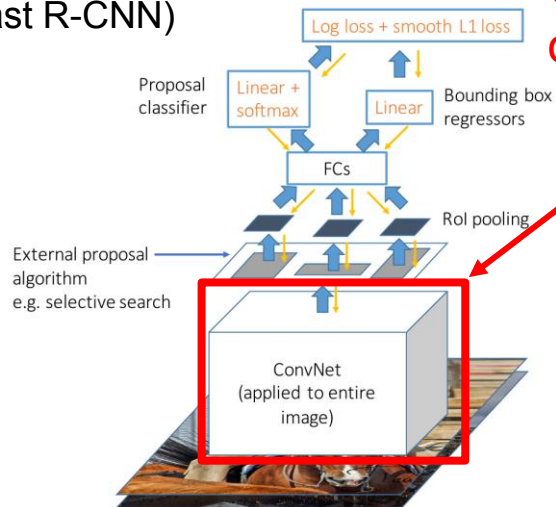

**CNN pretrained
on ImageNet**

Image Captioning: CNN + RNN

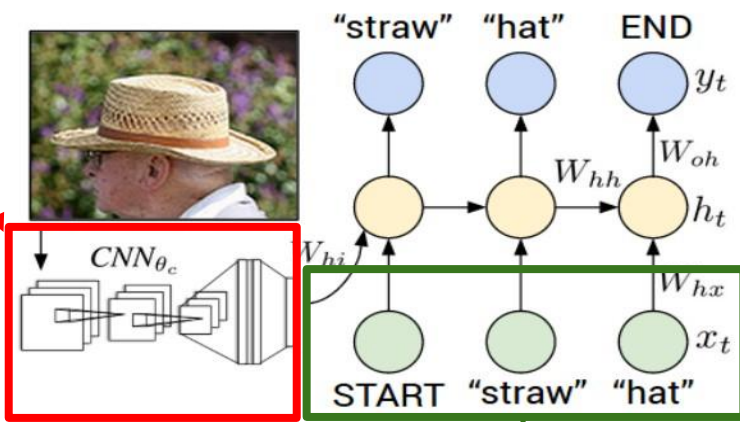


**Word vectors pretrained
with word2vec**

Karpathy and Fei-Fei, "Deep Visual-Semantic Alignments for Generating Image Descriptions", CVPR 2015
Figure copyright IEEE, 2015. Reproduced for educational purposes.

Girshick, "Fast R-CNN", ICCV 2015
Figure copyright Ross Girshick, 2015. Reproduced with permission.

Transfer learning with CNNs - Architecture matters


Object detection on MSCOCO

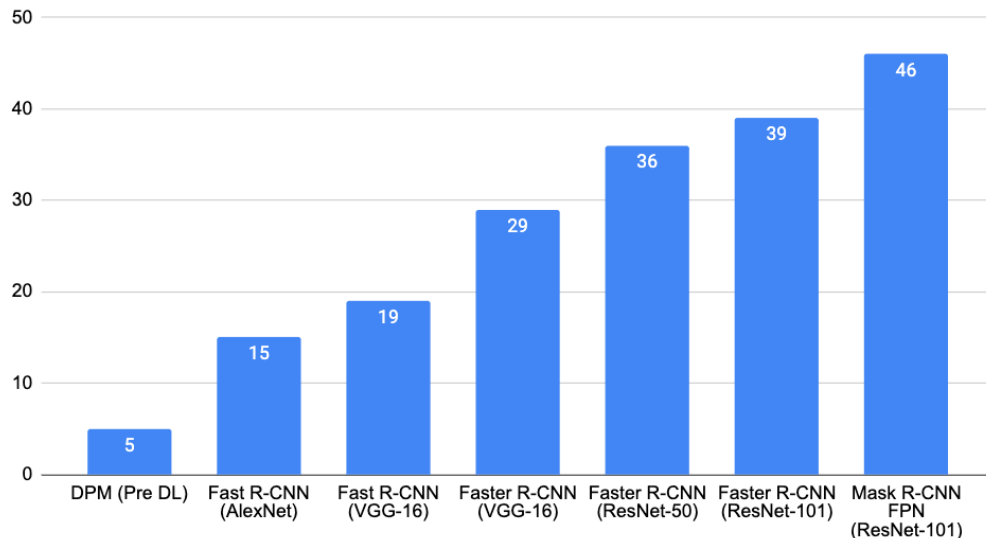

Girshick, "The Generalized R-CNN Framework for Object Detection", ICCV 2017 Tutorial on Instance-Level Visual Recognition

Transfer learning with CNNs is pervasive...

But it might not always be necessary!

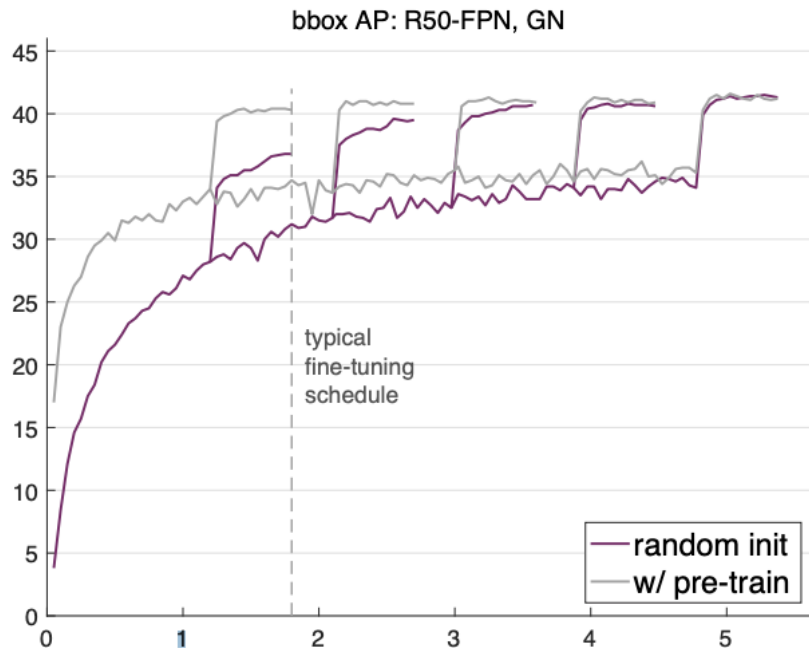

He et al, "Rethinking ImageNet Pre-training", ICCV 2019
Figure copyright Kai ming He, 2019. Reproduced with permission.

Training from scratch can work just as well as training from a pretrained ImageNet model for object detection

But it takes 2-3x as long to train.

They also find that collecting more data is better than finetuning on a related task

Takeaway for your projects and beyond:

Have some dataset of interest but it has $< \sim 1\text{M}$ images?


1. Find a very large dataset that has similar data, train a big model there
2. Transfer learn to your dataset

Deep learning frameworks provide a “Model Zoo” of pretrained models so you don’t need to train your own

TensorFlow: <https://github.com/tensorflow/models>

PyTorch: <https://github.com/pytorch/vision>

ImageNet Large Scale Visual Recognition Challenge (ILSVRC) winners


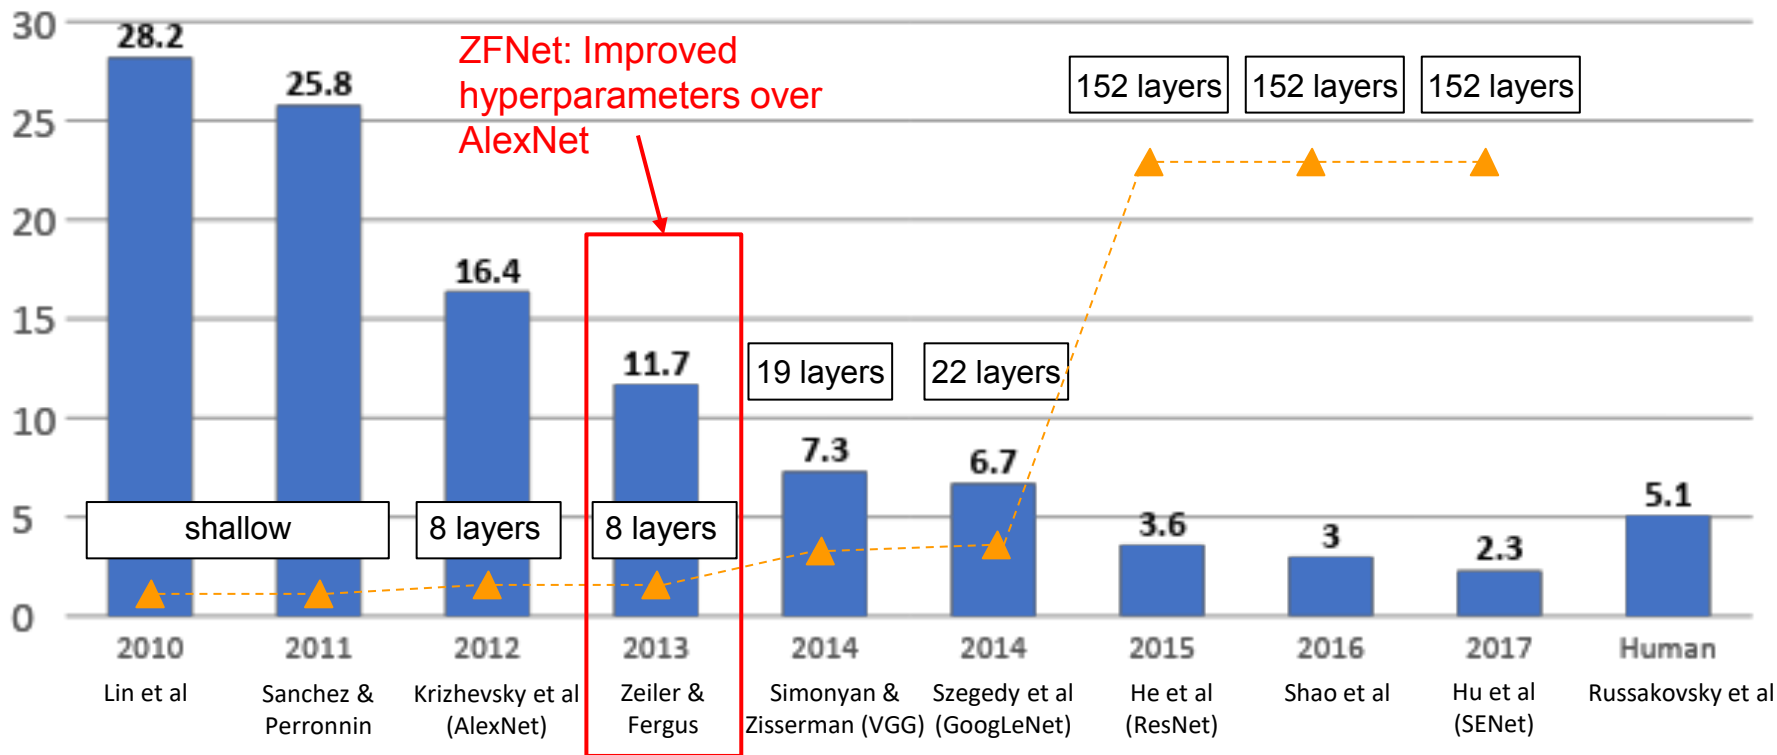


Case Study: GoogLeNet

[Szegedy et al., 2014]

Deeper networks, with computational efficiency



- ILSVRC'14 classification winner (6.7% top 5 error)
- 22 layers
- Only 5 million parameters!
12x less than AlexNet
27x less than VGG-16
- Efficient “Inception” module
- No FC layers

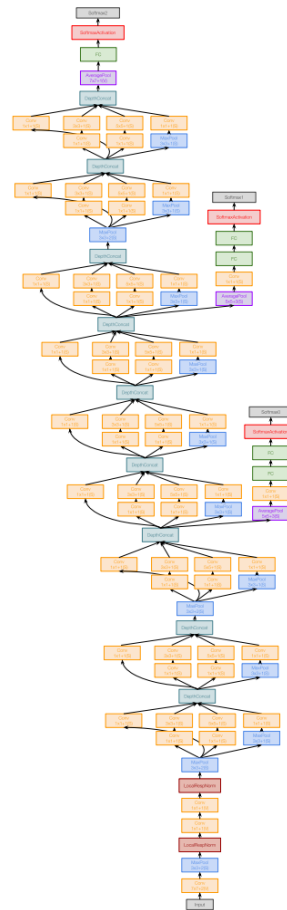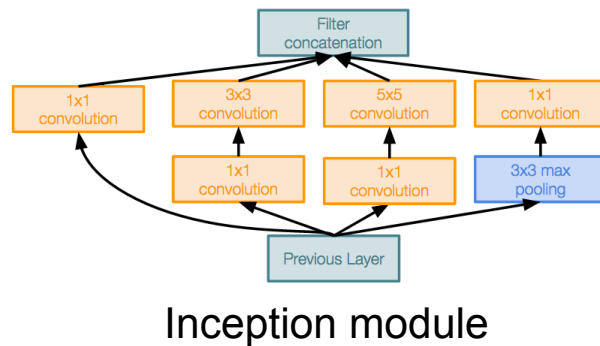

Case Study: GoogLeNet


[Szegedy et al., 2014]

“Inception module”: design a good local network topology (network within a network) and then stack these modules on top of each other

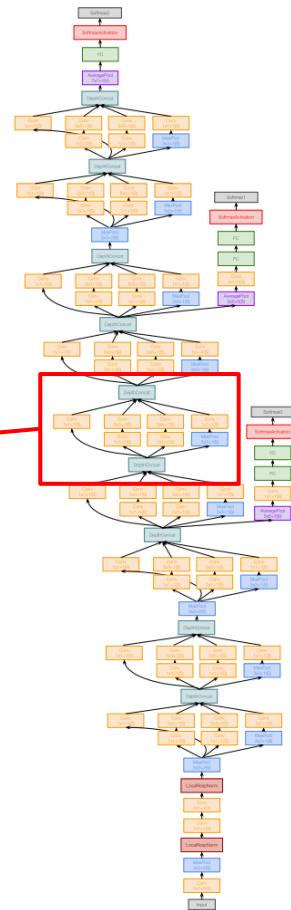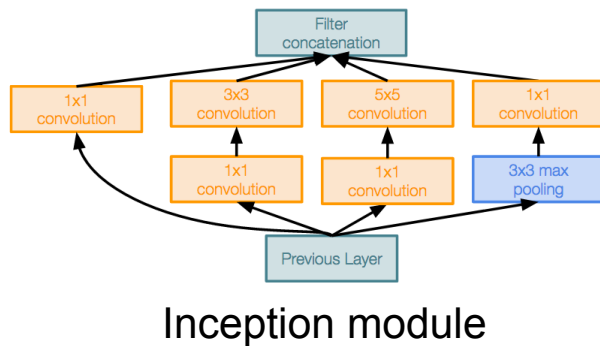

Case Study: GoogLeNet

[Szegedy et al., 2014]

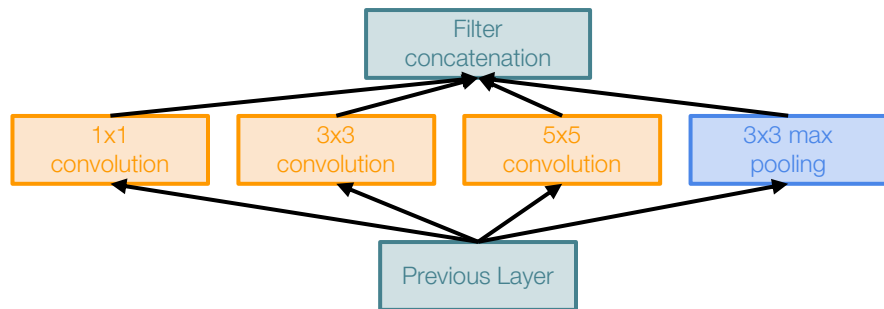

Naive Inception module


Apply parallel filter operations on the input from previous layer:

- Multiple receptive field sizes for convolution (1x1, 3x3, 5x5)
- Pooling operation (3x3)

Concatenate all filter outputs together channel-wise

Case Study: GoogLeNet

[Szegedy et al., 2014]

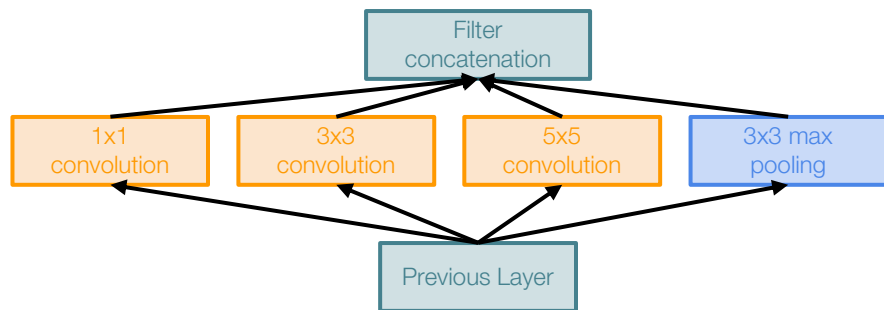

Naive Inception module

Apply parallel filter operations on the input from previous layer:

- Multiple receptive field sizes for convolution (1x1, 3x3, 5x5)
- Pooling operation (3x3)

Concatenate all filter outputs together channel-wise


Q: What is the problem with this?
[Hint: Computational complexity]

Case Study: GoogLeNet

[Szegedy et al., 2014]

Q: What is the problem with this?
[Hint: Computational complexity]

Example:

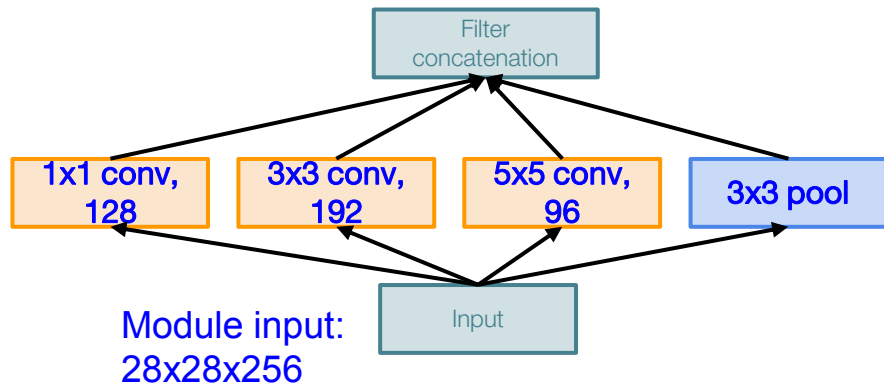

Naive Inception module


Case Study: GoogLeNet

[Szegedy et al., 2014]

Q: What is the problem with this?
[Hint: Computational complexity]

Example:

Q1: What are the output sizes of all different filter operations?

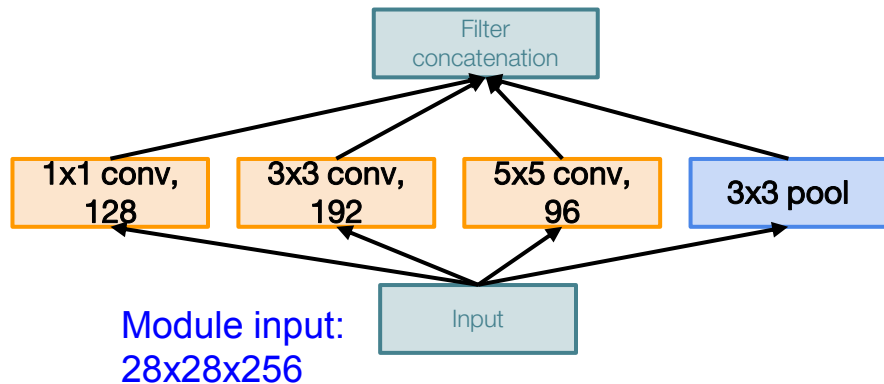

Naive Inception module


Case Study: GoogLeNet

[Szegedy et al., 2014]

Q: What is the problem with this?
[Hint: Computational complexity]

Example:

Q1: What are the output sizes of all different filter operations?

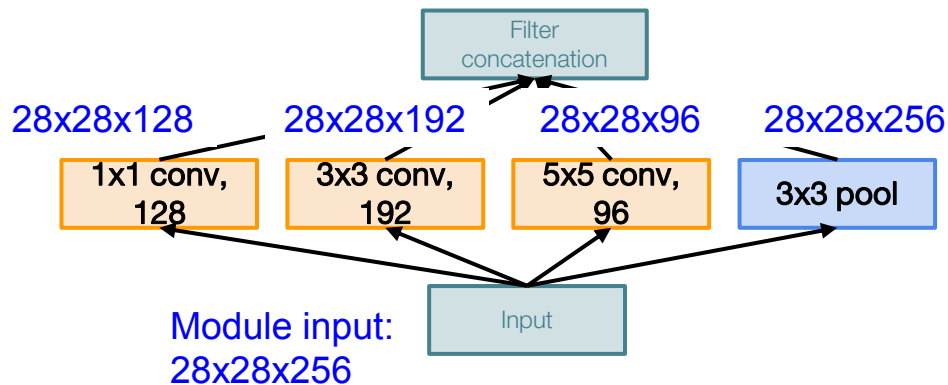

Naive Inception module


Case Study: GoogLeNet

[Szegedy et al., 2014]

Q: What is the problem with this?
[Hint: Computational complexity]

Example:

Q2: What is output size after
filter concatenation?

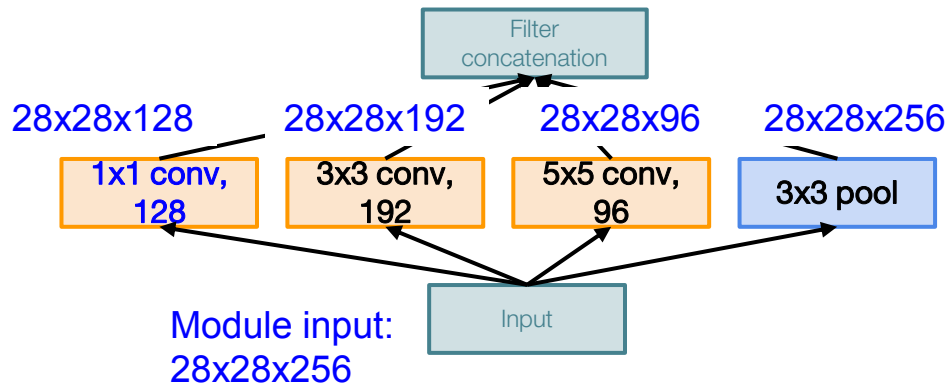

Naive Inception module

Case Study: GoogLeNet


[Szegedy et al., 2014]

Q: What is the problem with this?
[Hint: Computational complexity]

Example:

Q2: What is output size after
filter concatenation?

$$28 \times 28 \times (128 + 192 + 96 + 256) = 28 \times 28 \times 672$$

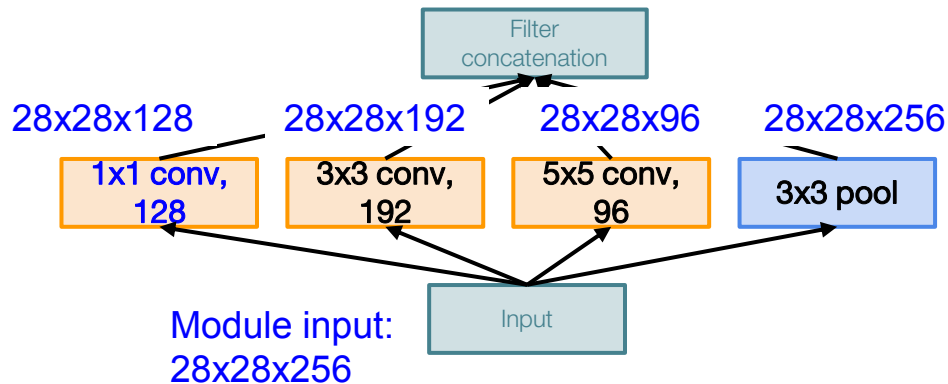

Naive Inception module


Case Study: GoogLeNet

[Szegedy et al., 2014]

Example:

Q2: What is output size after filter concatenation?

$$28 \times 28 \times (128 + 192 + 96 + 256) = 28 \times 28 \times 672$$

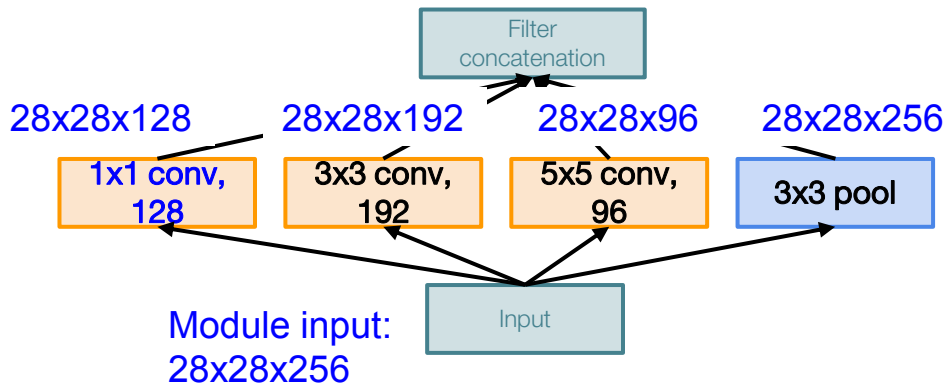

Naive Inception module

Q: What is the problem with this?
[Hint: Computational complexity]

Conv Ops:

[1x1 conv, 128] $28 \times 28 \times 128 \times 1 \times 1 \times 256$

[3x3 conv, 192]

$28 \times 28 \times 192 \times 3 \times 3 \times 256$

[5x5 conv, 96] $28 \times 28 \times 96 \times 5 \times 5 \times 256$

Total: 854M ops


Case Study: GoogLeNet

[Szegedy et al., 2014]

Example:

Q2: What is output size after filter concatenation?

$$28 \times 28 \times (128 + 192 + 96 + 256) = 28 \times 28 \times 672$$

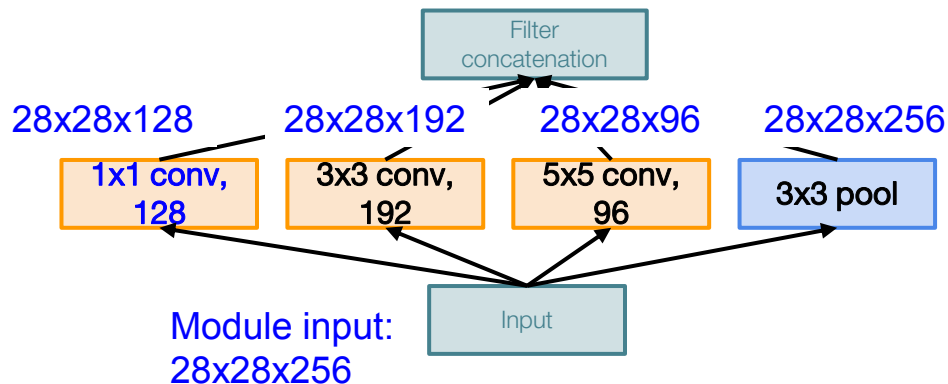

Naive Inception module

Q: What is the problem with this?
[Hint: Computational complexity]

Conv Ops:

[1x1 conv, 128] $28 \times 28 \times 128 \times 1 \times 1 \times 256$

[3x3 conv, 192]

$28 \times 28 \times 192 \times 3 \times 3 \times 256$

[5x5 conv, 96] $28 \times 28 \times 96 \times 5 \times 5 \times 256$

Total: 854M ops

Very expensive compute


Pooling layer also preserves feature depth, which means total depth after concatenation can only grow at every layer!

Case Study: GoogLeNet

[Szegedy et al., 2014]

Example:

Q2: What is output size after filter concatenation?

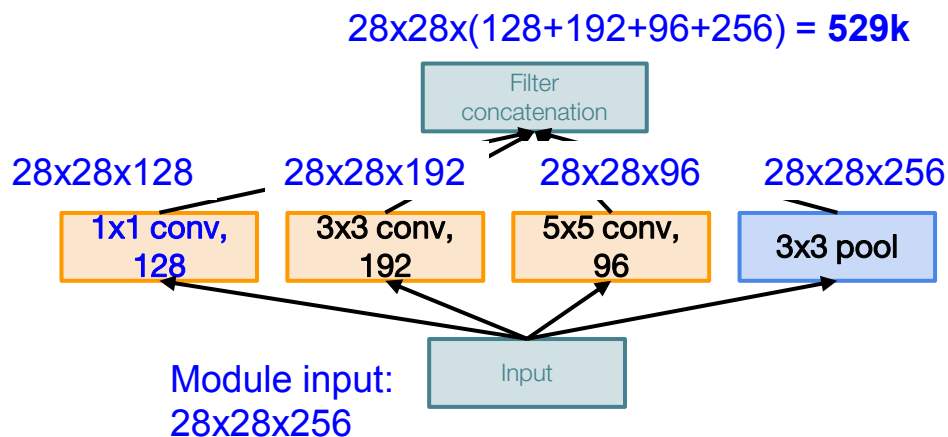


Naive Inception module

Q: What is the problem with this?
[Hint: Computational complexity]


Solution: “bottleneck” layers that use 1×1 convolutions to reduce feature channel size

Review: 1x1 convolutions

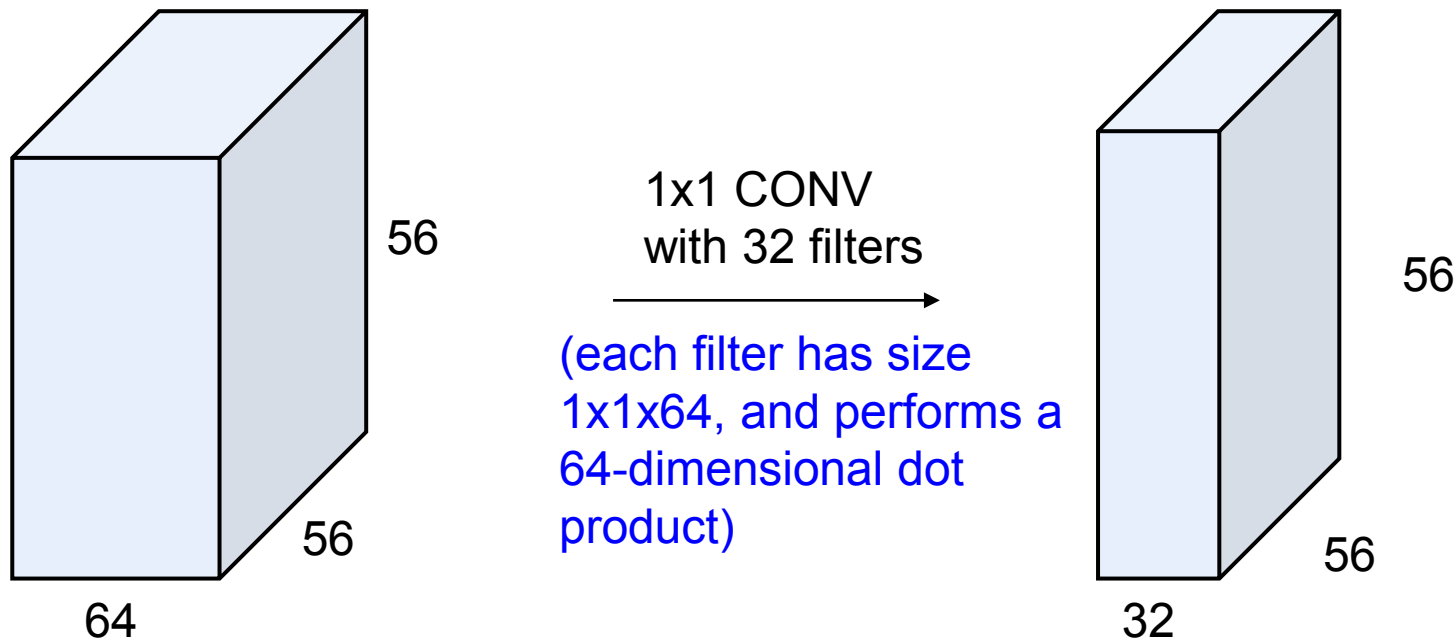


Review: 1x1 convolutions

Alternatively, interpret it as applying the same FC layer on each input pixel

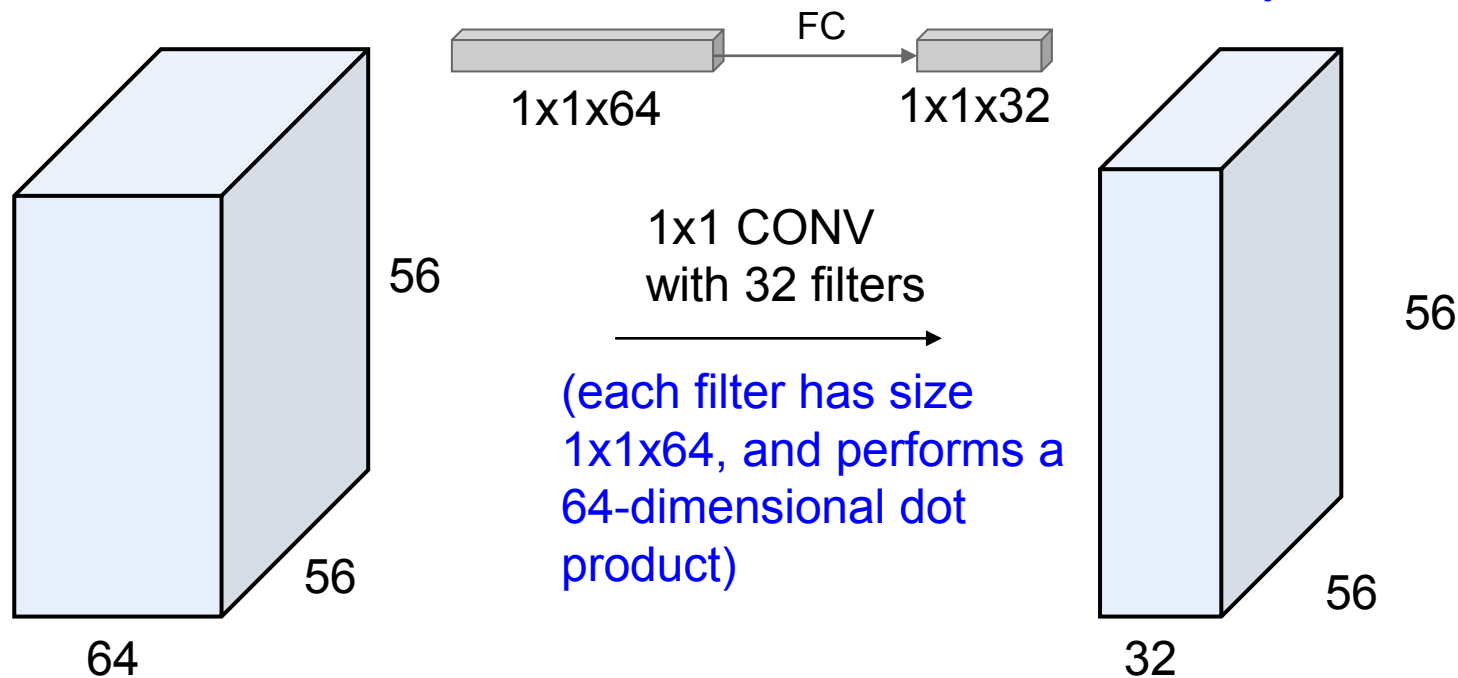


Review: 1x1 convolutions

Alternatively, interpret it as applying the same FC layer on each input pixel

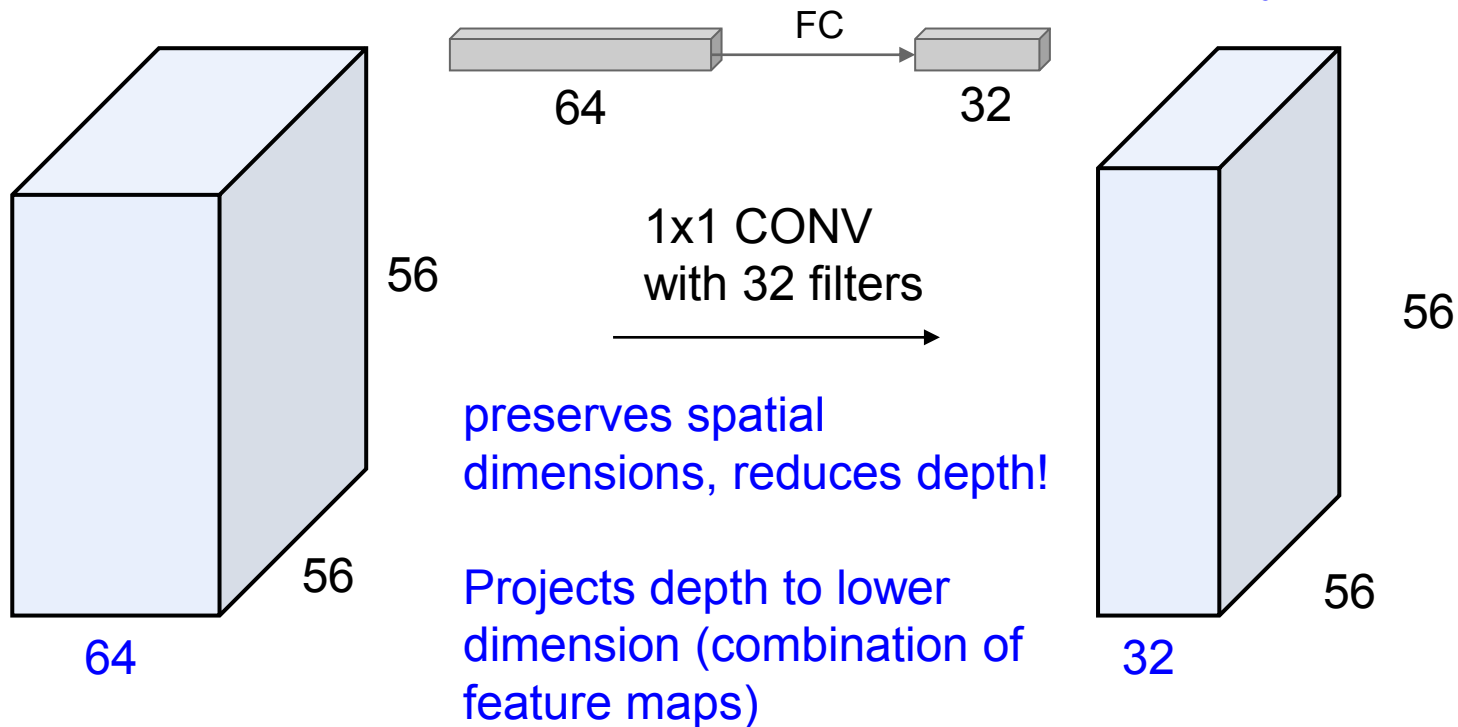


Case Study: GoogLeNet

[Szegedy et al., 2014]

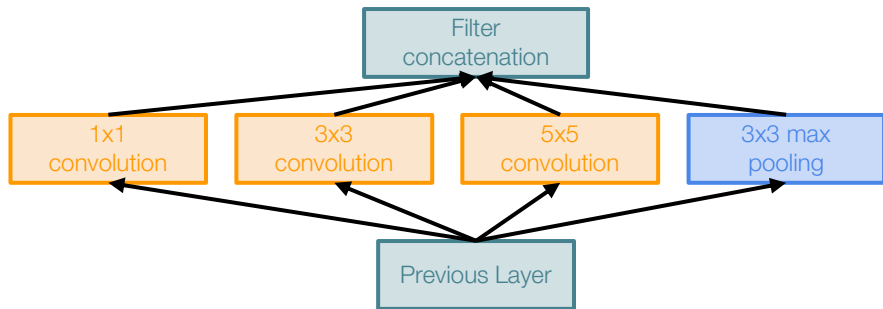


Naive Inception module

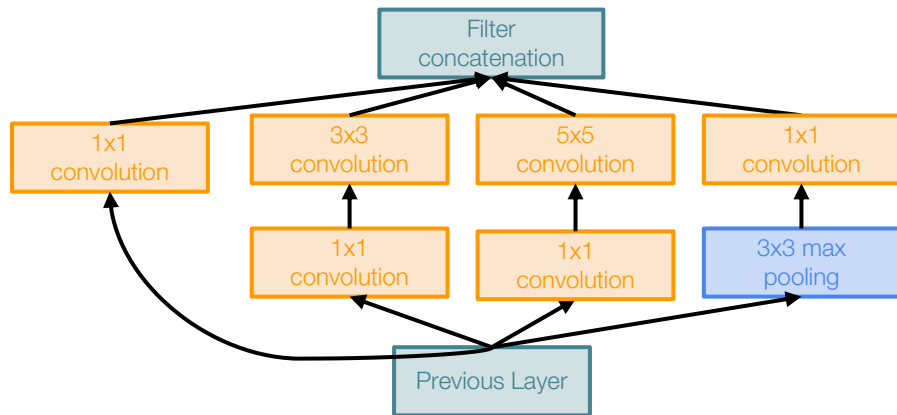

Inception module with dimension reduction


Case Study: GoogLeNet

[Szegedy et al., 2014]

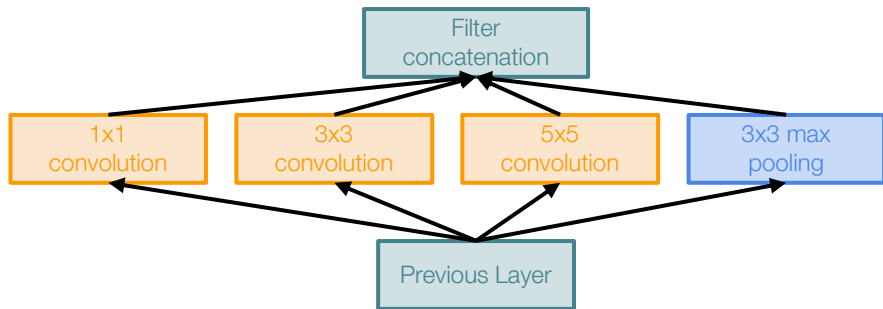

Naive Inception module


1x1 conv “bottleneck”
layers

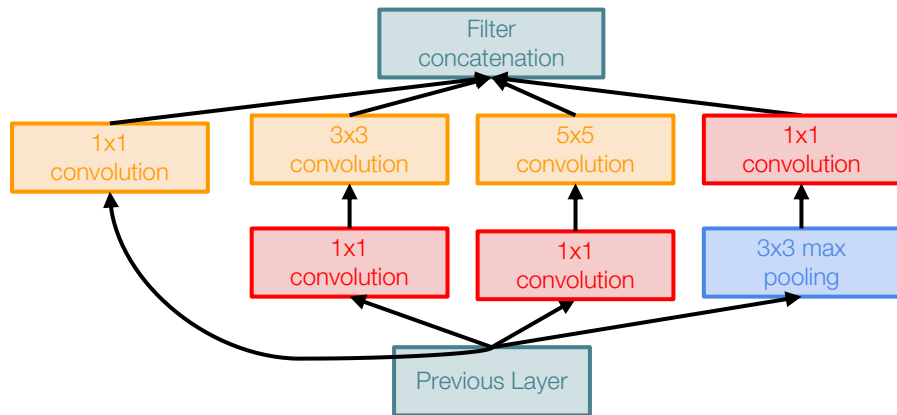

Inception module with dimension reduction

Case Study: GoogLeNet

[Szegedy et al., 2014]

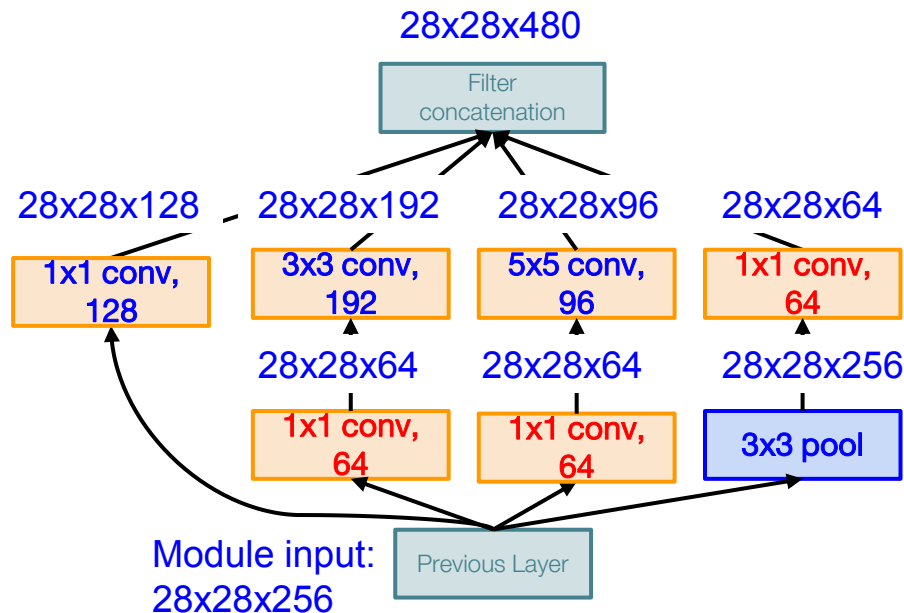

Inception module with dimension reduction

Using same parallel layers as naive example, and adding “1x1 conv, 64 filter” bottlenecks:

Conv Ops:

[1x1 conv, 64] 28x28x64x1x1x256
[1x1 conv, 64] 28x28x64x1x1x256
[1x1 conv, 128] 28x28x128x1x1x256
[3x3 conv, 192] 28x28x192x3x3x64
[5x5 conv, 96] 28x28x96x5x5x64
[1x1 conv, 64] 28x28x64x1x1x256

Total: 358M ops



Compared to 854M ops for naive version

Bottleneck can also reduce depth after pooling layer

Case Study: GoogLeNet


[Szegedy et al., 2014]

Stack Inception modules
with dimension reduction
on top of each other

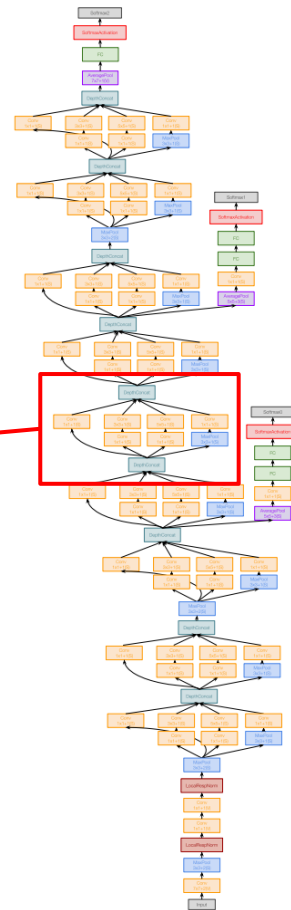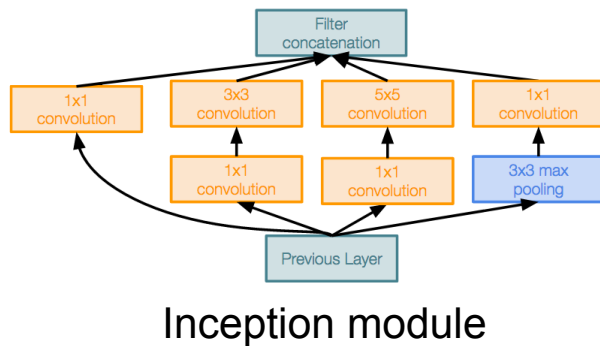

[Szegedy et al., 2014]

Full GoogLeNet architecture

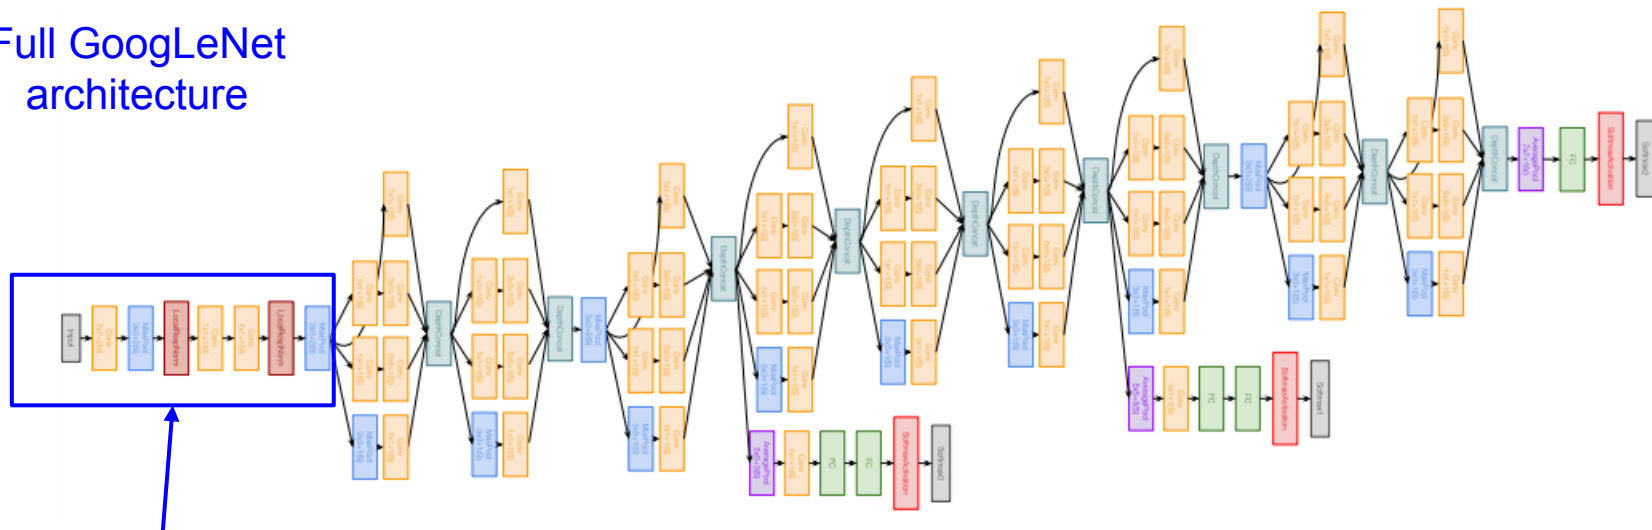


Stem Network:
Conv-Pool-
2x Conv-Pool

Case Study: GoogLeNet

[Szegedy et al., 2014]

Full GoogLeNet
architecture

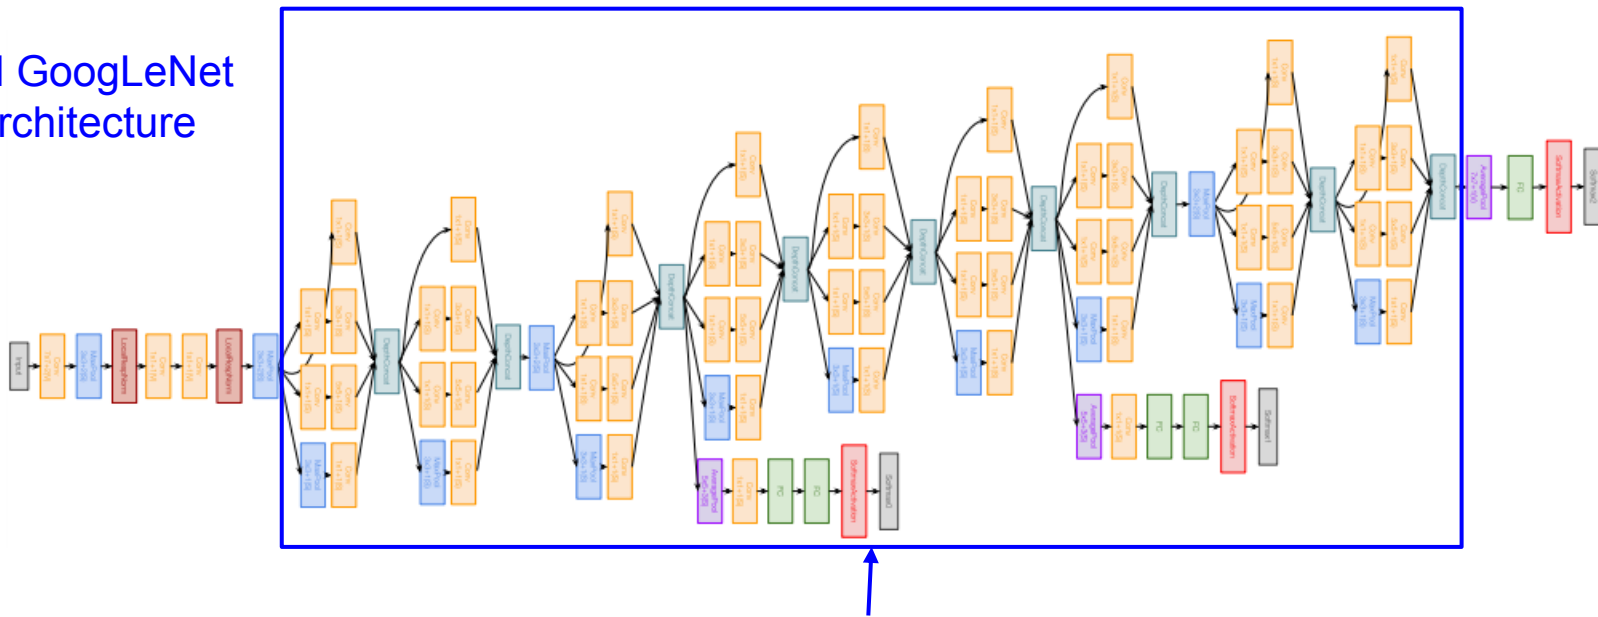


Stacked Inception
Modules

Case Study: GoogLeNet

[Szegedy et al., 2014]


Full GoogLeNet
architecture

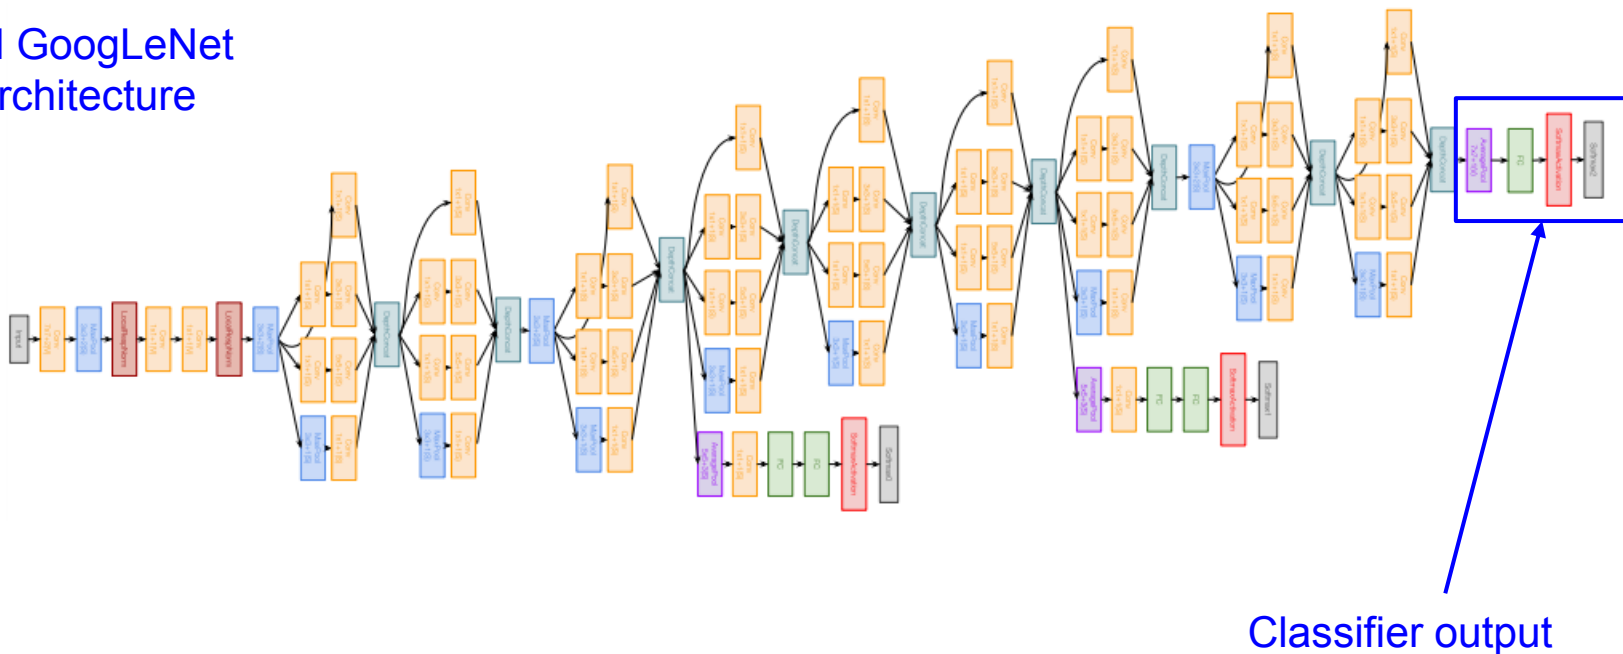

Case Study: GoogLeNet

[Szegedy et al., 2014]

Full GoogLeNet architecture

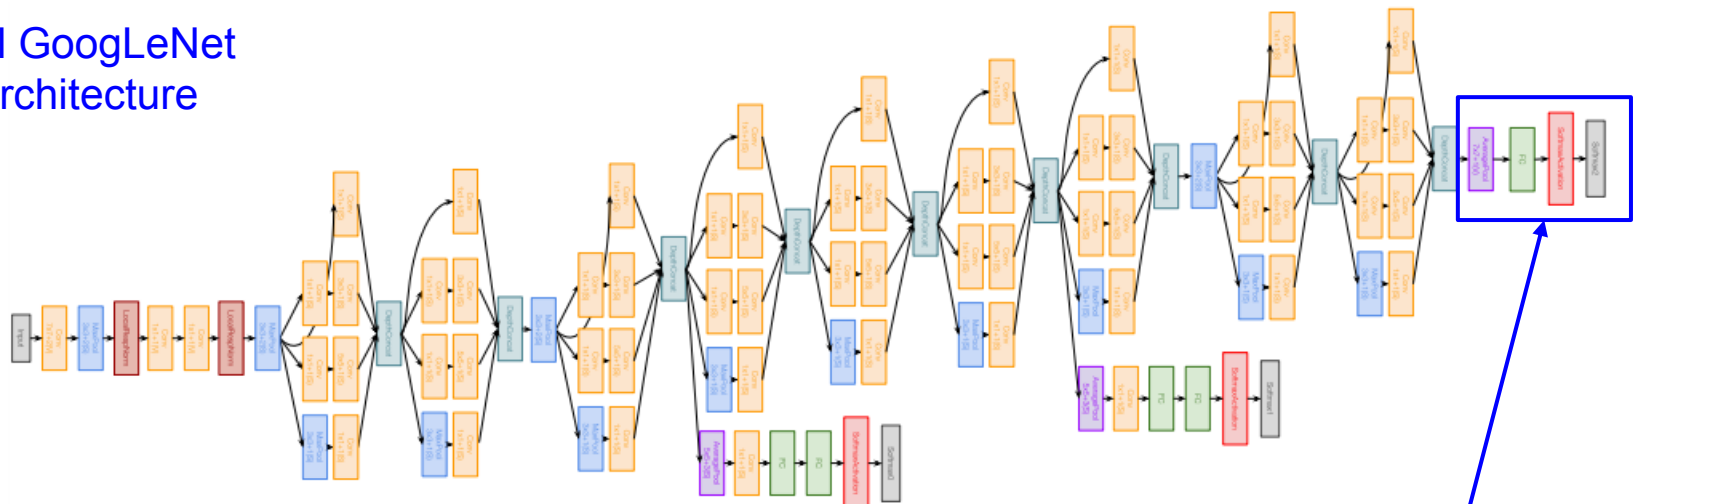


Note: after the last convolutional layer, a global average pooling layer is used that spatially averages across each feature map, before final FC layer. No longer multiple expensive FC layers!

Classifier output

Case Study: GoogLeNet

[Szegedy et al., 2014]


Full GoogLeNet
architecture

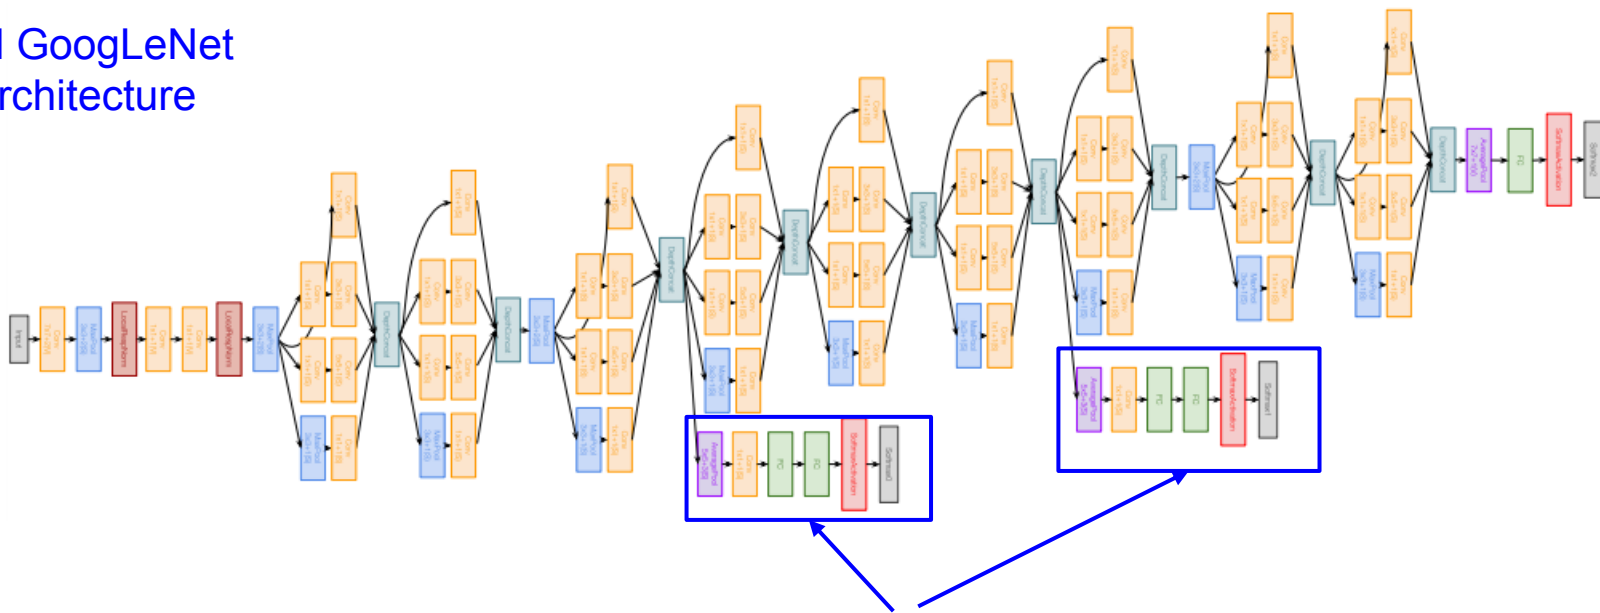

Auxiliary classification outputs to inject additional gradient at lower layers (AvgPool-1x1Conv-FC-FC-Softmax)

[Szegedy et al., 2014]

Full GoogLeNet architecture

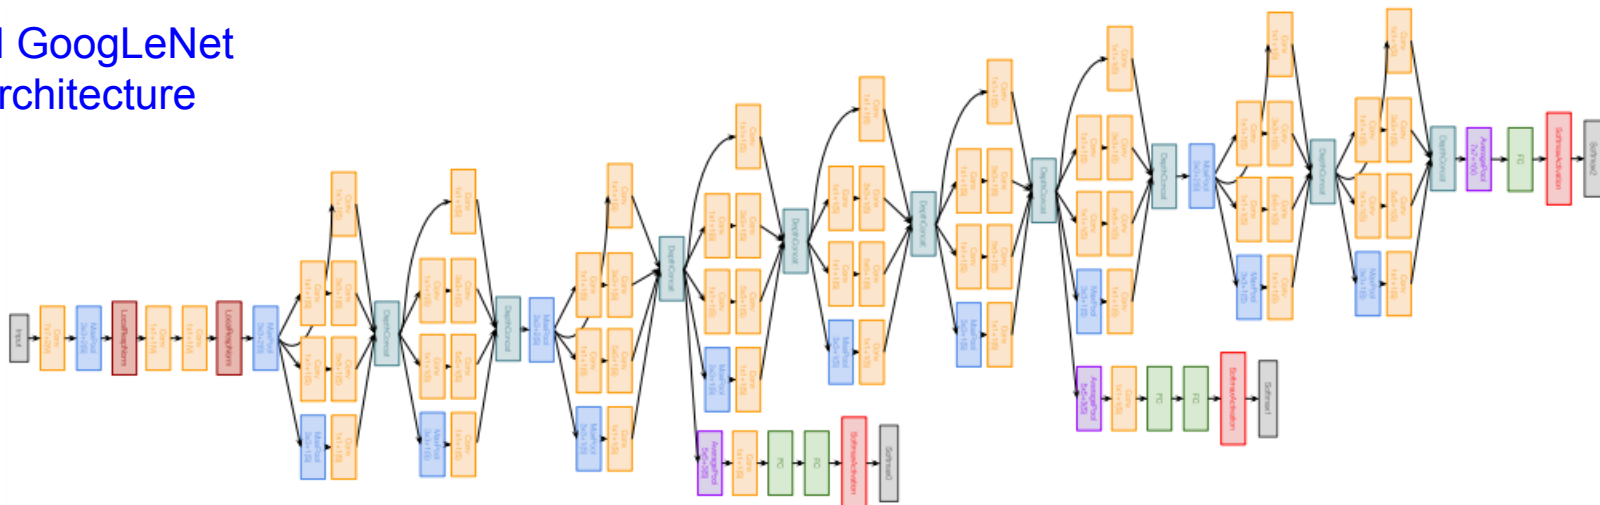


22 total layers with weights

(parallel layers count as 1 layer => 2 layers per Inception module. Don't count auxiliary output layers)

Next time: Training Neural Networks

How to improve single-model performance?

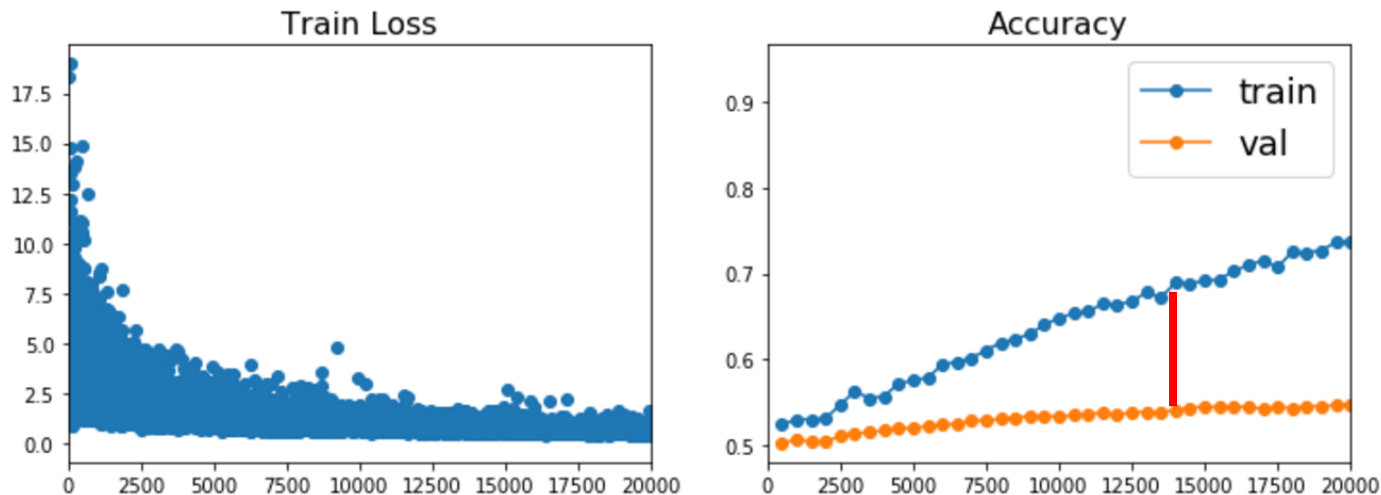

Regularization

Regularization: Add term to loss

$$L = \frac{1}{N} \sum_{i=1}^N \sum_{j \neq y_i} \max(0, f(x_i; W)_j - f(x_i; W)_{y_i} + 1) + \lambda R(W)$$

In common use:

L2 regularization

$$R(W) = \sum_k \sum_l W_{k,l}^2 \quad (\text{Weight decay})$$


L1 regularization

$$R(W) = \sum_k \sum_l |W_{k,l}|$$


Elastic net (L1 + L2)

$$R(W) = \sum_k \sum_l \beta W_{k,l}^2 + |W_{k,l}|$$

Regularization: Data Augmentation

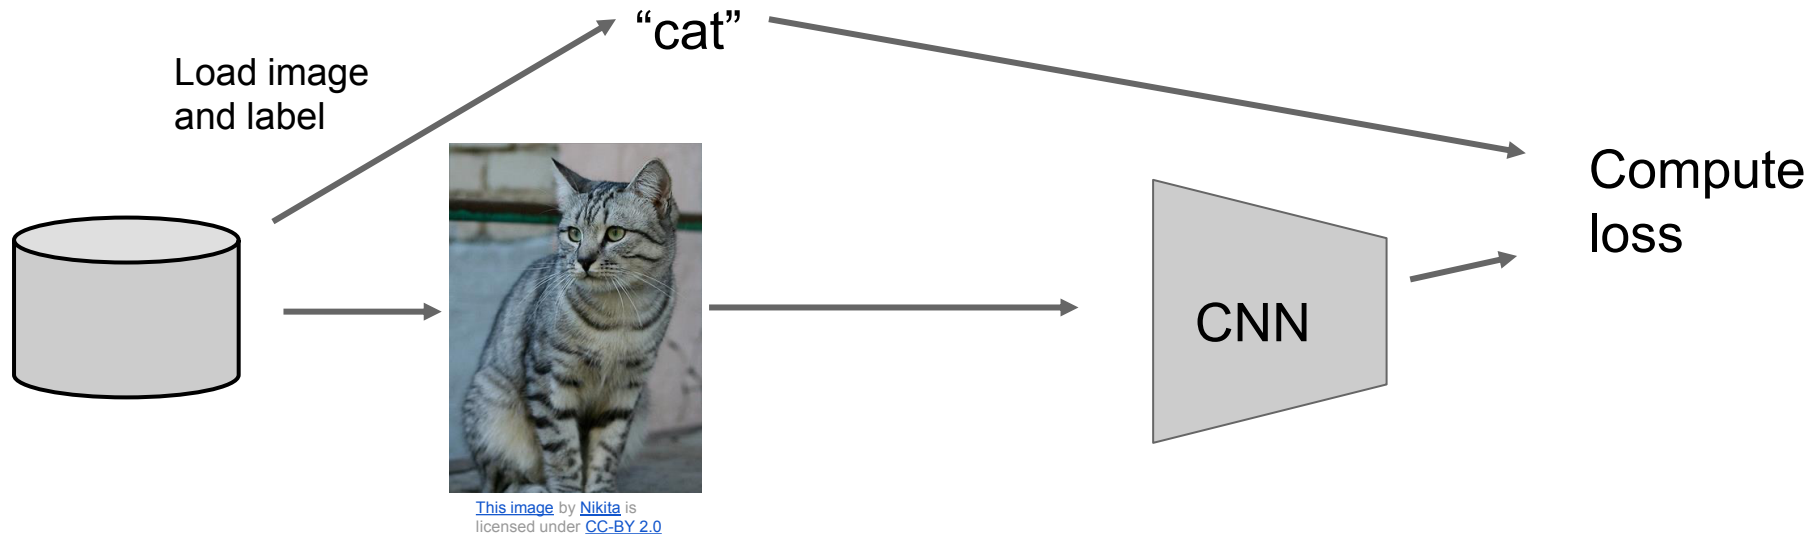

Regularization: Data Augmentation

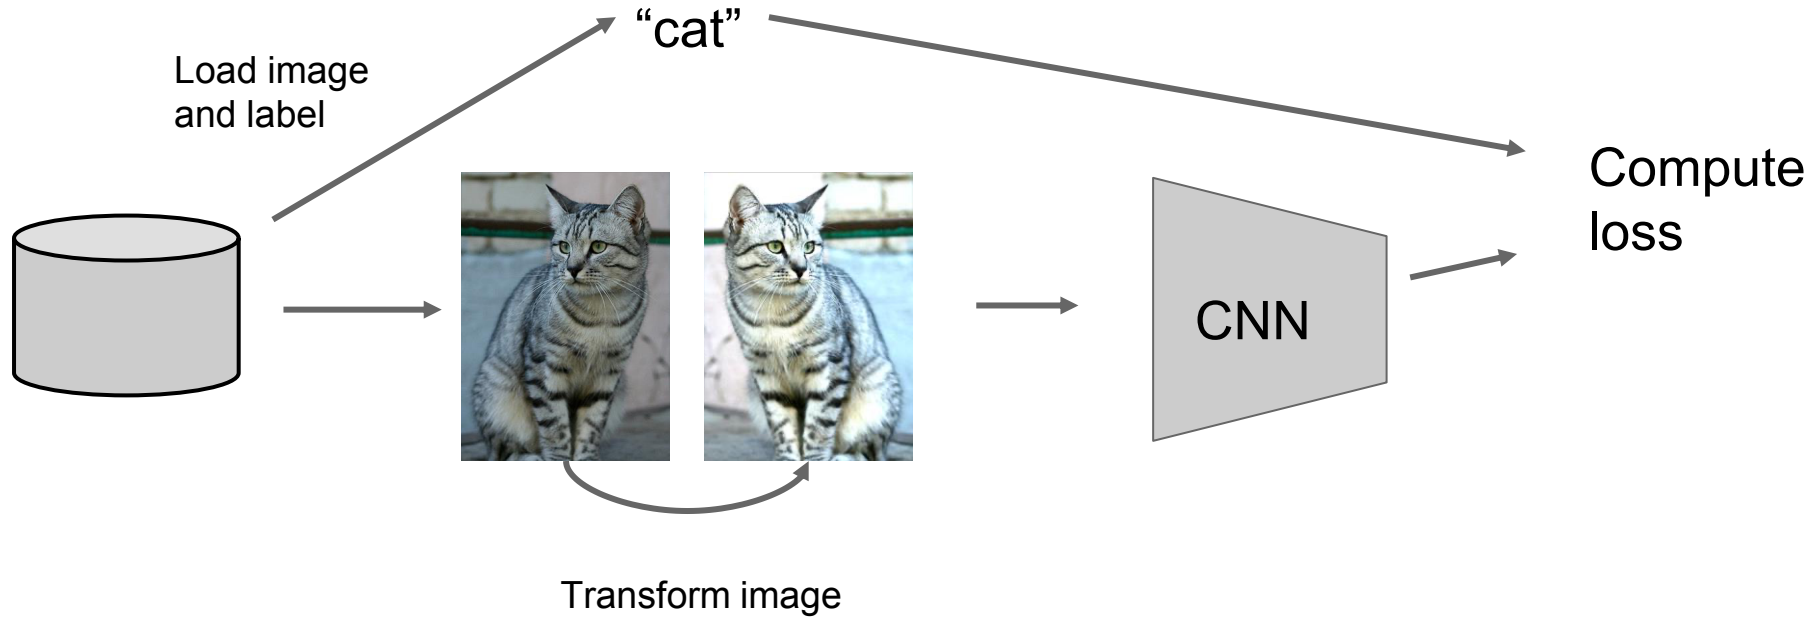

Data Augmentation

Horizontal Flips




Data Augmentation

Random crops and scales

Training: sample random crops / scales

ResNet:

1. Pick random L in range $[256, 480]$
2. Resize training image, short side = L
3. Sample random 224×224 patch

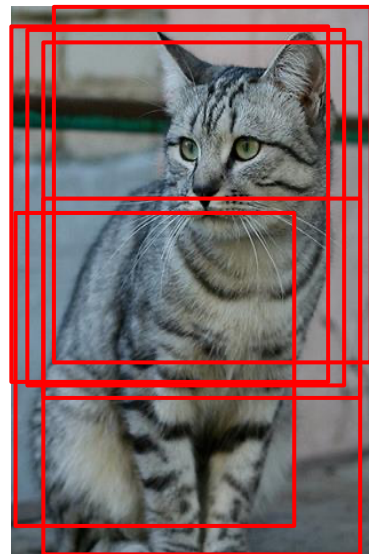


Data Augmentation

Random crops and scales

Training: sample random crops / scales

ResNet:

1. Pick random L in range $[256, 480]$
2. Resize training image, short side = L
3. Sample random 224×224 patch

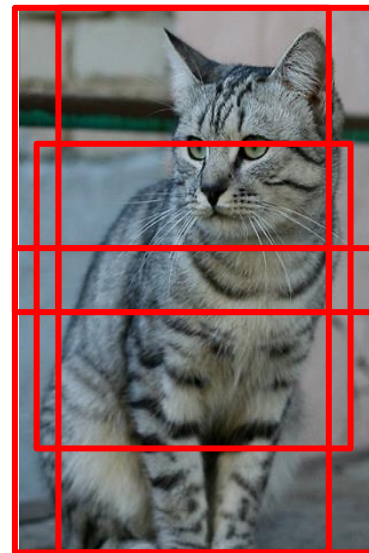

Testing: average a fixed set of crops

ResNet:

1. Resize image at 5 scales: $\{224, 256, 384, 480, 640\}$
2. For each size, use 10 224×224 crops: 4 corners + center, + flips

Data Augmentation

Color Jitter

Simple: Randomize
contrast and brightness





















Data Augmentation

Get creative for your problem!

Examples of data augmentations:

- translation
- rotation
- stretching
- shearing,
- lens distortions, ... (go crazy)

Automatic Data Augmentation

	Original	Sub-policy 1	Sub-policy 2	Sub-policy 3	Sub-policy 4	Sub-policy 5
Batch 1						
Batch 2						
Batch 3						
		ShearX, 0.9, 7 Invert, 0.2, 3	ShearY, 0.7, 6 Solarize, 0.4, 8	ShearX, 0.9, 4 AutoContrast, 0.8, 3	Invert, 0.9, 3 Equalize, 0.6, 3	ShearY, 0.8, 5 AutoContrast, 0.7, 3

Cubuk et al., "AutoAugment: Learning Augmentation Strategies from Data", CVPR 2019

Regularization: Cutout

Training: Set random image regions to zero

Testing: Use full image


Examples:

Dropout

Batch Normalization

Data Augmentation

Cutout / Random Crop

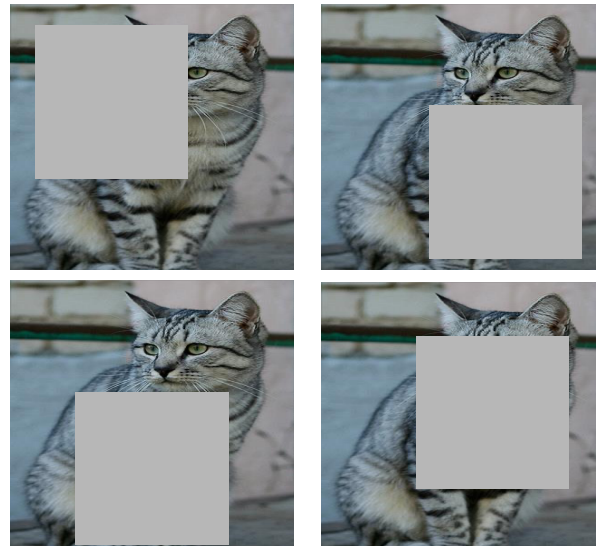


Works very well for small datasets like CIFAR,
less common for large datasets like ImageNet

DeVries and Taylor, "Improved Regularization of
Convolutional Neural Networks with Cutout", arXiv 2017

Regularization: Mixup

Training: Train on random blends of images

Testing: Use original images

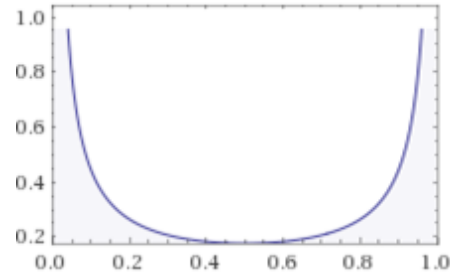

Examples:

Dropout

Batch Normalization

Data Augmentation


DropConnect

Fractional Max Pooling


Stochastic Depth

Cutout / Random Crop

Mixup

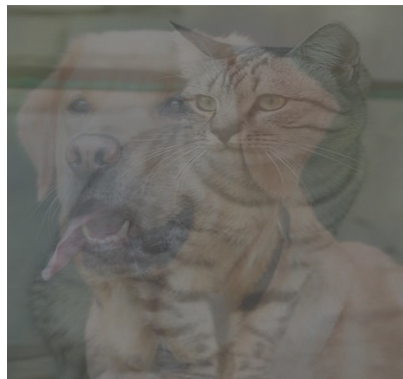

Randomly blend the pixels of pairs of training images, e.g. 40% cat, 60% dog



Target label:
cat: 0.4
dog: 0.6

Zhang et al, "*mixup*: Beyond Empirical Risk Minimization", ICLR 2018