


Chapter IV: Frequency Analysis of Discrete Signals

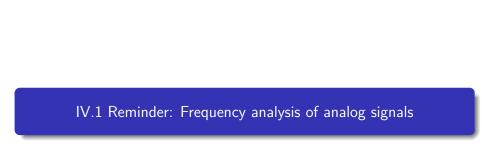

Introduction

- Very useful to analyze signals in frequency domain
- ▶ The **spectrum** of a signal indicates the frequency contents
- Mathematical tools:
 - periodical signals: Fourier series
 - non-periodical signals: Fourier transform

Analog periodical signals

Periodical signal:

$$x(t) = x(t+T)$$

► The fundamental frequency is

$$F_0 = \frac{1}{T}$$

► The signal can be decomposed as a sum of complex exponential signals, with multiples of the fundamental frequency, kF_0

$$x(t) = \sum_{k=-\infty}^{\infty} c_k e^{j2\pi k F_0 t}$$

Analog periodical signals

 \triangleright The coefficients c_k are the **spectrum** of the signal

$$c_k = \frac{1}{T} \int_{T/2}^{T/2} x(t) e^{-j2\pi k F_0 t}$$

- \triangleright The coefficients c_k are complex values
 - ▶ their modulus = "amplitude spectrum"
 - their phase = "phase spectrum"

Signal spectrum

- \triangleright The coefficients c_k are complex numbers
- ▶ If the signal is **real** $x(t) \in \mathbb{R}$, then the c_k are **even**
 - $|c_k| = |c_{-k}|$
 - $ightharpoonup \angle c_k = -\angle c_{-k}$
 - ▶ group the terms with c_k with c_{-k} →> cosine with amplitude $|c_k|$ and phase $\angle c_k$
- ▶ Interpretation of Fourier series for real signal
 - ▶ the signal is the sum of cosine signals with frequencies 0, F_0 , $2F_0$..., each with amplitude $|c_k|$ and initial phase $\angle c_k$
- No other frequencies appear in spectrum -> spectrum is made of "lines"

Energy conservation

► Average power of signal = energy of coefficients

$$P_T = \frac{1}{T} \int_T |x(t)|^2 = \sum_{-\infty}^{\infty} |c_k|^2$$

Time-frequency duality

- ► Time-frequency **duality**:
 - ► Real signal -> Even spectrum
 - ► Periodic signal -> Discrete spectrum

Analog non-periodical signals

▶ The signal is composed of all frequencies (inverse Fourier transform)

$$x(t) = \frac{1}{2\pi} \int_{-\infty}^{\infty} X(\omega) e^{j\omega t} d\omega$$

The frequency content is found by the Fourier transform

$$X(\omega) = \int_{-\infty}^{\infty} x(t)e^{-j\omega t}dt$$

- (Remember: $\omega = 2\pi F$)
- $ightharpoonup X(\omega)$ is a complex function
 - $ightharpoonup |X(\omega)|$ is the amplitude spectrum
 - $ightharpoonup \angle X(\omega)$ is the phase spectrum

Signal spectrum

- \triangleright $X(\omega)$ is a complex function
- ▶ If the signal is **real** $x(t) \in \mathbb{R}$, then the $X(\omega)$ is **even**
 - $|X(\omega)| = |X(-\omega)|$
 - \triangleright $\angle X(\omega) = -\angle X(-\omega)$
 - ▶ group the terms with c_k with c_{-k} →> cosine with amplitude $|X(\omega)|$ and phase $\angle X(\omega)$
- ▶ The power spectral density of x(t) is

$$S_{xx}(\omega) = |X(\omega)|^2$$

Energy conservation

▶ Signal energy is the same in time and frequency domains

$$E = \int_{-\infty}^{\infty} |x(t)|^2 dt = \frac{1}{2\pi} \int_{-\infty}^{\infty} |X(\omega)|^2 d\omega$$



Fourier series of discrete periodical signals

A discrete signal of period N:

$$x[n] = x[n + N]$$

► Can always be decomposed as a **sum of complex exponentials**:

$$x[n] = \sum_{k=0}^{N-1} c_k e^{j2\pi kn/N}, n = 0, 1, ...N - 1$$

Finding the coefficients c_k :

$$c_k = \frac{1}{N} \sum_{n=0}^{N-1} x[n] e^{-j2\pi kn/N}$$

Comparison with analog Fourier series

- Compared to analog signals:
 - ightharpoonup consider fundamental frequency $f_0 = 1/N$
 - ▶ only *N* terms, with frequencies $k \cdot f_0$:
 - \triangleright 0, f_0 , $2f_0$, ... $(N-1)f_0$
 - \triangleright only N distinct coefficients c_k
 - ▶ the *N* coefficients c_k can be chosen like $-\frac{N}{2} < k \le \frac{N}{2} =>$ the frequencies span the range -1/2...1/2

$$-\frac{1}{2} < f_k \le \frac{1}{2}$$

$$-\pi < \omega_k \le \pi$$

Basic properties of Fourier coefficients

1. Signal is **discrete** –> coefficients are **periodic** with period N

$$c_{k+N} = \frac{1}{N} \sum_{n=0}^{N-1} x[n] e^{-j2\pi(k+N)n/N} = \frac{1}{N} \sum_{n=0}^{N-1} x[n] e^{-j2\pi kn/N}$$

- 2. If signal is real $x[n] \in \mathbb{R}$, the coefficients are **even**:
 - $c_k^* = c_{-k}$
 - $|c_k| = |c_{-k}|$
 - $ightharpoonup \angle c_k = \angle c_{-k}$
- Together with periodicity:
 - $|c_k| = |c_{-k}| = |c_{N-k}|$

Expressing as sum of sinusoids

▶ Grouping terms with c_k and c_{-k} we get

$$x[n] = c_0 + 2\sum_{k=1}^{L} |c_k| cos(2\pi \frac{k}{N} + \angle c_k)$$

where L = N/2 or L = (N-1)/2 depending if N is even or odd

- ightharpoonup Signal = DC value + a finite sum of sinusoids with frequencies kf_0
 - $ightharpoonup |c_k|$ give the amplitudes (x 2)
 - $ightharpoonup \angle c_k$ give the phases

Power spectral density

▶ The average power of a discrete periodic signal

$$P = \frac{1}{N} \sum_{n=0}^{N-1} |x[n]|^2$$

Is the same in the frequency domain (with proof):

$$P = \sum_{k=0}^{N-1} |c_k|^2$$

▶ Power spectral density of the signal is

$$S_{xx}[k] = |c_k|^2$$

Energy over one period is

$$E = \sum_{n=0}^{N-1} |x[n]|^2 = N \sum_{k=0}^{N-1} |c_k|^2$$

2018-2019 Exam

2018-2019 Exam

▶ Properties of Fourier series: only 1, 2, and 5

1. Linearity

If the signal $x_1[n]$ has the Fourier series coefficients $\{c_k^{(1)}\}$, and $x_2[n]$ has $\{c_k^{(2)}\}$, then their sum has

$$a \cdot x_1[n] + b \cdot x_2[n] \leftrightarrow \{a \cdot c_k^{(1)} + b \cdot c_k^{(2)}\}$$

Proof: via definition

2. Shifting in time

If $x[n] \leftrightarrow \{c_k\}$, then

$$x[n-n_0] \leftrightarrow \{e^{(-j2\pi k n_0/N)}c_k\}$$

Proof: via definition

▶ The amplitudes $|c_k|$ are not affected, shifting in time affects only the phase

3. Modulation in time

$$e^{j2\pi k_0 n/N} \leftrightarrow \{c_{k-k_0}\}$$

4. Complex conjugation

$$x^*[n] \leftrightarrow \{c_{-k}^*\}$$

5. Circular convolution

Circular convolution of two signals \leftrightarrow product of coefficients

$$x_1[n] \otimes x_2[n] \leftrightarrow \{N \cdot c_k^{(1)} \cdot c_k^{(2)}\}$$

Circular convolution:

$$x_1[n] \otimes x_2[n] = \sum_{k=0}^{N-1} x_1[k] x_2[(n-k)_N]$$

- takes two periodic signals of period N, result is also periodic with period N
- Example at the whiteboard: how it is computed

6. Product in time

Product in time \leftrightarrow circular convolution of Fourier series coefficients

$$x_1[n] \cdot x_2[n] \leftrightarrow \sum_{k=0}^{N-1} c_m^{(1)} c_{(k-m)_N}^{(2)} = c_k^{(1)} \otimes c_k^{(2)}$$

Fourier transform of discrete non-periodical signals

- ightharpoonup Non-periodical signals contain all frequencies, not only the multiples of f_0
- ▶ The Fourier transform of a discrete signal:

$$X(\omega) = \sum_{n=-\infty}^{\infty} x[n]e^{-j\omega n}$$

► The inverse Fourier transform:

$$x[n] = \frac{1}{2\pi} \int_{-\pi}^{\pi} X(\omega) e^{j\omega n} d\omega$$

Comparison

- Compared with the Fourier transform of analog signals
 - sum instead of integral in Fourier transform
 - spectrum is only in range:

$$\omega \in [-\pi, \pi]$$

$$f\in\left[-\frac{1}{2},\frac{1}{2}\right]$$

- Compared with the Fourier series of discrete periodical signals
 - general ω instead of $2\pi kf_0$
 - spectrum is continuous, not discrete
 - integral, not sum in inverse Fourier transform

Parseval theorem

▶ Parseval theorem: energy of the signal is the same in time and frequency domains

$$E = \sum_{-\infty}^{\infty} |x[n]|^2 = \frac{1}{2\pi} \int_{-\pi}^{\pi} |X(\omega)|^2$$

- ► Proof: on whiteboard
- ► The **energy spectral density** gives the energy contained for each frequency

$$S_{xx}(\omega) = |X(\omega)|^2$$

Basic properties of Fourier transform

▶ It is **periodical** with period 2π

$$X(\omega + 2\pi) = X(\omega)$$

▶ If the signal x[n] is real, the Fourier transform is **even**

$$x[n] \in \mathbb{R} \to X^*(\omega) = X(-\omega)$$

- ► This means
 - ▶ modulus is even: $|X(\omega)| = |X(-\omega)|$
 - ▶ phase is odd: $X(\omega) = -X(-\omega)$

Relation between Fourier series and Fourier transform

- If apply Fourier transform to periodical discrete signals, $X(\omega)$ contains Diracs
- ▶ The Diracs are at frequencies kf_0 , just like the Fourier series
- ▶ The value of an impulse = the coefficient c_k of the Fourier series
- lacktriangle The Fourier series pprox the Fourier transform of periodic signals
 - ightharpoonup we directly compute the coefficients c_k of the impulses in the spectrum

Fourier transform and Z transform

Definition of Fourier transform = Z transform with:

$$z=e^{j\omega}$$

- $ightharpoonup e^{j\omega} = \text{points on the unit circle}$
- ► Fourier transform = Z transform evaluated **on the unit circle**
 - ▶ if the unit circle is in the convergence region of Z transform
 - otherwise, equivalence does not hold
- ► This is true for most usual signals we work with
 - ▶ there are exceptions, but they are outside the scope of this class

2018-2019 Exam

2018-2019 Exam

▶ Properties of Fourier transform: only 1, 2, 5, and Parseval theorem

1. Linearity

$$a \cdot x_1[n] + b \cdot x_2[n] \leftrightarrow a \cdot X_1(\omega) + b \cdot X_2(\omega)$$

Proof: via definition

2. Shifting in time

$$x[n-n_0] \leftrightarrow e^{-j\omega n_0}X(\omega)$$

Proof: via definition

▶ The amplitudes $|X(\omega)|$ is not affected, shifting in time affects only the phase

3. Modulation in time

$$e^{j\omega_0 n}x[n]\leftrightarrow X(\omega-\omega_0)$$

4. Complex conjugation

$$x^*[n] \leftrightarrow X^*(-\omega)$$

5. Convolution

$$x_1[n] * x_2[n] \leftrightarrow X_1(\omega) \cdot X_2(\omega)$$

Not circular convolution, this is the normal convolution

6. Product in time

Product in time \leftrightarrow convolution of Fourier transforms

$$x_1[n] \cdot x_2[n] \leftrightarrow \frac{1}{2\pi} \int_{-\pi}^{\pi} X_1(\lambda) X_2(\omega - \lambda) d\lambda$$

Correlation theorem

$$r_{x_1x_2}[I] \leftrightarrow X_1(\omega)X_2(-\omega)$$

Wiener Khinchin theorem

Autocorrelation of a signal \leftrightarrow Power spectral density

$$r_{xx}[I] \leftrightarrow S_{xx}(\omega) = |X(\omega)|^2$$

Parseval theorem

Energy is the same when computed in the time or frequency domain

$$\sum |x[n]|^2 = \frac{1}{2\pi} \int_{-\pi}^{\pi} |X(\omega)|^2 d\omega$$

Relationship of Fourier transform and Fourier series

- ► How are they related?
 - ► Fourier transform: for non-periodical signals
 - ► Fourier series: for periodical series
- ▶ Duality: periodic in time ↔ discrete in frequency
- ▶ If we **periodize** a signal x[n] by repeating with period N:

$$x_{N}[n] = \sum_{k=-\infty}^{\infty} x[n-kN]$$

then the Fourier transform w is discrete (made of Diracs):

$$X_N(\omega) = 2\pi c_k \delta(\omega - k \frac{2\pi}{N})$$

▶ The coefficients of the Diracs = exactly the Fourier series coefficients

Relationship of Fourier transform and Fourier series

- ➤ So, Fourier transform can be considered for both periodic and non-periodic signals
- ► Fourier transform for periodic signals = discrete (sum of Diracs with some coefficients)
 - ▶ Diracs at frequencies $f_0 = 1/N$ and its multiplies
- ► Fourier series for periodic signals = gives the coefficients of the Diracs directly
 - it just omits to write the Diracs explicitly in the equation

Relation of Fourier transform and Z transform

- ► Fourier transform: $X(\omega) = \sum_{-\infty}^{\infty} x[n]e^{-j\omega n}$
- ightharpoonup Z transform: $X(z) = \sum_{-\infty}^{\infty} x[n]z^{-n}$
- **Fourier tranform = Z transform for** $z = e^{j\omega}$
- $ightharpoonup z = e^{j\omega}$ means evaluated on the unit circle:
 - $|z| = |e^{j\omega}| = 1 (modulus)$
 - $ightharpoonup \angle z = \angle e^{j\omega} = \omega(phase)$
- Conditions:
 - ▶ unit circle must be in the Convergence Region of Z transform
 - some signals can have Fourier transform even though unit circle not in CR
- ▶ If signal has pole on unit circle -> Dirac (infinite) in Fourier transform
 - ► e.g. *u*[*n*]
 - ightharpoonup some signals are non-convergent on unit circle, but have Fourier transform (e.g. u[n])

$$X(z) = C \cdot \frac{(z - z_1) \cdots (z - z_M)}{(z - p_1) \cdots (z - p_N)}$$
$$X(\omega) = C \cdot \frac{(e^{j\omega} - z_1) \cdots (e^{j\omega} - z_M)}{(e^{j\omega} - p_1) \cdots (e^{j\omega} - p_N)}$$

Modulus:

$$|X(\omega)| = |C| \cdot \frac{|e^{j\omega} - z_1| \cdots |e^{j\omega} - z_M|}{|e^{j\omega} - p_1| \cdots |e^{j\omega} - p_N|}$$

Phase:

$$\angle X = \angle C + \angle (e^{j\omega} - z_1) + \cdots + \angle (e^{j\omega} - z_M) - \angle (e^{j\omega} - p_1) - \cdots - \angle (e^{j\omega} - p_N)$$

- For complex numbers:
 - ightharpoonup modulus of |a-b| = the length of the segment between a and b
 - ▶ phase of |a b| = the angle of the segment from b to a (direction is important)
- ▶ So, for a point on the unit circle $z = e^{j\omega}$
 - modulus $|X(\omega)|$ is given by the distances to the zeros and to the poles
 - ▶ phase $\angle X(\omega)$ is given by the angles from the zeros and poles to z

- Consequences:
 - when a pole is very close to unit circle -> Fourier transform is large at this point
 - when a zero is very close to unit circle -> Fourier transform is small at this point
- ► Examples:...
- ▶ Simple interpretation for modulus $|X(\omega)|$:
 - \triangleright Z transform X(z) is a "landscape"
 - poles = mountains of infinite height
 - zeros = valleys of zero height
 - Fourier transform $X(\omega) =$ "Walking over this landscape along the unit circle" -> the heights give the Fourier transform
 - ► When close to a mountain -> road is high -> Fourier transform has large amplitude
 - ▶ When close to a valley -> road is low -> Fourier transform has small

- Note: X(z) might also have a constant C in front!
 - ► It does not appear in pole-zero plot
 - ▶ The value of |C| and $\angle C$ must be determined separately
- ► This "geometric method" can be applied for both modulus and phase

Time-frequency duality

- ▶ **Duality** properties related to Fourier transform/series
- ▶ Discrete ↔ Periodic
 - discrete in time -> periodic in frequency
 - periodic in time -> discrete in frequency
- ► Continuous ↔ Non-periodic
 - continous in time -> non-periodic in frequency
 - non-periodic in time -> continuous in frequency

Frequency-based classification of signals

- Based on frequency content:
 - ► low-frequency signals
 - mid-frequency signals (band-pass)
 - high-frequency signals
- **Band-limited** signals: spectrum is 0 over some frequency f_{max}
- ▶ Time-limited signals: signal value is 0 outside some time interval
- ▶ **Bandwitdh** B: frequency interval $[F_1, F_2]$ which contains 95% of energy
 - ► $B = F_2 F_1$
- Based on bandwidth B:
 - ▶ Narrow-band signals: B << central frequency $\frac{F_1+F_2}{2}$
 - ▶ Wide-band signals: not narrow-band