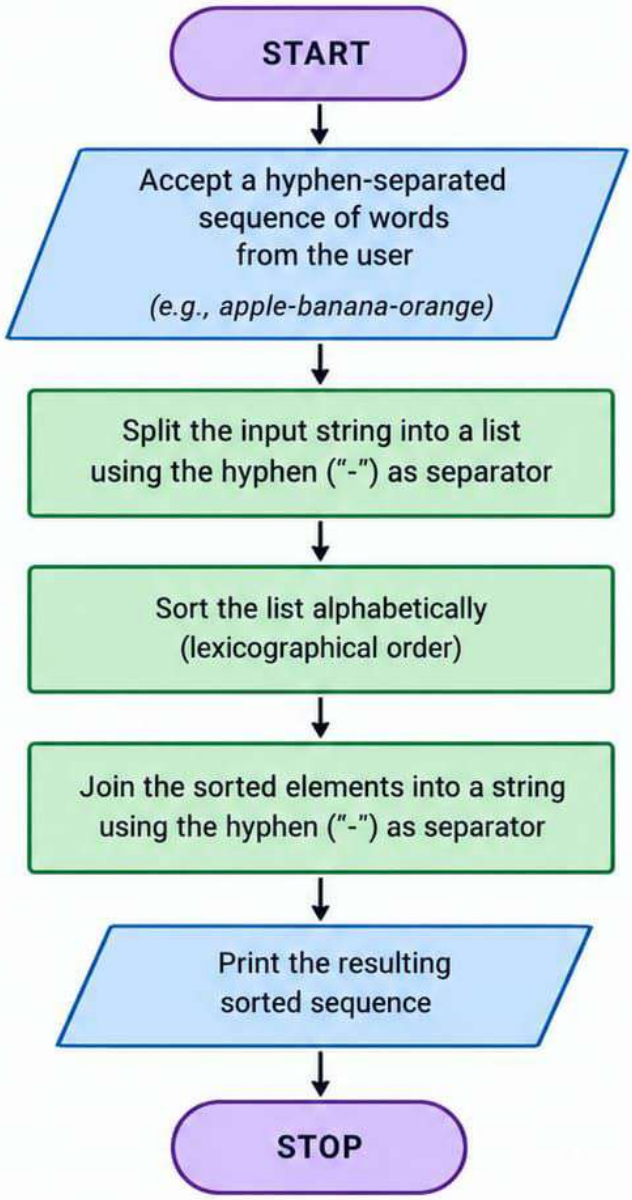


Flowchart Symbols:

- Oval (Terminator) – Start / Stop
- Parallelogram (Input/Output) – Take input / Display output
- Rectangle (Process) – Processing step / Calculation
- Arrow – Flow direction

Python Program

```python
# Program to sort a hyphen-separated sequence of words alphabetically

# Take input from the user
s = input("Enter a hyphen-separated sequence of words: ")

# Split the input into a list using '-'
words = s.split('-')

# Sort the list alphabetically
words.sort()

# Join the sorted elements using '-'
result = '-'.join(words)

# Print the resulting sequence
print("Sorted sequence:", result)

```


Example Run

Input :

```
Enter a hyphen-separated sequence of words: banana-apple-orange-grape
```

Output :

```
Sorted sequence: apple-banana-grape-orange
```

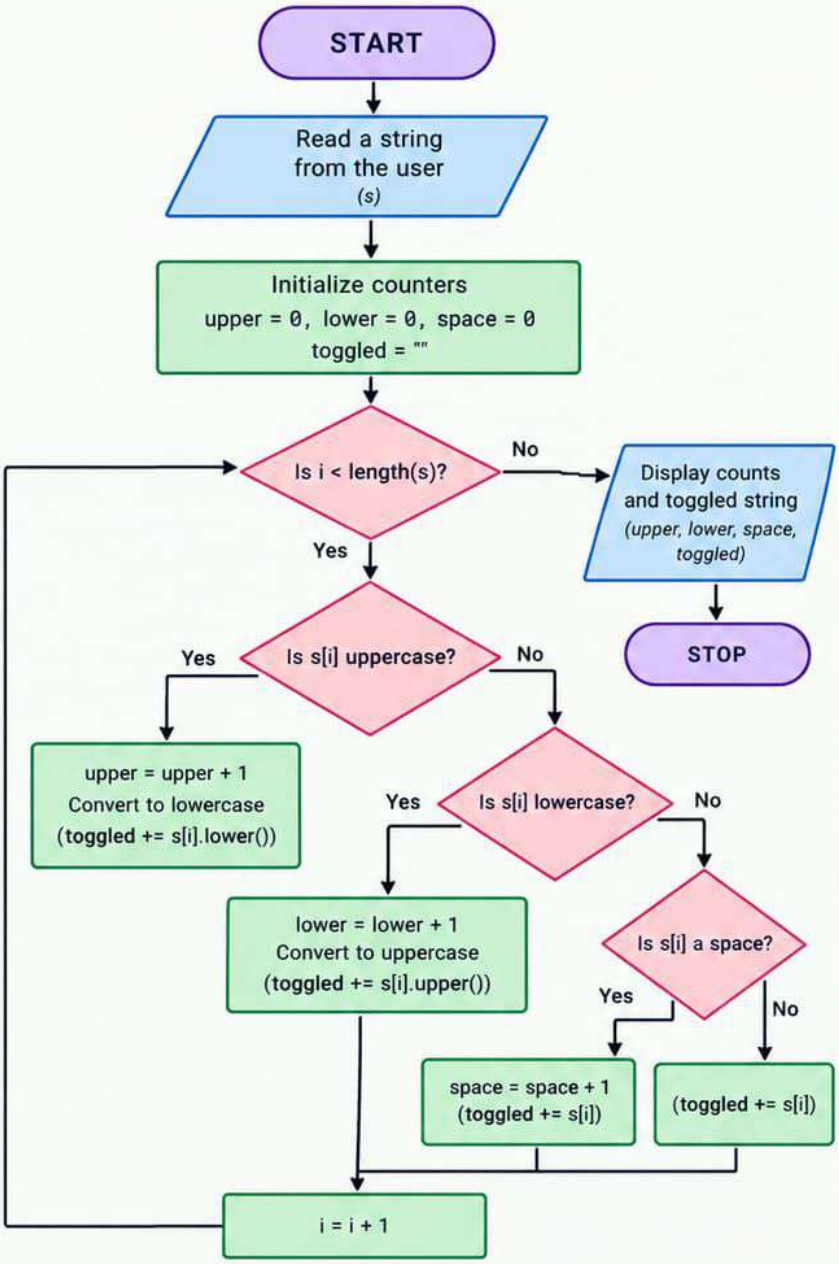

Flowchart Symbols:

- Oval (Terminator) – Start / Stop
- Parallelogram (Input/Output) – Take input / Display output
- Rectangle (Process) – Processing step / Calculation
- Diamond (Decision) – Condition

Python Program

```python
# Program to count uppercase, lowercase,
# spaces and toggle the case of a string

# Step 2: Read a string from the user
s = input("Enter a string: ")


# Step 3: Initialize counters
upper = 0
lower = 0
space = 0
toggled = ""

# Step 4: Traverse each character in the string
for ch in s:
    # Step 5: If uppercase
    if ch.isupper():
        upper += 1
        toggled += ch.lower() # convert to lowercase
    # Step 6: If lowercase
    elif ch.islower():
        lower += 1
        toggled += ch.upper() # convert to uppercase
    # Step 7: If space
    elif ch == ' ':
        space += 1
        toggled += ch
    else:
        toggled += ch # other characters remain same

# Step 8: Display the results
print(f"Uppercase letters: {upper}")
print(f"Lowercase letters: {lower}")
print(f"Spaces: {space}")
print(f"Toggled string: {toggled}")
```

Example Run

```
Enter a string:
Hinglish is Cool
Uppercase letters: 3
Lowercase letters: 8
Spaces: 2
Toggled string: hINGLIsh IS cOOL
```

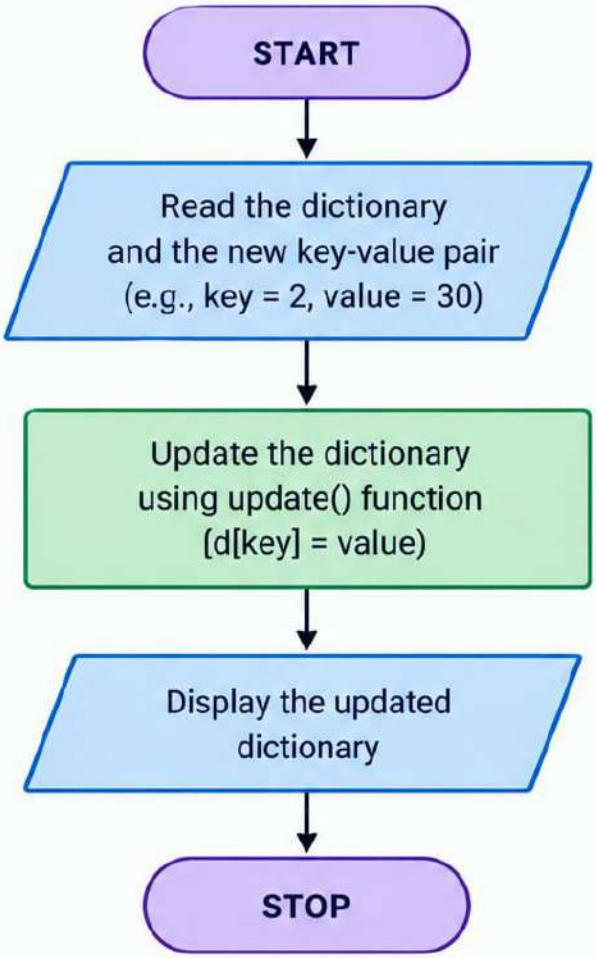

Flowchart Symbols:

- Oval (Terminator) – Start / Stop
- Parallelogram (Input/Output) – Read / Display
- Rectangle (Process) – Processing step
- Arrow – Flow direction

Python Program

```python
# Program to add a key to a dictionary
# Sample Dictionary: {0: 10, 1: 20}

# Step 2: Read the dictionary and new key-value pair
d = eval(input("Enter the dictionary: "))
key = int(input("Enter the new key: "))
value = int(input("Enter the value: "))

# Step 3: Update the value using update() function
d.update({key: value})

# Step 4: Display the updated dictionary
print("\nUpdated dictionary:")
print(d)
```

Sample Run

```
Enter the dictionary: {0: 10, 1: 20}
Enter the new key: 2
Enter the value: 30

Updated dictionary:
{0: 10, 1: 20, 2: 30}
```

Note:
The update() function adds the key-value pair if the key is not already present, or updates the value if the key already exists.