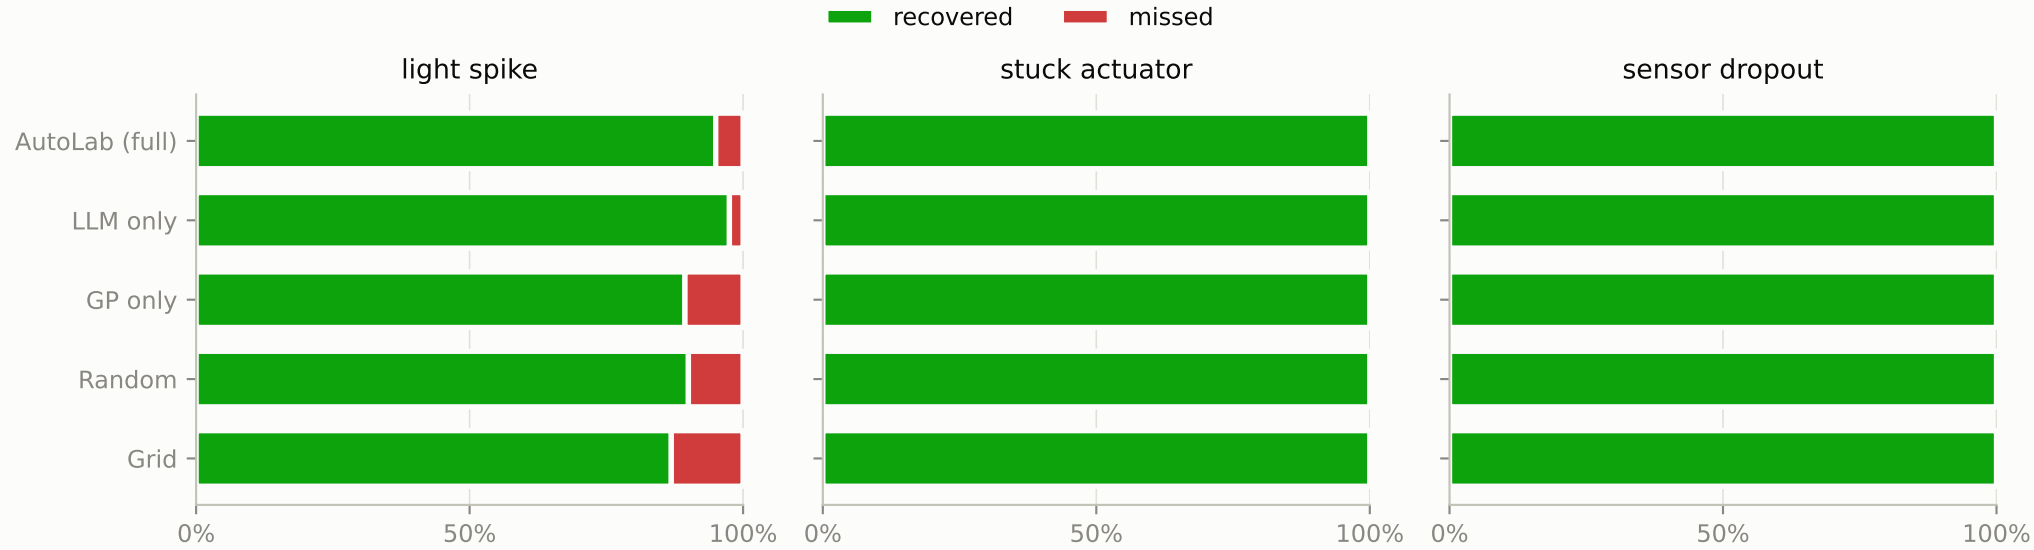

Data source: DIGITAL TWIN. LLM methods: mock provider (deterministic stand-in, not a language model).
With mock, AutoLab = GP only on the same seeds; AutoLab and LLM only use 5 seeds, the others 20, so differences between them here come from the seed sets. Faults condition, all experiments; share of runs.