


Orange Research

Shape the future and value innovation

Challenge EURO/ROADEF 2026

Keep the flow!



Challenge Rules

Challenge Organizers

Amal Benhamiche, Yannick Carlinet, Morgan Chopin, Eric Gourdin, Nancy Perrot



Contents

1	General rules	1
2	Organization	1
2.1	Roadmap	1
2.2	Prizes	1
2.3	Datasets	2
2.4	Evaluation	2
2.5	Submission	2
2.6	Ranking method	3
2.6.1	Definition	3
2.6.2	Example	4
2.7	Computing and software limitations	4
2.8	Format of the submitted program	4
2.9	Variability	5
2.10	Available solvers	5
2.11	Provided tools	5
2.11.1	Checker	5
2.11.2	Networktools	5
2.11.3	Docker image	5
2.12	Contact information	5
3	Discussion and updates	6
4	Intellectual property	6

1 General rules

Introduction The EURO/ROADEF 2026 Challenge is dedicated to a problem related to Segment Routing, entitled “Adaptive Segment Routing – Keep the Flow!”. The problem description, benchmark instances, and solution checker are provided by Orange. Participants compete to design and submit the most effective algorithmic solutions for solving the proposed problem. All official information regarding the challenge is made available on the challenge website. Participants are invited to submit feedback, including questions, concerns, or the reporting of potential errors, to the organizing committee. For this purpose, a dedicated forum on the challenge website and a specific email address are provided (see Section 2.12). The organizing committee endeavors to respond to participants’ inquiries as accurately and promptly as possible.

General rules

- The following categories of individuals are expressly excluded from participation in the challenge:
 - Employees of Orange
 - Interns at Orange
 - Members of the organizing committee
- The Organizing Committee shall not disclose any information relating to the challenge to any third party, except for information that is made publicly available to all participants.

Team composition The rules governing team composition are defined as follows:

- A team may consist of any number of individuals.
- No individual shall be a member of more than one team.
- Each team is authorized to submit one and only one program to solve the problem.
- A junior team shall be composed exclusively of student members.
- A member shall be deemed a student if they are enrolled in an undergraduate, graduate, or PhD program as of December 31, 2026. If the PhD has been defended prior to this date, the individual shall not be considered a student for the purposes of the challenge.

2 Organization

This section describes the general steps of the challenge.

2.1 Roadmap

The challenge starts on February 25th, 2026 and results will be announced at IFORS 2026 conference, ROADEF 2027 conference and ROADEF 2028 for the scientific prize (see Figure 1)

The teams can participate to the sprint and qualification phase independently to each other. After the qualification phase, only qualified teams selected by the organizers (see Section 2.6) will be allowed to participate to the final phase.

2.2 Prizes

The total amount of prizes is 40k€, divided in several categories as explained at <https://www.roadef.org/challenge/2026/en/prix.php>

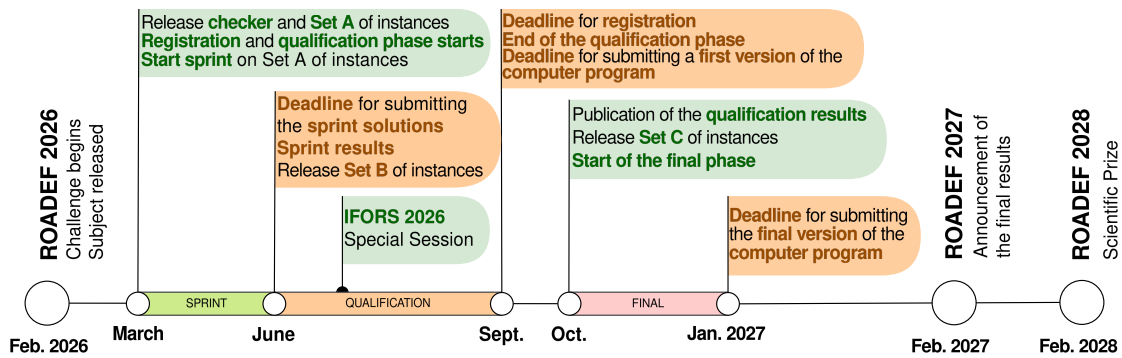


Figure 1: ROADEF 2026 Challenge roadmap. The deadlines can be found on the challenge website <https://roadef.org/challenge/2026/en/calendrier.php>

2.3 Datasets

Four datasets composed of industrial problem instances are provided to participants during the challenge:

- Dataset A of 20 instances at the beginning of the challenge.
- Dataset B of 15 instances available after the end of the sprint phase.
- Dataset C of 15 instances available after the end of the qualification phase.
- Dataset X of 15 hidden instances that will be used to rank the candidates for the final phase and available after the end of the challenge.

2.4 Evaluation

Sprint phase During this phase, participants are not required to submit any program code or documentation; only solution files corresponding to the proposed instances shall be provided. Upon expiration of the Sprint Phase submission deadline, each team must have submitted its solution files. Dataset A is used as the sole basis for comparing and ranking teams. A prize is awarded to the team ranked first at the conclusion of this phase.

Qualification phase At the deadline of the qualification phase, each team must send its computer program (see Section 2.7) and a short document (2 pages max), that describes the solving method. The dataset B will be used to compare teams. The time limit for the program execution is 10 minutes per instance in this phase. Teams qualified for the final phase will be selected according to their score (cf. Section 2.6) and the quality of their documentation.

Final phase At the deadline of the final phase, each team must send its computer program (see Section 2.7) and a document (5 pages max), which describes the solving method. The datasets C and X will be used to compare teams. Dataset X will not be disclosed before the evaluation. The computer program of each team will be executed on each instance within the time limit (15 minutes per instance in final phase).

2.5 Submission

Before submission, teams must register by completing the form on the challenge website:

<https://roadef.org/challenge/2026/en/registration.php>

The solutions (and programs for the qualification/final phases) must be submitted by email at this address:

challenge.roadef2026@orange.com

with the following guidelines:

- The submission must be attached to the email as a zip archive.
- The file name of the archive must be '`<team_ID>.zip`', where `<team_ID>` is the id given at subscription (e.g. S42).
- The email must have the subject '`[ChallengeROADEF2026] [<phase>] <team_ID>`', where `<phase>` is one of 'sprint', 'qualification' or 'final'.

For the sprint phase, there is no 'run.sh' script, only the solution files, which must be named using the format '`<instance_name>-srpaths.json`' so they can be directly read by the checker (for instance 'setA-04-srpaths.json').

Candidates are able to submit as many times as they wish, only the last email received before the deadline will be considered. Upon submission, candidates will receive a confirmation email that the submission was received. For the sprint phase, it is the responsibility of the candidates to check that the submitted solution files are considered valid by the checker (cf. 2.11.1).

2.6 Ranking method

2.6.1 Definition

At the end of each phase, teams are ranked according to the solutions they provided. The used ranking function is the following. Each team earns points for every instance, depending on their result. We denote by *score* the number of points earned by a team. The winner is the team that maximizes the sum of its scores over all instances.

Solution Comparison. For a given instance, two routing scheme solutions can be compared as follows. They are entered in the checker (cf. Section 2.11.1), with the option '`--max-decimal-places 6`', which gives in return a vector of loads for all arcs and all timesteps, sorted in decreasing order. The resulting vectors for the two solutions are then compared lexicographically. The solution with a stricly lower resulting vector is said to be strictly better than the other one.

More formally, given two solutions S and S' , we say that S is stricly better than S' , denoted by $S \succ S'$, if, and only if, there exists $k \in \{1, \dots, |A| \times |T|\}$ such that,

$$\begin{cases} \lambda_S(k) < \lambda_{S'}(k) \\ \lambda_S(i) = \lambda_{S'}(i), \forall i < k \end{cases}$$

where T is the input time periods, A the set of input network arcs and $\lambda_X(i)$ denotes the i -th largest load induced by a routing scheme solution X among all arcs and all timesteps.

Let n be the total number of teams and m the total number of instances in a dataset. Let S_{ij} be the solution provided by team $i \in [n]$ for instance $j \in [m]$. We denote by nb_{ij} the number of teams with a solution strictly better than the solution of team i on instance j ,

$$nb_{ij} = |\{k \in [n] : S_{kj} \succ S_{ij}\}|$$

Let R be the maximal score that a team can earn from one instance. R will be set at the start of each phase, according to the number of participants.

Let p_{ij} be the number of points scored (i.e., the score) by team i for the instance j . It is defined as follows,

$$p_{ij} = \begin{cases} \max(0, R - nb_{ij}) & \text{if the solution is feasible} \\ 0 & \text{if the solution is unfeasible} \\ -1 & \text{if a crash occurs} \end{cases}$$

The global score of a team, denoted as score_i is defined by,

$$\text{score}_i = \sum_{j=1}^m p_{ij}$$

The winner is the team with the highest score. In case of equality (i.e., several teams with the same highest score), the winner is the team with the highest number of best known solutions that is the team i where $|\{j \in [m] : nb_{ij} = 0\}|$ is maximum.

2.6.2 Example

Table 1 illustrates how the top team is identified. In this example, we consider $m = 6$ instances of the *T-ADAPTIVE SEGMENT ROUTING* problem, $n = 7$ teams and $R = 5$. According to table 1(c), Team 5 would be the winner. It has the same score as Team 6 (20), but a higher number of best known solutions (2 vs 0).

Instance	1	2	3	4	5	6
Team 1	2	5	2	2	1	3
Team 2	0	0	5	4	6	5
Team 3	1	6	0	0	1	6
Team 4	3	4	6	2	5	4
Team 5	4	2	3	1	0	0
Team 6	6	1	1	5	1	2
Team 7	5	2	3	6	1	0

(a) Values of nb_{ij}

Instance	1	2	3	4	5	6
Team 1	3	0	3	3	4	2
Team 2	5	5	0	1	0	0
Team 3	4	0	5	5	4	0
Team 4	2	1	0	3	0	1
Team 5	1	3	2	4	5	5
Team 6	0	4	4	5	4	3
Team 7	0	3	2	-1	4	5

(b) Values of p_{ij}

Team	Score
Team 1	15
Team 2	11
Team 3	18
Team 4	7
Team 5	20
Team 6	20
Team 7	13

(c) Values of score_i

Table 1: Example score computation with 6 problem instances, 7 teams and $R = 5$

2.7 Computing and software limitations

To make a fair comparison of methods developed by different participating teams, each of them has to deliver for qualification and final phases an executable code. This program must take as inputs a problem instance from one of the datasets according to format given in the problem description document. It must return output solution files using standards defined in the problem description document. Programs of candidates will be run on Google Cloud Platform, in VM with 8 CPU (Xeon 2.80GHz), 32 GB of RAM and Ubuntu 24.04.

2.8 Format of the submitted program

As a reminder, a program has to be submitted only for the qualification and final phases. Teams must provide a directory which contains a shell script `run.sh` and all the files/subdirectories needed for the execution. The script will take 4 arguments:

1. pathname of input file network topology
2. pathname of input file traffic matrix
3. pathname of input file interventions scenario
4. pathname of output file srpaths

Example of command line:

```
run.sh ../datasetB/AS/toy-net.json \
      ../datasetB/AS/toy-tm.json \
      ../datasetB/AS/toy-scenario.json \
      ../datasetB/AS/toy-srpaths.json
```


The organizers will run the script `run.sh` **ONCE** for each instance, and interrupt the script once the time limit is reached (as a reminder, the time limit is 10mn in the qualification phase and 15mn in the final phase).

2.9 Variability

The same seed (chosen at random) will be used for each team and each instance. Using the seed value passed as a parameter to the executable program is under the responsibility of participants to support the repeatability of experiments/evaluations, particularly, if their solution methods are based on probabilistic frameworks or components. If variability occurs, the organizers can not be responsible from potential bad behavior on this single run. The team’s submissions will be run by the organizers, they should thus give support to the organizers in the process of running their algorithms

2.10 Available solvers

The following list provides the commercial solvers available on our evaluation platform:

- CPLEX
- GUROBI
- HEXALY

The solver versions will be communicated shortly after the start of the challenge.

2.11 Provided tools

2.11.1 Checker

The provided checker and its source code are available at

<https://gitlab.com/Orange-OpenSource/network-optimization-tools/challenge-roadef-2026>

2.11.2 Networktools

networktools, an internal C++ library developed at Orange Research for modeling and solving network optimization problems (and also used to develop the checker), is available as open source at

<https://gitlab.com/Orange-OpenSource/network-optimization-tools/networktools>

2.11.3 Docker image

A Docker image is provided to reproduce the same configuration and environment settings as those used on the organizers’ server to evaluate the teams’ programs. It will be available at the [challenge gitlab](#) before the qualification phase.

2.12 Contact information

For any inquiries regarding the challenge rules or problem, feel free to contact the organizers at

challenge.roadef2026@orange.com

You can also post an issue on the [challenge gitlab](#)

3 Discussion and updates

To help participants managing their project, the organizers try to communicate immediately changes that might occur during the challenge by updating the dedicated github repository. This includes clarification of the problem description or change in problem instances for example. The organizers try to avoid making such changes unless they find it necessary for the challenge. The organizers reserve the right to disqualify any participant or team from the competition at any time if the participant is considered to have worked outside the spirit of the competition rules.

4 Intellectual property

- Participants have intellectual property on their computer programs developed during the challenge. Orange and any third party may use information provided by the participants through technical reports, scientific papers and oral presentations, but cannot use a computer program off the challenge scope without the author team’s agreement.
- Participants to the challenge cannot claim to have a partnership or a contract with Orange, even if they win the challenge. They can only claim to be participants (respectively qualified / winner) if it is the case.
- Orange may (but has taken no engagement to) sign contracts with some participants after the challenge. Any such contract would be independent of the challenge