

INSERT

- ◆ What is Insert:-

- It is used to insert a single or a multiple records in a table.



- ◆ Without Specifying column names:-

- Syntax:-

INSERT INTO table_name **VALUES** (value1, value2, value3....);

Eg. **INSERT INTO** student **VALUES**(101,'abcd');

- ◆ By Specifying column names:-

- Syntax:-

INSERT INTO table_name (column_name1, column_name2) **VALUES** (val1, val2,...);

Eg. **INSERT INTO** student (id, name) **VALUES** (101,'abcd');

◆ **UPDATE**

- **SQL UPDATE** statement is used to change the data of the records held by tables.
- Which rows is to be update, it is decided by a condition.
- Syntax:-

UPDATE table_name **SET** [column_name1 = value1,...column_nameN = value] [**WHERE** condition]

Eg. UPDATE student **SET** name='Abc' 'address'= 'Pune'
WHERE id=1

◆ **DELETE**

- Remove All Rows:-
- Syntax:-

DELETE FROM table_name;

Eg. DELETE FROM student;

- Remove All Rows With Condition:-
- Syntax:-

DELETE FROM table_name **WHERE** condition;


Eg. DELETE FROM student **WHERE** id=101;

JOINS

◆ What is Join:-

- JOIN means **“to combine two or more tables”**.
- The SQL JOIN clause takes records from two or more tables in a database and combines it together.

◆ Types of Join:-

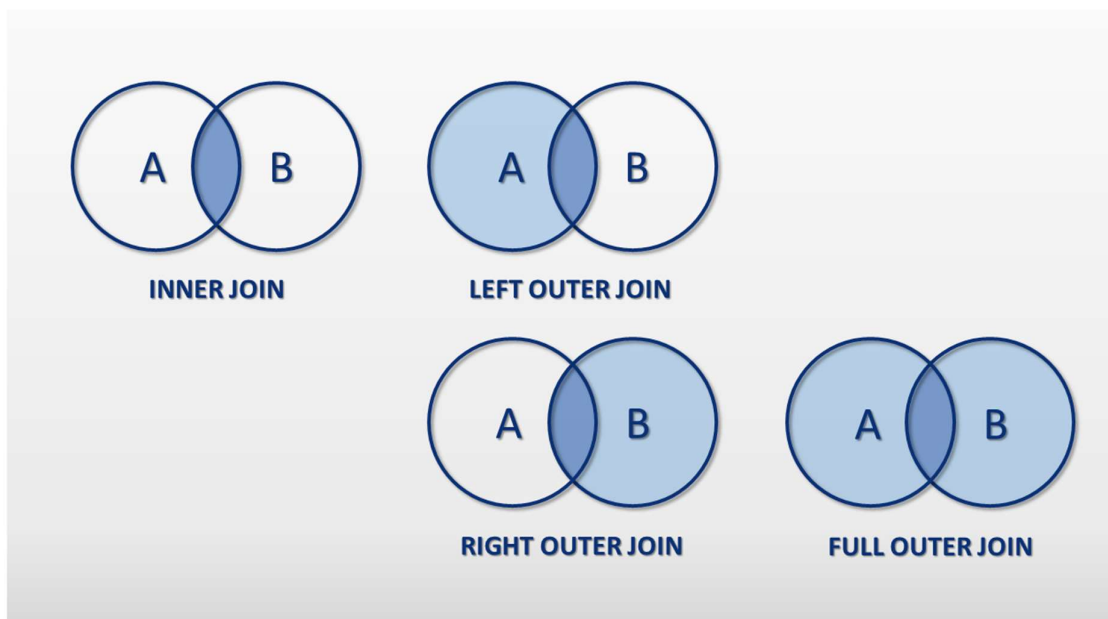

Id	Name	Address		Id	Contact	Pincode
1	Abc	Pune	+	1	9874563210	132456
2	Xyz	Mumbai		3	9874563210	789456

Id	Name	Address	Contact	Pincode
1	Abc	Pune	9874563210	132456

◆ Inner Join:-

- The **INNER JOIN** keyword selects records that have matching values in both tables.

- Syntax:-

```
SELECT column_name(s)
FROM table1
INNER JOIN table2
ON table1.column_name = table2.column_name;
```

Eg. **SELECT * FROM** student1 **INNER JOIN** student2
ON student1.id=student2.id;

◆ Left Outer Join:-

- The SQL Left join returns all the values from the left table and it also includes matching values from right table.
- If there are no matching join value it returns NULL.

- Syntax:-

```
SELECT column_name(s)
FROM table1
LEFT JOIN table2
ON table1.column_name = table2.column_name;
```

Eg. **SELECT * FROM student1 LEFT JOIN student2
ON student1.id=student2.id;**

◆ **Right Outer Join:-**

- The SQL right join returns all the values from the rows of right table.
- It also includes the matched values from left table.
- If there is no matching in both tables, it returns NULL.
- Syntax:-

```
SELECT column_name(s)  
FROM table1  
RIGHT JOIN table2  
ON table1.column_name = table2.column_name;  
Eg. SELECT * FROM student1 RIGHT JOIN student2  
ON student1.id=student2.id;
```

◆ **Full Outer Join:-**

- The SQL full join is the result of combination of both left and right outer join.
- It puts NULL on the place of matches not found.
- It is known as SQL FULL JOIN.
- Syntax:-

```
SELECT column_name(s) FROM table1 LEFT JOIN  
table2 ON table1.column_name = table2.column_name;  
UNION  
SELECT column_name(s) FROM table1 RIGHT JOIN  
table2 ON table1.column_name = table2.column_name;
```

Eg. **SELECT * FROM student1 LEFT JOIN student2
ON student1.id = student2.id;
UNION
SELECT * FROM student1 RIGHT JOIN student2 ON
student1.id = student2.id;**