


Лабораторная 11

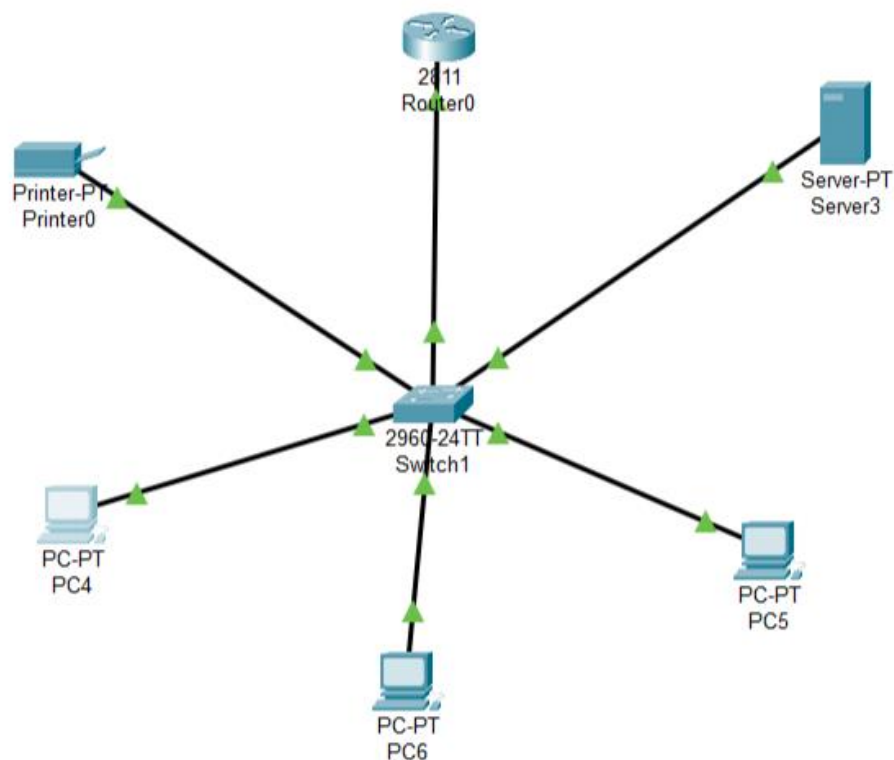

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#ip address 192.168.0.1 255.255.255.0
      ^
% Invalid input detected at '^' marker.

Router(config)#int fa0/0
Router(config-if)#ip address 192.168.0.1 255.255.255.0
Router(config-if)#no shutdown
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#exit
Router(config)#ip dhcp excluded-address 192.168.0.1 192.168.0.5
Router(config)#ip dhcp pool companyname
Router(dhcp-config)#network 192.168.0.1 255.255.255.0
Router(dhcp-config)#default-router 192.168.0.1
Router(dhcp-config)#domain-name companyname
Router(dhcp-config)#dns-server 192.168.0.2
Router(dhcp-config)#exit
Router(config)#
```

DNS

DNS Service

☒ On☐ Off

Resource Records

Name

company.com

Type A Record



Address 192.168.0.2

Add

Save

Remove

No.	Name	Type	Detail
0	company.com	A Record	192.168.0.2

```
C:\>ping 192.168.0.3
```

```
Pinging 192.168.0.3 with 32 bytes of data:
```

```
Request timed out.
```

```
Request timed out.
```

```
Request timed out.
```

```
Request timed out.
```

```
Ping statistics for 192.168.0.3:
```

```
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```

```
C:\>|
```