Playwright GitHub Actions Workflow

A GitHub Actions workflow automatically runs your tests, for example on every push or pull request, and stores the resulting reports without anyone needing to run them manually.

To run manually: go to your repo → Actions → Playwright Tests → Run workflow → choose your parameters → Run.

.github\workflows\playwright.yml

#To run manually: go to your repo → Actions → Playwright Tests → Run workflow → choose your parameters → Run.

```yaml
name: 🎭 Playwright Tests

on:
  push:
    branches: [master]
  pull_request:
    branches: [master]
  workflow_dispatch:
    inputs:
      test_suite:
        description: "Select test suite"
        type: choice
        options:
          - test:master
          - test:sanity
          - test:regression
          - test:e2e
          - test:api
          - test:web
          - test:datadriven
        default: "test:e2e"
      browser:
        description: "Select browser"
        type: choice
        options:
          - chromium
          - firefox
          - webkit
        default: "chromium"
      mode:
        description: "Run mode"
        type: choice
        options:
          - headless
          - headed
        default: "headless"

jobs:
  test:
    timeout-minutes: 60
    runs-on: windows-latest

    steps:
      - name: 📥 Checkout Repository
        uses: actions/checkout@v4
```

```yaml
    - name: 🟢 Set up Node.js
      uses: actions/setup-node@v4
      with:
        node-version: lts/*

    - name: 📦 Install Dependencies
      run: npm ci

    - name: 🎭 Install Playwright Browsers
      run: npx playwright install --with-deps

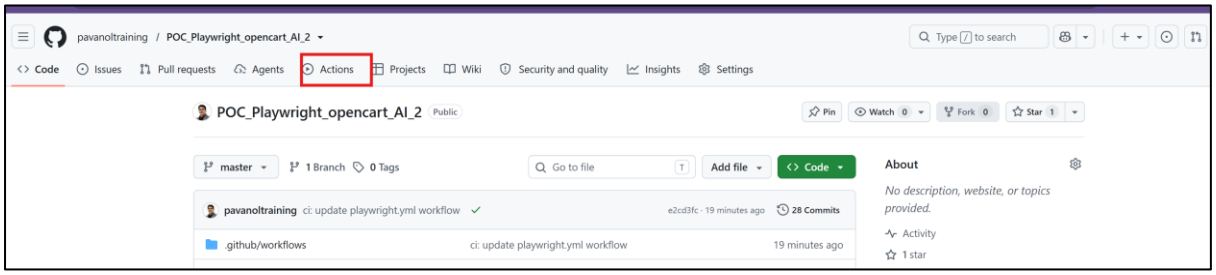
    - name: ⚙️ Create .env File
      run: Copy-Item .env.example .env

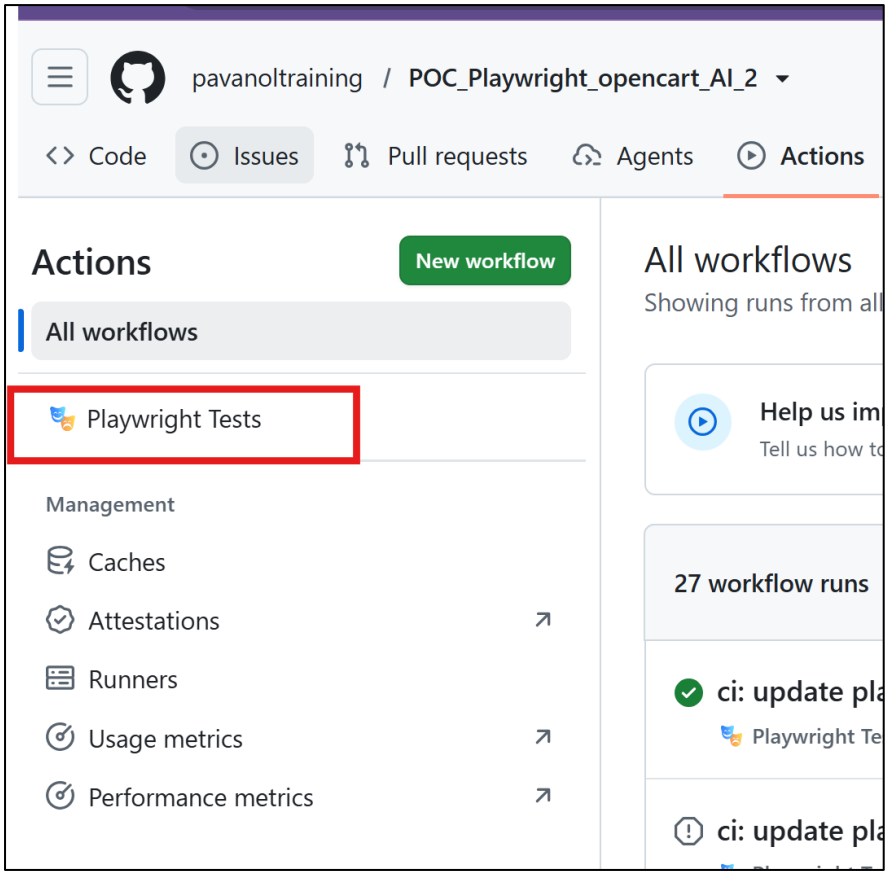
    - name: 🚀 Run Playwright Tests
      run: |
        $suite = "${{ github.event.inputs.test_suite || 'test:e2e' }}"
        $browser = "${{ github.event.inputs.browser || 'chromium' }}"
        $mode = "${{ github.event.inputs.mode || 'headless' }}"
        $tag = $suite -replace 'test:', ''
        $browserFlag = "--project=$browser"
        $modeFlag = if ($mode -eq 'headed') { '--headed' } else { '' }
        npx playwright test --grep "@$tag" $browserFlag $modeFlag
      env:
        CI: "1"

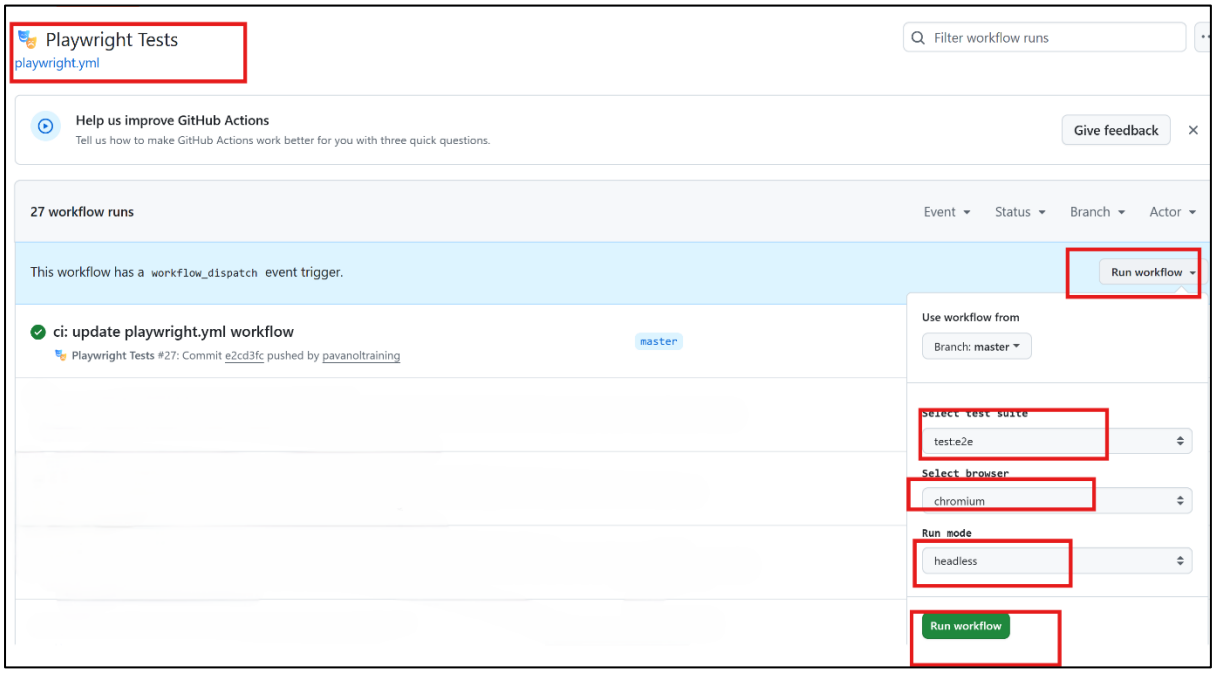
    - name: 📊 Upload Playwright HTML Report
      if: always()
      uses: actions/upload-artifact@v4
      with:
        name: playwright-report
        path: reports/
        retention-days: 30

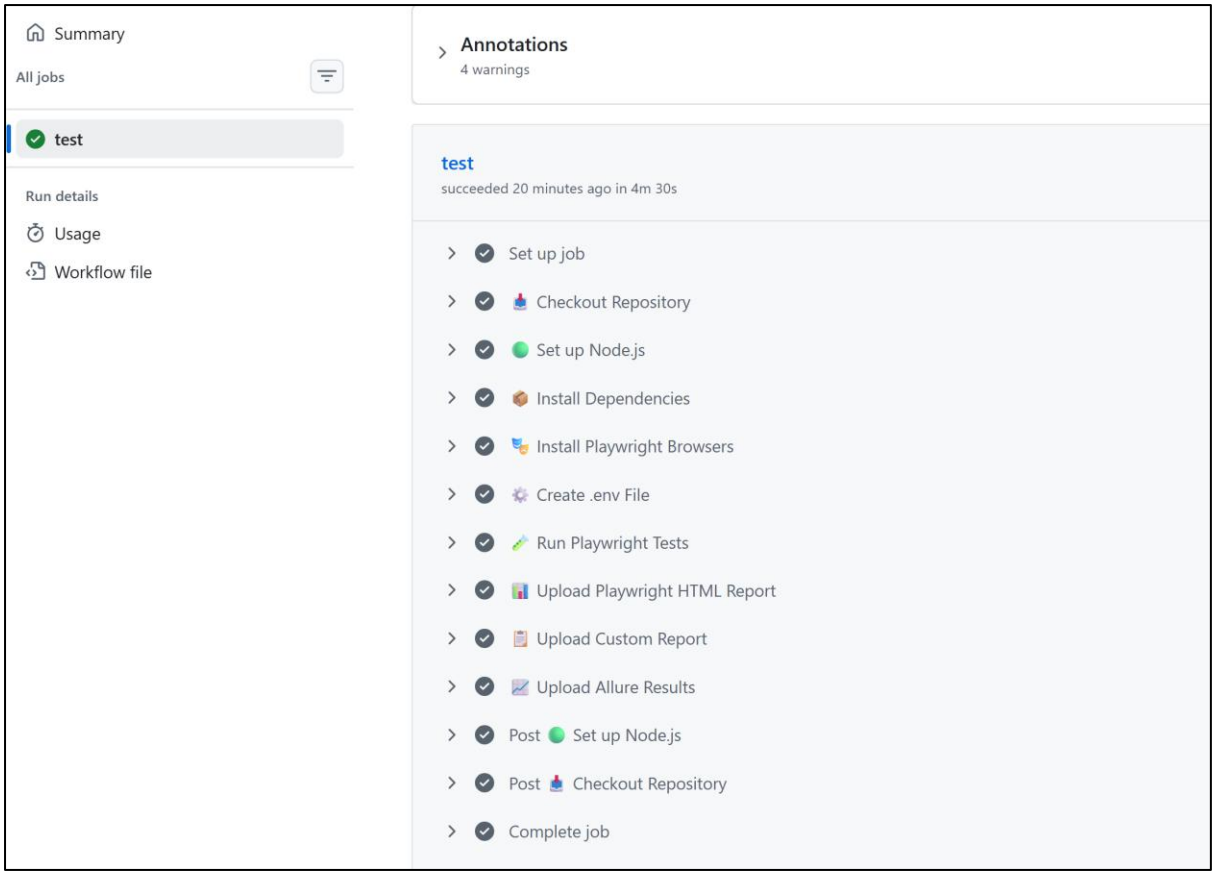
    - name: 📋 Upload Custom Report
      if: always()
      uses: actions/upload-artifact@v4
      with:
        name: custom-report
        path: custom-report/
        retention-days: 30

    - name: 📈 Upload Allure Results
      if: always()
      uses: actions/upload-artifact@v4
      with:
        name: allure-results
        path: allure-results/
        retention-days: 30
```




pavanoltraining / POC_Playwright_opencart_AI_2
Code
Issues
Pull requests
Agents
Actions
Actions
New workflow
All workflows
Playwright Tests
Management
Caches
Attestations
Runners
Usage metrics
Performance metrics
All workflows
Showing runs from all
Help us im
Tell us how to
27 workflow runs
ci: update pla
Playwright Te
ci: update pla


Playwright Tests
playwright.yml
Filter workflow runs
Help us improve GitHub Actions
Tell us how to make GitHub Actions work better for you with three quick questions.
Give feedback
27 workflow runs
Event
Status
Branch
Actor
This workflow has a workflow_dispatch event trigger.
Run workflow
Use workflow from
Branch: master
ci: update playwright.yml workflow
Playwright Tests #27: Commit e2cd3fc pushed by pavanoltraining
master
Select test suite
test:e2e
Select browser
chromium
Run mode
headless
Run workflow


Summary
All jobs
test
Run details
Usage
Workflow file
Annotations
4 warnings
test
succeeded 20 minutes ago in 4m 30s
Set up job
Checkout Repository
Set up Node.js
Install Dependencies
Install Playwright Browsers
Create .env File
Run Playwright Tests
Upload Playwright HTML Report
Upload Custom Report
Upload Allure Results
Post Set up Node.js
Post Checkout Repository
Complete job