


Web

Типовые архитектуры приложений

Типовая структура MVC



MPA (MVC)

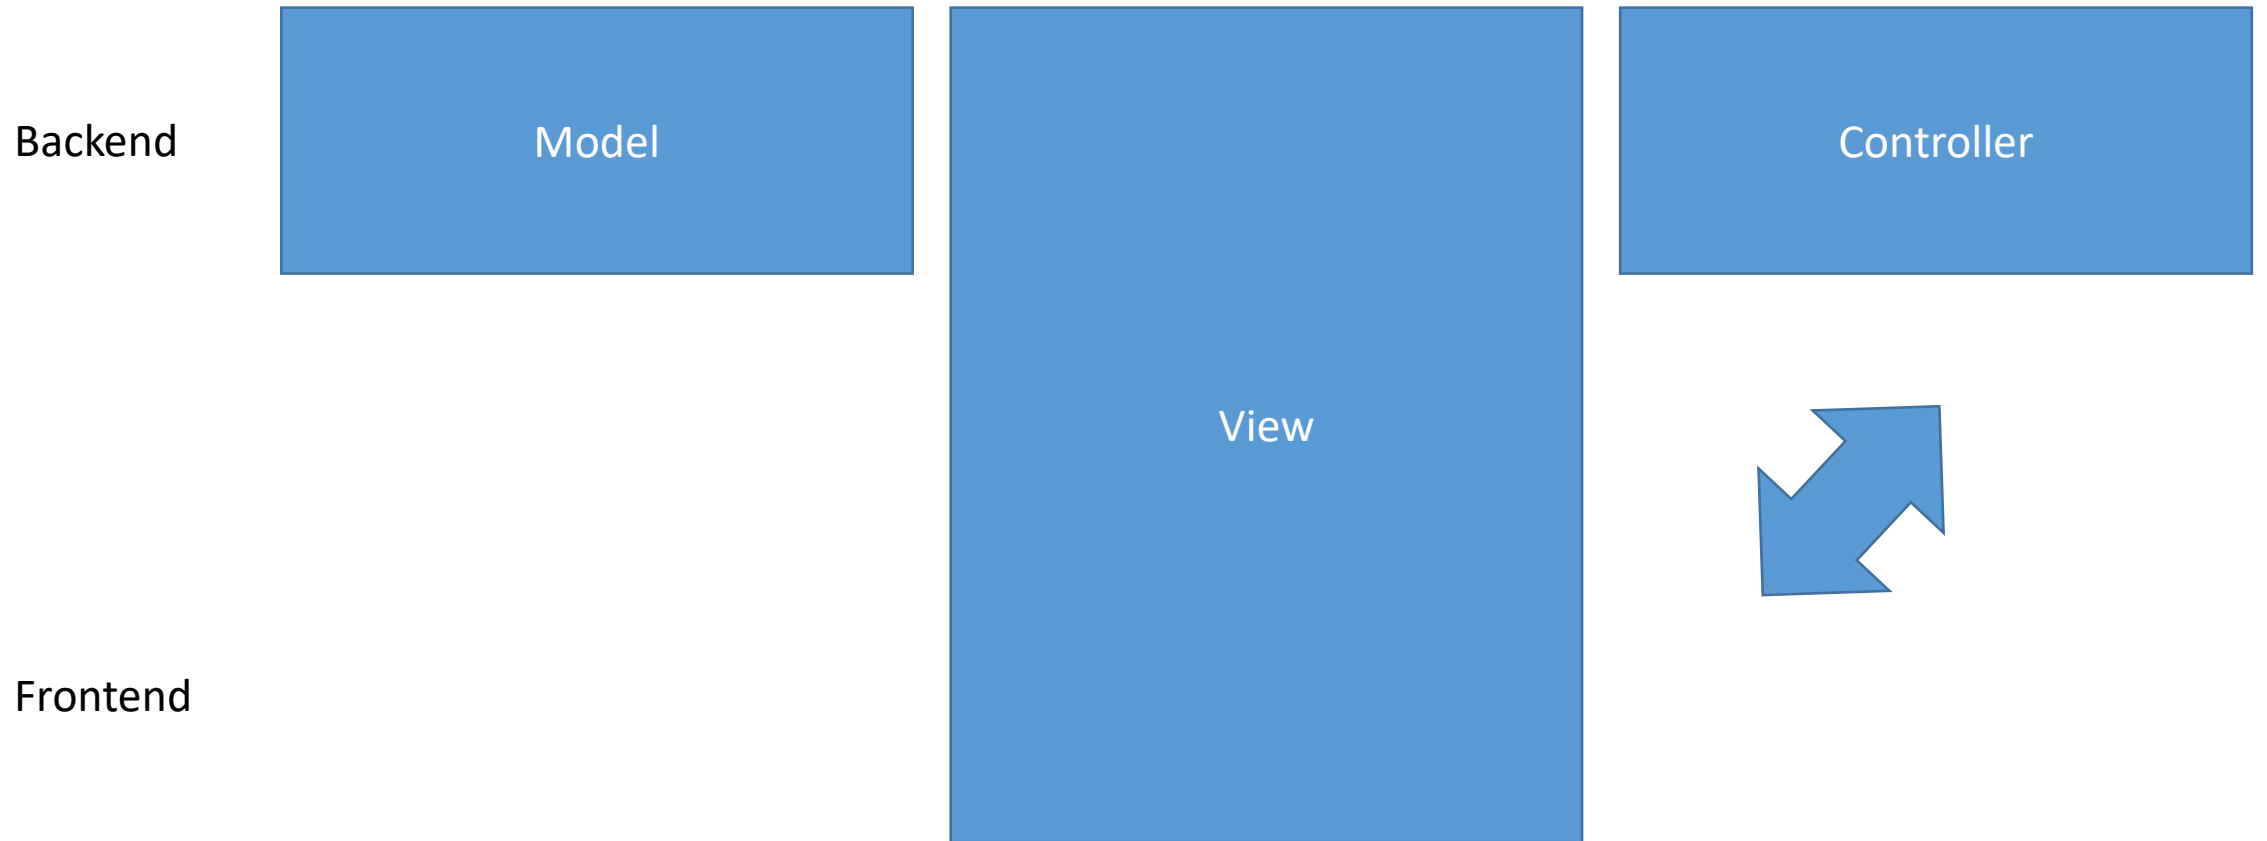

SPA (M*C + JS App)


Backend

Model


Controller

Frontend


JS Application
(~View)




MVC

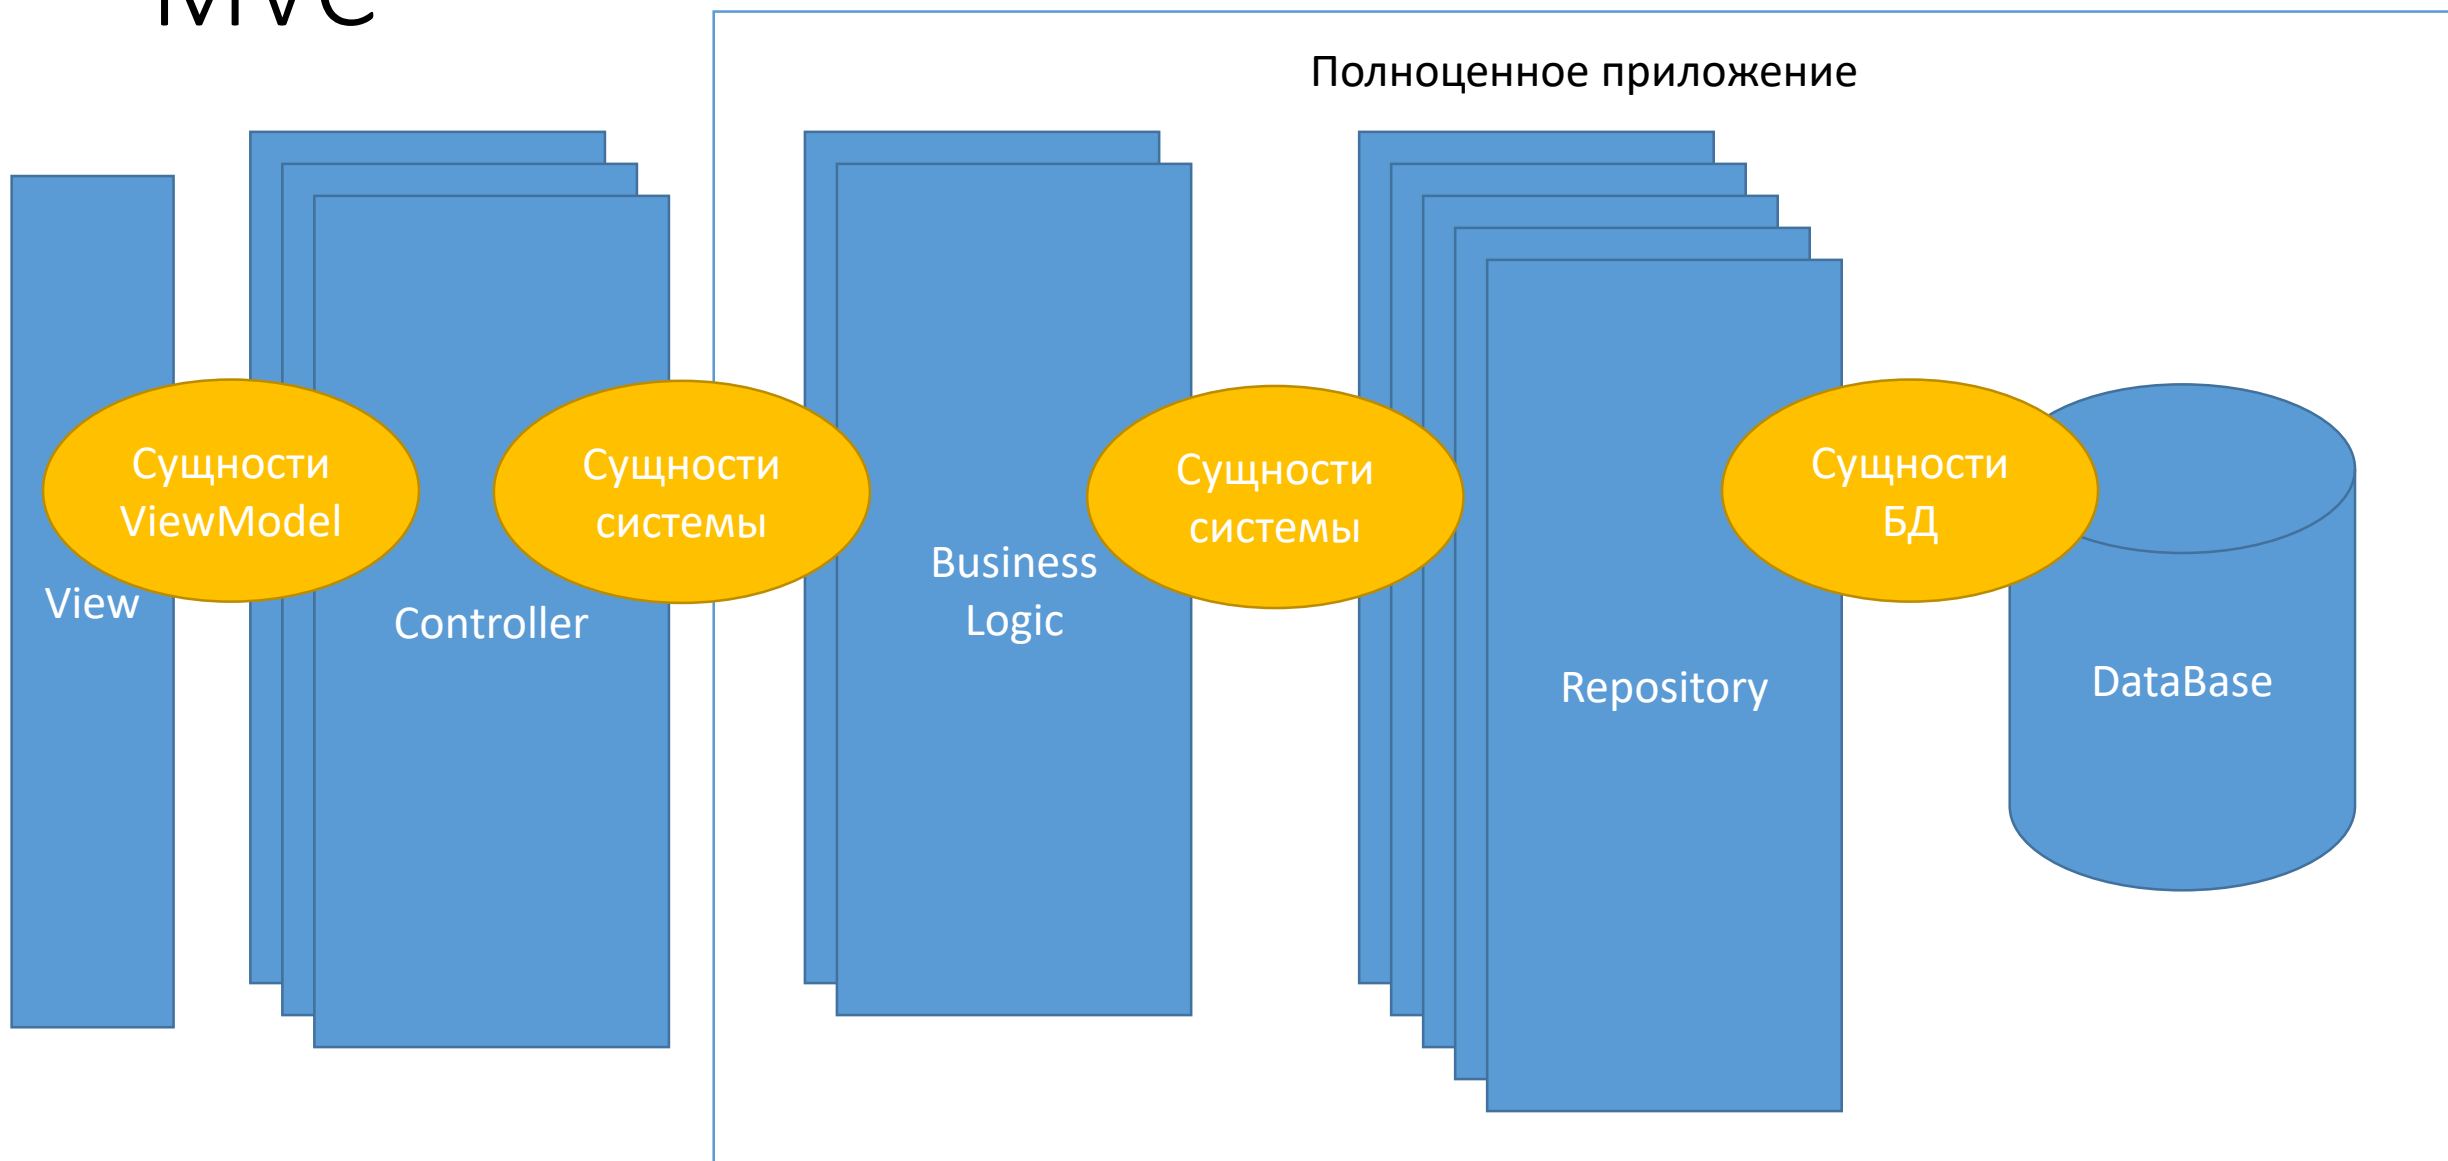

MVC, *дцать лет спустя

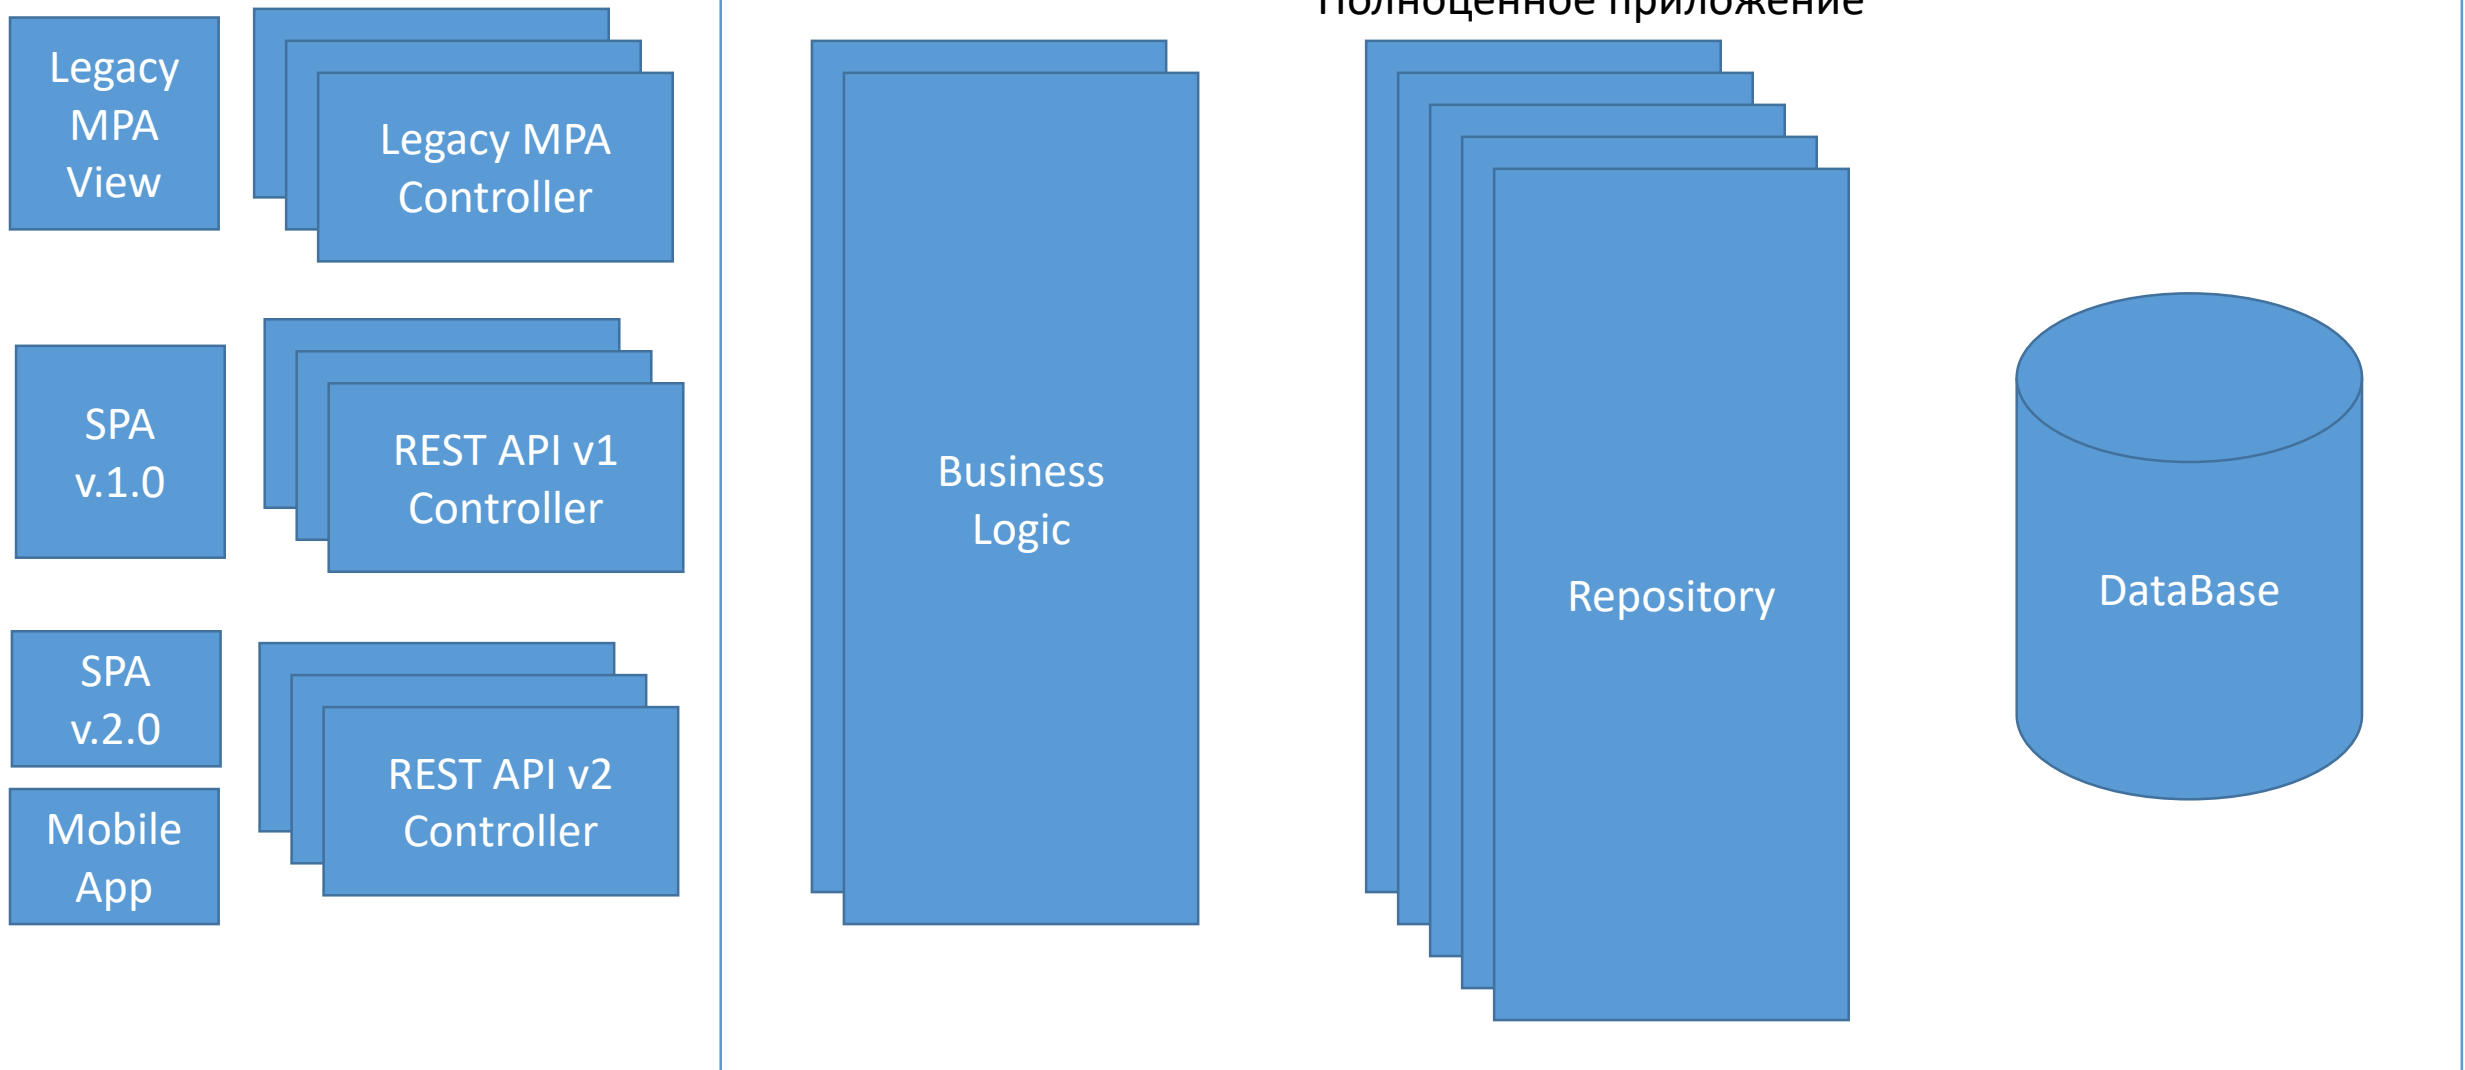

SPA

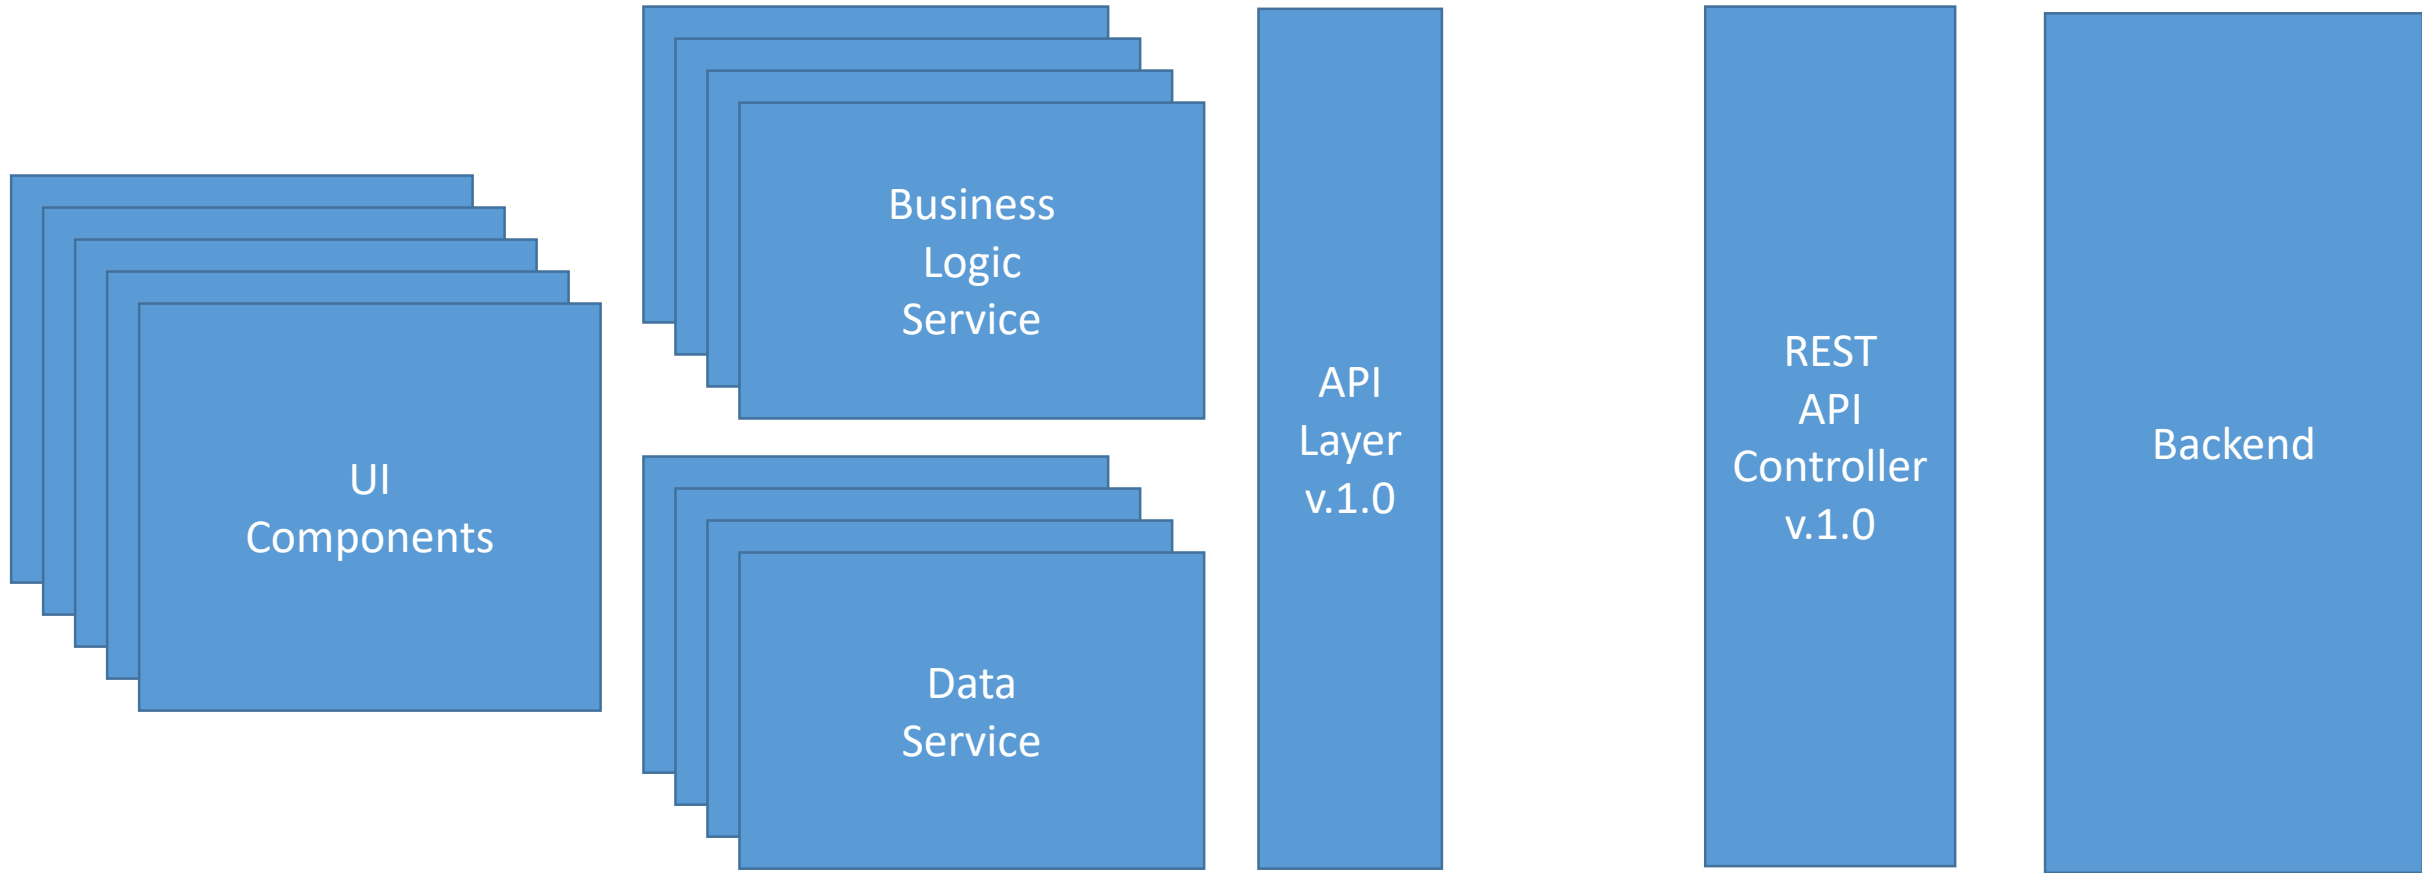

REST

<http://www.restapitutorial.ru/>

Resource	GET	PUT	POST	DELETE
Collection Uri, such as <code>http://example.com/resources</code>	List the URIs and perhaps other details of the collection's members.	Replace the entire collection with another collection.	Create a new entry in the collection. The new entry's URI is assigned automatically and is usually returned by the operation.	Delete the entire collection.
Element Uri, such as <code>http://example.com/resources/item17</code>	Retrieve a representation of the addressed member of the collection, expressed in an appropriate Internet media type.	Replace the addressed member of the collection, or if it doesn't exist, create it.	Not generally used. Treat the addressed member as a collection in its own right and create a new entry in it.	Delete the addressed member of the collection.