

UDF – User Defined Function – потребителски дефинирани функции

По конвенция е желателно името на функцията да започва с `udf_` подобно на `v_` за View и думите в описанието да бъдат разделени с долна черта `snake_case`.

SQL functions are easy to create. But you have to understand the 3 different types of functions in SQL:

1) Scalar functions:


-- return a single value.


2) Table based functions:

-- returns a Table.

3) Aggregate function:

returns a single value (but the function looped through a window set).

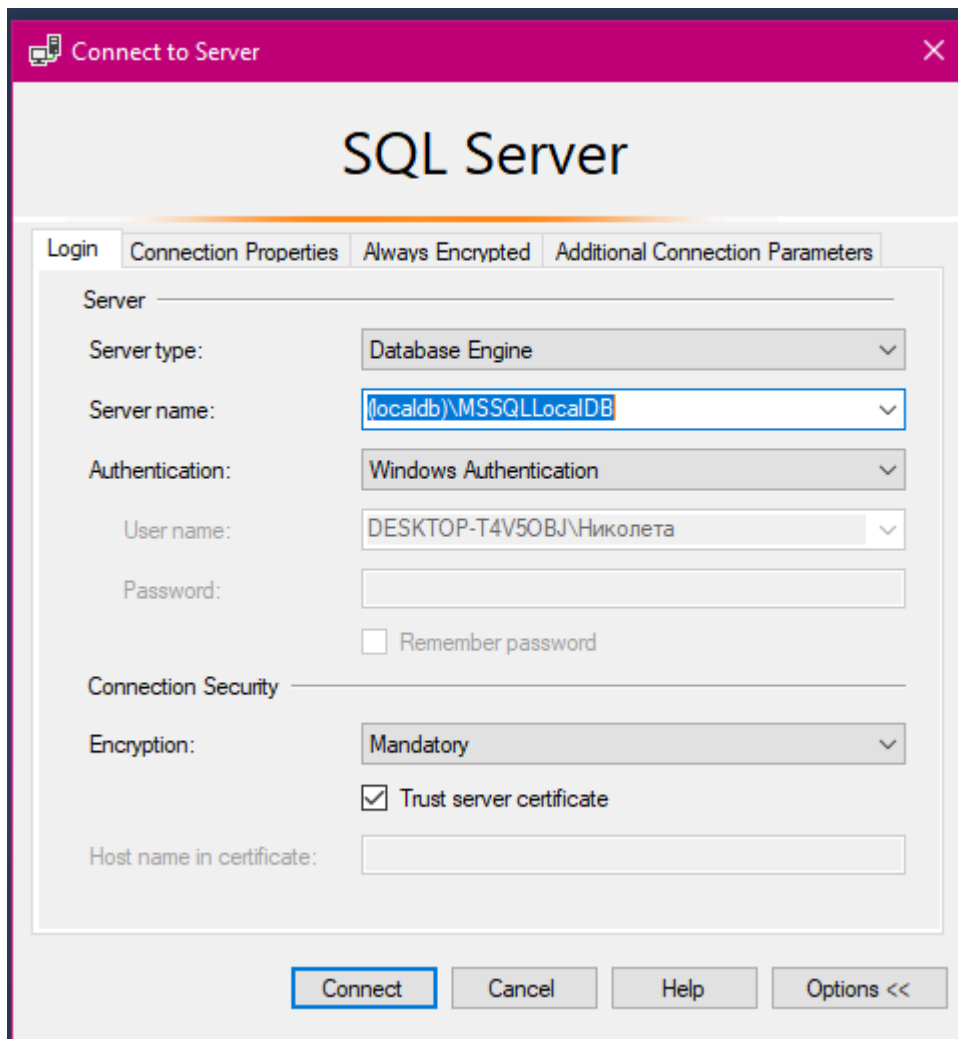

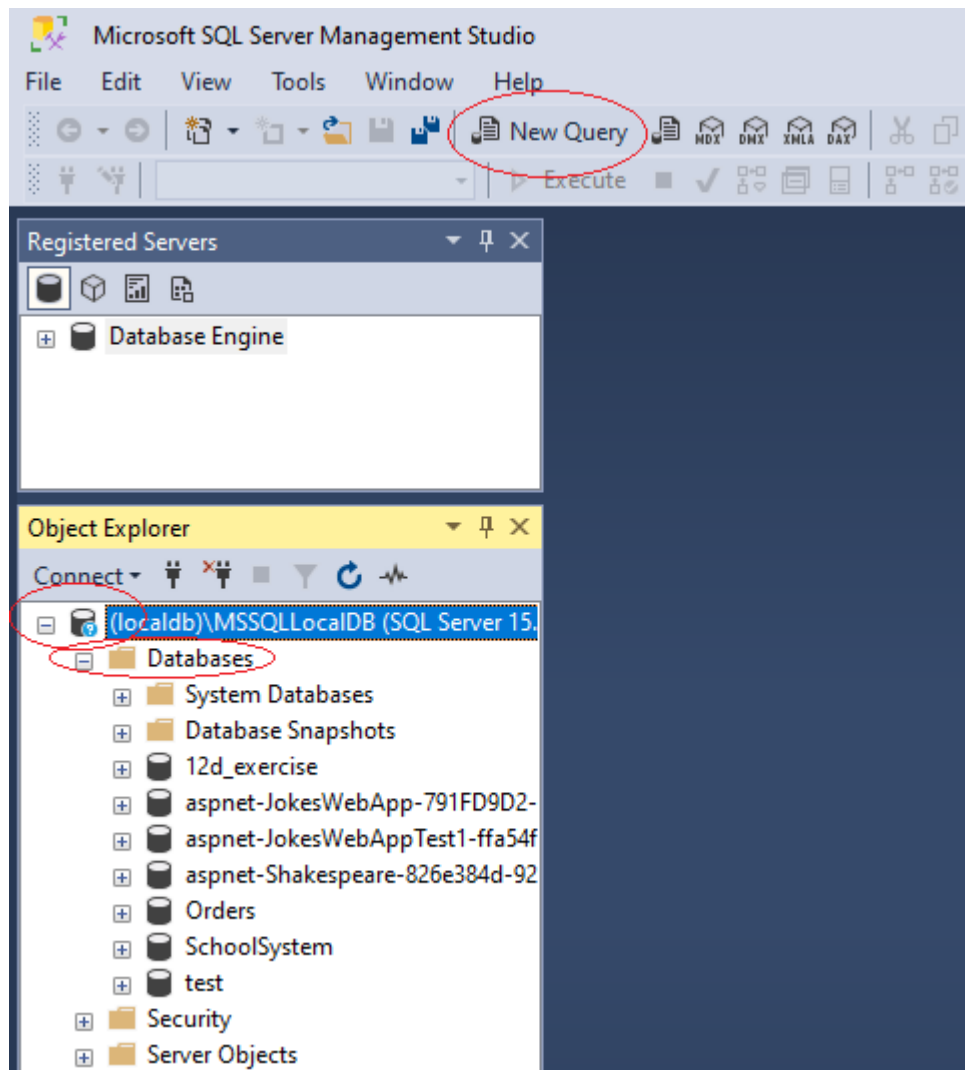

Execute

SQLQuery1.sql - (I...50BJ\Николета (52))*

```
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET NAMES utf8mb4 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;

CREATE DATABASE IF NOT EXISTS `company` /*!40100 DEFAULT CHARACTER SET utf8 */;
USE `company`;

CREATE TABLE IF NOT EXISTS `addresses` (
  `address_id` int(10) NOT NULL AUTO_INCREMENT,
  `address_text` varchar(100) NOT NULL,
  `town_id` int(10) DEFAULT NULL,
  PRIMARY KEY (`address_id`),
  UNIQUE KEY `PK_Addresses` (`address_id`),
  KEY `fk_addresses_towns` (`town_id`).
```

Messages

Msg 156, Level 15, State 1, Line 7
Incorrect syntax near the keyword 'IF'.

Msg 102, Level 15, State 1, Line 7
Incorrect syntax near ''.

Msg 102, Level 15, State 1, Line 11
Incorrect syntax near ''.

Msg 102, Level 15, State 1, Line 318
Incorrect syntax near ''.

Msg 102, Level 15, State 1, Line 351
Incorrect syntax near ''.

Execute

SQLQuery1.sql - (I...50BJ\Николета (52))*

```
/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET NAMES utf8mb4 */;
/*!40014 SET @OLD_FOREIGN_KEY_CHECKS=@@FOREIGN_KEY_CHECKS, FOREIGN_KEY_CHECKS=0 */;
/*!40101 SET @OLD_SQL_MODE=@@SQL_MODE, SQL_MODE='NO_AUTO_VALUE_ON_ZERO' */;

CREATE DATABASE company; /*!40100 DEFAULT CHARACTER SET utf8 */;
USE company;

CREATE TABLE addresses (
  address_id int(10) NOT NULL IDENTITY,
  address_text varchar(100) NOT NULL,
  town_id int(10) DEFAULT NULL,
  PRIMARY KEY (address_id),
  UNIQUE KEY PK_Addresses (address_id),
  KEY fk_addresses_towns (town_id).
```