

ТЕСТВАНЕ НА БД С ИЗКУСТВЕН ИНТЕЛЕКТ

Действително БД Persons, а не People.

<https://ai2sql.io>





Join thousands of developers using AI to supercharge their workflow

- ✓ Free to start
- ✓ Cancel anytime

- ✓ 24/7 support

Email

you@example.com

Password

••••••••


Minimum 6 characters

Confirm Password

••••••••



By signing up, I agree to the [Privacy Policy](#) and the [Terms of Service](#).

Create Account

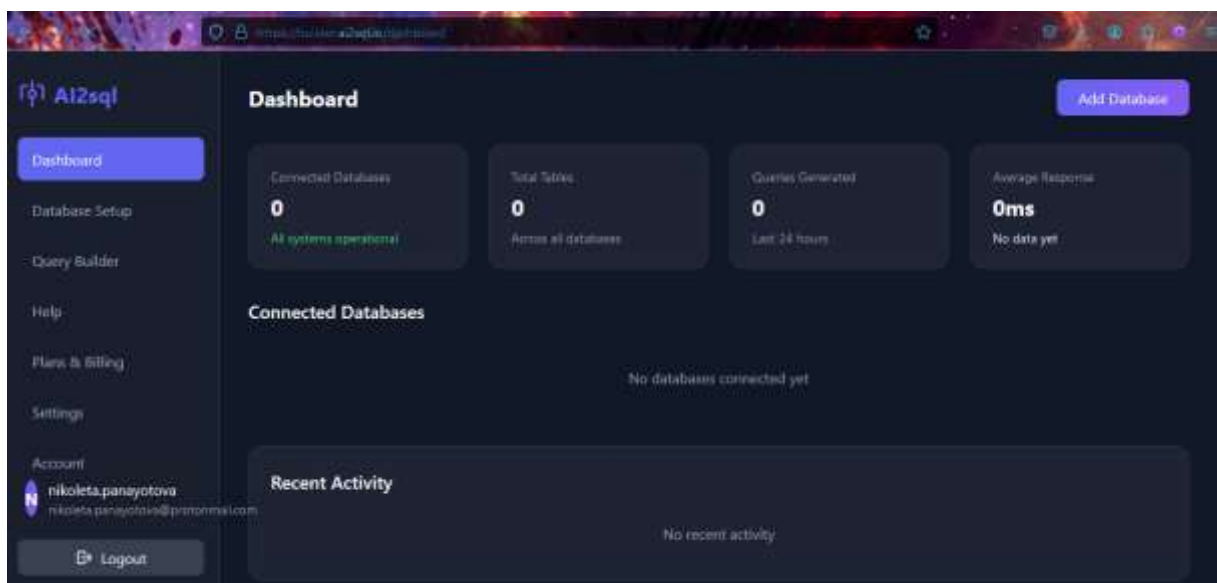

СУБД

СУРБД

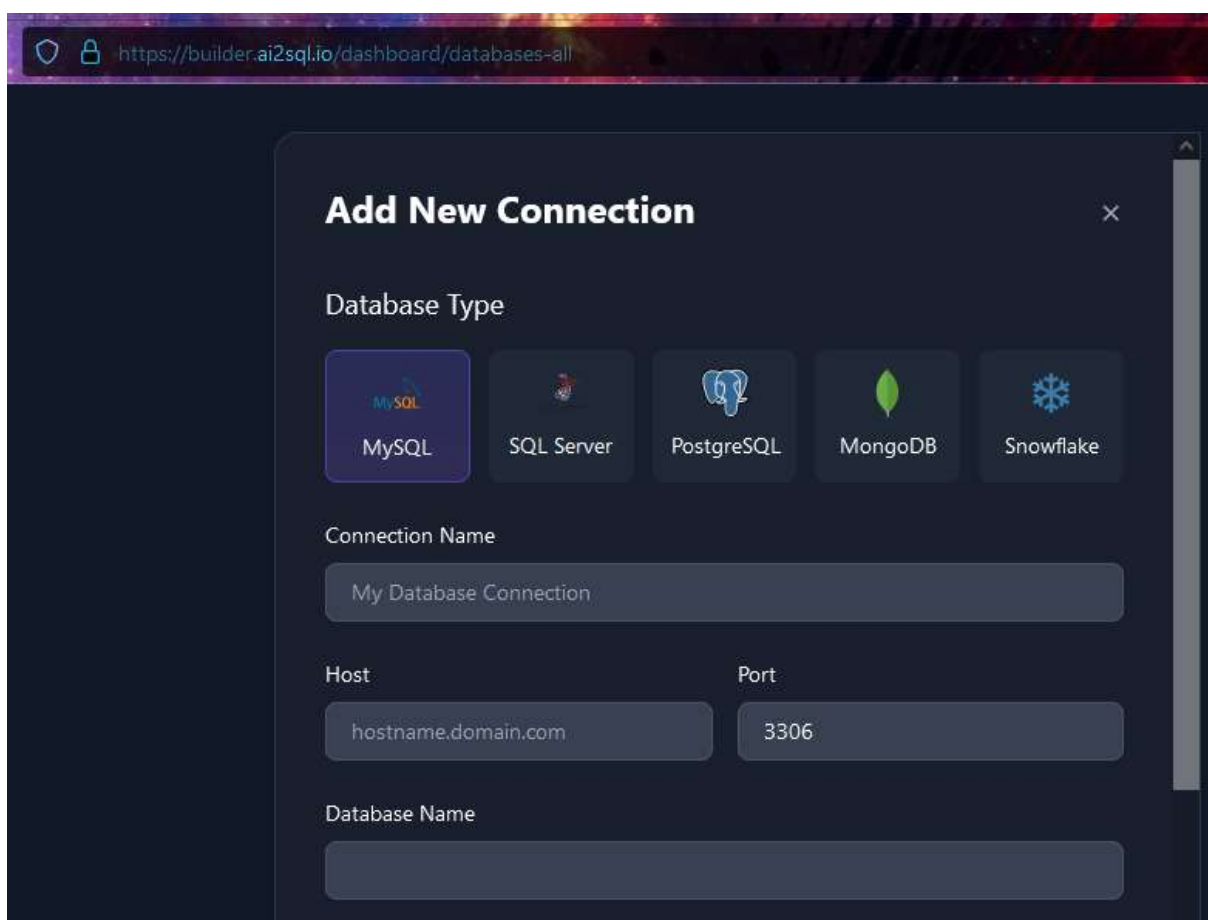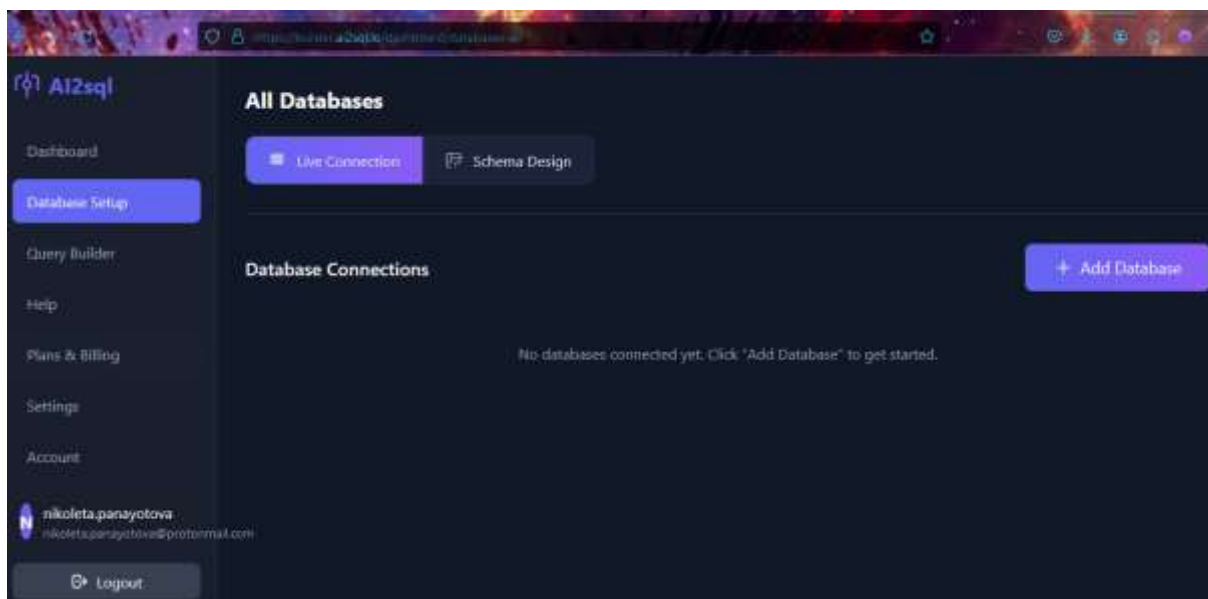

Данните за попълване са същите, които виждаме в Workbench при създаване на нова конекция. Винаги първо я тестваме, а после потвърждаваме.

Database Type

MySQL

SQL Server

PostgreSQL

MongoDB

Snowflake

MySQL connection failed; connect ECONNREFUSED 127.0.0.1:3306

Connection Name

test

Host

127.0.0.1

Port

3306

Database Name

geography

Username

Password

Cancel

Test Connection

Save Connection

За всеки случай погледнах адреса – действително това не е нашият ip:

Command Prompt

Ethernet adapter Ethernet:

Media State : Media disconnected

Connection-specific DNS Suffix . :

Wireless LAN adapter Local Area Connection* 1:

Media State : Media disconnected

Connection-specific DNS Suffix . :

Wireless LAN adapter Local Area Connection* 2:

Media State : Media disconnected

Connection-specific DNS Suffix . :

Wireless LAN adapter Wi-Fi:

Connection-specific DNS Suffix . :

IPv6 Address. :

IPv6 Address. :

Temporary IPv6 Address. :

Temporary IPv6 Address. :

Link-local IPv6 Address :

IPv4 Address. :

Subnet Mask :

Default Gateway :

cmd

ipconfig



Create New Manual Database

Database Type

MySQL ▼




Database Name

geography



Description

Optional description


Cancel Create Database

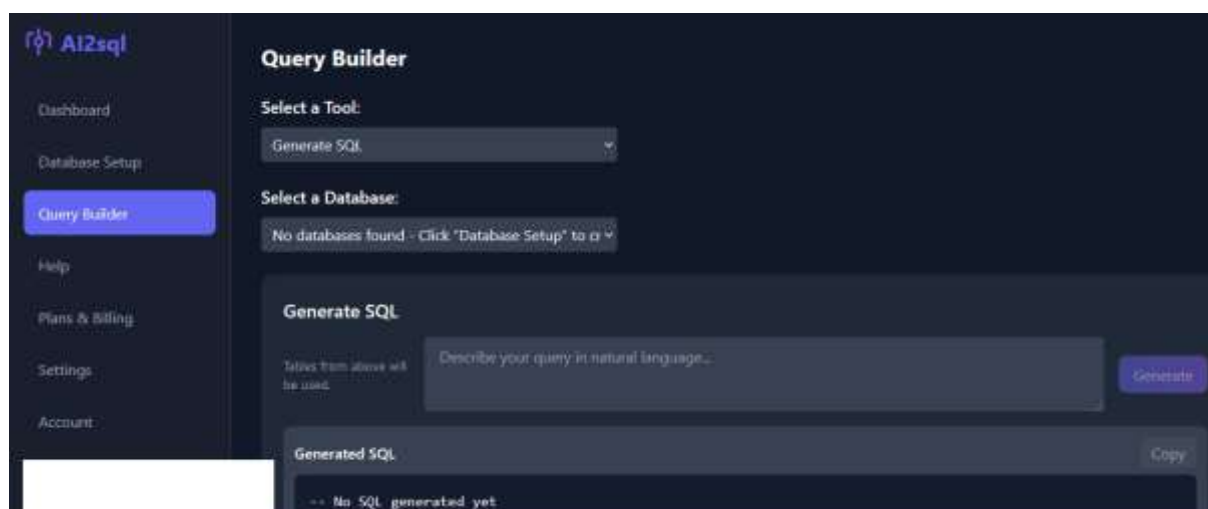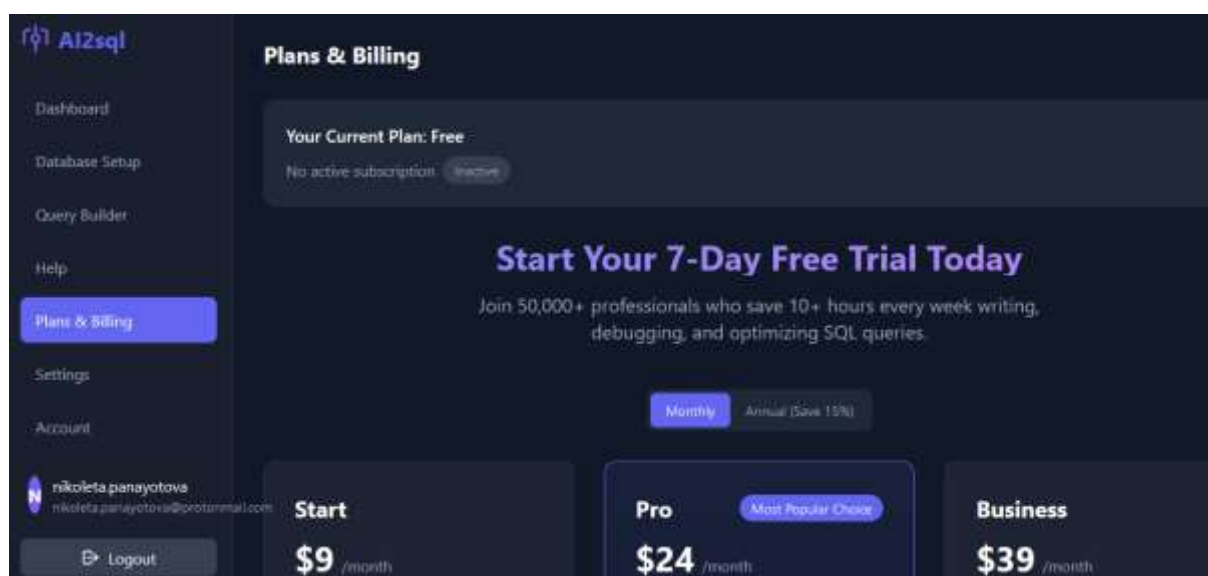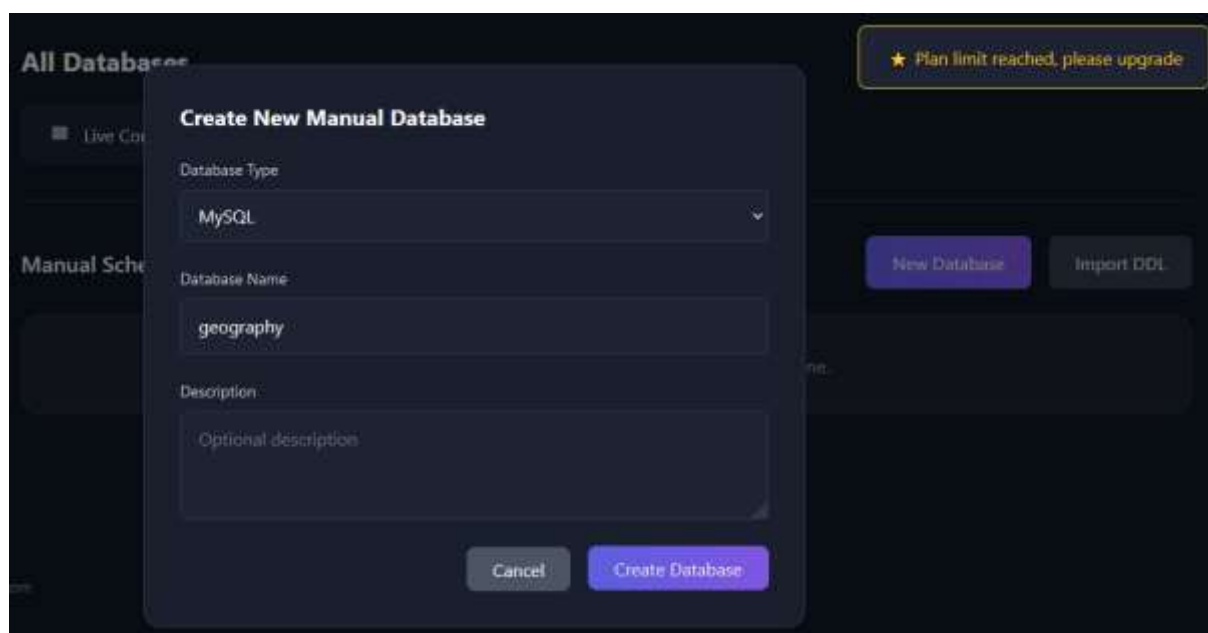


По същия начин както в WorkBench, винаги първо тестваме нова връзка, а после я запазваме:

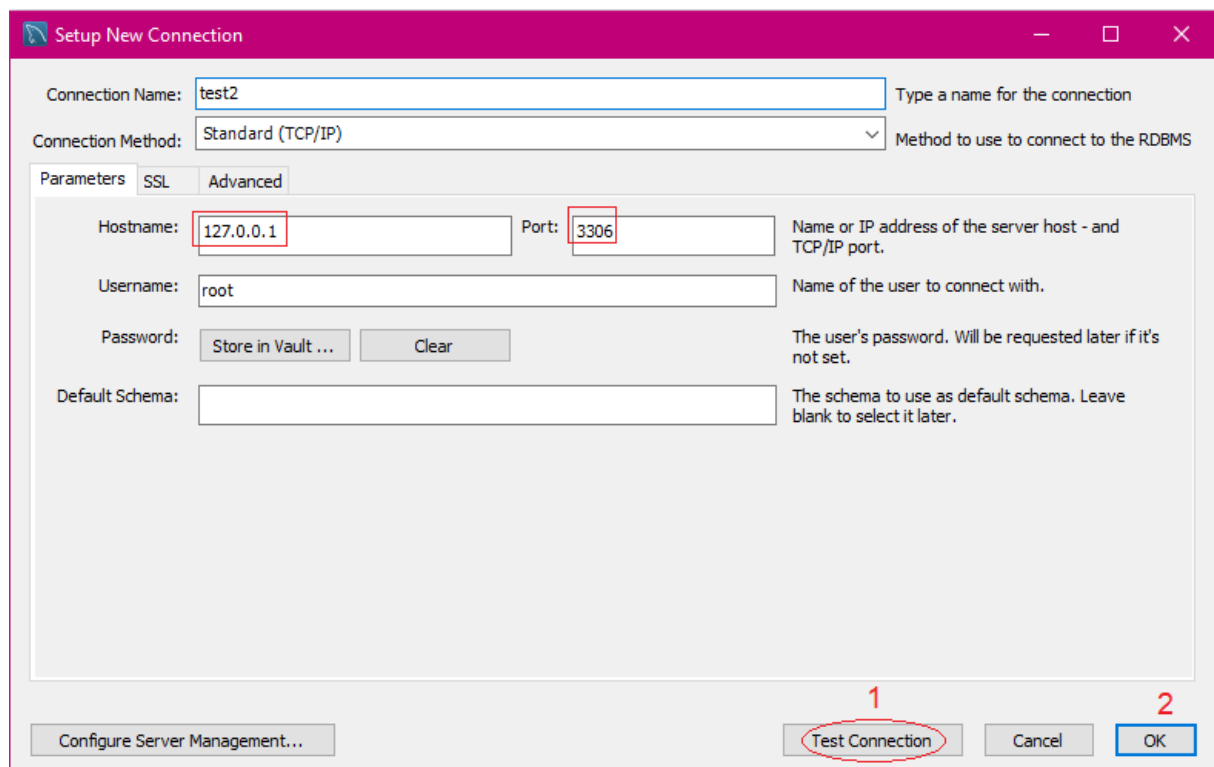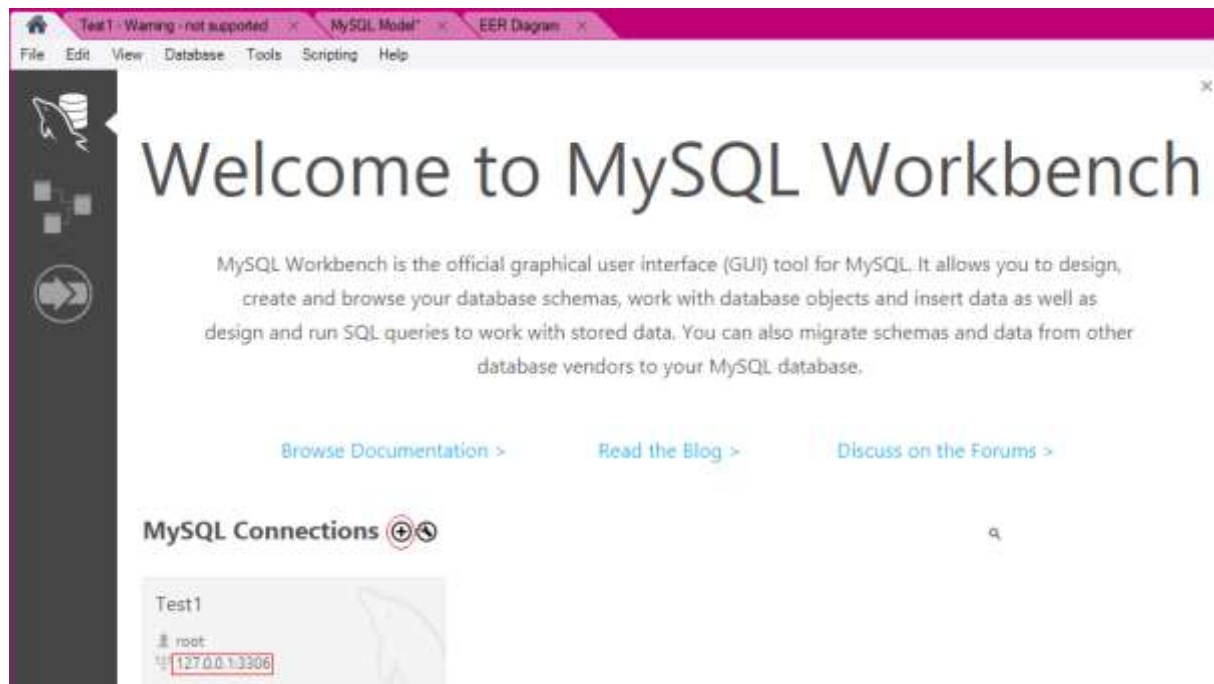

<https://ai2sql.crisp.help/en/article/troubleshooting-ai2sql-connector-issues-1u8156b/>

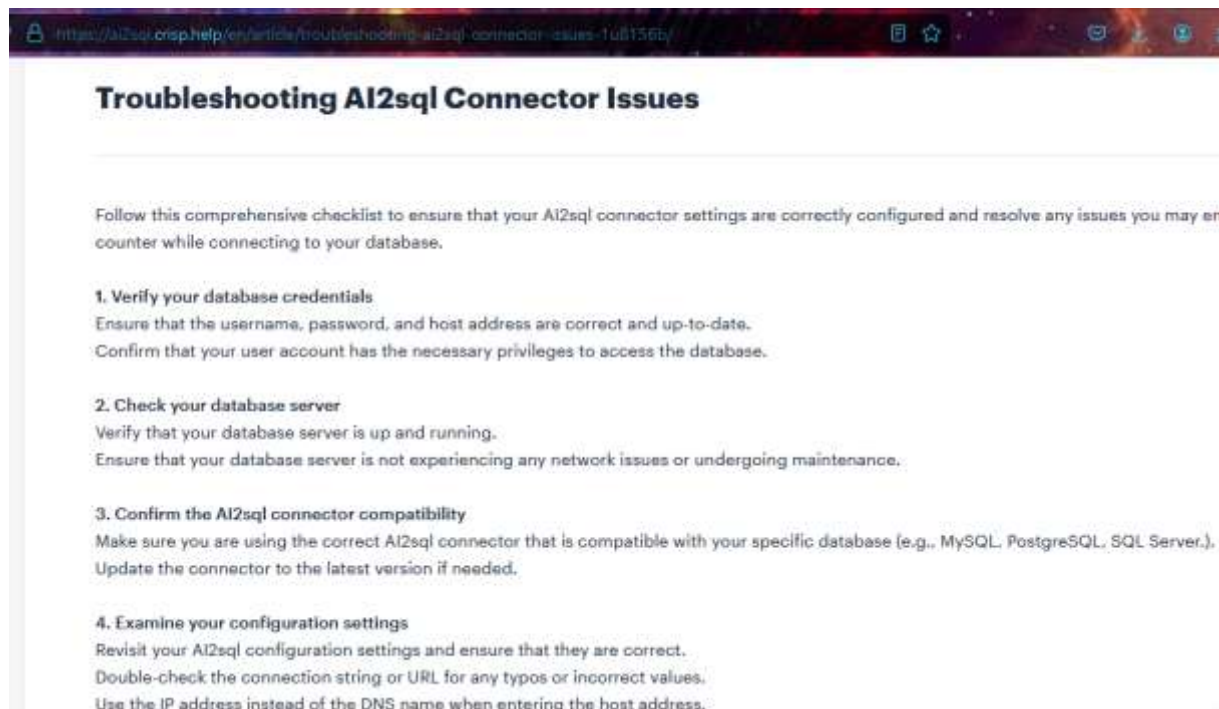

Реално предоставяш достъп на ИИ до лични/служебни данни.

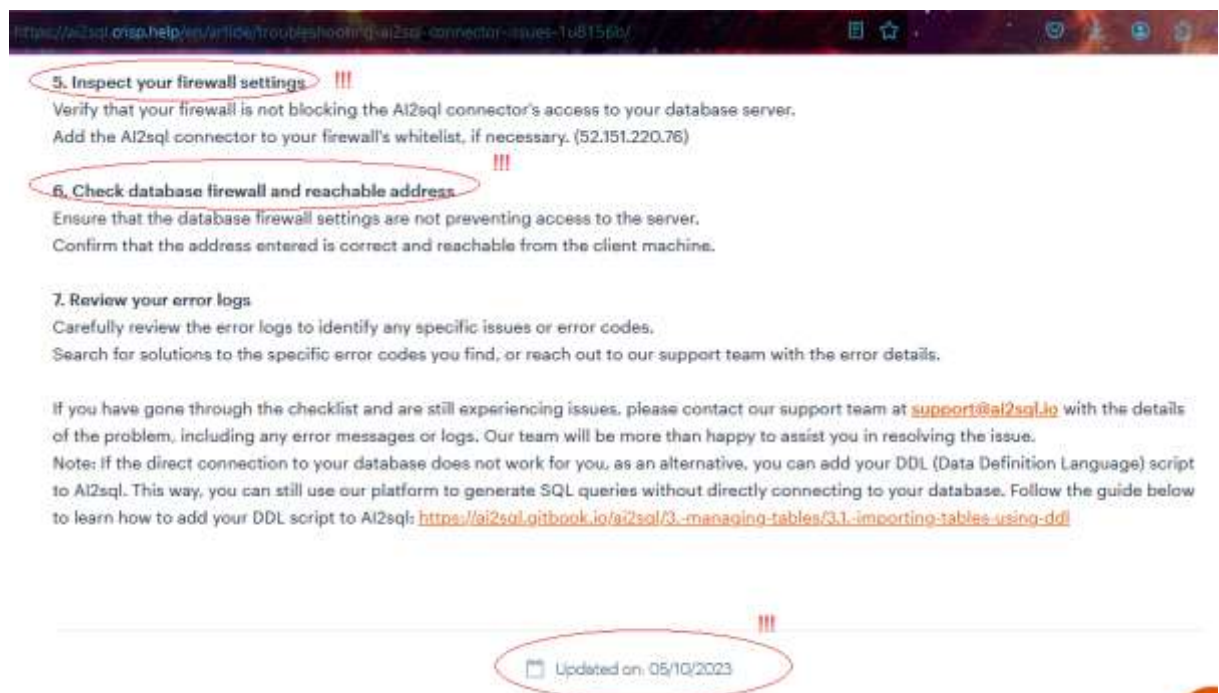

https://cybersecuritynews.com/deepseek-database-leaked/?fbclid=IwY2xjawIJU31leHRuA2FlbQlxMQABHYttKVu6aynT3jEjhP0uV7xAHkLapGbRpGK07jg6lc0rp1HouCbbhEiu8Q_aem_oMgSzWefc1TCNrqbwdVthg



DeepSeek Database Leaked – Full Control Over DB Secret keys, Logs & Chat History Exposed

By **Balaji N** - January 30, 2025



A security vulnerability in DeepSeek, a prominent Chinese AI startup, exposed a publicly accessible ClickHouse database containing highly sensitive information, including over a million lines of log streams.

Recent Posts



Vulnerabilities

New Jailbreak Techniques Expose DeepSeek LLM Vulnerabilities, Enabling Malicious Exploits

Tushar Subhra Dutta - January 31, 2025

Recent revelations have exposed critical vulnerabilities in DeepSeek's

A boy lets a ball drop from a height h . What is the speed of the ball when reaching the floor? (no drag)



$$\sum \mathbf{F} = \dot{\mathbf{p}}; \quad \mathbf{p} = m\mathbf{r}$$

$$m\ddot{\mathbf{r}} = -\gamma\dot{\mathbf{r}} - mg\hat{e}_y$$

$$m\ddot{G}(t) + \gamma\dot{G}(t) = \delta(t)$$

$$(-m\omega^2 + i\omega\gamma)G(\omega) = 1$$

$$G(t) = -\frac{1}{2\pi} \int \frac{e^{i\omega t}}{\omega(m\omega - i\gamma)} d\omega$$

$$G(t) = \Theta(t) \frac{1}{\gamma} [1 - \exp(-\gamma t/m)]$$

$$\mathbf{r}(t) = \int_0^t G(t-\tau)(-mg\hat{e}_y) d\tau$$



$$\mathbf{r}(t) = \frac{mgt}{\gamma} \hat{e}_y - \frac{m^2}{\gamma^2} [1 - \exp(-\gamma t/m)] \hat{e}_y$$


$$\lim_{\gamma \rightarrow 0} \mathbf{r} \cdot \hat{e}_y = h - \frac{gt^2}{2} \Rightarrow t = \sqrt{\frac{2h}{g}}$$

$$v = \lim_{\gamma \rightarrow 0} -\dot{\mathbf{r}} \cdot \hat{e}_y = gt = \sqrt{2gh}$$



$$mgh = \frac{1}{2}mv^2 \Rightarrow v = \sqrt{2gh}$$

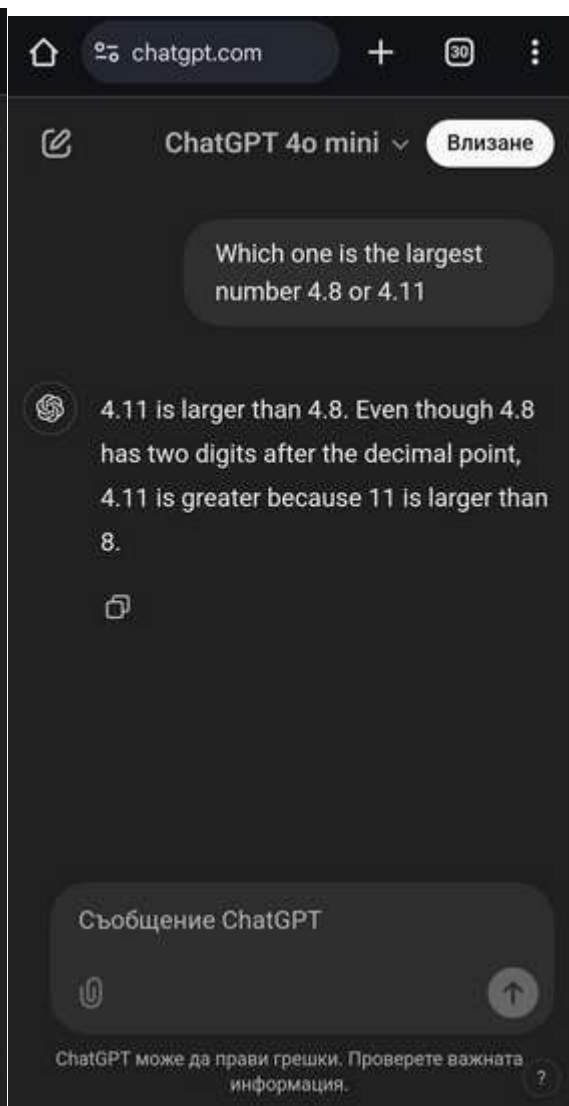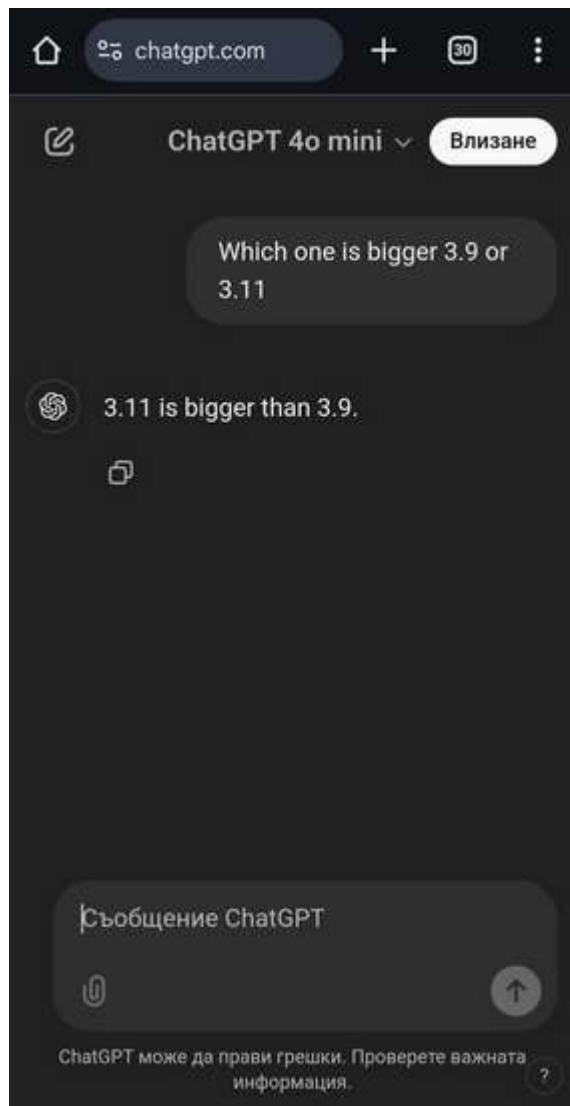

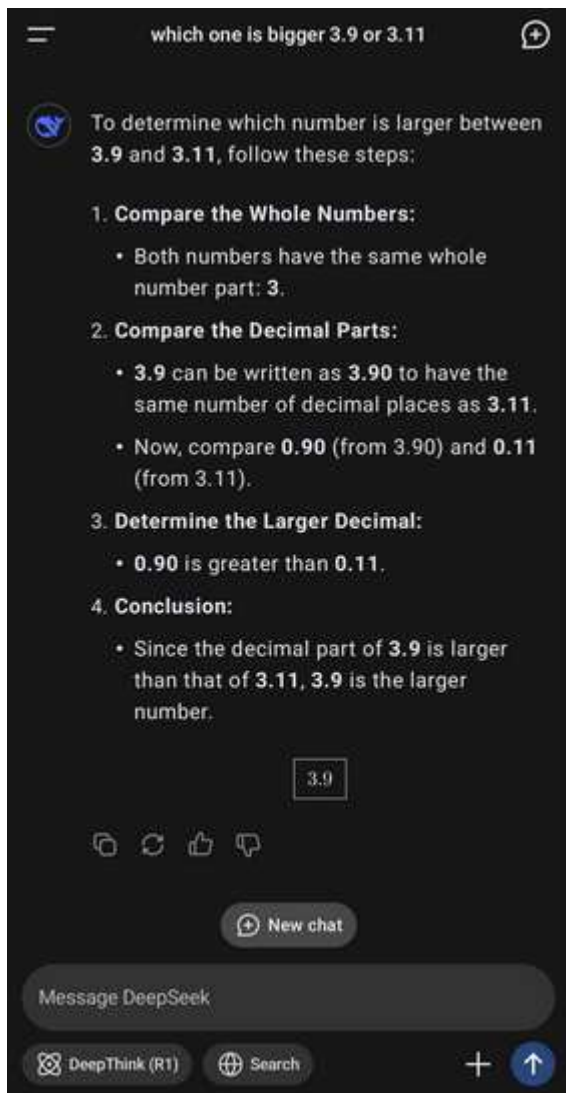

SQL Beginner-Level Test

Basic SQL Concepts

1. **What does SQL stand for?**
 - A. Structured Question Language
 - B. Simple Query Language
 - C. Structured Query Language
 - D. Systematic Query Language**Answer: C**
2. **Which SQL statement is used to retrieve data from a database?**
 - A. FETCH
 - B. SELECT
 - C. GET
 - D. RETRIEVE**Answer: B**
3. **Which keyword is used to filter the results in a SQL query?**
 - A. FILTER
 - B. ORDER

- C. WHERE
- D. GROUP

Answer: C

4. Which clause is used to sort the results in ascending or descending order?

- A. GROUP BY
- B. ORDER BY
- C. SORT
- D. ARRANGE

Answer: B

5. Which symbol is used as a wildcard to match any number of characters in SQL?

- A. %
- B. _
- C. *
- D. ?

Answer: A

Data Definition Language (DDL)

6. Which SQL statement is used to create a new table?

- A. INSERT
- B. CREATE TABLE
- C. NEW TABLE
- D. ADD TABLE

Answer: B

7. Which command is used to remove a table from a database?

- A. REMOVE TABLE
- B. DELETE TABLE
- C. DROP TABLE
- D. CLEAR TABLE

Answer: C

8. How do you add a new column to an existing table?

- A. MODIFY TABLE
- B. ALTER TABLE ADD COLUMN
- C. UPDATE TABLE
- D. ADD COLUMN TO TABLE

Answer: B

9. Which SQL statement is used to remove all records from a table without deleting its structure?

- A. DELETE
- B. DROP
- C. TRUNCATE
- D. CLEAR

Answer: C

10. Which of the following data types is used to store textual data in SQL?

- A. INT
- B. VARCHAR
- C. FLOAT

- D. BOOLEAN

Answer: B

Data Manipulation Language (DML)

11. Which SQL statement is used to insert new records into a table?

- A. ADD
- B. INSERT INTO
- C. NEW RECORD
- D. UPDATE

Answer: B

12. How do you update existing data in a table?

- A. MODIFY
- B. CHANGE
- C. UPDATE
- D. SET

Answer: C

13. Which SQL statement is used to remove specific records from a table?

- A. REMOVE
- B. DELETE
- C. DROP
- D. CLEAR

Answer: B

14. What happens if you run `DELETE FROM employees;` without a `WHERE` clause?

- A. It deletes only the first row
- B. It deletes the last inserted row
- C. It deletes all rows in the `employees` table
- D. It gives an error

Answer: C

15. Which SQL keyword is used to group rows that have the same values?

- A. ORDER BY
- B. GROUP BY
- C. SORT
- D. AGGREGATE

Answer: B

Joins and Relationships

16. Which SQL clause is used to combine rows from two or more tables based on a related column?

- A. JOIN
- B. UNION
- C. MERGE
- D. CONNECT

Answer: A

17. What type of join returns only matching records from both tables?

- A. LEFT JOIN
- B. RIGHT JOIN
- C. INNER JOIN
- D. FULL OUTER JOIN

Answer: C

18. Which SQL clause is used to remove duplicate rows from a result set?

- A. DISTINCT
- B. UNIQUE
- C. NO DUPLICATES
- D. CLEAN

Answer: A

19. Which SQL function is used to return the total number of rows in a table?

- A. COUNT()
- B. SUM()
- C. TOTAL()
- D. NUM()

Answer: A

20. Which of the following statements about primary keys is true?

- A. A table can have multiple primary keys
- B. A primary key can contain duplicate values
- C. A primary key uniquely identifies each record
- D. A primary key is optional in a table

Answer: C

.....

Here's a **Medium-Level SQL Test** with 20 multiple-choice questions covering queries, joins, indexing, transactions, and more.

SQL Intermediate-Level Test

Advanced Queries and Functions

1. Which SQL function is used to get the current date and time?

- A. CURRENT_DATE
- B. GETDATE()
- C. NOW()
- D. Both B and C

Answer: D

2. Which SQL statement retrieves unique department names from the "employees" table?

- A. SELECT DISTINCT department FROM employees;
- B. SELECT UNIQUE department FROM employees;
- C. SELECT DIFFERENT department FROM employees;
- D. SELECT department FROM employees GROUP BY department;

Answer: A

3. What will happen if you execute the following query?

🦊 DeepSeek-R1 is now live and open source, rivaling OpenAI's Model o1. Available on web, app, and API. [Click for details.](#)

deepseek

Into the unknown

Start Now

Free access to DeepSeek-V3.
Experience the intelligent model.

Get DeepSeek App

Chat on the go with DeepSeek-V3
Your free all-in-one AI tool

Due to large-scale malicious attacks on DeepSeek's services, registration may be busy. Please wait and try again. Registered users can log in normally. Thank you for your understanding and support.



Only login via email, Google, or +86 phone number login is supported in your region.

Phone number / email address

Password

☐ I confirm that I have read, consent and agree to DeepSeek's [Terms of Use](#) and [Privacy Policy](#).

Log in

[Forgot password?](#) [Sign up](#)

OR

 Log in with Google

ChatGPT

This script creates a **geography database** with properly defined relationships.

```
sql
-- Create the database
CREATE DATABASE GeographyDB;
USE GeographyDB;

-- Table for Continents
CREATE TABLE Continents (
  ContinentID INT PRIMARY KEY AUTO_INCREMENT,
  ContinentName VARCHAR(50) NOT NULL UNIQUE
);

-- Table for Countries
CREATE TABLE Countries (
  CountryID INT PRIMARY KEY AUTO_INCREMENT,
  CountryName VARCHAR(100) NOT NULL UNIQUE
```

Copy Edit

Message ChatGPT

-- Create the database

CREATE DATABASE GeographyDB;

USE GeographyDB;

-- Table for Continents

```
CREATE TABLE Continents (  
    ContinentID INT PRIMARY KEY AUTO_INCREMENT,  
    ContinentName VARCHAR(50) NOT NULL UNIQUE  
);
```

-- Table for Countries

```
CREATE TABLE Countries (  
    CountryID INT PRIMARY KEY AUTO_INCREMENT,  
    CountryName VARCHAR(100) NOT NULL UNIQUE,  
    Capital VARCHAR(100),  
    Population BIGINT,  
    Area DECIMAL(10,2), -- Area in square kilometers  
    ContinentID INT,  
    FOREIGN KEY (ContinentID) REFERENCES Continents(ContinentID)  
);
```

-- Table for Cities

```
CREATE TABLE Cities (  
    CityID INT PRIMARY KEY AUTO_INCREMENT,  
    CityName VARCHAR(100) NOT NULL,  
    Population BIGINT,  
    CountryID INT,  
    IsCapital BOOLEAN DEFAULT FALSE,  
    FOREIGN KEY (CountryID) REFERENCES Countries(CountryID)  
);
```

-- Table for Regions (e.g., states, provinces)

```
CREATE TABLE Regions (  
    RegionID INT PRIMARY KEY AUTO_INCREMENT,
```

```
    RegionName VARCHAR(100) NOT NULL,  
    CountryID INT,  
    FOREIGN KEY (CountryID) REFERENCES Countries(CountryID)  
);
```

-- Table for Rivers

```
CREATE TABLE Rivers (  
    RiverID INT PRIMARY KEY AUTO_INCREMENT,  
    RiverName VARCHAR(100) NOT NULL UNIQUE,  
    Length DECIMAL(10,2), -- Length in kilometers  
    Source VARCHAR(100),  
    Mouth VARCHAR(100)  
);
```

-- Table for Mountains

```
CREATE TABLE Mountains (  
    MountainID INT PRIMARY KEY AUTO_INCREMENT,  
    MountainName VARCHAR(100) NOT NULL UNIQUE,  
    Height DECIMAL(10,2), -- Height in meters  
    Location VARCHAR(100)  
);
```

-- Table for Lakes

```
CREATE TABLE Lakes (  
    LakeID INT PRIMARY KEY AUTO_INCREMENT,  
    LakeName VARCHAR(100) NOT NULL UNIQUE,  
    SurfaceArea DECIMAL(10,2), -- Area in square kilometers  
    Depth DECIMAL(10,2), -- Maximum depth in meters  
    CountryID INT,  
    FOREIGN KEY (CountryID) REFERENCES Countries(CountryID)  
);
```

-- Table for Borders (Country-to-Country relationships)

```
CREATE TABLE CountryBorders (  
    BorderID INT PRIMARY KEY AUTO_INCREMENT,  
    Country1ID INT,  
    Country2ID INT,  
    BorderLength DECIMAL(10,2), -- Length in kilometers  
    FOREIGN KEY (Country1ID) REFERENCES Countries(CountryID),  
    FOREIGN KEY (Country2ID) REFERENCES Countries(CountryID),  
    CONSTRAINT unique_border UNIQUE (Country1ID, Country2ID)  
);
```


-- Table for Oceans

```
CREATE TABLE Oceans (  
    OceanID INT PRIMARY KEY AUTO_INCREMENT,  
    OceanName VARCHAR(100) NOT NULL UNIQUE,  
    Area DECIMAL(15,2) -- Area in square kilometers  
);
```


-- Table for Seas

```
CREATE TABLE Seas (  
    SeaID INT PRIMARY KEY AUTO_INCREMENT,  
    SeaName VARCHAR(100) NOT NULL UNIQUE,  
    Area DECIMAL(15,2),  
    OceanID INT,  
    FOREIGN KEY (OceanID) REFERENCES Oceans(OceanID)  
);
```


Тестваме кода в WorkBench – най-добре директно с ER-диаграма.

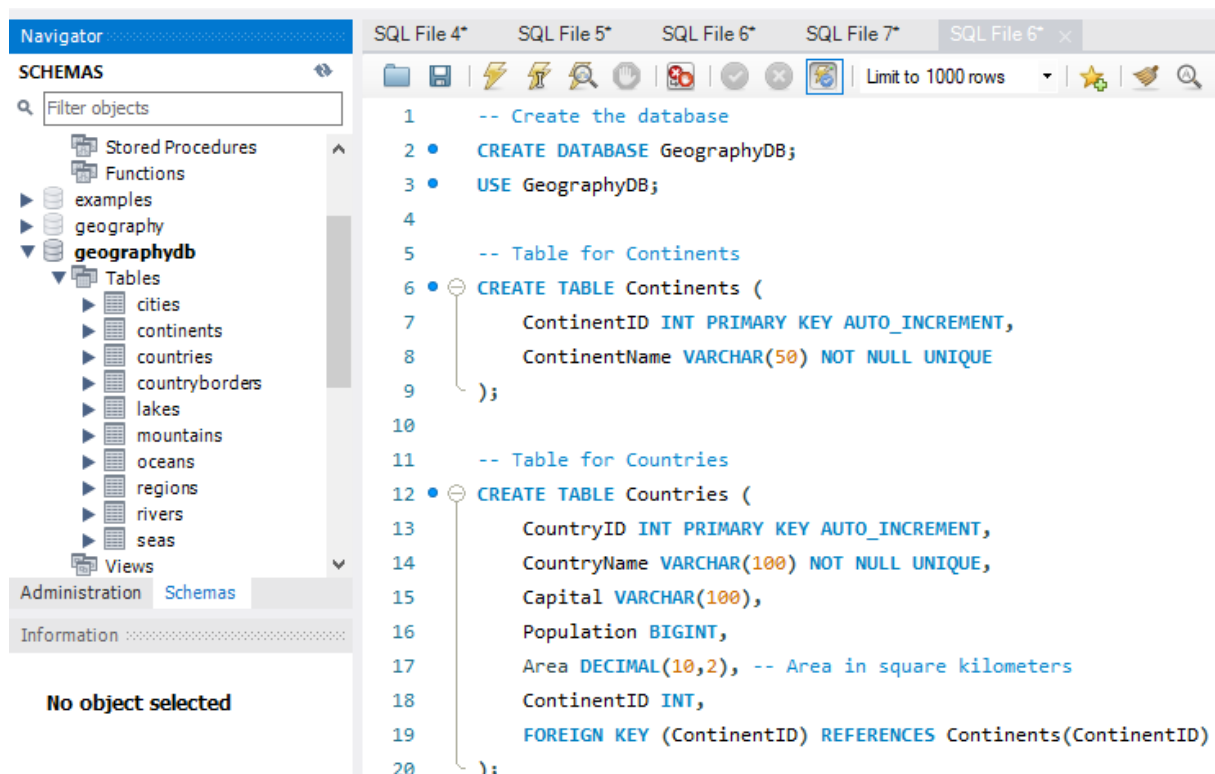

Оказва се, че има много грешки – липсват връзки между таблиците, също неправилна таблица за границите (може направо да се изтрие, вместо да има само 2 граници). Между таблици държави-планини, трябва да има 3-та средна, която държи външните ключове за връзка n:n и т.н. Тези неща е важно да се коригират, преди да се попълват с данни, както можеше да стане, ако се бях предоверила на ChatGPT и просто бях поискала да ги запълни със записи. Корекцията после щеше да е много трудна.

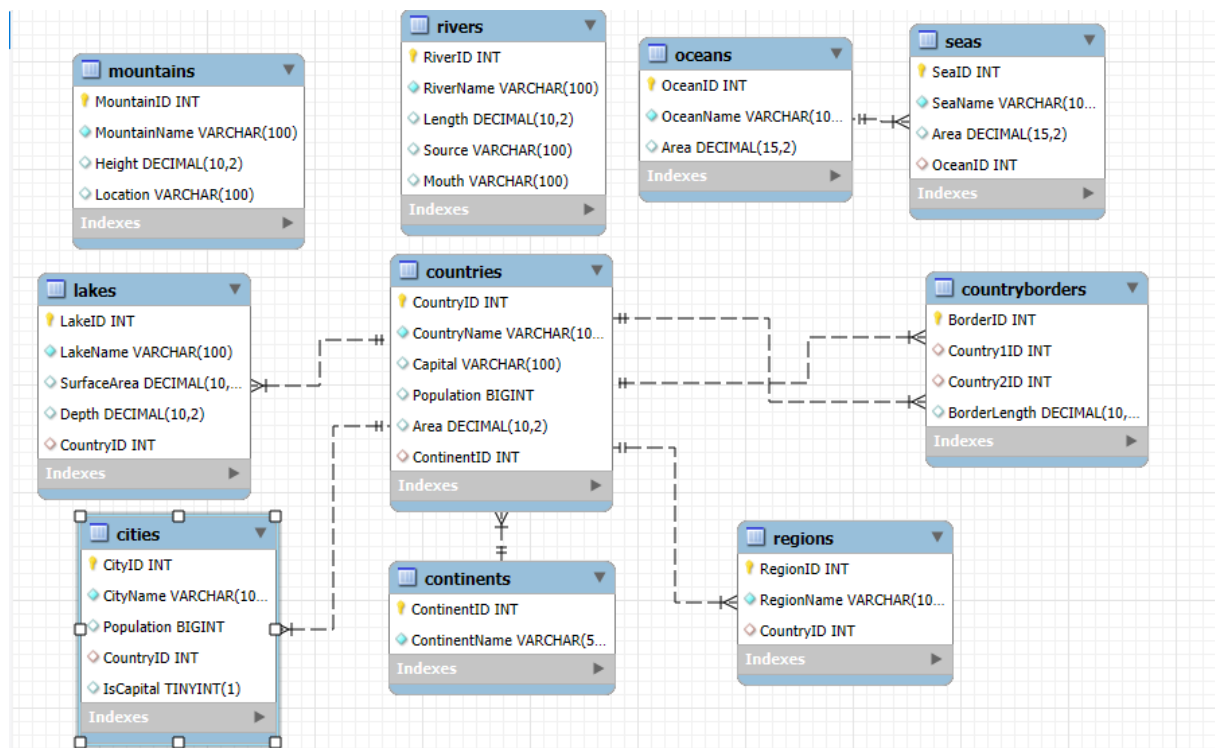

Специализиран AI-генератор на БД: <https://fabricate.mockaroo.com>

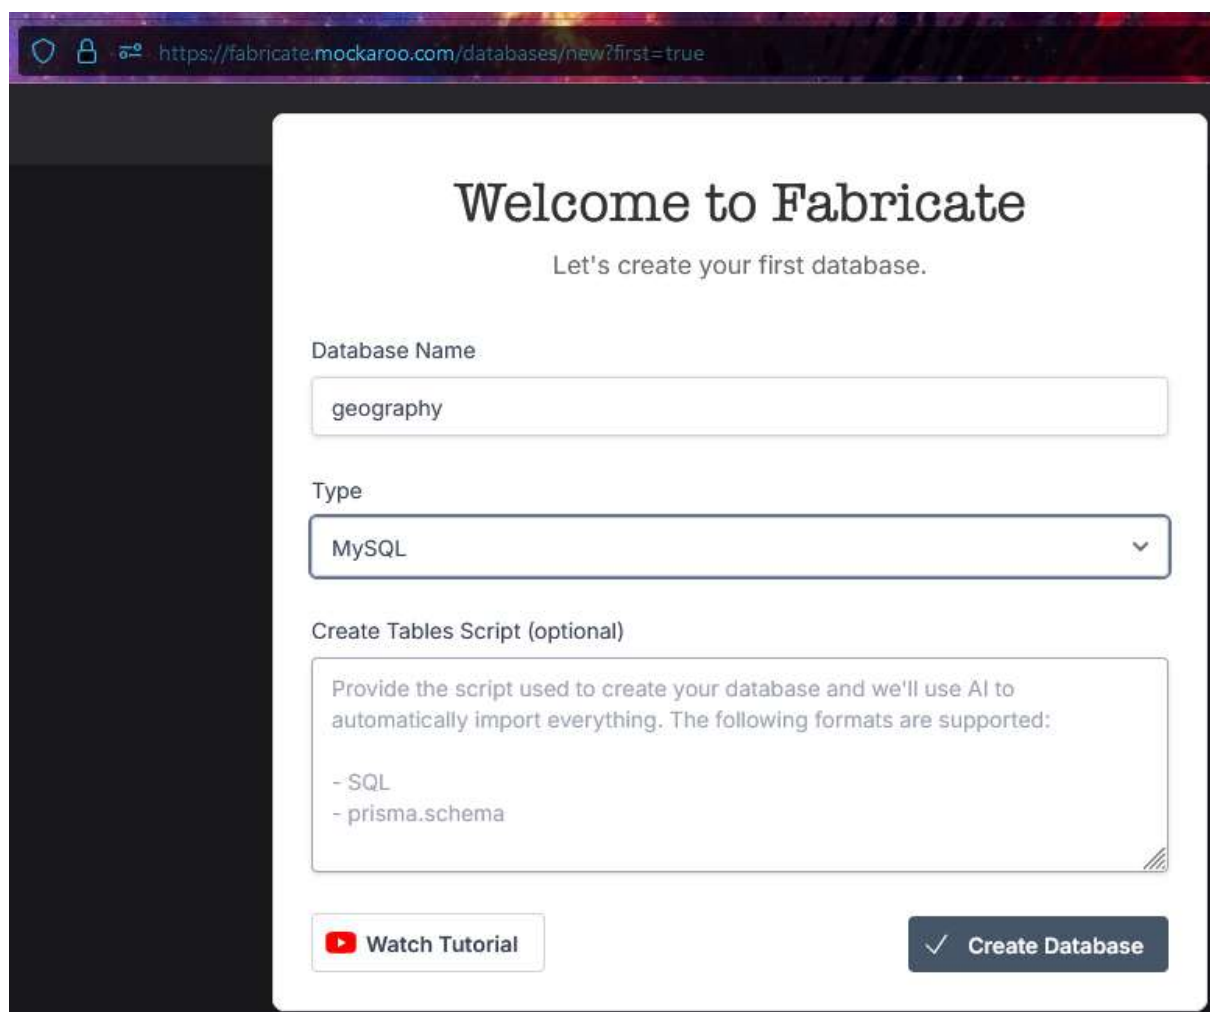

The screenshot shows a web browser window with the URL <https://fabricate.mockaroo.com/databases/new?first=true>. The page has a dark sidebar on the left and a main white content area. The content area features a large heading 'Welcome to Fabricate' and a subheading 'Let's create your first database.' Below these are three form fields: 'Database Name' with the text 'geography', 'Type' with a dropdown menu showing 'MySQL', and 'Create Tables Script (optional)' with a text area containing instructions and supported formats. At the bottom of the form are two buttons: 'Watch Tutorial' with a YouTube icon and 'Create Database' with a checkmark icon.

Database Name

geography

Type

MySQL

Create Tables Script (optional)

Provide the script used to create your database and we'll use AI to automatically import everything. The following formats are supported:

- SQL
- prisma.schema

Watch Tutorial

✓ Create Database

https://fabricate.mockaroo.com/databases/1feca429-33f2-4498-af60-3af07fc4646

Add Table(s)

Create a new table called:

countries

Optionally describe your table and we'll create the columns automatically:

countries table with id, country code, name, capital, currency code, continent code

Example Data (optional):

Paste a few rows of example CSV or JSON data here and we will derive the columns and types automatically.

OR

Import tables and relationships from a SQL DDL script:

Cancel Add Table

fabricate

geography

countries

TUTORIALS

- Fabricate Overview (3 minutes)
- Foreign Key Relationships (1 minute)
- Derive One Column from Another (2 minutes)
- Create Data for Any Domain Using AI (1 minute)
- JSON Data (2 minutes)
- Mock APIs (3 minutes)

Николета Панайотова

countries Rows: exactly 100

+ Add Column Attach Data...

id	country code	name	capital	currency code	continent code
Number	Country Code (US)	Country (US)	City (US)	Currency Code (US)	List
1	US	United States	Milwaukee	USD	EU
2	US	United States	Kent	USD	AF
3	US	United States	Salt Lake City	USD	AN
4	US	United States	West Palm Beach	USD	EU
5	US	United States	Jacksonville	USD	NA
6	US	United States	Van Nuys	USD	EU
7	US	United States	Rochester	USD	NA
8	US	United States	Cincinnati	USD	EU
9	US	United States	New York City	USD	AF
10	US	United States	Harrisburg	USD	SA
11	US	United States	Tacoma	USD	NA
12	US	United States	Memphis	USD	AS
13	US	United States	Decatur	USD	NA
14	US	United States	Seattle	USD	AN
15	US	United States	Columbus	USD	AF

This is a preview showing up to the first 100 rows.

Your account is currently on the free plan, limited to 100 rows per table. Upgrade Now

Column Settings

Name

capital

Generator

City (US)

Q Search...

City (Global)
e.g. Paris

City (US)
e.g. New York

Column From Another Table
Pulls related values from a column in another table.

Company Domain Name
e.g. apple.com

Company Industry
e.g. Consumer Electronics

Percentage num

Delete

Close

✓

Apply Changes

Друг много мощен ИИ – <https://app.chat2db.ai/workspace>

