

59 - UseStatusCodePagesWithRedirects vs UseStatusCodePagesWithReExecute

```
yeNotFound.cshtml | ErrorController.cs | Startup.cs | launchSettings.json | HomeController.cs
EmployeeManagement.Startup | Configure(IApplicationBuilder app)
0 references
public void Configure(IApplicationBuilder app, IWebHostEnvironment env)
{
    if (env.IsDevelopment()) // bool, IsStaging, IsProduction, IsEnvironment
    {
        app.UseDeveloperExceptionPage();
    }
    else
    {
        app.UseStatusCodePagesWithRedirects("/Error/{0}");

        app.UseStaticFiles(); //Short-circle ordering
        app.UseMvc(rb => //app.usemvcwithdefaultrouting(); error after .net 3.0
        {
            rb.MapRoute("default", "{controller=home}/{action=index}/{id?}");
        });
        app.UseRouting();

        app.UseEndpoints(endpoints =>
```

Когато пристигне грешен адрес, с Redirects обикаля последователно следващите middleware, вижда, че не е за тях – не е за StaticFiles, докато не стигне до MVCRoute, където съвпада с error/404, после се връща и в обратна посока намира Redirect. Когато занулим и заредим да погледнем какво става в Developer Tools, виждаме резултат bar -> Status 302 Found:




Sorry, the resource you requested could not be found

[Click here to navigate to the home page](#)

Name	Status	Type	Initiator	Size
bar	302	document / Redirect	Other: 349774000bar	160 B
404	200	document		1.3 kB
jquery.slim.min.js	200	script	#08	(memory cache)

bar	302	
404	200	
jquery.slim.min.js	200	302 Found

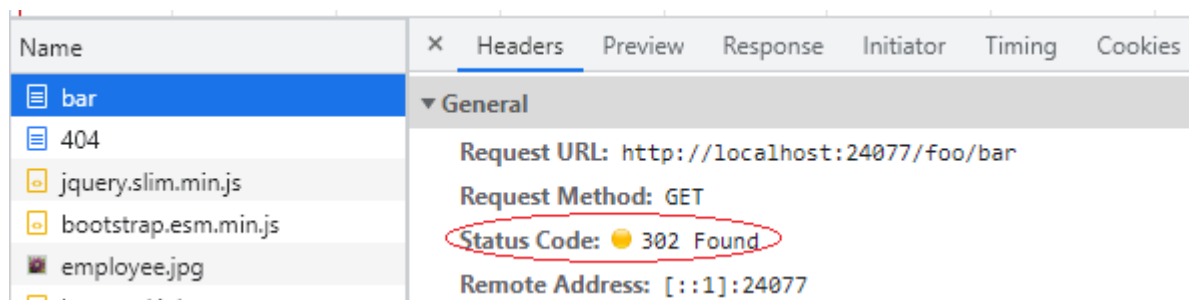

Виждаме последователно с мишката:


bar -> /foo/bar ... 302 found

404 -> /error/404 ... 200 OK

Т.е. последователно оглежда middleware един след друг и когато се връща, изпълнява MVC route -> NotFound заедно с код 200 OK. Ключовата дума тук е Redirect – пренасочва към /error/404


```
app.UseStatusCodePagesWithRedirects("/Error/{0}");
```

Ако обаче наистина се случи реална грешка, семантично всичко ще бъде изпълнено. Ето защо, много девелъпери предпочитат другия вид ReExecute – вместо да пренасочва, изпълнява.

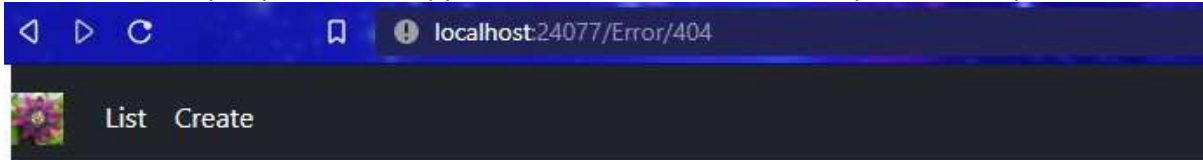


Sorry, the resource you requested could not be found.

[Click here to navigate to the home page](#)

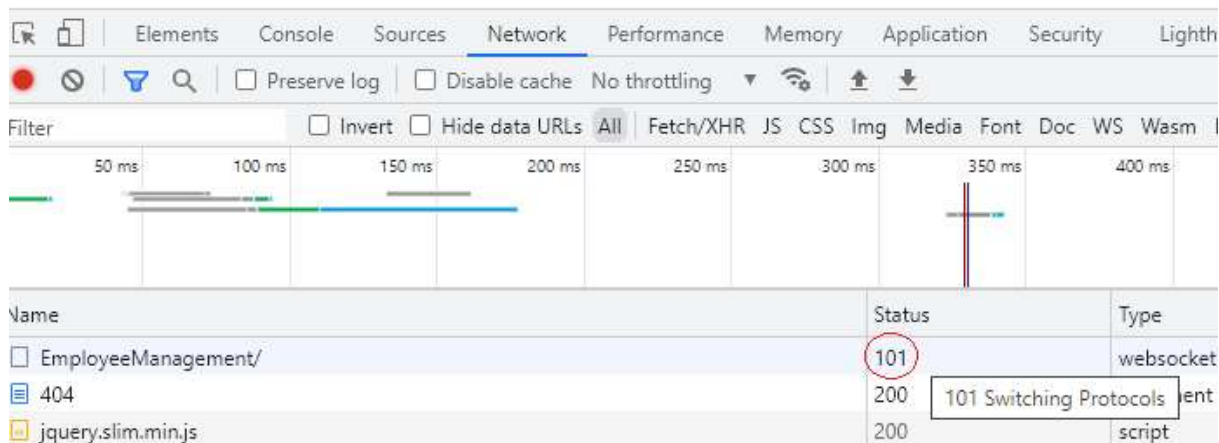


Вместо 302 имаме 404 – без пренасочване, но страницата пак се изпълнява.

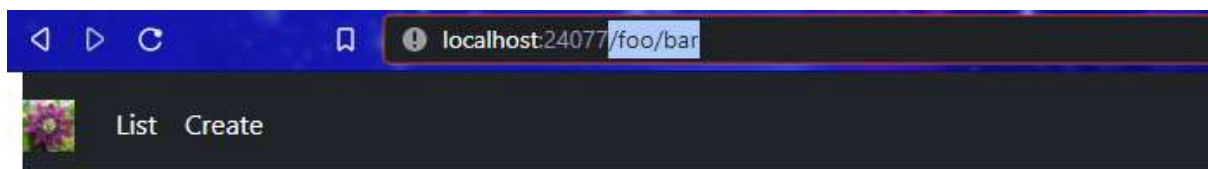

Sorry, the resource you requested could not be found.

[Click here to navigate to the home page](#)

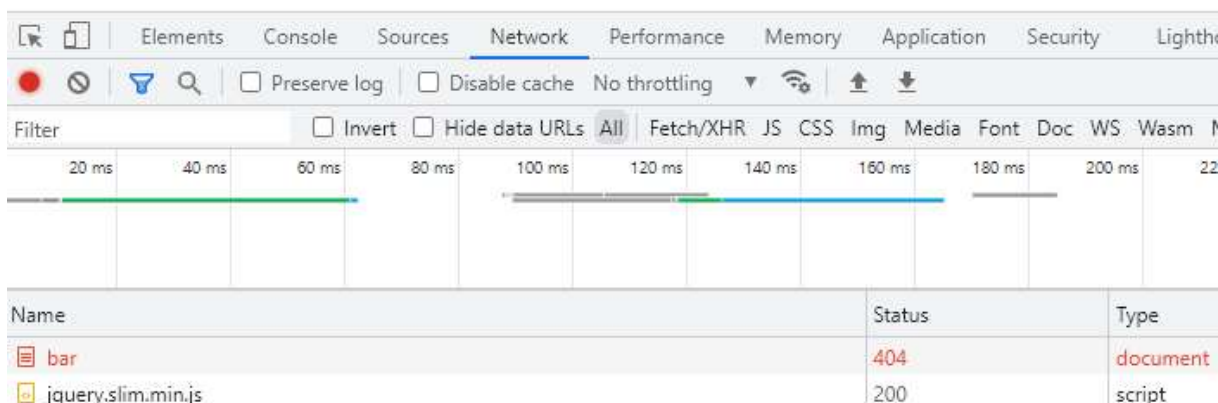

Ехесите обаче има възможност за повече предоставяне на информация чрез прехвърляне на данни:

```
EmployeeNotFound.cshtml | ErrorController.cs* | Startup.cs | launchSettings.json | HomeController.cs
EmployeeManagement.Controllers.ErrorController | HttpStatusHandler(int statusCode)
0 references
public class ErrorController : Controller
{
    [Route("/Error/{statusCode}")]
    0 references
    public IActionResult HttpStatusHandler(int statusCode)
    {
        var statusCodeResult = HttpContext.Features.Get<IStatusCodeReExecuteFeature>()
    }
}

Microsoft.AspNetCore.Diagnostics;
using Microsoft.AspNetCore.Diagnostics;
using Microsoft.AspNetCore.Mvc;
```

Въвеждаме 2 променливи за прехвърляне на данни – адрес и заявка:

```
eeNotFound.cshtml | ErrorController.cs | Startup.cs | launchSettings.json | HomeController.cs
EmployeeManagement.Controllers.ErrorController | HttpStatusHandler(int statusCode)

[Route("/Error/{statusCode}")]
0 references
public IActionResult HttpStatusHandler(int statusCode)
{
    var statusCodeResult = HttpContext.Features.Get<IStatusCodeReExecuteFeature>();


    switch (statusCode)
    {
        case 404:
            ViewBag.ErrorMessage = "Sorry, the resource you requested could not be found";
            ViewBag.Path = statusCodeResult.OriginalPath;
            ViewBag.QS = statusCodeResult.OriginalQueryString;
            break;
    }

    return View("NotFound");
}
```

```
public IActionResult HttpStatusHandler(int statusCode)
{
    var statusCodeResult =
HttpContext.Features.Get<IStatusCodeReExecuteFeature>();

    switch (statusCode)
    {
        case 404:
            ViewBag.ErrorMessage = "Sorry, the resource you requested
could not be found";
            ViewBag.Path = statusCodeResult.OriginalPath;
            ViewBag.QS = statusCodeResult.OriginalQueryString;
            break;
    }
    return View("NotFound");
}
```


```
nd.cshtml | NotFound.cshtml | ErrorController.cs
@model int
@{
    ViewBag.PageTitle = "Not Found";
}
<h1>@ViewBag.ErrorMessage</h1>
<h1>@ViewBag.Path</h1>
<h1>@ViewBag.QS</h1>
<a asp-action="index" asp-controller="home">
    Click here to navigate to the home page
</a>
```

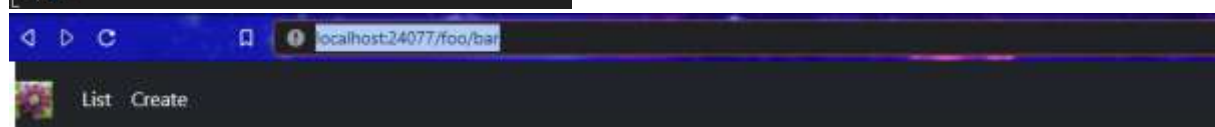

Sorry, the resource you requested could not be found
/foo/bar

[Click here to navigate to the home page](#)

При това положение, вече можем да видим повече:



Sorry, the resource you requested could not be found

/foo/bar path

?abc=xyz query string

[Click here to navigate to the home page](#)

Извод:

UseStatusCodePagesWithRedirects

- **Because a redirect is issued, the URL in the address bar changes**
- **Returns a success status code (200) when actually an error occurred which isn't semantically correct**

UseStatusCodePagesWithReExecute

- **Re-executes the pipeline and returns the original status code (404 for example)**
- **As it re-executes the pipeline and not issue a redirect request, we also preserve the original URL (/foo/bar) in the address bar**