


105 - Create google oauth credentials Client Id and Client Secret

Create Google OAuth Credentials


Register Application

<https://console.developers.google.com>

Login with your google credentials <https://console.developers.google.com>

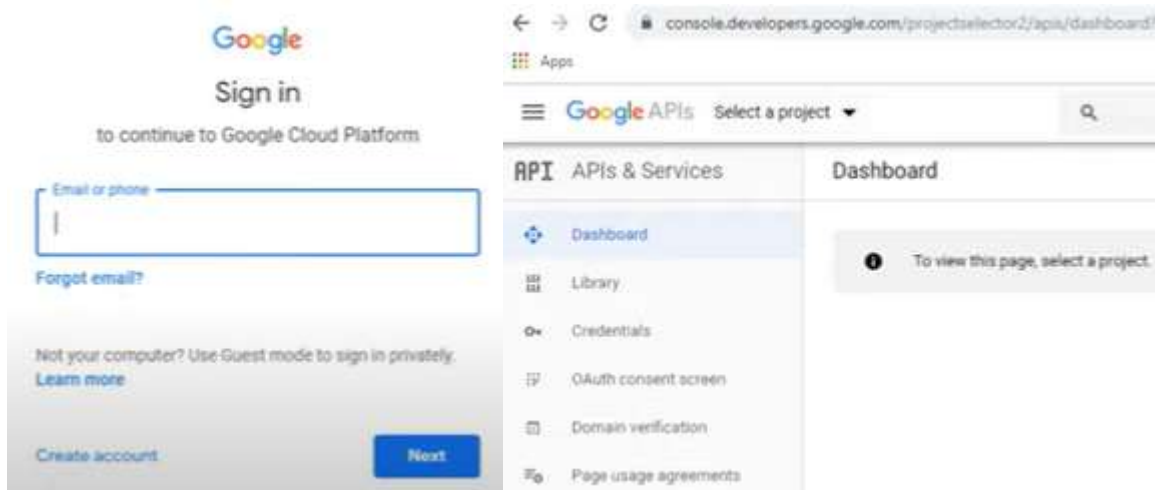

Create new project.

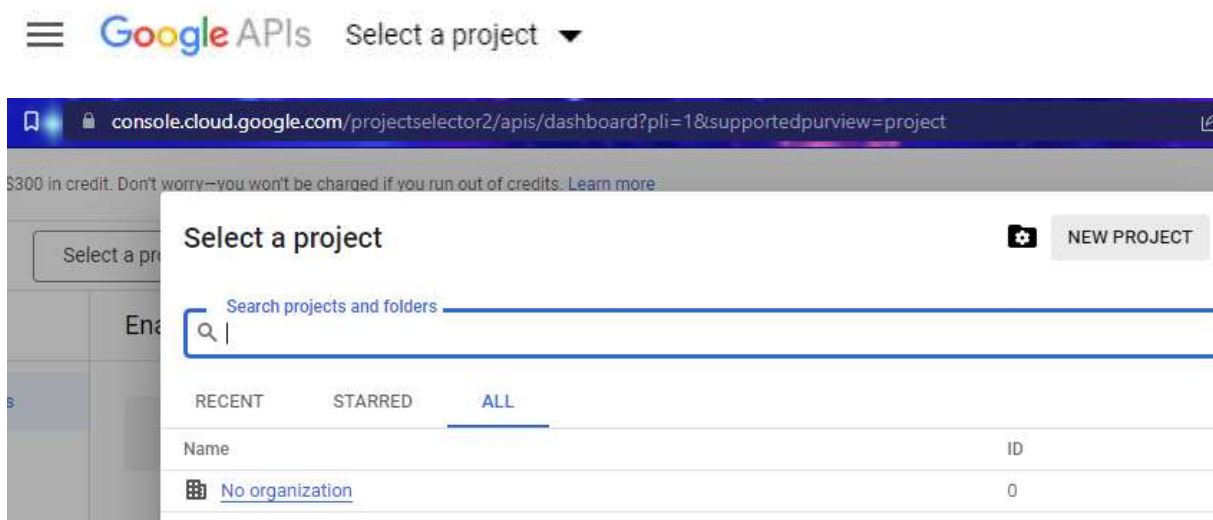



Start your Free Trial with \$300 in credit. Don't worry—you won't be charged if you run out of credits. [Learn more](#)



Google Cloud

Search for resources, docs, products, and more

New Project



You have 12 projects remaining in your quota. Request an increase or delete projects. [Learn more](#)

[MANAGE QUOTAS](#)

Project name *

My Project 47026



Project ID: enduring-badge-369614. It cannot be changed later. [EDIT](#)

Location *

No organization

[BROWSE](#)

Parent organization or folder

[CREATE](#)

[CANCEL](#)

Наричаме проекта „Employee Mgmt STS” (Security token service), защото ще предоставим услуга за идентификация

Project name *

Employee Mgmt STS



Project ID: employee-mgmt-sts-369614. It cannot be changed later. [EDIT](#)

-> Create.



Google Cloud

Employee Mgmt STS

Search for resources, docs, products, and more (/)

APIs & Services

APIs & Services

[+ ENABLE APIS AND SERVICES](#)



Enabled APIs & services



Library



Credentials



OAuth consent screen



Page usage agreements

1 hour 6 hours

Traffic




Errors

1.0/s

0.8/s

След това е необходим Enable APIS and services, като за целта -> Library. Ако дясното меню не е видимо, го включваме от Google Cloud.

Пренасочва ни към страницата за търсене. Търсим “Google+api”

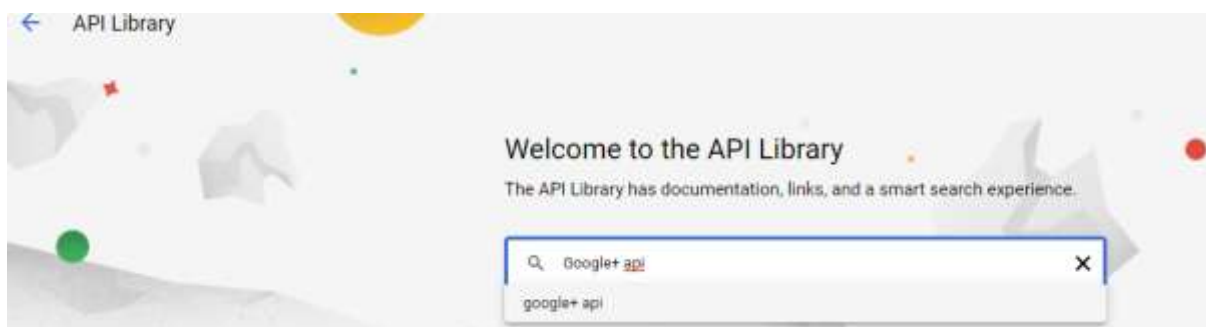

Employee Mgmt STS ▼

google+ api

3 results



Google+ API
Google
The Google+ API enables developers to build on top of the Google+ platform.

Enable



Google+ API

[Google](#)

The Google+ API enables developers to build on top of the Google+ platform.

ENABLE

Click to enable this API

OVERVIEW

DOCUMENTATION

←

API/Service Details

■ DISABLE API



Google+ API

The Google+ API enables developers to build on top of the Google+ platform.

By Google

Service name	Type	Status
plus.googleapis.com	Public API	Enabled

QUOTAS

API APIs & Services

⚙️ Enabled APIs & services

📖 Library

🔑 Credentials

🔗 OAuth consent screen

📄 Page usage agreements

OAuth consent screen

Choose how you want to configure and register your app, including your target users. You can only associate one app with your project.

User Type

☐ Internal ?

Only available to users within your organization. You will not need to submit your app for verification. [Learn more about user type](#)

☐ External ?

Available to any test user with a Google Account. Your app will start in testing mode and will only be available to users you add to the list of test users. Once your app is ready to push to production, you may need to verify your app. [Learn more about user type](#)

CREATE

При мен позволява само External:

App information

This shows in the consent screen, and helps end users know who you are and contact you

App name *

Employee Management

The name of the app asking for consent

User support email *

For users to contact you with questions about their consent

App logo

BROWSE

Upload an image, not larger than 1MB on the consent screen that will help users recognize your app. Allowed image formats are JPG, PNG, and BMP. Logos should be square and 120px by 120px for the best results.

Задължителното поле само е име “Employee Management” – важно е да запомним, че това е, което потребителят ще вижда и не е необходимо да съвпада с името на проекта.

Надолу има изискване за имейл на developer – оставих моя.

Edit app registration

Your non-sensitive scopes

API ↑	Scope	User-facing description
-------	-------	-------------------------

No rows to display

Your sensitive scopes

Sensitive scopes are scopes that request access to private user data.

API ↑	Scope	User-facing description
-------	-------	-------------------------

No rows to display

Your restricted scopes

Restricted scopes are scopes that request access to highly sensitive user data.

OAuth consent screen

pragim@gmail.com

Scopes for Google APIs

Scopes allow your application to access your user's private data. [Learn more](#)

If you add a sensitive scope, such as scopes that give you full access to Gmail or Drive, Google will verify your consent screen before it's published.

email

profile

openid


Scopes are a type or level of authenticated user data that we want to allow Google to share with the client application.

В старата версия се виждат предложения за 3 Scope: email, profile, openID.

После при мен има Test Users, където е вписан моят имейл.

Може да оставим празни -> Save


Последна стъпка е Credentials:

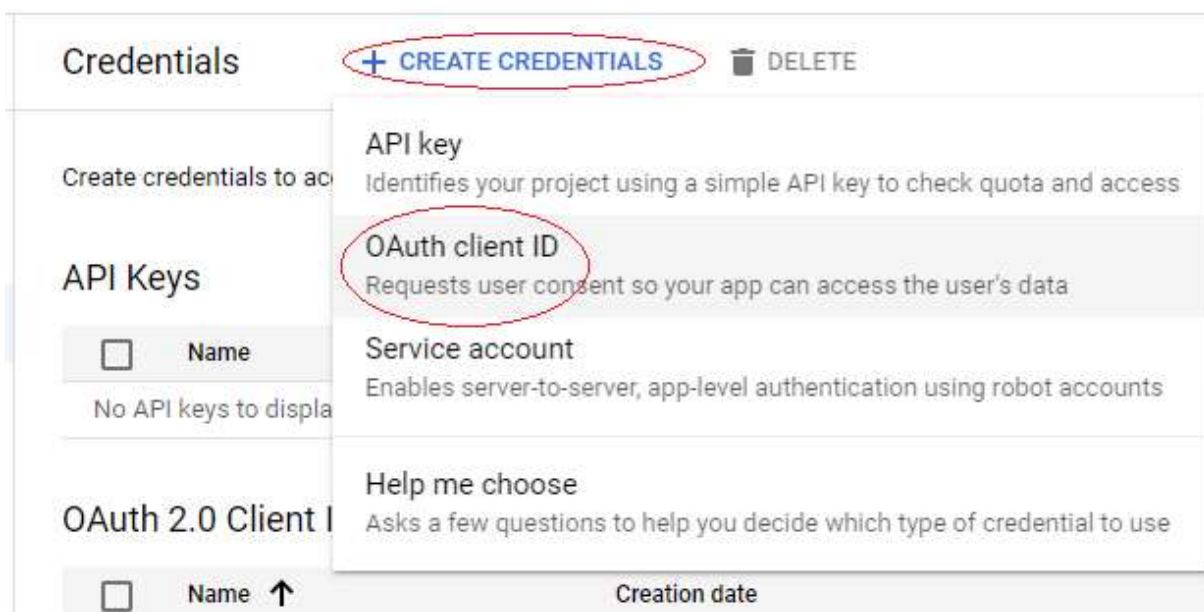

Create credentials -> Oath client ID

← Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

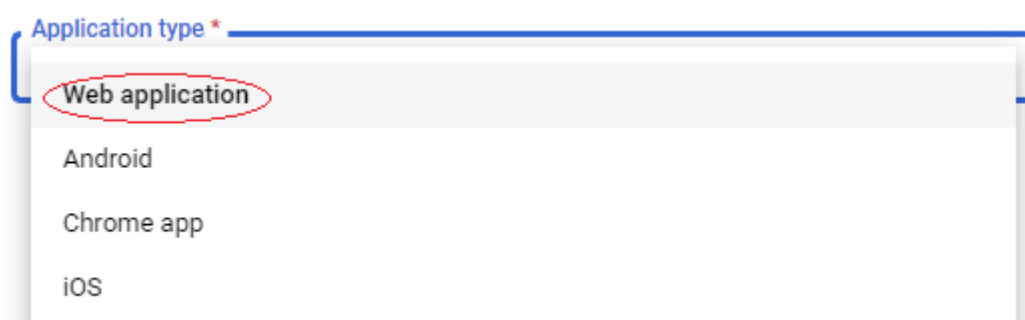

Name: "Employee Mgmt Client"

Application type *
Web application

Name *
Employee Mgmt Client

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.




The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#).

Authorized JavaScript origins ?

For use with requests from a browser

+ ADD URI

Към момента, приложението е хостнато на локалната машина. За да вземем URL: д.б. върху Employee Management проекта -> Properties -> Debug ->

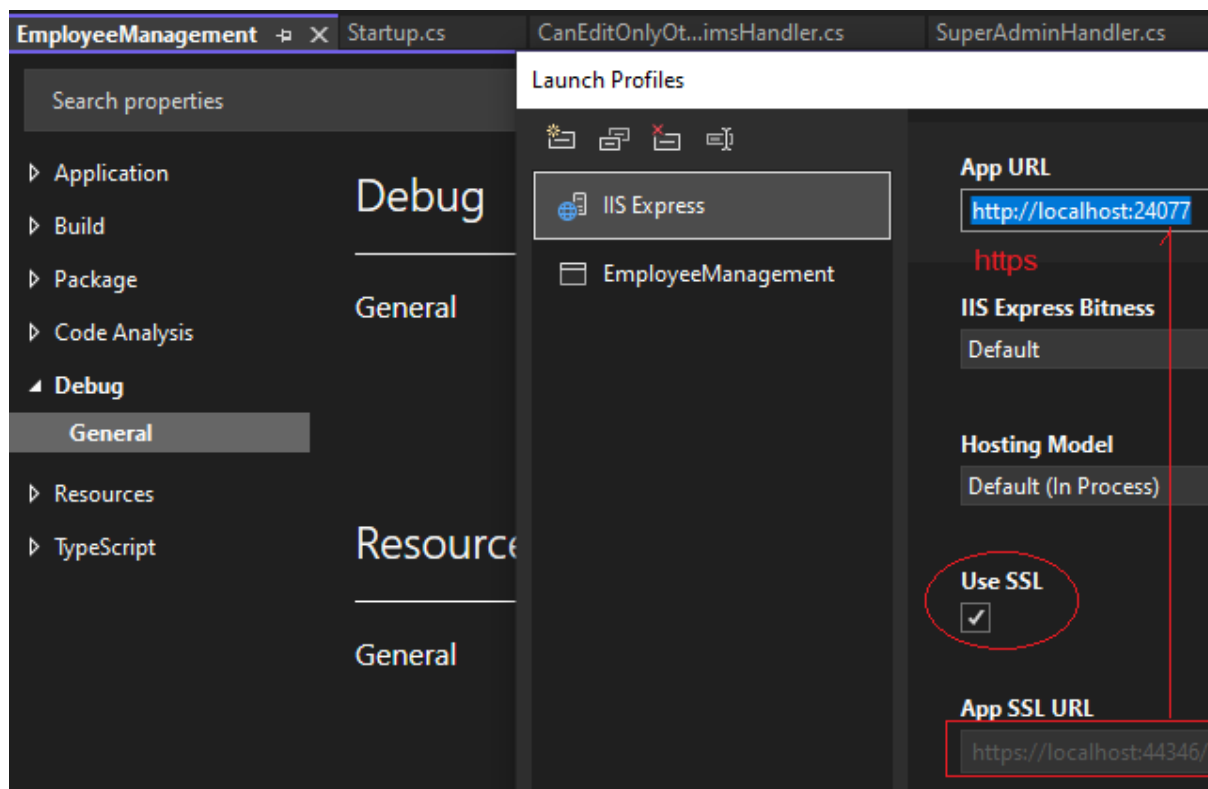

Много е важно да се маркира Use SSL, защото към момента без него използваме само http, а https е много по-сигурен. Копираме адреса от App SSL URL, който е https -> Paste App URL.

Поставяме го също в JavaScript origins: **https**://localhost:44346

Authorized JavaScript origins

For use with requests from a browser

URIs 1 *

<https://localhost:44346>

+ ADD URI

Authorized redirect URIs

For use with requests from a web server

URIs 1 *

<https://localhost:44346/signin-google>



+ ADD URI

Последно, задаваме адрес в Authorized redirect URIs, което е пренасочването към сайта при успешно вписване в Google. По подразбиране това е адреса на хостване [/signin-google](https://localhost:44346/signin-google).

Може да се смени директорията по избор -> Create.

OAuth client created

The client ID and secret can always be accessed from Credentials in APIs & Services

 OAuth access is restricted to the [test users](#) listed on your [OAuth consent screen](#)

Your Client ID

606586895091-rpfn2tbpqd0t5j2irg1fq4k7cj788nv9.apps.gc 

Your Client Secret

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 

 DOWNLOAD JSON

OK

Готово – вече разполагаме с клиентски ID + Secret, които са необходими за регистрация на нашето приложение в Google. Как ще го направим – в следващия урок.

Create Google OAuth Credentials


Register Application

<https://console.developers.google.com>

Step 1 : Create a Project




Step 2 : Enable Google+ API

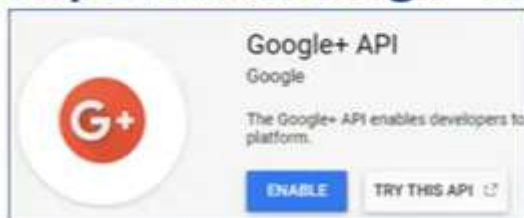

Create Google OAuth Credentials

Step 3 : Configure OAuth consent screen

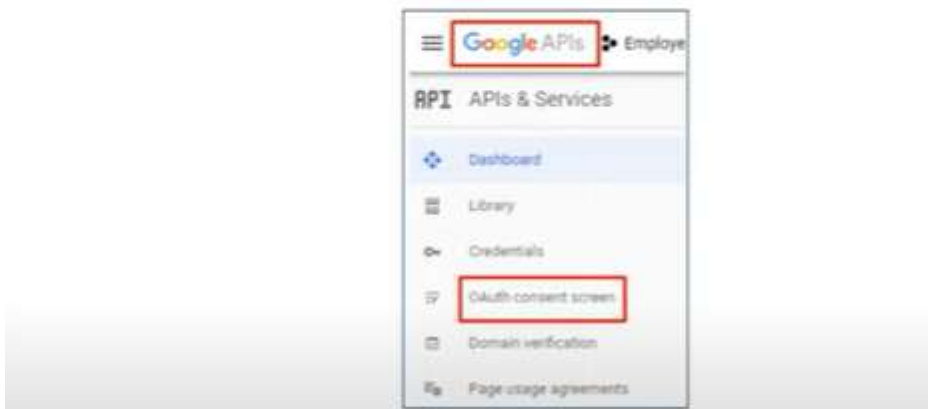

Create Google OAuth Credentials

Step 4 : Create OAuth client credentials

For applications that use the OAuth 2.0 protocol to call Google APIs, you can use an OAuth 2.0 client ID to generate an access token. The token contains a unique identifier. See [Setting up OAuth 2.0](#) for more information.

Application type

- ☒ Web application **1**
- ☐ Android [Learn more](#)
- ☐ Chrome App [Learn more](#)
- ☐ iOS [Learn more](#)
- ☐ Other

Name ⓘ

Employee Mgmt Client **2**

Restrictions

Enter JavaScript origins, redirect URIs, or both [Learn More](#)

Origins and redirect domains must be added to the list of Authorized Domains in the [OAuth consent settings](#).

Authorized JavaScript origins

For use with requests from a browser. This is the origin URI of the client application. It can't contain a wildcard (https://*.example.com) or a path (https://example.com/subdir). If you're using a nonstandard port, you must include it in the origin URI.

https://localhost:44385 **3**

Type in the domain and press **Add it**

Authorized redirect URIs

For use with requests from a web server. This is the path in your application that users are redirected to after they have authenticated with Google. The path will be appended with the authorization code for access. Must have a protocol. Cannot contain URIs, fragments or relative paths. Must be a public IP address.

https://localhost:44385/signin-google **4**