

Configure Google Authentication

Part 105 - Registering with Google to obtain Client Id and Secret

Part 106 - Set up the UI to enable Google Authentication

Part 107 - Handling authenticated user information received from Google

```
public void ConfigureServices(IServiceCollection services)
{
    services.AddAuthentication()
        .AddGoogle(options =>
        {
            options.ClientId = "XXXXX";
            options.ClientSecret = "XXXXX";
        });
}
```

Configure Facebook Authentication

```
public void ConfigureServices(IServiceCollection services)
{
    services.AddAuthentication()
        .AddGoogle(options =>
        {
            options.ClientId = "XXXXX";
            options.ClientSecret = "XXXXX";
        })
        .AddFacebook(options =>
        {
            options.AppId = "XXXXX";
            options.AppSecret = "XXXXX";
        });
}
```

<https://developers.facebook.com/apps/3085022948456094/settings/basic/>

.NET




Microsoft.AspNetCore.Authentication.Facebook by Microsoft, 54M d 6.0.11
ASP.NET Core middleware that enables an application to support Facebook's OAuth 2.0 authentication workflow. 7.0.0

```
EmployeeManagement.Startup | ConfigureServices(ISe
services.AddAuthentication()
    .AddGoogle(options =>
    {
        options.ClientId = "606586895091-rpfn2tbpqd0t5j2irglfq4k7cj788
        options.ClientSecret = "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";
        //options.CallbackPath = "";
    })
    .AddFacebook(options =>
    {
        options.AppId = "3085022948456094";
        options.AppSecret = "13230e5d81901e12d6f38401cf125c35";
    });
```

```
.AddFacebook(options =>
{
    options.AppId = "3085022948456094";
    options.AppSecret = "13230e5d81901e12d6f38401cf125c35";
});
```


External Login

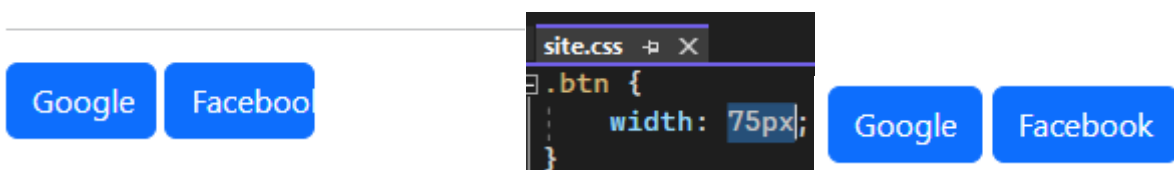

Бутон Facebook е изрязан, това е заради site.css фиксираната дължина 75px; По-добрият вариант е директно в страницата `style="width:auto"`

```
Startup.cs | Login.cshtml*
@foreach(var provider in Model.ExternalLogins)
{
    <button type="submit" class="btn btn-primary"
        style="width:auto"
        name="provider" value="@provider.Name"
        title="Login using your @provider.DisplayName account">
        @provider.DisplayName
    </button>
}
```


Тестваме AccountController->ExternalLogin + BreakPoint -> Facebook btn

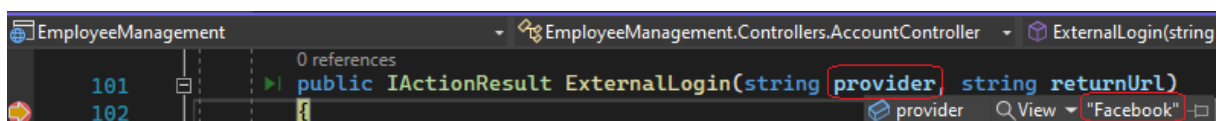

+ new BreakPoint

```
110 [AllowAnonymous]  
111 public async Task<IActionResult>  
112     ExternalLoginCallback(string returnUrl = null, string remoteError = null)  
113     {
```

Continue – при мен дава генерална грешка.

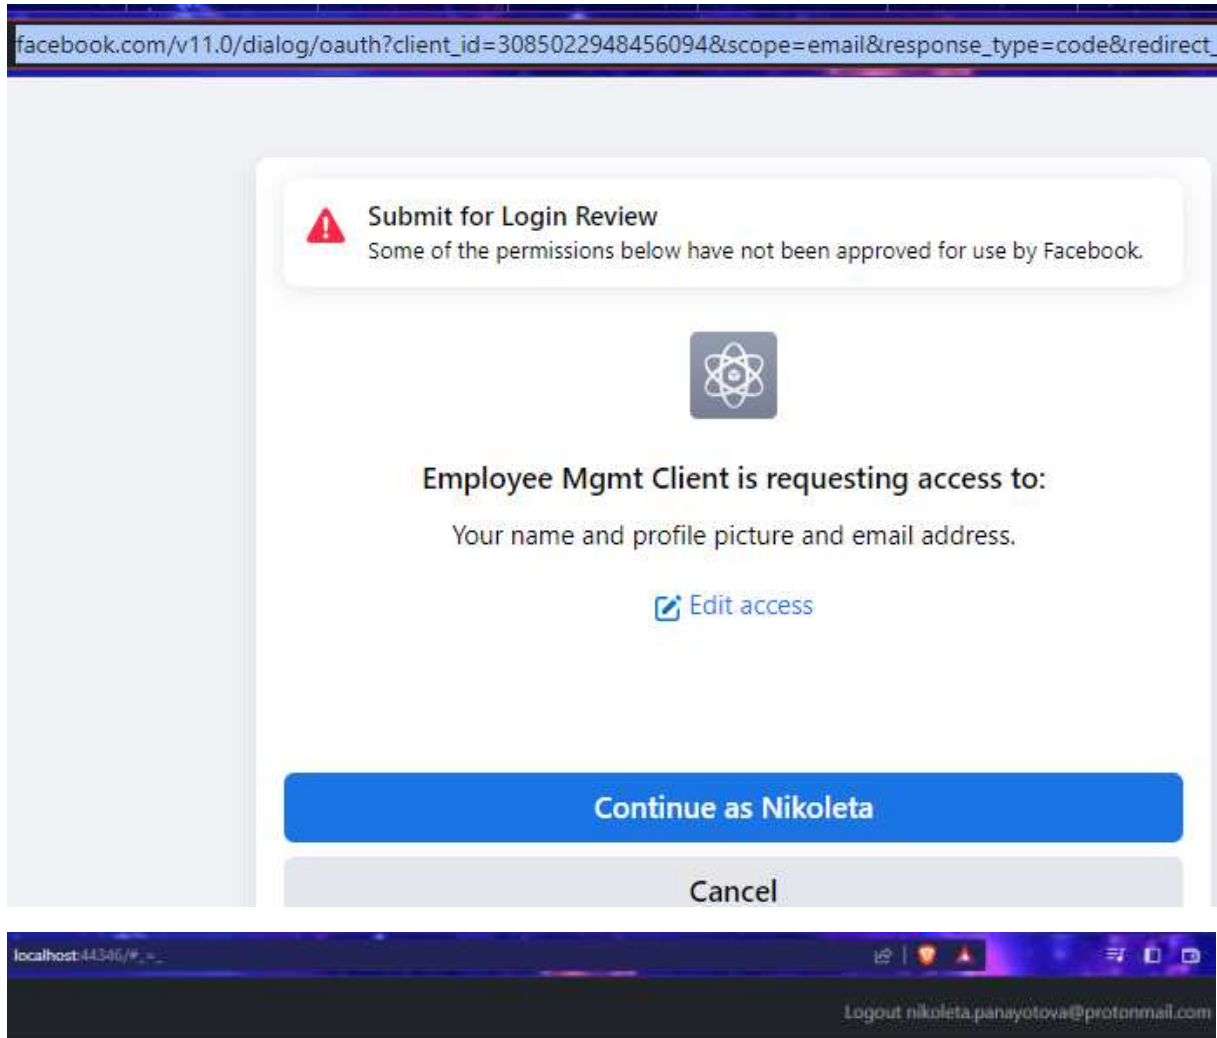

Успешно вписване с друг имейл и странен URL, тогава вече ме допуска при нов Debug до следващите BreakPoint:

```

AccountController.cs  Startup.cs
EmployeeManagement
var info = await signInManager.ExternalLoginAsync(providerKey, returnUrl);
if (info == null)
{
    ModelState
        .AddModelError(string.Empty, "Error loading...");
    return View("Login", loginViewModel);
}
// If the user already has a login (i.e if there is a record in the
// table) then sign-in the user with this external provider.
var signInResult = await signInManager.ExternalLoginSignInAsync(providerKey, info.ProviderKey, isPersistent: false, bypassTwoStep: false);
if (signInResult.Succeeded)
{
    // ...
}

```

dbo.AspNetUserLogins [Data] AccountController.cs Startup.cs

Max Rows: 1000

	LoginProvider	ProviderKey	ProviderDispla...	UserId
▶	Facebook	688753976215688	Facebook	1f032ac4-bc55-...
	Google	1126375077100...	Google	84eb9e06-25b7...
⚙	NULL	NULL	NULL	NULL

Дали ще бъде успешно или не, зависи от UserLogins таблицата.

dbo.AspNetUsers [Data] dbo.AspNetUserLogins [Data] AccountController.cs Startup.cs

Max Rows: 1000

	Id	UserName	NormalizedUs...	Email	NormalizedEm...	EmailConfirmed	PasswordHash
▶	519-3a32950ab516	nikoleta.panay...	NIKOLETA.PAN...	nikoleta.panay...	NIKOLETA.PAN...	False	NULL
	1f9ea9da-40d8-...	aurora@abv.bg	AURORA@ABV...	aurora@abv.bg	AURORA@ABV...	False	AQAAAAEAAC...
	84eb9e06-25b7...	amidalafame@...	AMIDALAFLAM...	amidalafame@...	AMIDALAFLAM...	False	NULL

Външните акаунти са без записана парола

```

152 {
153     var email = info.Principal.FindFirstValue(ClaimTypes.Email);
154
155     if (email != null)
156     {
157         var user = await userManager.FindByEmailAsync(email);
158
159         if (user == null)
160         {
161             user = new ApplicationUser
162             {
163                 UserName = info.Principal.FindFirstValue(ClaimTypes.Email),
164                 Email = info.Principal.FindFirstValue(ClaimTypes.Email)
165             };
166             await userManager.CreateAsync(user);
167         }
168     }
169     await userManager.AddLoginAsync(user, info);


```

Ако имейлът не е намерен, се създава нов профил, което виждаме от таблиците.

Linking External and Local Accounts



AspNetUsers and AspNetUserLogins

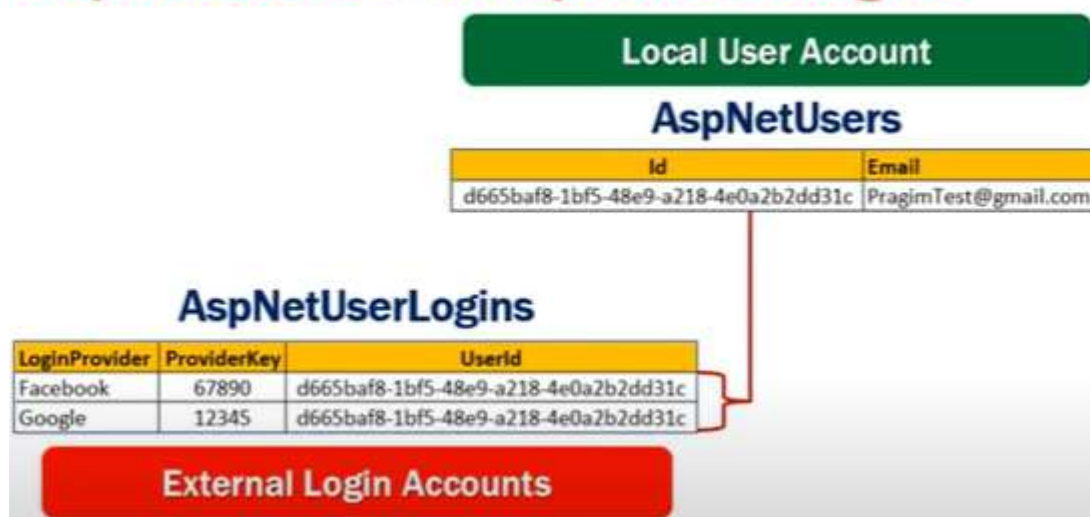

Понеже с един и същи имейл е регистриран Google + Facebook акаунт, потребителят е един, с едно ID, съответно ако се впише с Google и се изследват елементите при Debug за Provider, email и т.н. те ще показват данните за всяко вписване, актуални към съответния BreakPoint.