


Warsztaty Ruby on Rails z inFakt



Konfiguracija



Konfiguracja

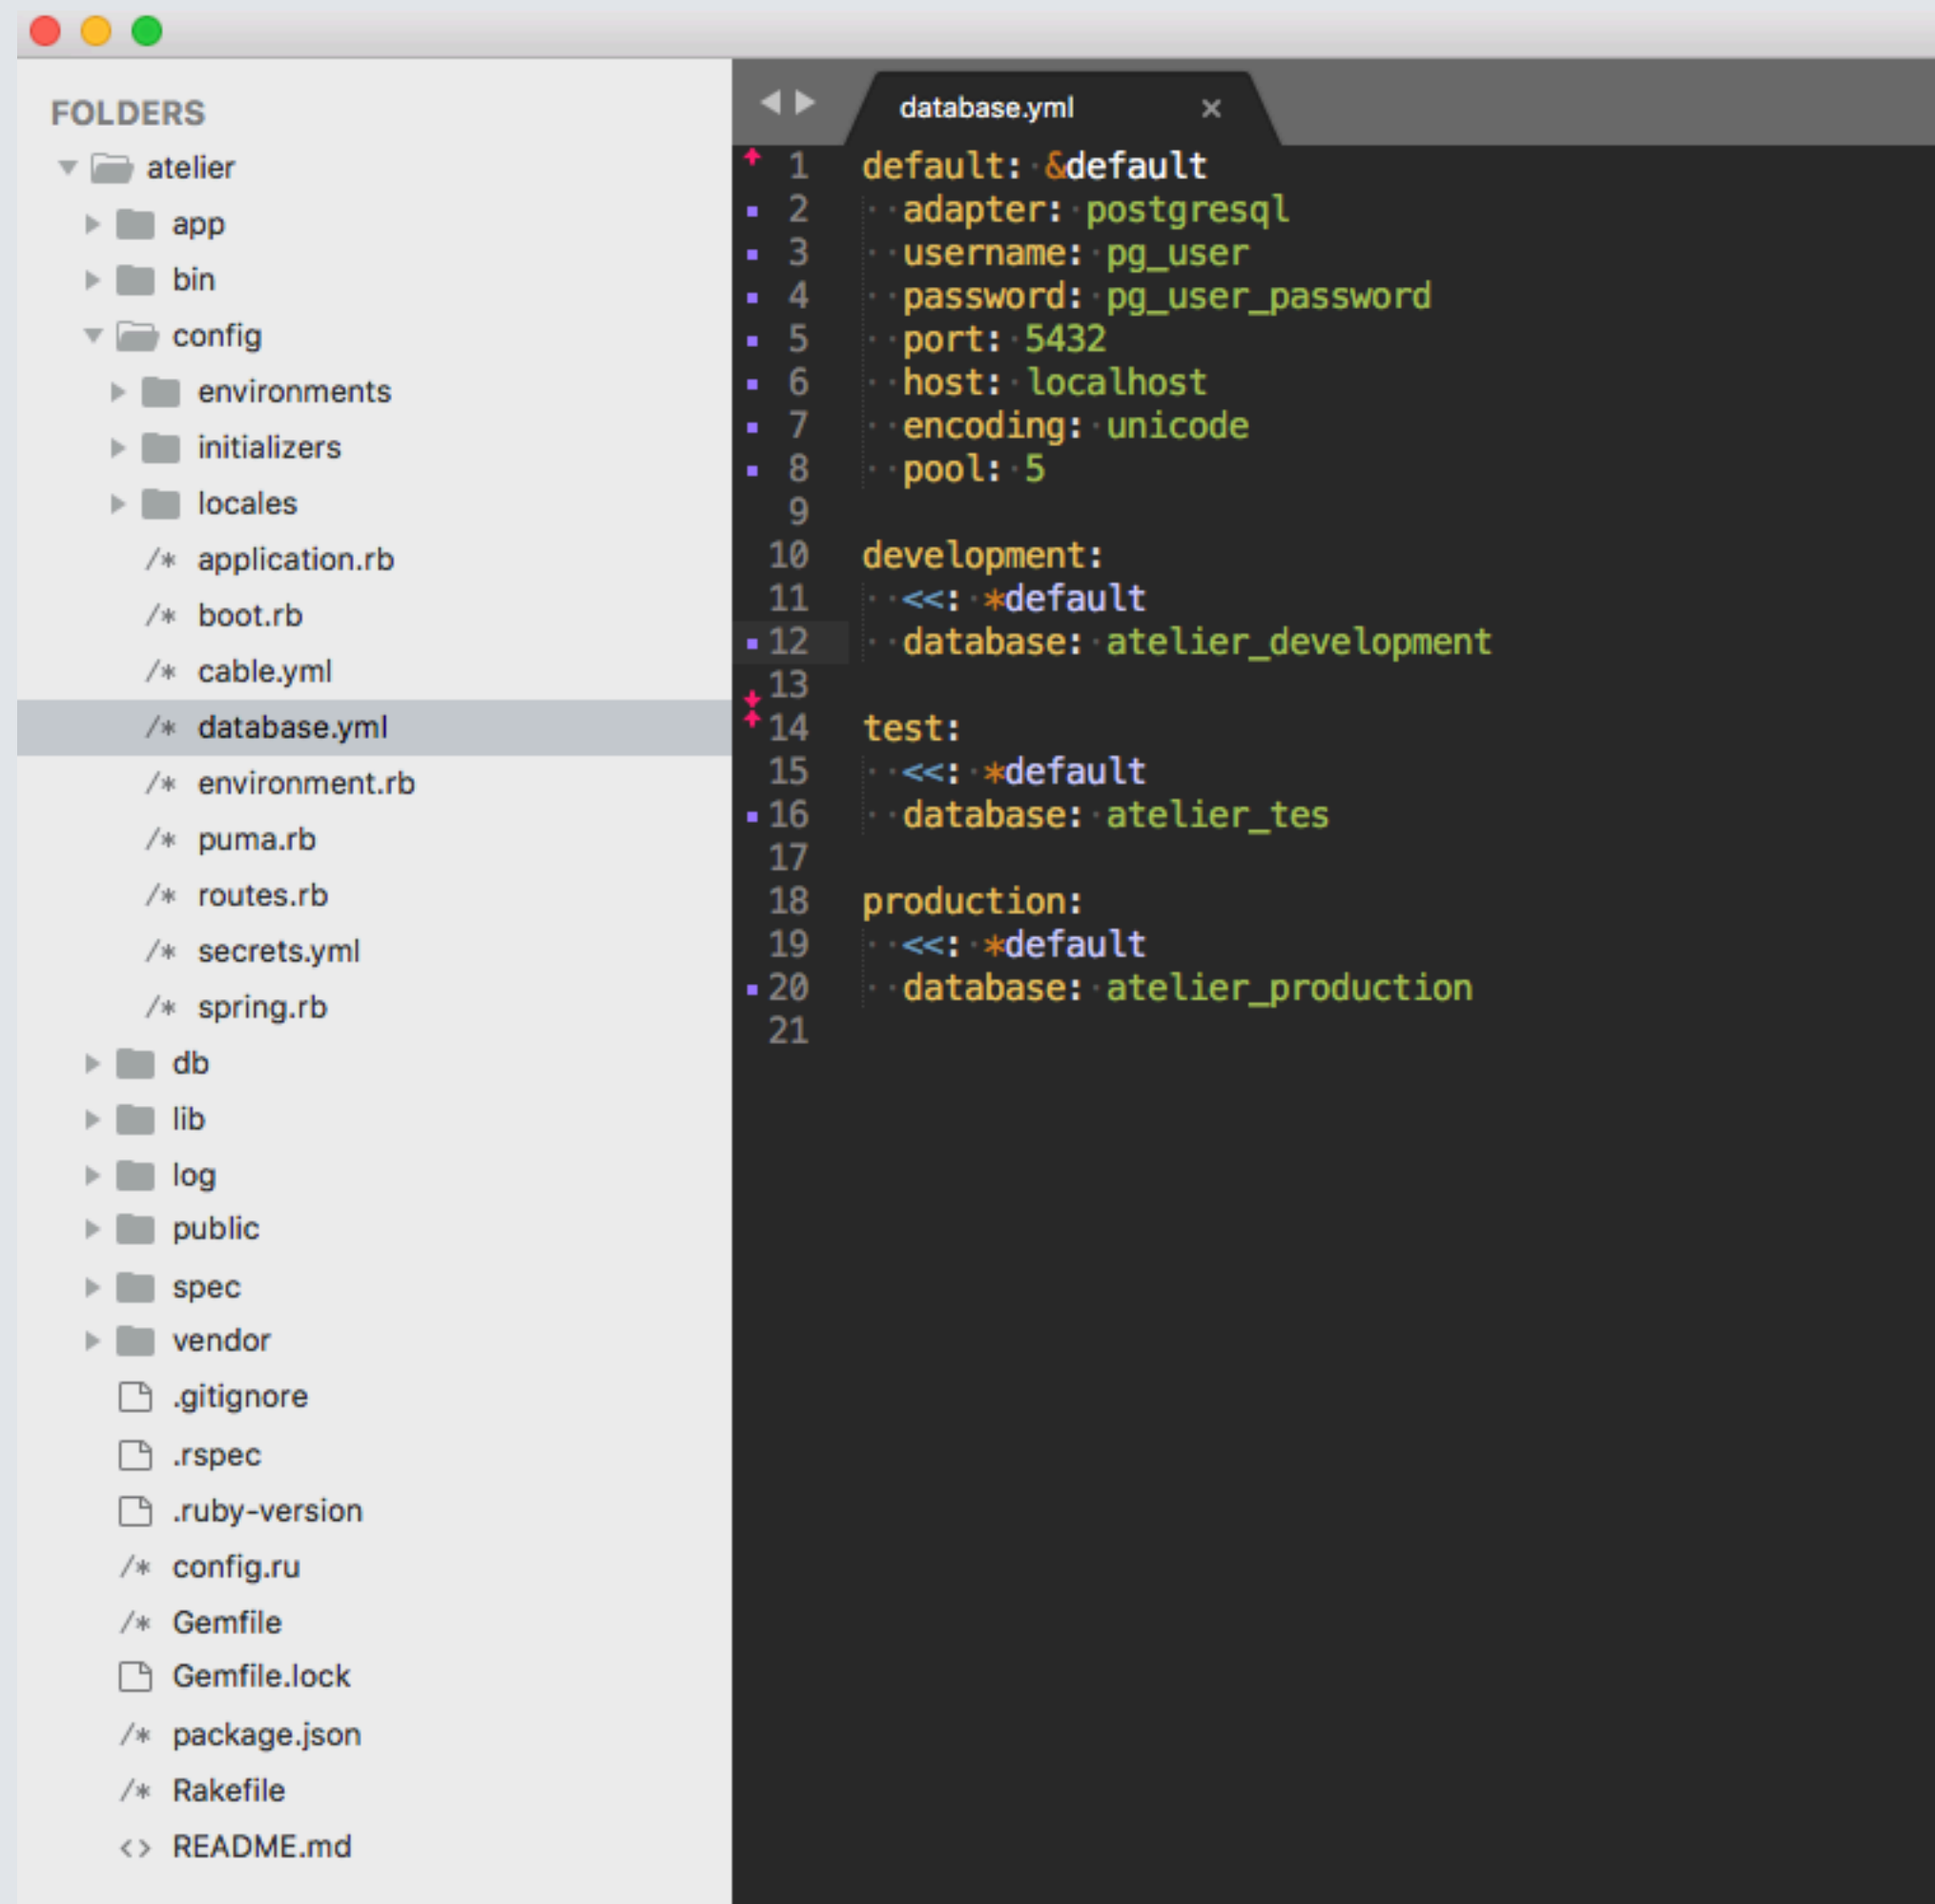

The image shows a code editor window with a sidebar on the left displaying a file tree and a main editor area on the right showing the contents of a file named `database.yml`.

FOLDERS

- ▼ atelier
 - ▶ app
 - ▶ bin
 - ▼ config
 - ▶ environments
 - ▶ initializers
 - ▶ locales
 - /* application.rb
 - /* boot.rb
 - /* cable.yml
 - /* database.yml
 - /* environment.rb
 - /* puma.rb
 - /* routes.rb
 - /* secrets.yml
 - /* spring.rb
 - ▶ db
 - ▶ lib
 - ▶ log
 - ▶ public
 - ▶ spec
 - ▶ vendor
 - .gitignore
 - .rspec
 - .ruby-version
 - /* config.ru
 - /* Gemfile
 - Gemfile.lock
 - /* package.json
 - /* Rakefile
 - <> README.md

database.yml

```
1 default: &default
2   adapter: postgresql
3   username: pg_user
4   password: pg_user_password
5   port: 5432
6   host: localhost
7   encoding: unicode
8   pool: 5
9
10 development:
11   <<: *default
12   database: atelier_development
13
14 test:
15   <<: *default
16   database: atelier_test
17
18 production:
19   <<: *default
20   database: atelier_production
21
```


Konfiguracja

Dane wrażliwe?

Konfiguracja

A jeśli mamy więcej konfiguracji?

Konfiguracja

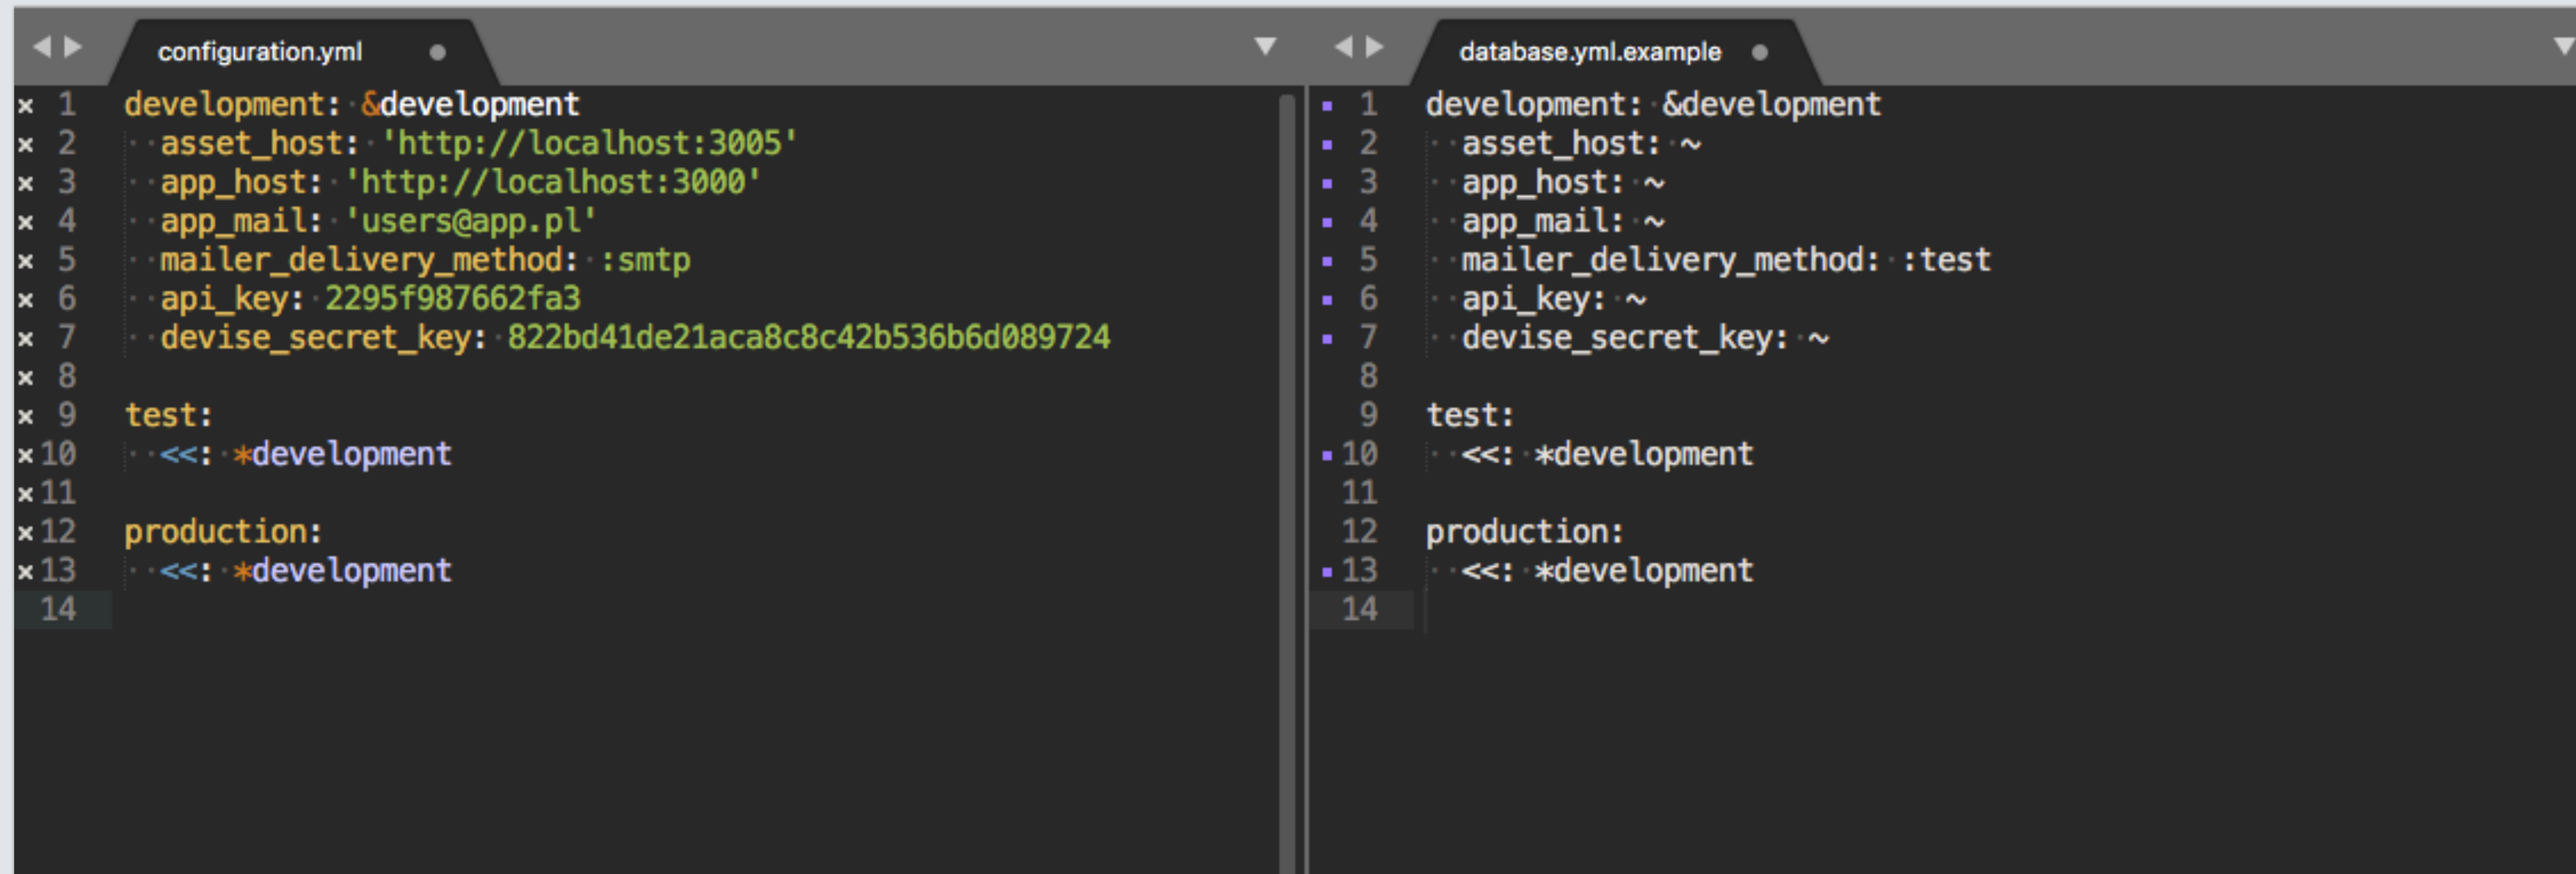

```
configuration.yml
1 development: &development
2   · asset_host: 'http://localhost:3005'
3   · app_host: 'http://localhost:3000'
4   · app_mail: 'users@app.pl'
5   · mailer_delivery_method: :smtp
6   · api_key: 2295f987662fa3
7   · devise_secret_key: 822bd41de21aca8c8c42b536b6d089724
8
9 test:
10   · <<: *development
11
12 production:
13   · <<: *development
14

database.yml.example
1 development: &development
2   · asset_host: ~
3   · app_host: ~
4   · app_mail: ~
5   · mailer_delivery_method: :test
6   · api_key: ~
7   · devise_secret_key: ~
8
9 test:
10   · <<: *development
11
12 production:
13   · <<: *development
14
```

Pytania ?

Adrian Zięba
Ruby Developer @infakt