1 . Select a standard dataset such as MNIST, Fashion-MNIST, EMNIST, or CelebA for the classification task.

```
import tensorflow as tf
import numpy as np
import matplotlib.pyplot as plt
from tensorflow.keras import datasets, layers, models
(x_train, y_train), (x_test, y_test) = datasets.mnist.load_data()
print("Training Images:", x_train.shape)
print("Training Labels:", y_train.shape)
print("Testing Images:", x_test.shape)
print("Testing Labels:", y_test.shape)
```

```
Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/mnist.npz
11490434/11490434 ━━━━━━━━━━━━━━━━━━━━ 0s 0us/step
Training Images: (60000, 28, 28)
Training Labels: (60000,)
Testing Images: (10000, 28, 28)
Testing Labels: (10000,)
```


Downloading data from htt s: stora e. oo lea is.com tensorflow tf-keras-datasets mnist.n z
1149e434/1149e434es eus/step
Training Images: (6000, 28, 28)
Training Labels: (60000,)
Testing Images: (1000, 28, 28)
Testing Labels: (10000,)

2. Import the required libraries and load the selected dataset into the development environment.

```
plt.figure(figsize=(10, 5)) for
i in range(10) :
    plt.subp10t(2, 5, i + 1) plt.
     cmap= ' gray' ) plt . title( "Digit:
+ str(y_train[i])) plt. axis( off' ) plt .
tight_layout ( ) plt . show()
```

Digit: 5 Digit: Digit: 4 Digit: 1 Digit: 9



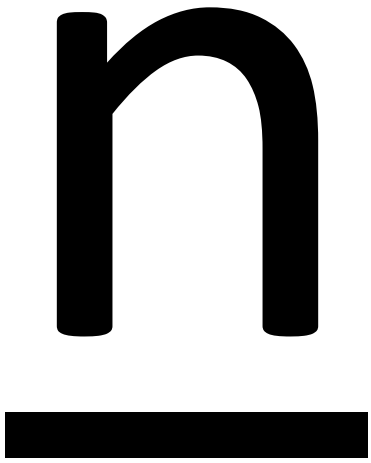

Digit: 2 Digit: 1 Digit: 3 Digit: 1 Digit: 4

anan

u

3. Perform image preprocessing by resizing (if required), normalization, and splitting the dataset into training, validation, and testing sets.

```
x train = x_train . astype( ' float32.)/
255.0 x test = x_test . astype( 'float32.)/
255.0 x train = x_train. reshape(-l, 28, 28,
1)
x_test = x_test.reshape(-1, 28, 28, 1)
print("Training shape:", x_train.shape)
print("Testing shape:", x_test.shape)
```

```
Training shape: (60000, 28, 28, 1)
Testing shape: (10000, 28, 28, 1)
```

4. Design a Convolutional Neural Network (CNN) consisting of convolutional layers, pooling layers, activation functions, fully connected layers, and an output layer.

5. Configure the model using an appropriate optimizer, loss function, learning rate, batch size, and number of training epochs.

```
model.compile(
    optimizer='adam',
    loss='sparse_categorical_crossentropy',
    metrics=['accuracy']
)
print("CNN model compiled successfully!")
```

```
CNN model compiled successfully!
```

6. Train the CNN model using the training dataset and monitor the learning process through training and validation accuracy/loss curves.

Layer (type)	Output Shape	Param #
conv2d (Conv2D)	(None, 26, 26, 32)	320
max_p001ing2d (MaxP001ing2D)	(None, 13, 13, 32)	
conv2d_1 (Conv2D)	(None, 11, 11, 64)	18,496
max_p001ing2d_1 (MaxP001ing2D)	(None, 5, 5, 64)	
flatten (Flatten)	(None, 1600)	
dense (Dense)	None, 64)	102,464
dense_l (Dense)	None	650

```
model = models.Sequential([
    layers.Conv2D(32, (3, 3), activation='relu',
                  input_shape=(28, 28, 1)),
    layers.MaxPooling2D((2, 2)),
    layers.Conv2D(64, (3, 3), activation='relu'),
    layers.MaxPooling2D((2, 2)),
    layers.Flatten(),
    layers.Dense(64, activation='relu'),
    layers.Dense(10, activation='softmax')
])

model.summary()
```

```
/usr/local/lib/python3.13/dist-packages/keras/src/layers/convolutional/base_conv.py:113: UserWarning: Do not pass an `input_shap
  super().__init__(activity_regularizer=activity_regularizer, **kwargs)
Model: "sequential"
```

Layer (type)	Output Shape	Param #
conv2d (Conv2D)	(None, 26, 26, 32)	320
max_pooling2d (MaxPooling2D)	(None, 13, 13, 32)	0
conv2d_1 (Conv2D)	(None, 11, 11, 64)	18,496
max_pooling2d_1 (MaxPooling2D)	(None, 5, 5, 64)	0
flatten (Flatten)	(None, 1600)	0
dense (Dense)	(None, 64)	102,464
dense_1 (Dense)	(None, 10)	650

```
Total params: 121,930 (476.29 KB)
Trainable params: 121,930 (476.29 KB)
Non-trainable params: 0 (0.00 B)
```

```
history = model.fit(
    x_train,
    y_train,
    epochs=5,
    batch_size=64,
    validation_split=0.1
)
```

```
Epoch 1/5
844/844 ━━━━━━━━━━━━━━━━━━━━ 46s 53ms/step - accuracy: 0.9450 - loss: 0.1851 - val_accuracy: 0.9828 - val_loss: 0.0613
Epoch 2/5
844/844 ━━━━━━━━━━━━━━━━━━━━ 80s 51ms/step - accuracy: 0.9830 - loss: 0.0559 - val_accuracy: 0.9873 - val_loss: 0.0434
Epoch 3/5
844/844 ━━━━━━━━━━━━━━━━━━━━ 57s 67ms/step - accuracy: 0.9882 - loss: 0.0388 - val_accuracy: 0.9897 - val_loss: 0.0345
Epoch 4/5
844/844 ━━━━━━━━━━━━━━━━━━━━ 57s 67ms/step - accuracy: 0.9909 - loss: 0.0280 - val_accuracy: 0.9905 - val_loss: 0.0341
Epoch 5/5
844/844 ━━━━━━━━━━━━━━━━━━━━ 74s 58ms/step - accuracy: 0.9928 - loss: 0.0229 - val_accuracy: 0.9880 - val_loss: 0.0426
```

7. Evaluate the trained model on the testing dataset using performance metrics such as Accuracy, Precision, Recall, Fl-Score, and Confusion Matrix.

```
test_loss, test_accuracy = model.evaluate(x_test, y_test)
print("Test Loss:", test_loss)
print("Test Accuracy:", test_accuracy)
from sklearn.metrics import classification_report, confusion_matrix
y_probability = model.predict(x_test)
y_pred = np.argmax(y_probability, axis=1)
print(classification_report(y_test, y_pred))
```

```
313/313 ━━━━━━━━━━━━━━━━━━━━ 3s 9ms/step - accuracy: 0.9899 - loss: 0.0321
Test Loss: 0.03206883370876312
Test Accuracy: 0.9898999929428101
313/313 ━━━━━━━━━━━━━━━━━━━━ 3s 8ms/step
              precision    recall  f1-score   support

           0       0.99      0.99      0.99       980
           1       1.00      0.99      0.99      1135
           2       0.98      1.00      0.99      1032
           3       0.97      1.00      0.98      1010
           4       1.00      0.99      0.99       982
           5       0.99      0.98      0.99       892
           6       0.99      0.99      0.99       958
           7       0.99      0.99      0.99      1028
           8       0.99      0.99      0.99       974
           9       0.99      0.98      0.99      1009

    accuracy                           0.99     10000
   macro avg       0.99      0.99      0.99     10000
weighted avg       0.99      0.99      0.99     10000
```

8. Perform predictions on unseen images and compare the predicted labels with the actual labels.

```
plt.figure(figsize=(12, 6))

for i in range(10) :
    plt.subp10t(2, 5, i + 1)
    plt.imshow(x_test[i] .reshape(28, 28), cmap= ' gray' )
    plt.title(
        "Actual: ' + str(y_test[i]) +
      " \nPredicted :   + str(y_pred[i])

    plt. axis( 'off' )
plt . tight_layout (
) plt . show()
```

Actual: 7 Predicted: 7	Actual: 2 Predicted: 2	Actual: 1 Predicted: 1	Actual: O Predicted: 0	Actual: 4 Predicted: 4



Actual: 1 Predicted: 1	Actual: 4 Predicted: 4	Actual: 9 Predicted: 9	Actual: 5 Predicted: 5	Actual: g Predicted: 9

9. Analyze the model's performance, identify possible misclassifications, and discuss factors affecting classification accuracy.

```
wrong = np.where(y_pred != y_test)[0]

print("Total Misclassified Images:", len(wrong))
plt.figure(figsize=(12, 8))

for i in range(min(10, len(wrong))):
    index = wrong[i]

    plt.subplot(2, 5, i + 1)

    plt.imshow(x_test[index].reshape(28, 28), cmap='gray')

    plt.title(
        "Actual: " + str(y_test[index]) +
        "\nPredicted: " + str(y_pred[index])
    )

    plt.axis('off')

plt.tight_layout()
plt.show()
```

Total Misclassified Images: 101

Actual: 7 Predicted: 2	Actual: 5 Predicted: 3	Actual: 9 Predicted: 3	Actual: 7 Predicted: 5	Actual: 4 Predicted: 9



Actual: 8 Predicted: 3	Actual: 9 Predicted: 7	Actual: 3 Predicted: 5	Actual: 1 Predicted: 3	Actual: 8 Predicted: 9

ansun

10. Summarize the results and discuss the practical applications of CNN-based image classification in modern computer vision systems.

```
plt.figure(figsize=(8, 5))

plt. plot(history. history[ ' accuracy' ], label= 'Training Accuracy' ) PIt
. plot (history . history [ 'val_accuracy' ] , label-'Validation Accuracy'
)

plt.xlabel( ' Epoch' ) plt .ylabel( 'Accuracy' )
plt.title( 'Training and Validation Accuracy'
)

plt. legend() plt .
show()
plt.figure(figsize=(8,
5))

plt.plot(history.history[ ' loss' ] , label='Training Loss' ) plt.
lot(history.history[ 'val_loss' ], label= 'Validation Loss' )

plt.xlabel( ' Epoch' ) plt.ylabel( ' Loss' )
plt.title( 'Training and Validation Loss ' )


plt. legend() plt . show() from sklearn.metrics
import confusion_matrix cm =
confusion_matrix(y_test, y_pred)
plt.figure(figsize=(10, 8))

sns.heatmap(cm, annot=True, fmt-' d ' , cmap='Blues ' )


plt.xlabel( 'Predicted Label ' )
plt.y1abe1( 'Actua1 Label' )
plt.title( 'Confusion Matrix' )

plt . show()
```

Training and Validation Accuracy

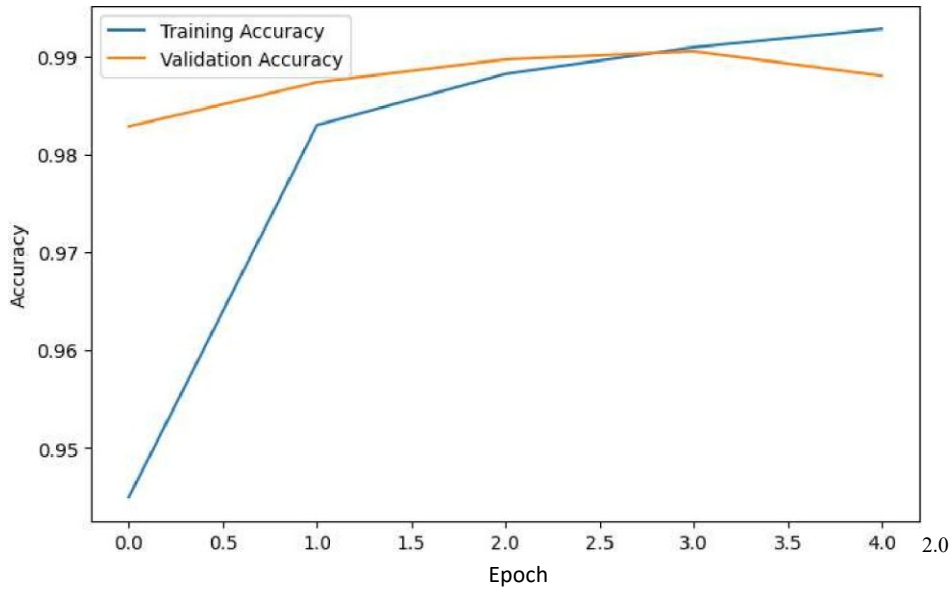

Training and Validation Loss

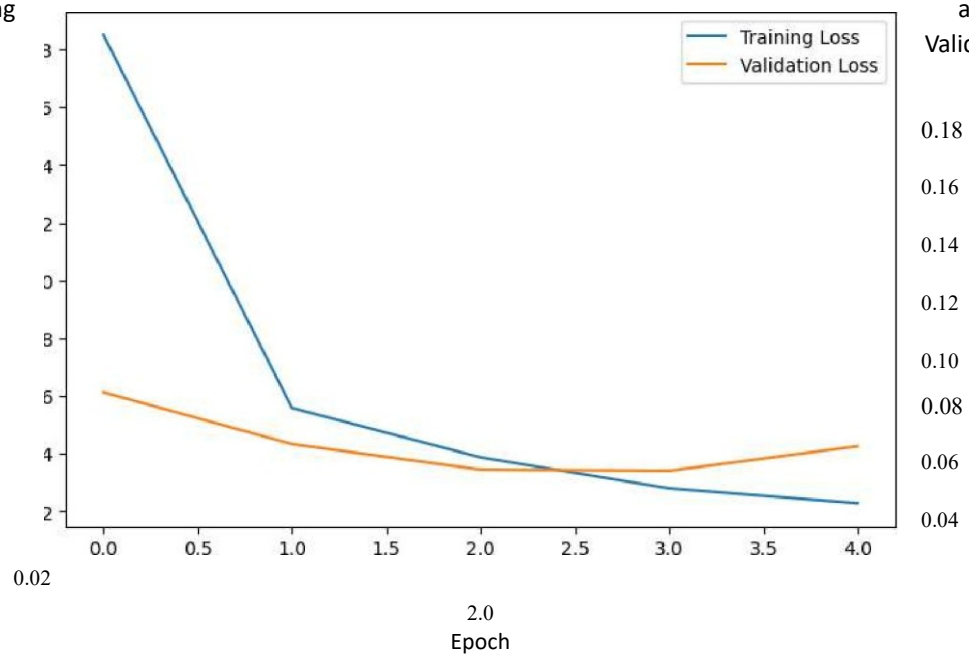

Confusion Matrix

