

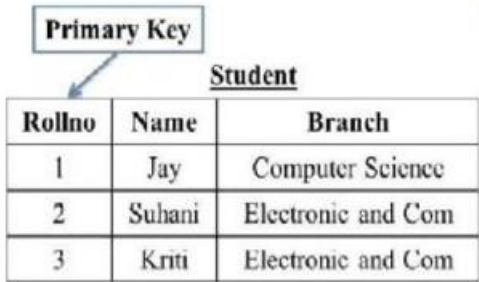
	MODULE: 5 (Database) Topics Covered Basics of Database
1. What do you understand By Database	→A database is an organized collection of data, stored and accessed electronically. Databases are used to store and manage large amounts of structured and unstructured data, and they can be used to support a wide range of activities, including data storage, data analysis, and data management.
2. What is Normalization?	→Normalization is a methodological method used in the design of databases to create a neat, structured, and structured table in which each table relates to just one subject or one-to-one correspondence. The objective is to extensively reduce data redundancy and dependency.
3. What is Difference between DBMS and RDBMS?	→ RDBMS: - Relation database management system. Data Stored is in table format. Multiple data element is accessible together. Data in the form of a table are linked together. Support distributed database. Data is Stored in large amount. RDBMS supports multiple users. The software and hardware requirement are higher. Example: - Oracle, SQL, Server. →DBMS: - Data stored is in file format Individual access of data element No connection between data No support for distributed database Data stored is a small quantity DBMS support a single user The software and hardware requirements are low

	Example: - XML, Microsoft Assess.
4. What is MF Cod Rule of RDBMS Systems?	→The MF Cod Rule of RDBMS Systems states that for a system to qualify as an RDBMS, it must be able to manage database entirely through the relational capabilities . Rule 0 of the MF Cod Rules states that the system must qualify as relational, as a database, and as a management system. For a system to qualify as an RDBMS, that system must use its relational facilities exclusively to manage the database.
5. What do you understand By Data Redundancy?	→Data redundancy refers to the situation where the same pieces of data are stored in multiple places within a database or data storage system. This can happen intentionally or accidentally. Redundancy can be useful for data recovery in case of corruption or loss. In computer memory and storage, data redundancy allows for error correction
6. What is DDL Interpreter?	→DML Compiler: It processes the DML statements into low level instruction (machine language), so that they can be executed. DDL Interpreter: It processes the DDL statements into a set of tables containing meta data (data about data).
7. What is DML Compiler in SQL?	→The Data Manipulation Language, or DML for short, is the group of commands responsible for manipulating data in a database; this generally entails inserting, editing, or deleting rows in SQL tables.
8. What is SQL Key Constraints writing an Example of SQL Key Constraints	<p>→Constraints are the rules that we can apply on the type of data in a table. That is, we can specify the limit on the type of data that can be stored in a particular column in a table using constraints.</p> <p>The available constraints in SQL are:</p> <ul style="list-style-type: none"> • NOT NULL: This constraint tells that we cannot store a null value in a column. That is, if a column is specified as NOT NULL then we will not be able to store null in this particular column any more. • UNIQUE: This constraint when specified with a column, tells that all the values in the

	<p>column must be unique. That is, the values in any row of a column must not be repeated.</p> <ul style="list-style-type: none"> • PRIMARY KEY: A primary key is a field which can uniquely identify each row in a table. And this constraint is used to specify a field in a table as primary key. • FOREIGN KEY: A Foreign key is a field which can uniquely identify each row in another table. And this constraint is used to specify a field as foreign key. • CHECK: This constraint helps to validate the values of a column to meet a particular condition. That is, it helps to ensure that the value stored in a column meets a specific condition. • DEFAULT: This constraint specifies a default value for the column when no value is specified by the user.
9. What is save Point? How to create a save Point write a Query?	<p>→A save point in SQL is a logical rollback point within a transaction. It allows you to specify a point in a transaction that you can roll back to without affecting the entire transaction. To create a, save point, use the following syntax: <code>SAVEPOINT savepoint_name</code>. You can then perform various SQL operations within the transaction. To roll back to a specific save point, use <code>ROLLBACK TO save_point_name</code></p>
10.What is trigger and how to create a Trigger in SQL?	<p>→Trigger is a statement that a system executes automatically when there is any modification to the database. In a trigger, we first specify when the trigger is to be executed and then the action to be performed when the trigger executes. Triggers are used to specify certain integrity constraints and referential constraints that cannot be specified using the constraint mechanism of SQL.</p> <p>Example –</p> <p>Suppose, we are adding a tuple to the 'Donors' table that is some person has donated blood. So, we can</p>

	<p>design a trigger that will automatically add the value of donated blood to the 'Blood_record' table.</p> <p>Types of Triggers –</p> <p>We can define 6 types of triggers for each table:</p> <ol style="list-style-type: none"> 1. AFTER INSERT activated after data is inserted into the table. 2. AFTER UPDATE: activated after data in the table is modified. 3. AFTER DELETE: activated after data is deleted/removed from the table. 4. BEFORE INSERT: activated before data is inserted into the table. 5. BEFORE UPDATE: activated before data in the table is modified. 6. BEFORE DELETE: activated before data is deleted/removed from the table.
--	---

SQL Queries

Create Table Name: Student	
1	<pre> CREAT TABLE Student (Rollno int PRIMARY KEY, Name Varchar(30), </pre>

	<div>Branch Text</div> <div>);</div> <div><table><tr><th>Rollno</th><th>Name</th><th>Branch</th></tr></table></div>	Rollno	Name	Branch																									
Rollno	Name	Branch																											
3	<div>INSERT INTO student VALUES (1,'Jay','Computer Science');</div> <div>INSERT INTO student VALUES (2,'Suhani','Electronic and Com');</div> <div>INSERT INTO student VALUES (2,'Kriti','Electronic and Com');</div> <div><table><tr><th>Rollno</th><th>Name</th><th>Branch</th></tr><tr><td>1</td><td>Jay</td><td>Computer Science</td></tr><tr><td>2</td><td>Suhani</td><td>Electronic and com</td></tr><tr><td>3</td><td>Kriti</td><td>Electronic and com</td></tr></table></div>	Rollno	Name	Branch	1	Jay	Computer Science	2	Suhani	Electronic and com	3	Kriti	Electronic and com																
Rollno	Name	Branch																											
1	Jay	Computer Science																											
2	Suhani	Electronic and com																											
3	Kriti	Electronic and com																											
4 Create Table Name: Exam	<div><div>Foreign Key</div><div><div>Exam</div><table><tr><th>Rollno</th><th>S_code</th><th>Marks</th><th>P_code</th></tr><tr><td>1</td><td>CS11</td><td>50</td><td>CS</td></tr><tr><td>1</td><td>CS12</td><td>60</td><td>CS</td></tr><tr><td>2</td><td>EC101</td><td>66</td><td>EC</td></tr><tr><td>2</td><td>EC102</td><td>70</td><td>EC</td></tr><tr><td>3</td><td>EC101</td><td>45</td><td>EC</td></tr><tr><td>3</td><td>EC102</td><td>50</td><td>EC</td></tr></table></div></div>	Rollno	S_code	Marks	P_code	1	CS11	50	CS	1	CS12	60	CS	2	EC101	66	EC	2	EC102	70	EC	3	EC101	45	EC	3	EC102	50	EC
Rollno	S_code	Marks	P_code																										
1	CS11	50	CS																										
1	CS12	60	CS																										
2	EC101	66	EC																										
2	EC102	70	EC																										
3	EC101	45	EC																										
3	EC102	50	EC																										
5	<div>CREATE TABLE Exam</div> <div>(</div> <div>Rollno int,</div> <div>S_code text,</div> <div>Marks int,</div> <div>P_code text,</div> <div>FOREIGN KEY(Rollno) REFERENCES student(Rollno)</div> <div>);</div> <div><table><tr><th>Rollno</th><th>S_code</th><th>Marks</th><th>P_code</th></tr></table></div>	Rollno	S_code	Marks	P_code																								
Rollno	S_code	Marks	P_code																										
6	<div>INSERT INTO exam VALUES(1,'CS11',50,'CS');</div> <div>INSERT INTO exam VALUES(1,'CS12',60,'CS');</div> <div>INSERT INTO exam VALUES(2,'EC101',66,'EC');</div> <div>INSERT INTO exam VALUES(2,'EC102',70,'EC');</div> <div>INSERT INTO exam VALUES(3,'EC101',45,'EC');</div> <div>INSERT INTO exam VALUES(3,'EC102',50,'EC');</div>																												

	Rollno	S_code	Marks	P_code
	1	CS11	50	CS
	1	CS12	60	CS
	2	EC101	66	EC
	2	EC102	70	EC
	3	EC101	45	EC
	3	EC102	50	EC

2.Create table given below: Employee

Employee_id	First_name	Last_name	Salary	Joining_date	Department
1	John	Abraham	1000000	01-JAN-13 12.00.00 AM	Banking
2	Michael	Clarke	800000	01-JAN-13 12.00.00 AM	Insurance
3	Roy	Thomas	700000	01-FEB-13 12.00.00 AM	Banking
4	Tom	Jose	600000	01-FEB-13 12.00.00 AM	Insurance
5	Jerry	Pinto	650000	01-FEB-13 12.00.00 AM	Insurance
6	Philip	Mathew	750000	01-JAN-13 12.00.00 AM	Services
7	TestName1	123	650000	01-JAN-13 12.00.00 AM	Services
8	TestName2	Lname%	600000	01-FEB-13 12.00.00 AM	Insurance

1

```
CREATE TABLE Employee
(
  Employee_id int,
  First_name varchar(50),
  Last_name varchar(50),
  Salary int,
  Joining_date datetime,
  Department text
);
```

Employee_id First_name Last_name Salary Joining_date Department

3

```
INSERT INTO employee VALUES(1,'John','Abraham',1000000,'13-01-01 12.00.00 AM','Banking');
INSERT INTO employee VALUES(2,'Michael','Clarke',800000,'13-01-01 12.00.00 AM','Insurance');
INSERT INTO employee VALUES(3,'Roy','Thomas',700000,'13-02-01 12.00.00 AM','Banking');
INSERT INTO employee VALUES(4,'Tom','Jose',600000,'13-02-01 12.00.00 AM','Insurance');
INSERT INTO employee VALUES(5,'Jerry','Pinto',650000,'13-02-01 12.00.00 AM','Insurance');
INSERT INTO employee VALUES(6,'Philip','Mathew',750000,'13-01-01 12.00.00 AM','Service');
INSERT INTO employee VALUES(7,'TestName1','123',650000,'13-01-01 12.00.00 AM','Service');
INSERT INTO employee VALUES(8,'TestName2','Lname%',600000,'13-02-01 12.00.00 AM','Insurance');
```

Creat table give below: Incentive

```
CREATE TABLE Incentive
(
  Employee_ref_id int,
```

	<div>Incentive_date date, Incentive_amount int);</div> <div><table><tr><th>Employee_ref_id</th><th>Incentive_date</th><th>Incentive_amount</th></tr></table></div>	Employee_ref_id	Incentive_date	Incentive_amount																								
Employee_ref_id	Incentive_date	Incentive_amount																										
2	<div>INSERT INTO incentive VALUES(1,'13-02-01',5000); INSERT INTO incentive VALUES(2,'13-02-01',3000); INSERT INTO incentive VALUES(3,'13-02-01',4000); INSERT INTO incentive VALUES(1,'13-01-01',4500); INSERT INTO incentive VALUES(2,'13-01-01',3500);</div> <div><table><tr><th>Employee_ref_id</th><th>Incentive_date</th><th>Incentive_amount</th></tr><tr><td>1</td><td>2013-02-01</td><td>5000</td></tr><tr><td>2</td><td>2013-02-01</td><td>3000</td></tr><tr><td>3</td><td>2013-02-01</td><td>4000</td></tr><tr><td>1</td><td>2013-01-01</td><td>4500</td></tr><tr><td>2</td><td>2013-01-01</td><td>3500</td></tr></table></div>	Employee_ref_id	Incentive_date	Incentive_amount	1	2013-02-01	5000	2	2013-02-01	3000	3	2013-02-01	4000	1	2013-01-01	4500	2	2013-01-01	3500									
Employee_ref_id	Incentive_date	Incentive_amount																										
1	2013-02-01	5000																										
2	2013-02-01	3000																										
3	2013-02-01	4000																										
1	2013-01-01	4500																										
2	2013-01-01	3500																										
3. Get First_Name from employee table using Tom name “Employee Name”.	<div>→SELECT * FROM employee WHERE First_name='Tom';</div> <div><table><tr><th>Employee_id</th><th>First_name</th><th>Last_name</th><th>Salary</th><th>Joining_date</th><th>Department</th></tr><tr><td>4</td><td>Tom</td><td>Jose</td><td>600000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr></table></div>	Employee_id	First_name	Last_name	Salary	Joining_date	Department	4	Tom	Jose	600000	2013-02-01 12:00:00	Insurance															
Employee_id	First_name	Last_name	Salary	Joining_date	Department																							
4	Tom	Jose	600000	2013-02-01 12:00:00	Insurance																							
4. Get FIRST_NAME, Joining Date, and Salary from employee table.	<div>→SELECT First_name,Joining_date,Salary FROM employee;</div> <div><table><tr><th>First_name</th><th>Joining_date</th><th>Salary</th></tr><tr><td>John</td><td>2013-01-01 12:00:00</td><td>1000000</td></tr><tr><td>Michael</td><td>2013-01-01 12:00:00</td><td>800000</td></tr><tr><td>Roy</td><td>2013-02-01 12:00:00</td><td>700000</td></tr><tr><td>Tom</td><td>2013-02-01 12:00:00</td><td>600000</td></tr><tr><td>Jerry</td><td>2013-02-01 12:00:00</td><td>650000</td></tr><tr><td>Philip</td><td>2013-01-01 12:00:00</td><td>750000</td></tr><tr><td>TestName1</td><td>2013-01-01 12:00:00</td><td>650000</td></tr><tr><td>TestName2</td><td>2013-02-01 12:00:00</td><td>600000</td></tr></table></div>	First_name	Joining_date	Salary	John	2013-01-01 12:00:00	1000000	Michael	2013-01-01 12:00:00	800000	Roy	2013-02-01 12:00:00	700000	Tom	2013-02-01 12:00:00	600000	Jerry	2013-02-01 12:00:00	650000	Philip	2013-01-01 12:00:00	750000	TestName1	2013-01-01 12:00:00	650000	TestName2	2013-02-01 12:00:00	600000
First_name	Joining_date	Salary																										
John	2013-01-01 12:00:00	1000000																										
Michael	2013-01-01 12:00:00	800000																										
Roy	2013-02-01 12:00:00	700000																										
Tom	2013-02-01 12:00:00	600000																										
Jerry	2013-02-01 12:00:00	650000																										
Philip	2013-01-01 12:00:00	750000																										
TestName1	2013-01-01 12:00:00	650000																										
TestName2	2013-02-01 12:00:00	600000																										
5. Get all employee details from the employee table order by First Name	<div>→SELECT * FROM employee ORDER BY First_name ASC,Salary DESC;</div>																											

Ascending and Salary descending?	<table><tr><th>Employee_id</th><th>First_name</th><th>Last_name</th><th>Salary</th><th>Joining_date</th><th>Department</th></tr><tr><td>5</td><td>Jerry</td><td>Pinto</td><td>650000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr><tr><td>1</td><td>John</td><td>Abraham</td><td>1000000</td><td>2013-01-01 12:00:00</td><td>Banking</td></tr><tr><td>2</td><td>Michael</td><td>Clarke</td><td>800000</td><td>2013-01-01 12:00:00</td><td>Insurance</td></tr><tr><td>6</td><td>Philip</td><td>Mathew</td><td>750000</td><td>2013-01-01 12:00:00</td><td>Service</td></tr><tr><td>3</td><td>Roy</td><td>Thomas</td><td>700000</td><td>2013-02-01 12:00:00</td><td>Banking</td></tr><tr><td>7</td><td>TestName1</td><td>123</td><td>650000</td><td>2013-01-01 12:00:00</td><td>Service</td></tr><tr><td>8</td><td>TestName2</td><td>Lname%</td><td>600000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr><tr><td>4</td><td>Tom</td><td>Jose</td><td>600000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr></table>	Employee_id	First_name	Last_name	Salary	Joining_date	Department	5	Jerry	Pinto	650000	2013-02-01 12:00:00	Insurance	1	John	Abraham	1000000	2013-01-01 12:00:00	Banking	2	Michael	Clarke	800000	2013-01-01 12:00:00	Insurance	6	Philip	Mathew	750000	2013-01-01 12:00:00	Service	3	Roy	Thomas	700000	2013-02-01 12:00:00	Banking	7	TestName1	123	650000	2013-01-01 12:00:00	Service	8	TestName2	Lname%	600000	2013-02-01 12:00:00	Insurance	4	Tom	Jose	600000	2013-02-01 12:00:00	Insurance
Employee_id	First_name	Last_name	Salary	Joining_date	Department																																																		
5	Jerry	Pinto	650000	2013-02-01 12:00:00	Insurance																																																		
1	John	Abraham	1000000	2013-01-01 12:00:00	Banking																																																		
2	Michael	Clarke	800000	2013-01-01 12:00:00	Insurance																																																		
6	Philip	Mathew	750000	2013-01-01 12:00:00	Service																																																		
3	Roy	Thomas	700000	2013-02-01 12:00:00	Banking																																																		
7	TestName1	123	650000	2013-01-01 12:00:00	Service																																																		
8	TestName2	Lname%	600000	2013-02-01 12:00:00	Insurance																																																		
4	Tom	Jose	600000	2013-02-01 12:00:00	Insurance																																																		
6. Get employee details from employee table whose first name contains 'J'.	<p>→SELECT * FROM employee WHERE First_name LIKE'j'%';</p> <table><tr><th>Employee_id</th><th>First_name</th><th>Last_name</th><th>Salary</th><th>Joining_date</th><th>Department</th></tr><tr><td>1</td><td>John</td><td>Abraham</td><td>1000000</td><td>2013-01-01 12:00:00</td><td>Banking</td></tr><tr><td>5</td><td>Jerry</td><td>Pinto</td><td>650000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr></table>	Employee_id	First_name	Last_name	Salary	Joining_date	Department	1	John	Abraham	1000000	2013-01-01 12:00:00	Banking	5	Jerry	Pinto	650000	2013-02-01 12:00:00	Insurance																																				
Employee_id	First_name	Last_name	Salary	Joining_date	Department																																																		
1	John	Abraham	1000000	2013-01-01 12:00:00	Banking																																																		
5	Jerry	Pinto	650000	2013-02-01 12:00:00	Insurance																																																		
7. Get department wise maximum salary from employee table order by	<p>→SELECT MAX(Salary) AS Salary FROM employee;</p> <table><tr><th>Salary</th></tr><tr><td>1000000</td></tr></table>	Salary	1000000																																																				
Salary																																																							
1000000																																																							
8. salaryascending?	<p>→SELECT * FROM employee ORDER BY Salary ASC;</p> <table><tr><th>Employee_id</th><th>First_name</th><th>Last_name</th><th>Salary</th><th>Joining_date</th><th>Department</th></tr><tr><td>4</td><td>Tom</td><td>Jose</td><td>600000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr><tr><td>8</td><td>TestName2</td><td>Lname%</td><td>600000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr><tr><td>5</td><td>Jerry</td><td>Pinto</td><td>650000</td><td>2013-02-01 12:00:00</td><td>Insurance</td></tr><tr><td>7</td><td>TestName1</td><td>123</td><td>650000</td><td>2013-01-01 12:00:00</td><td>Service</td></tr><tr><td>3</td><td>Roy</td><td>Thomas</td><td>700000</td><td>2013-02-01 12:00:00</td><td>Banking</td></tr><tr><td>6</td><td>Philip</td><td>Mathew</td><td>750000</td><td>2013-01-01 12:00:00</td><td>Service</td></tr><tr><td>2</td><td>Michael</td><td>Clarke</td><td>800000</td><td>2013-01-01 12:00:00</td><td>Insurance</td></tr><tr><td>1</td><td>John</td><td>Abraham</td><td>1000000</td><td>2013-01-01 12:00:00</td><td>Banking</td></tr></table>	Employee_id	First_name	Last_name	Salary	Joining_date	Department	4	Tom	Jose	600000	2013-02-01 12:00:00	Insurance	8	TestName2	Lname%	600000	2013-02-01 12:00:00	Insurance	5	Jerry	Pinto	650000	2013-02-01 12:00:00	Insurance	7	TestName1	123	650000	2013-01-01 12:00:00	Service	3	Roy	Thomas	700000	2013-02-01 12:00:00	Banking	6	Philip	Mathew	750000	2013-01-01 12:00:00	Service	2	Michael	Clarke	800000	2013-01-01 12:00:00	Insurance	1	John	Abraham	1000000	2013-01-01 12:00:00	Banking
Employee_id	First_name	Last_name	Salary	Joining_date	Department																																																		
4	Tom	Jose	600000	2013-02-01 12:00:00	Insurance																																																		
8	TestName2	Lname%	600000	2013-02-01 12:00:00	Insurance																																																		
5	Jerry	Pinto	650000	2013-02-01 12:00:00	Insurance																																																		
7	TestName1	123	650000	2013-01-01 12:00:00	Service																																																		
3	Roy	Thomas	700000	2013-02-01 12:00:00	Banking																																																		
6	Philip	Mathew	750000	2013-01-01 12:00:00	Service																																																		
2	Michael	Clarke	800000	2013-01-01 12:00:00	Insurance																																																		
1	John	Abraham	1000000	2013-01-01 12:00:00	Banking																																																		
9. Select first_name, incentive amount from employee and incentives table forthose employees who have incentives and incentive amount greater than 3000	<p>SELECT e.First_name, i.Incentive_amount FROM Employee e JOIN Incentive i ON e.Employee_id = i.Employee_ref_id WHERE i.Incentive_amount > 3000;</p> <p>Output:</p>																																																						

	<table><tr><th>First_name</th><th>Incentive_amount</th></tr><tr><td>John</td><td>5000</td></tr><tr><td>Roy</td><td>4000</td></tr><tr><td>John</td><td>4500</td></tr><tr><td>Michael</td><td>3500</td></tr></table>	First_name	Incentive_amount	John	5000	Roy	4000	John	4500	Michael	3500
First_name	Incentive_amount										
John	5000										
Roy	4000										
John	4500										
Michael	3500										
10. Create After Insert trigger on Employee table which insert records in viewtable	<div>→</div> <pre>CREATE TRIGGER AfterInsertEmployee AFTER INSERT ON Employee FOR EACH ROW BEGIN INSERT INTO ViewTable (Employee_id, First_name, Last_name, Salary, Joining_date, Department) VALUES (NEW.Employee_id, NEW.First_name, NEW.Last_name, NEW.Salary, NEW.Joining_date, NEW.Department); END;</pre>										

11. Create table given below: Salesperson	<div>TABLE-1</div> <div>TABLE NAME- SALESPERSON</div> <table><tr><th>(PK)SNo</th><th>SNAME</th><th>CITY</th><th>COMM</th></tr><tr><td>1001</td><td>Peel</td><td>London</td><td>.12</td></tr><tr><td>1002</td><td>Serres</td><td>San Jose</td><td>.13</td></tr><tr><td>1004</td><td>Motika</td><td>London</td><td>.11</td></tr><tr><td>1007</td><td>Rafkin</td><td>Barcelona</td><td>.15</td></tr><tr><td>1003</td><td>Axelrod</td><td>New York</td><td>.1</td></tr></table>	(PK)SNo	SNAME	CITY	COMM	1001	Peel	London	.12	1002	Serres	San Jose	.13	1004	Motika	London	.11	1007	Rafkin	Barcelona	.15	1003	Axelrod	New York	.1											
(PK)SNo	SNAME	CITY	COMM																																	
1001	Peel	London	.12																																	
1002	Serres	San Jose	.13																																	
1004	Motika	London	.11																																	
1007	Rafkin	Barcelona	.15																																	
1003	Axelrod	New York	.1																																	
1	<div>CREATE TABLE Salesperson (PK_SNo int, SNAME varchar(30), City varchar(30), Comm text);</div> <div><table><tr><th>PK_SNo</th><th>SNAME</th><th>City</th><th>Comm</th></tr></table></div>	PK_SNo	SNAME	City	Comm																															
PK_SNo	SNAME	City	Comm																																	
2	<div>INSERT INTO salesperson VALUES(1001,'Peel','London',.12); INSERT INTO salesperson VALUES(1002,'Serres','San Jose',.13); INSERT INTO salesperson VALUES(1004,'Motika','London',.11); INSERT INTO salesperson VALUES(1007,'Rafkin','Barcelona',.15); INSERT INTO salesperson VALUES(1003,'Axelrod','New York',.1);</div> <div><table><tr><th>PK_SNo</th><th>SNAME</th><th>City</th><th>Comm</th></tr><tr><td>1001</td><td>Peel</td><td>London</td><td>0.12</td></tr><tr><td>1002</td><td>Serres</td><td>San Jose</td><td>0.13</td></tr><tr><td>1004</td><td>Motika</td><td>London</td><td>0.11</td></tr><tr><td>1007</td><td>Rafkin</td><td>Barcelona</td><td>0.15</td></tr><tr><td>1003</td><td>Axelrod</td><td>New York</td><td>0.1</td></tr></table></div>	PK_SNo	SNAME	City	Comm	1001	Peel	London	0.12	1002	Serres	San Jose	0.13	1004	Motika	London	0.11	1007	Rafkin	Barcelona	0.15	1003	Axelrod	New York	0.1											
PK_SNo	SNAME	City	Comm																																	
1001	Peel	London	0.12																																	
1002	Serres	San Jose	0.13																																	
1004	Motika	London	0.11																																	
1007	Rafkin	Barcelona	0.15																																	
1003	Axelrod	New York	0.1																																	
11. Create table given below: Customer	<div>TABLE-2</div> <div>TABLE NAME- CUSTOMER</div> <table><tr><th>(PK)CNM.</th><th>CNAME</th><th>CITY</th><th>RATING</th><th>(FK)SNo</th></tr><tr><td>201</td><td>Hoffman</td><td>London</td><td>100</td><td>1001</td></tr><tr><td>202</td><td>Giovanne</td><td>Roe</td><td>200</td><td>1003</td></tr><tr><td>203</td><td>Liu</td><td>San Jose</td><td>300</td><td>1002</td></tr><tr><td>204</td><td>Grass</td><td>Barcelona</td><td>100</td><td>1002</td></tr><tr><td>206</td><td>Clemens</td><td>London</td><td>300</td><td>1007</td></tr><tr><td>207</td><td>Pereira</td><td>Roe</td><td>100</td><td>1004</td></tr></table>	(PK)CNM.	CNAME	CITY	RATING	(FK)SNo	201	Hoffman	London	100	1001	202	Giovanne	Roe	200	1003	203	Liu	San Jose	300	1002	204	Grass	Barcelona	100	1002	206	Clemens	London	300	1007	207	Pereira	Roe	100	1004
(PK)CNM.	CNAME	CITY	RATING	(FK)SNo																																
201	Hoffman	London	100	1001																																
202	Giovanne	Roe	200	1003																																
203	Liu	San Jose	300	1002																																
204	Grass	Barcelona	100	1002																																
206	Clemens	London	300	1007																																
207	Pereira	Roe	100	1004																																

3	<div>CREATE TABLE Customer (PK_CNM int, CNAME varchar(30), City varchar(30), Rating int, FK_SNo int);</div> <div><table><tr><th>PK_CNM</th><th>CNAME</th><th>City</th><th>Rating</th><th>FK_SNo</th></tr></table></div>	PK_CNM	CNAME	City	Rating	FK_SNo																														
PK_CNM	CNAME	City	Rating	FK_SNo																																
4	<div>INSERT INTO customer VALUES(201,'Hoffman','London',100,1001); INSERT INTO customer VALUES(202,'Giovanne','Roe',200,1003); INSERT INTO customer VALUES(203,'Liu','San Jose',300,1002); INSERT INTO customer VALUES(204,'Grass','Barcelona',100,1002); INSERT INTO customer VALUES(206,'Clemens','London',300,1007); INSERT INTO customer VALUES(207,'Pereira','Roe',100,1004);</div> <div><table><tr><th>PK_CNM</th><th>CNAME</th><th>City</th><th>Rating</th><th>FK_SNo</th></tr><tr><td>201</td><td>Hoffman</td><td>London</td><td>100</td><td>1001</td></tr><tr><td>202</td><td>Giovanne</td><td>Roe</td><td>200</td><td>1003</td></tr><tr><td>203</td><td>Liu</td><td>San Jose</td><td>300</td><td>1002</td></tr><tr><td>204</td><td>Grass</td><td>Barcelona</td><td>100</td><td>1002</td></tr><tr><td>206</td><td>Clemens</td><td>London</td><td>300</td><td>1007</td></tr><tr><td>207</td><td>Pereira</td><td>Roe</td><td>100</td><td>1004</td></tr></table></div>	PK_CNM	CNAME	City	Rating	FK_SNo	201	Hoffman	London	100	1001	202	Giovanne	Roe	200	1003	203	Liu	San Jose	300	1002	204	Grass	Barcelona	100	1002	206	Clemens	London	300	1007	207	Pereira	Roe	100	1004
PK_CNM	CNAME	City	Rating	FK_SNo																																
201	Hoffman	London	100	1001																																
202	Giovanne	Roe	200	1003																																
203	Liu	San Jose	300	1002																																
204	Grass	Barcelona	100	1002																																
206	Clemens	London	300	1007																																
207	Pereira	Roe	100	1004																																
Retrieve the below data from above table	All query is performed below.																																			

13.All orders
for more
than \$1000.

```
SELECT
    o.OrderID, o.CustomerID, o.OrderAmount, o.OrderDate,
    c.CName AS CustomerName, c.City AS CustomerCity,
    s.SName AS SalespersonName, s.City AS SalespersonCity
FROM
    Orders o
JOIN
    Customer c ON o.CustomerID = c.CNo
JOIN
    Salesperson s ON c.SNo = s.SNo
WHERE
    o.OrderAmount > 1000;
```

Output:

OrderID	CustomerID	OrderAmount	OrderDate	CustomerName	CustomerCity	SalespersonName	SalespersonCity
3	203	1200.00	2024-03-05	Liu	San Jose	Serres	San Jose
2	202	1500.00	2024-02-10	Giovanne	Roe	Axelrod	New York
5	205	2000.00	2024-05-18	Clemens	London	Motika	London

14.Names
and cities of
all
salespeople
in London
with
commission
above 0.12

```
SELECT
    SName, City
FROM
    Salesperson
WHERE
    City = 'London' AND Comm > 0.12;

SELECT
    SName, City
FROM
    Salesperson
WHERE
    City = 'Barcelona' OR City = 'London';
```

Output:

	SName	City
<input type="checkbox"/> Edit Copy Delete	Peel	London
<input type="checkbox"/> Edit Copy Delete	Motika	London
<input type="checkbox"/> Edit Copy Delete	Rafkin	Barcelona

15.All salespeople either in Barcelona or in London Output:	<pre>SELECT SName, City FROM Salesperson WHERE City = 'Barcelona' OR City = 'London';</pre> <p>→</p> <table><thead><tr><th>SName</th><th>City</th></tr></thead><tbody><tr><td>Peel</td><td>London</td></tr><tr><td>Motika</td><td>London</td></tr><tr><td>Rafkin</td><td>Barcelona</td></tr></tbody></table>	SName	City	Peel	London	Motika	London	Rafkin	Barcelona												
SName	City																				
Peel	London																				
Motika	London																				
Rafkin	Barcelona																				
16. All salespeople with commission between 0.10 and 0.12. (Boundary values should be excluded).	<pre>SELECT * FROM Salesperson WHERE Comm > 0.10 AND Comm < 0.12;</pre> <p>Output:</p> <table><thead><tr><th>SNo</th><th>SName</th><th>City</th><th>Comm</th></tr></thead><tbody><tr><td>1004</td><td>Motika</td><td>London</td><td>0.11</td></tr></tbody></table>	SNo	SName	City	Comm	1004	Motika	London	0.11												
SNo	SName	City	Comm																		
1004	Motika	London	0.11																		
17. All customers excluding those with rating <= 100 unless they are located in Rome	<pre>SELECT * FROM Customer WHERE Rating > 100 OR (Rating <= 100 AND City = 'Rome');</pre> <p>Output:</p> <table><thead><tr><th>CNo</th><th>CName</th><th>City</th><th>Rating</th><th>SNo</th></tr></thead><tbody><tr><td>202</td><td>Giovanne</td><td>Roe</td><td>200</td><td>1003</td></tr><tr><td>203</td><td>Liu</td><td>San Jose</td><td>300</td><td>1002</td></tr><tr><td>205</td><td>Clemens</td><td>London</td><td>300</td><td>1004</td></tr></tbody></table>	CNo	CName	City	Rating	SNo	202	Giovanne	Roe	200	1003	203	Liu	San Jose	300	1002	205	Clemens	London	300	1004
CNo	CName	City	Rating	SNo																	
202	Giovanne	Roe	200	1003																	
203	Liu	San Jose	300	1002																	
205	Clemens	London	300	1004																	

18. Write a SQL statement that displays all the information about all salespeople	<pre> salesman_id name city commission -----+-----+-----+----- 5001 James Hoog New York 0.15 5002 Nail Knite Paris 0.13 5005 Pit Alex London 0.11 5006 Mc Lyon Paris 0.14 5007 Paul Adam Rome 0.13 5003 Lauson Hen San Jose 0.12 </pre>
1	<pre> CREATE TABLE salespeople (salesman_id int, name varchar(30), </pre>

	<div>city text, commission text);</div> <div><table><tr><th>salesman_id</th><th>name</th><th>city</th><th>commission</th></tr></table></div>	salesman_id	name	city	commission																								
salesman_id	name	city	commission																										
2	<div>INSERT INTO salespeople VALUES(5001,'James Hoog','New York',0.15); INSERT INTO salespeople VALUES(5002,'Nail Knite','paris',0.13); INSERT INTO salespeople VALUES(5005,'Pit Alex','London',0.11); INSERT INTO salespeople VALUES(5006,'Mc Lyon','paris',0.14); INSERT INTO salespeople VALUES(5007,'Paul Adam','Rome',0.13); INSERT INTO salespeople VALUES(5003,'Lauson Hen','San Jose',0.12);</div> <div><table><tr><th>salesman_id</th><th>name</th><th>city</th><th>commission</th></tr><tr><td>5001</td><td>James Hoog</td><td>New York</td><td>0.15</td></tr><tr><td>5002</td><td>Nail Knite</td><td>paris</td><td>0.13</td></tr><tr><td>5005</td><td>Pit Alex</td><td>London</td><td>0.11</td></tr><tr><td>5006</td><td>Mc Lyon</td><td>paris</td><td>0.14</td></tr><tr><td>5007</td><td>Paul Adam</td><td>Rome</td><td>0.13</td></tr><tr><td>5003</td><td>Lauson Hen</td><td>San Jose</td><td>0.12</td></tr></table></div>	salesman_id	name	city	commission	5001	James Hoog	New York	0.15	5002	Nail Knite	paris	0.13	5005	Pit Alex	London	0.11	5006	Mc Lyon	paris	0.14	5007	Paul Adam	Rome	0.13	5003	Lauson Hen	San Jose	0.12
salesman_id	name	city	commission																										
5001	James Hoog	New York	0.15																										
5002	Nail Knite	paris	0.13																										
5005	Pit Alex	London	0.11																										
5006	Mc Lyon	paris	0.14																										
5007	Paul Adam	Rome	0.13																										
5003	Lauson Hen	San Jose	0.12																										

19. From the following table, write a SQL query to find orders that are delivered by a salespers on with ID. 5001. Return ord_no, ord_date, purch_amt.	<table><tr><th>ord_no</th><th>purch_amt</th><th>ord_date</th><th>customer_id</th><th>salesman_id</th></tr><tr><td>70001</td><td>150.5</td><td>2012-10-05</td><td>3005</td><td>5002</td></tr><tr><td>70009</td><td>270.65</td><td>2012-09-10</td><td>3001</td><td>5005</td></tr><tr><td>70002</td><td>65.26</td><td>2012-10-05</td><td>3002</td><td>5001</td></tr><tr><td>70004</td><td>110.5</td><td>2012-08-17</td><td>3009</td><td>5003</td></tr><tr><td>70007</td><td>948.5</td><td>2012-09-10</td><td>3005</td><td>5002</td></tr><tr><td>70005</td><td>2400.6</td><td>2012-07-27</td><td>3007</td><td>5001</td></tr><tr><td>70008</td><td>5760</td><td>2012-09-10</td><td>3002</td><td>5001</td></tr><tr><td>70010</td><td>1983.43</td><td>2012-10-10</td><td>3004</td><td>5006</td></tr><tr><td>70003</td><td>2480.4</td><td>2012-10-10</td><td>3009</td><td>5003</td></tr><tr><td>70012</td><td>250.45</td><td>2012-06-27</td><td>3008</td><td>5002</td></tr><tr><td>70011</td><td>75.29</td><td>2012-08-17</td><td>3003</td><td>5007</td></tr><tr><td>70013</td><td>3045.6</td><td>2012-04-25</td><td>3002</td><td>5001</td></tr></table>	ord_no	purch_amt	ord_date	customer_id	salesman_id	70001	150.5	2012-10-05	3005	5002	70009	270.65	2012-09-10	3001	5005	70002	65.26	2012-10-05	3002	5001	70004	110.5	2012-08-17	3009	5003	70007	948.5	2012-09-10	3005	5002	70005	2400.6	2012-07-27	3007	5001	70008	5760	2012-09-10	3002	5001	70010	1983.43	2012-10-10	3004	5006	70003	2480.4	2012-10-10	3009	5003	70012	250.45	2012-06-27	3008	5002	70011	75.29	2012-08-17	3003	5007	70013	3045.6	2012-04-25	3002	5001
ord_no	purch_amt	ord_date	customer_id	salesman_id																																																														
70001	150.5	2012-10-05	3005	5002																																																														
70009	270.65	2012-09-10	3001	5005																																																														
70002	65.26	2012-10-05	3002	5001																																																														
70004	110.5	2012-08-17	3009	5003																																																														
70007	948.5	2012-09-10	3005	5002																																																														
70005	2400.6	2012-07-27	3007	5001																																																														
70008	5760	2012-09-10	3002	5001																																																														
70010	1983.43	2012-10-10	3004	5006																																																														
70003	2480.4	2012-10-10	3009	5003																																																														
70012	250.45	2012-06-27	3008	5002																																																														
70011	75.29	2012-08-17	3003	5007																																																														
70013	3045.6	2012-04-25	3002	5001																																																														
1	<pre>CREATE TABLE orders (ord_no int, purch_amt text, ord_date date, customer_id int, salesman_id int);</pre> <table><tr><th>ord_no</th><th>purch_amt</th><th>ord_date</th><th>customer_id</th><th>salesman_id</th></tr></table>	ord_no	purch_amt	ord_date	customer_id	salesman_id																																																												
ord_no	purch_amt	ord_date	customer_id	salesman_id																																																														
2	<pre>INSERT INTO orders VALUES(70001,150.5,'2012-10-05',3005,5002); INSERT INTO orders VALUES(70009,270.65,'2012-09-10',3001,5005); INSERT INTO orders VALUES(70002,65.26,'2012-10-05',3002,5001); INSERT INTO orders VALUES(70004,110.5,'2012-08-17',3009,5003); INSERT INTO orders VALUES(70007,948.5,'2012-09-10',3005,5002); INSERT INTO orders VALUES(70005,2400.6,'2012-07-27',3007,5001); INSERT INTO orders VALUES(70008,5760,'2012-09-10',3002,5001); INSERT INTO orders VALUES(70010,1983.43,'2012-10-10',3004,5006); INSERT INTO orders VALUES(70003,2480.4,'2012-10-10',3009,5003); INSERT INTO orders VALUES(70012,250.45,'2012-06-27',3008,5002); INSERT INTO orders VALUES(70011,75.29,'2012-08-17',3003,5007); INSERT INTO orders VALUES(70013,3045.6,'2012-04-25',3002,5001);</pre>																																																																	

	<table><tr><th>ord_no</th><th>purch_amt</th><th>ord_date</th><th>customer_id</th><th>salesman_id</th></tr><tr><td>70001</td><td>150.5</td><td>2012-10-05</td><td>3005</td><td>5002</td></tr><tr><td>70009</td><td>270.65</td><td>2012-09-10</td><td>3001</td><td>5005</td></tr><tr><td>70002</td><td>65.26</td><td>2012-10-05</td><td>3002</td><td>5001</td></tr><tr><td>70004</td><td>110.5</td><td>2012-08-17</td><td>3009</td><td>5003</td></tr><tr><td>70007</td><td>948.5</td><td>2012-09-10</td><td>3005</td><td>5002</td></tr><tr><td>70005</td><td>2400.6</td><td>2012-07-27</td><td>3007</td><td>5001</td></tr><tr><td>70008</td><td>5760</td><td>2012-09-10</td><td>3002</td><td>5001</td></tr><tr><td>70010</td><td>1983.43</td><td>2012-10-10</td><td>3004</td><td>5006</td></tr><tr><td>70003</td><td>2480.4</td><td>2012-10-10</td><td>3009</td><td>5003</td></tr><tr><td>70012</td><td>250.45</td><td>2012-06-27</td><td>3008</td><td>5002</td></tr><tr><td>70011</td><td>75.29</td><td>2012-08-17</td><td>3003</td><td>5007</td></tr><tr><td>70013</td><td>3045.6</td><td>2012-04-25</td><td>3002</td><td>5001</td></tr></table>	ord_no	purch_amt	ord_date	customer_id	salesman_id	70001	150.5	2012-10-05	3005	5002	70009	270.65	2012-09-10	3001	5005	70002	65.26	2012-10-05	3002	5001	70004	110.5	2012-08-17	3009	5003	70007	948.5	2012-09-10	3005	5002	70005	2400.6	2012-07-27	3007	5001	70008	5760	2012-09-10	3002	5001	70010	1983.43	2012-10-10	3004	5006	70003	2480.4	2012-10-10	3009	5003	70012	250.45	2012-06-27	3008	5002	70011	75.29	2012-08-17	3003	5007	70013	3045.6	2012-04-25	3002	5001
ord_no	purch_amt	ord_date	customer_id	salesman_id																																																														
70001	150.5	2012-10-05	3005	5002																																																														
70009	270.65	2012-09-10	3001	5005																																																														
70002	65.26	2012-10-05	3002	5001																																																														
70004	110.5	2012-08-17	3009	5003																																																														
70007	948.5	2012-09-10	3005	5002																																																														
70005	2400.6	2012-07-27	3007	5001																																																														
70008	5760	2012-09-10	3002	5001																																																														
70010	1983.43	2012-10-10	3004	5006																																																														
70003	2480.4	2012-10-10	3009	5003																																																														
70012	250.45	2012-06-27	3008	5002																																																														
70011	75.29	2012-08-17	3003	5007																																																														
70013	3045.6	2012-04-25	3002	5001																																																														
Query:	<pre>1 SELECT ord_no, ord_date, purch_amt 2 FROM orders 3 WHERE salesman_id = 5001;</pre>																																																																	
Output:	<table><tr><th>ord_no</th><th>ord_date</th><th>purch_amt</th></tr><tr><td>70002</td><td>2012-10-05</td><td>65.26</td></tr><tr><td>70005</td><td>2012-07-27</td><td>2400.6</td></tr><tr><td>70008</td><td>2012-09-10</td><td>5760</td></tr><tr><td>70013</td><td>2012-04-25</td><td>3045.6</td></tr></table>	ord_no	ord_date	purch_amt	70002	2012-10-05	65.26	70005	2012-07-27	2400.6	70008	2012-09-10	5760	70013	2012-04-25	3045.6																																																		
ord_no	ord_date	purch_amt																																																																
70002	2012-10-05	65.26																																																																
70005	2012-07-27	2400.6																																																																
70008	2012-09-10	5760																																																																
70013	2012-04-25	3045.6																																																																

20. From the following table, write a SQL query to select a range of products whose price is in the range Rs.200 to Rs.600. Begin and end values are included. Return pro_id, pro_name, pro_price, and pro_com.	PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM
	101	Mother Board	3200.00	15
	102	Key Board	450.00	16
	103	ZIP drive	250.00	14
	104	Speaker	550.00	16
	105	Monitor	5000.00	11
	106	DVD drive	900.00	12
	107	CD drive	800.00	12
	108	Printer	2600.00	13
	109	Refill cartridge	350.00	13
	110	Mouse	250.00	12
	CREATE TABLE item_mast (pro_id int, pro_name varchar(30), pro_price text, pro_com int);			
	pro_id	pro_name	pro_price	pro_com
	INSERT INTO item_mast VALUES(101,'Mother Board',3200.00,15); INSERT INTO item_mast VALUES(102,'Key Board',450.00,16); INSERT INTO item_mast VALUES(103,'ZIP Drive',250.00,14); INSERT INTO item_mast VALUES(104,'Speaker',550.00,16); INSERT INTO item_mast VALUES(105,'Monitor',5000.00,11); INSERT INTO item_mast VALUES(106,'DVD drive',900.00,12); INSERT INTO item_mast VALUES(107,'CD drive',800.00,12); INSERT INTO item_mast VALUES(108,'Printer',2600.00,13); INSERT INTO item_mast VALUES(109,'Refill catridge',350.00,13); INSERT INTO item_mast VALUES(110,'Mouse',250.00,12);			

	<table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr><tr><td>101</td><td>Mother Board</td><td>3200.00</td><td>15</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP Drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>105</td><td>Monitor</td><td>5000.00</td><td>11</td></tr><tr><td>106</td><td>DVD drive</td><td>900.00</td><td>12</td></tr><tr><td>107</td><td>CD drive</td><td>800.00</td><td>12</td></tr><tr><td>108</td><td>Printer</td><td>2600.00</td><td>13</td></tr><tr><td>109</td><td>Refill catridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table>	pro_id	pro_name	pro_price	pro_com	101	Mother Board	3200.00	15	102	Key Board	450.00	16	103	ZIP Drive	250.00	14	104	Speaker	550.00	16	105	Monitor	5000.00	11	106	DVD drive	900.00	12	107	CD drive	800.00	12	108	Printer	2600.00	13	109	Refill catridge	350.00	13	110	Mouse	250.00	12
pro_id	pro_name	pro_price	pro_com																																										
101	Mother Board	3200.00	15																																										
102	Key Board	450.00	16																																										
103	ZIP Drive	250.00	14																																										
104	Speaker	550.00	16																																										
105	Monitor	5000.00	11																																										
106	DVD drive	900.00	12																																										
107	CD drive	800.00	12																																										
108	Printer	2600.00	13																																										
109	Refill catridge	350.00	13																																										
110	Mouse	250.00	12																																										
Query:	<pre>SELECT PRO_ID, PRO_NAME, PRO_PRICE, PRO_COM FROM item_mast WHERE PRO_PRICE BETWEEN 200 AND 600;</pre>																																												
Output:	<table><tr><th>PRO_ID</th><th>PRO_NAME</th><th>PRO_PRICE</th><th>PRO_COM</th></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP Drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>109</td><td>Refill catridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP Drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>109</td><td>Refill catridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table>	PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM	102	Key Board	450.00	16	103	ZIP Drive	250.00	14	104	Speaker	550.00	16	109	Refill catridge	350.00	13	110	Mouse	250.00	12	102	Key Board	450.00	16	103	ZIP Drive	250.00	14	104	Speaker	550.00	16	109	Refill catridge	350.00	13	110	Mouse	250.00	12
PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM																																										
102	Key Board	450.00	16																																										
103	ZIP Drive	250.00	14																																										
104	Speaker	550.00	16																																										
109	Refill catridge	350.00	13																																										
110	Mouse	250.00	12																																										
102	Key Board	450.00	16																																										
103	ZIP Drive	250.00	14																																										
104	Speaker	550.00	16																																										
109	Refill catridge	350.00	13																																										
110	Mouse	250.00	12																																										

21. From the following table, write a SQL query to calculate the average price for a manufacturer code of 16. Return avg.	<table><tr><th>PRO_ID</th><th>PRO_NAME</th><th>PRO_PRICE</th><th>PRO_COM</th></tr><tr><td>101</td><td>Mother Board</td><td>3200.00</td><td>15</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>105</td><td>Monitor</td><td>5000.00</td><td>11</td></tr><tr><td>106</td><td>DVD drive</td><td>900.00</td><td>12</td></tr><tr><td>107</td><td>CD drive</td><td>800.00</td><td>12</td></tr><tr><td>108</td><td>Printer</td><td>2600.00</td><td>13</td></tr><tr><td>109</td><td>Refill cartridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table>	PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM	101	Mother Board	3200.00	15	102	Key Board	450.00	16	103	ZIP drive	250.00	14	104	Speaker	550.00	16	105	Monitor	5000.00	11	106	DVD drive	900.00	12	107	CD drive	800.00	12	108	Printer	2600.00	13	109	Refill cartridge	350.00	13	110	Mouse	250.00	12
PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM																																										
101	Mother Board	3200.00	15																																										
102	Key Board	450.00	16																																										
103	ZIP drive	250.00	14																																										
104	Speaker	550.00	16																																										
105	Monitor	5000.00	11																																										
106	DVD drive	900.00	12																																										
107	CD drive	800.00	12																																										
108	Printer	2600.00	13																																										
109	Refill cartridge	350.00	13																																										
110	Mouse	250.00	12																																										
	<pre>CREATE TABLE item_mast (pro_id int, pro_name varchar(30), pro_price text, pro_com int);</pre> <table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr></table>	pro_id	pro_name	pro_price	pro_com																																								
pro_id	pro_name	pro_price	pro_com																																										
	<pre>INSERT INTO item_mast VALUES(101,'Mother Board',3200.00,15); INSERT INTO item_mast VALUES(102,'Key Board',450.00,16); INSERT INTO item_mast VALUES(103,'ZIP Drive',250.00,14); INSERT INTO item_mast VALUES(104,'Speaker',550.00,16); INSERT INTO item_mast VALUES(105,'Monitor',5000.00,11); INSERT INTO item_mast VALUES(106,'DVD drive',900.00,12); INSERT INTO item_mast VALUES(107,'CD drive',800.00,12); INSERT INTO item_mast VALUES(108,'Printer',2600.00,13); INSERT INTO item_mast VALUES(109,'Refill catridge',350.00,13); INSERT INTO item_mast VALUES(110,'Mouse',250.00,12);</pre>																																												

	<table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr><tr><td>101</td><td>Mother Board</td><td>3200.00</td><td>15</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP Drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>105</td><td>Monitor</td><td>5000.00</td><td>11</td></tr><tr><td>106</td><td>DVD drive</td><td>900.00</td><td>12</td></tr><tr><td>107</td><td>CD drive</td><td>800.00</td><td>12</td></tr><tr><td>108</td><td>Printer</td><td>2600.00</td><td>13</td></tr><tr><td>109</td><td>Refill catridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table>	pro_id	pro_name	pro_price	pro_com	101	Mother Board	3200.00	15	102	Key Board	450.00	16	103	ZIP Drive	250.00	14	104	Speaker	550.00	16	105	Monitor	5000.00	11	106	DVD drive	900.00	12	107	CD drive	800.00	12	108	Printer	2600.00	13	109	Refill catridge	350.00	13	110	Mouse	250.00	12
pro_id	pro_name	pro_price	pro_com																																										
101	Mother Board	3200.00	15																																										
102	Key Board	450.00	16																																										
103	ZIP Drive	250.00	14																																										
104	Speaker	550.00	16																																										
105	Monitor	5000.00	11																																										
106	DVD drive	900.00	12																																										
107	CD drive	800.00	12																																										
108	Printer	2600.00	13																																										
109	Refill catridge	350.00	13																																										
110	Mouse	250.00	12																																										
Query:	<pre>SELECT AVG(PRO_PRICE) AS avg_price FROM item_mast WHERE PRO_COM = 16;</pre>																																												
Output:	<table><tr><th>avg_price</th></tr><tr><td>500</td></tr></table>	avg_price	500																																										
avg_price																																													
500																																													

22. From the following table, write a SQL query to display the pro_name as 'Item Name' and pro_priceas 'Price in Rs.'	<table><tr><th>PRO_ID</th><th>PRO_NAME</th><th>PRO_PRICE</th><th>PRO_COM</th></tr><tr><td>101</td><td>Mother Board</td><td>3200.00</td><td>15</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>105</td><td>Monitor</td><td>5000.00</td><td>11</td></tr><tr><td>106</td><td>DVD drive</td><td>900.00</td><td>12</td></tr><tr><td>107</td><td>CD drive</td><td>800.00</td><td>12</td></tr><tr><td>108</td><td>Printer</td><td>2600.00</td><td>13</td></tr><tr><td>109</td><td>Refill cartridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table>	PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM	101	Mother Board	3200.00	15	102	Key Board	450.00	16	103	ZIP drive	250.00	14	104	Speaker	550.00	16	105	Monitor	5000.00	11	106	DVD drive	900.00	12	107	CD drive	800.00	12	108	Printer	2600.00	13	109	Refill cartridge	350.00	13	110	Mouse	250.00	12
PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM																																										
101	Mother Board	3200.00	15																																										
102	Key Board	450.00	16																																										
103	ZIP drive	250.00	14																																										
104	Speaker	550.00	16																																										
105	Monitor	5000.00	11																																										
106	DVD drive	900.00	12																																										
107	CD drive	800.00	12																																										
108	Printer	2600.00	13																																										
109	Refill cartridge	350.00	13																																										
110	Mouse	250.00	12																																										
	<pre>CREATE TABLE item_mast (pro_id int, pro_name varchar(30), pro_price text, pro_com int);</pre> <table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr></table>	pro_id	pro_name	pro_price	pro_com																																								
pro_id	pro_name	pro_price	pro_com																																										
	<pre>INSERT INTO item_mast VALUES(101,'Mother Board',3200.00,15); INSERT INTO item_mast VALUES(102,'Key Board',450.00,16); INSERT INTO item_mast VALUES(103,'ZIP Drive',250.00,14); INSERT INTO item_mast VALUES(104,'Speaker',550.00,16); INSERT INTO item_mast VALUES(105,'Monitor',5000.00,11); INSERT INTO item_mast VALUES(106,'DVD drive',900.00,12); INSERT INTO item_mast VALUES(107,'CD drive',800.00,12); INSERT INTO item_mast VALUES(108,'Printer',2600.00,13); INSERT INTO item_mast VALUES(109,'Refill catridge',350.00,13); INSERT INTO item_mast VALUES(110,'Mouse',250.00,12);</pre>																																												

	<table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr><tr><td>101</td><td>Mother Board</td><td>3200.00</td><td>15</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP Drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>105</td><td>Monitor</td><td>5000.00</td><td>11</td></tr><tr><td>106</td><td>DVD drive</td><td>900.00</td><td>12</td></tr><tr><td>107</td><td>CD drive</td><td>800.00</td><td>12</td></tr><tr><td>108</td><td>Printer</td><td>2600.00</td><td>13</td></tr><tr><td>109</td><td>Refill catridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table>	pro_id	pro_name	pro_price	pro_com	101	Mother Board	3200.00	15	102	Key Board	450.00	16	103	ZIP Drive	250.00	14	104	Speaker	550.00	16	105	Monitor	5000.00	11	106	DVD drive	900.00	12	107	CD drive	800.00	12	108	Printer	2600.00	13	109	Refill catridge	350.00	13	110	Mouse	250.00	12
pro_id	pro_name	pro_price	pro_com																																										
101	Mother Board	3200.00	15																																										
102	Key Board	450.00	16																																										
103	ZIP Drive	250.00	14																																										
104	Speaker	550.00	16																																										
105	Monitor	5000.00	11																																										
106	DVD drive	900.00	12																																										
107	CD drive	800.00	12																																										
108	Printer	2600.00	13																																										
109	Refill catridge	350.00	13																																										
110	Mouse	250.00	12																																										
Query:	<pre>SELECT PRO_NAME AS "Item Name", PRO_PRICE AS "Price in Rs." FROM item_mast;</pre>																																												
Output:	<table><tr><th>Item Name</th><th>Price in Rs.</th></tr><tr><td>Mother Board</td><td>3200.00</td></tr><tr><td>Key Board</td><td>450.00</td></tr><tr><td>ZIP Drive</td><td>250.00</td></tr><tr><td>Speaker</td><td>550.00</td></tr><tr><td>Monitor</td><td>5000.00</td></tr><tr><td>DVD drive</td><td>900.00</td></tr><tr><td>CD drive</td><td>800.00</td></tr><tr><td>Printer</td><td>2600.00</td></tr><tr><td>Refill catridge</td><td>350.00</td></tr><tr><td>Mouse</td><td>250.00</td></tr></table>	Item Name	Price in Rs.	Mother Board	3200.00	Key Board	450.00	ZIP Drive	250.00	Speaker	550.00	Monitor	5000.00	DVD drive	900.00	CD drive	800.00	Printer	2600.00	Refill catridge	350.00	Mouse	250.00																						
Item Name	Price in Rs.																																												
Mother Board	3200.00																																												
Key Board	450.00																																												
ZIP Drive	250.00																																												
Speaker	550.00																																												
Monitor	5000.00																																												
DVD drive	900.00																																												
CD drive	800.00																																												
Printer	2600.00																																												
Refill catridge	350.00																																												
Mouse	250.00																																												

23. From the following table, write a SQL query to find the items whose prices are higher than or equal to \$250. Order the result by product price in	PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM
	101	Mother Board	3200.00	15
	102	Key Board	450.00	16
	103	ZIP drive	250.00	14
	104	Speaker	550.00	16
	105	Monitor	5000.00	11
	106	DVD drive	900.00	12
	107	CD drive	800.00	12
	108	Printer	2600.00	13
	109	Refill cartridge	350.00	13
	110	Mouse	250.00	12

descending, then product name in ascending. Return pro_name and pro_price.																																													
	<div>CREATE TABLE item_mast (pro_id int, pro_name varchar(30), pro_price text, pro_com int);</div> <div><table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr></table></div>	pro_id	pro_name	pro_price	pro_com																																								
pro_id	pro_name	pro_price	pro_com																																										
	<div>INSERT INTO item_mast VALUES(101,'Mother Board',3200.00,15); INSERT INTO item_mast VALUES(102,'Key Board',450.00,16); INSERT INTO item_mast VALUES(103,'ZIP Drive',250.00,14); INSERT INTO item_mast VALUES(104,'Speaker',550.00,16); INSERT INTO item_mast VALUES(105,'Monitor',5000.00,11); INSERT INTO item_mast VALUES(106,'DVD drive',900.00,12); INSERT INTO item_mast VALUES(107,'CD drive',800.00,12); INSERT INTO item_mast VALUES(108,'Printer',2600.00,13); INSERT INTO item_mast VALUES(109,'Refill catridge',350.00,13); INSERT INTO item_mast VALUES(110,'Mouse',250.00,12);</div> <div><table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr><tr><td>101</td><td>Mother Board</td><td>3200.00</td><td>15</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP Drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>105</td><td>Monitor</td><td>5000.00</td><td>11</td></tr><tr><td>106</td><td>DVD drive</td><td>900.00</td><td>12</td></tr><tr><td>107</td><td>CD drive</td><td>800.00</td><td>12</td></tr><tr><td>108</td><td>Printer</td><td>2600.00</td><td>13</td></tr><tr><td>109</td><td>Refill catridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table></div>	pro_id	pro_name	pro_price	pro_com	101	Mother Board	3200.00	15	102	Key Board	450.00	16	103	ZIP Drive	250.00	14	104	Speaker	550.00	16	105	Monitor	5000.00	11	106	DVD drive	900.00	12	107	CD drive	800.00	12	108	Printer	2600.00	13	109	Refill catridge	350.00	13	110	Mouse	250.00	12
pro_id	pro_name	pro_price	pro_com																																										
101	Mother Board	3200.00	15																																										
102	Key Board	450.00	16																																										
103	ZIP Drive	250.00	14																																										
104	Speaker	550.00	16																																										
105	Monitor	5000.00	11																																										
106	DVD drive	900.00	12																																										
107	CD drive	800.00	12																																										
108	Printer	2600.00	13																																										
109	Refill catridge	350.00	13																																										
110	Mouse	250.00	12																																										
Query:	<div>SELECT PRO_NAME, PRO_PRICE FROM item_mast WHERE PRO_PRICE >= 250 ORDER BY PRO_PRICE DESC, PRO_NAME ASC;</div>																																												

Output:	PRO_NAME ▲ 2	PRO_PRICE ▼ 1	
	DVD drive	900.00	
	DVD drive	900.00	
	CD drive	800.00	
	CD drive	800.00	
	Speaker	550.00	
	Speaker	550.00	
	Monitor	5000.00	
	Monitor	5000.00	
	Key Board	450.00	
	Key Board	450.00	
	Refill cartridge	350.00	
	Refill cartridge	350.00	
	Mother Board	3200.00	
	Mother Board	3200.00	
	Printer	2600.00	
	Printer	2600.00	
	Mouse	250.00	
	Mouse	250.00	
	ZIP Drive	250.00	
	ZIP Drive	250.00	

24. From the following table, write a SQL query to calculate average price of the items for each company. Return average price and company code.	PRO_ID	PRO_NAME	PRO_PRICE	PRO_COM
	101	Mother Board	3200.00	15
	102	Key Board	450.00	16
	103	ZIP drive	250.00	14
	104	Speaker	550.00	16
	105	Monitor	5000.00	11
	106	DVD drive	900.00	12
	107	CD drive	800.00	12
	108	Printer	2600.00	13
	109	Refill cartridge	350.00	13
	110	Mouse	250.00	12
	CREATE TABLE item_mast (pro_id int, pro_name varchar(30), pro_price text, pro_com int);			

	<table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr></table>	pro_id	pro_name	pro_price	pro_com																																								
pro_id	pro_name	pro_price	pro_com																																										
	<div>INSERT INTO item_mast VALUES(101,'Mother Board',3200.00,15); INSERT INTO item_mast VALUES(102,'Key Board',450.00,16); INSERT INTO item_mast VALUES(103,'ZIP Drive',250.00,14); INSERT INTO item_mast VALUES(104,'Speaker',550.00,16); INSERT INTO item_mast VALUES(105,'Monitor',5000.00,11); INSERT INTO item_mast VALUES(106,'DVD drive',900.00,12); INSERT INTO item_mast VALUES(107,'CD drive',800.00,12); INSERT INTO item_mast VALUES(108,'Printer',2600.00,13); INSERT INTO item_mast VALUES(109,'Refill catridge',350.00,13); INSERT INTO item_mast VALUES(110,'Mouse',250.00,12);</div> <table><tr><th>pro_id</th><th>pro_name</th><th>pro_price</th><th>pro_com</th></tr><tr><td>101</td><td>Mother Board</td><td>3200.00</td><td>15</td></tr><tr><td>102</td><td>Key Board</td><td>450.00</td><td>16</td></tr><tr><td>103</td><td>ZIP Drive</td><td>250.00</td><td>14</td></tr><tr><td>104</td><td>Speaker</td><td>550.00</td><td>16</td></tr><tr><td>105</td><td>Monitor</td><td>5000.00</td><td>11</td></tr><tr><td>106</td><td>DVD drive</td><td>900.00</td><td>12</td></tr><tr><td>107</td><td>CD drive</td><td>800.00</td><td>12</td></tr><tr><td>108</td><td>Printer</td><td>2600.00</td><td>13</td></tr><tr><td>109</td><td>Refill catridge</td><td>350.00</td><td>13</td></tr><tr><td>110</td><td>Mouse</td><td>250.00</td><td>12</td></tr></table>	pro_id	pro_name	pro_price	pro_com	101	Mother Board	3200.00	15	102	Key Board	450.00	16	103	ZIP Drive	250.00	14	104	Speaker	550.00	16	105	Monitor	5000.00	11	106	DVD drive	900.00	12	107	CD drive	800.00	12	108	Printer	2600.00	13	109	Refill catridge	350.00	13	110	Mouse	250.00	12
pro_id	pro_name	pro_price	pro_com																																										
101	Mother Board	3200.00	15																																										
102	Key Board	450.00	16																																										
103	ZIP Drive	250.00	14																																										
104	Speaker	550.00	16																																										
105	Monitor	5000.00	11																																										
106	DVD drive	900.00	12																																										
107	CD drive	800.00	12																																										
108	Printer	2600.00	13																																										
109	Refill catridge	350.00	13																																										
110	Mouse	250.00	12																																										
Query:	<div>SELECT PRO_COM, AVG(PRO_PRICE) AS avg_price FROM item_mast GROUP BY PRO_COM;</div>																																												
Output:	<table><tr><th>PRO_COM</th><th>avg_price</th></tr><tr><td>11</td><td>5000</td></tr><tr><td>12</td><td>650</td></tr><tr><td>13</td><td>1475</td></tr><tr><td>14</td><td>250</td></tr><tr><td>15</td><td>3200</td></tr><tr><td>16</td><td>500</td></tr></table>	PRO_COM	avg_price	11	5000	12	650	13	1475	14	250	15	3200	16	500																														
PRO_COM	avg_price																																												
11	5000																																												
12	650																																												
13	1475																																												
14	250																																												
15	3200																																												
16	500																																												

