

A4 Command Line Copying

Command Line Arguments

- Inside ExecNewProgram() use a helper method to copy the arguments to the new address space.
- How to do the copying?
 - Use CopyBytesFromVirtual and CopyBytesToVirtual in AddrSpace objects.
 - The trick, is to figure out what address to read from and write to.

Command Line Arguments

1. Check and ensure the argument pointer is valid.
2. Get number of arguments
 - This is a pointer to an array (of points to array of chars)
 - In KPL, arrays carry their size with them.
 - The first 4 bytes in an array address carry the number of elements in an array.

```
int numArgs  
AddrSpace.CopyBytesFromVirtual ((&numArgs) asInteger, argsPtr, 4)
```
3. Calculate new stack top by decreasing it according to how many bytes you need to store the array. Remember, we're storing the arguments on the stack, that's why we need to change the new stack top value.

Command Line Arguments

- For every array:
 1. Keep track of where you need to store the pointer to that array (it should be in some of the space you calculated in the initial array)
 2. Figure out its size (same way but watch out: array of char are 4 bytes for size + 1 byte for each char. You still have to allocate in multiples of 4 so round up to a multiple of 4 after you do the calculation)
 3. Figure out the virtual address based of the new bytes, by moving the stack pointer further.
 4. Write the bytes from the old address space to the new address.
 5. Write the address of the first byte to where the pointer need to be stored (step 1)

Command Line Arguments


- CopyBytesFromVirtual
 - Copies from a virtual address space to physical (kernel) memory.
- GetStringFromVirtual
 - Same: copies from virtual to physical.
- There is no way to copy from old virtual to new virtual.
 - We have to figure out the physical address of the of where to store the array of char.
 - Use method ExtractFrameAddr to extract the last page in the new Addr space.
 - Now you got the physical address of the new stack page. You still have not figured out the exact physical address.
 - Add to it the (new virtual address) % PAGE_SIZE

Stack Top



Stack page in
new address
space.


Stack page in
new address
space.



We have to manually
recreate the array of
pointers to char and
place it in top stack.

Stack page in
new address
space.

Figure out the
size of the
array

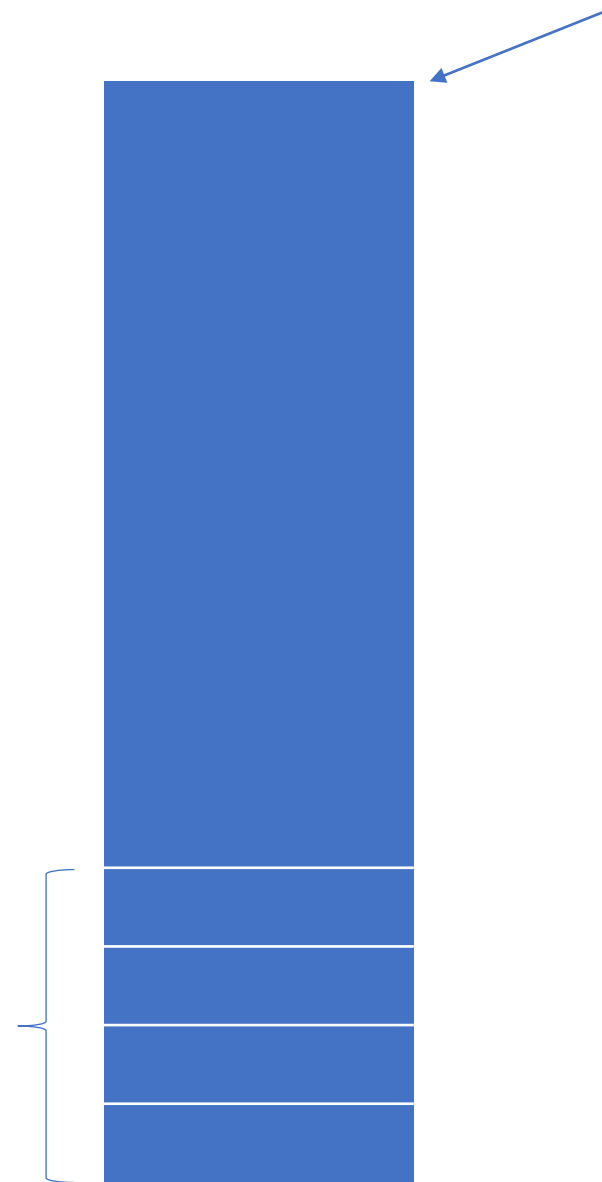


Stack page in
new address
space.

Fill up the number of
the arguments in the
first entry.

numArguments


Figure out the
size of the
array

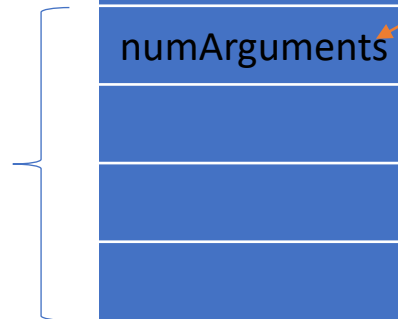

Stack page in
new address
space.

Figure out the size of
first char array

Figure out the
size of the
array

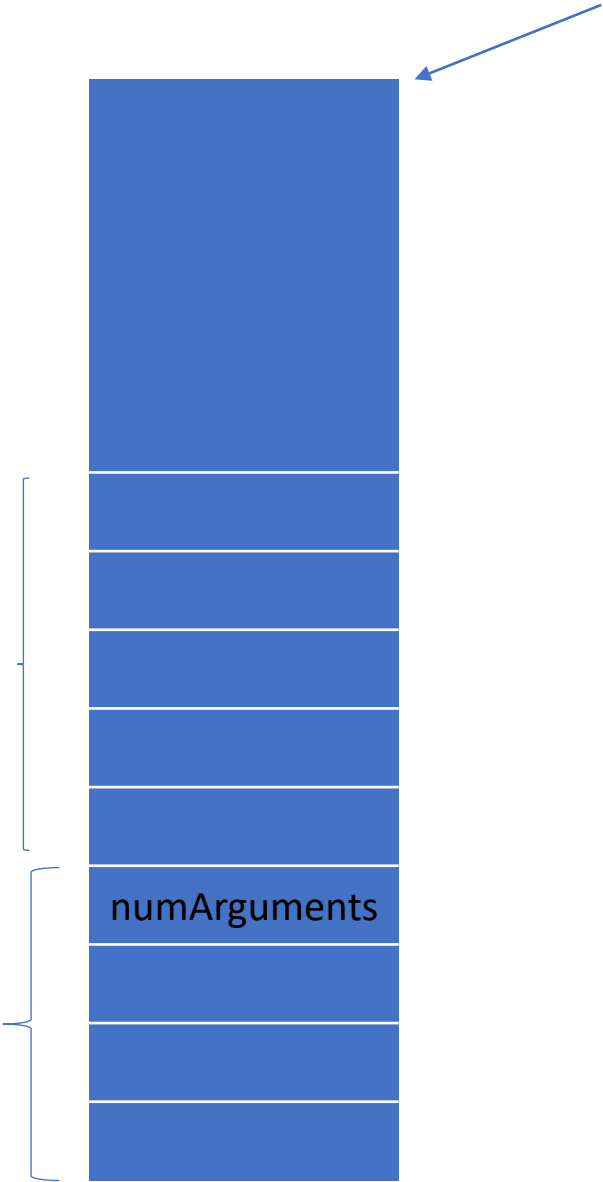


Copy first array of char from old virtual address. Start with copying the number of arguments and then the elements.

Stack page in new address space.

Figure out the size of first char array

Figure out the size of the array

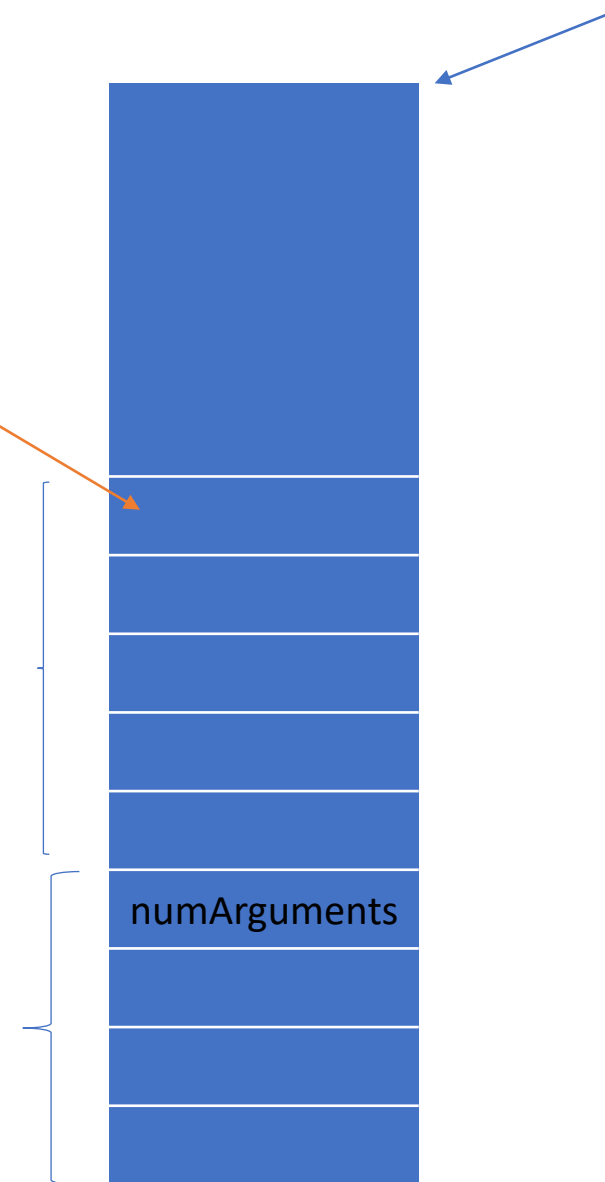


Copy first array of char from old virtual address. Start with copying the number of arguments and then the elements.

Stack page in new address space.

Figure out the size of first char array

Figure out the size of the array

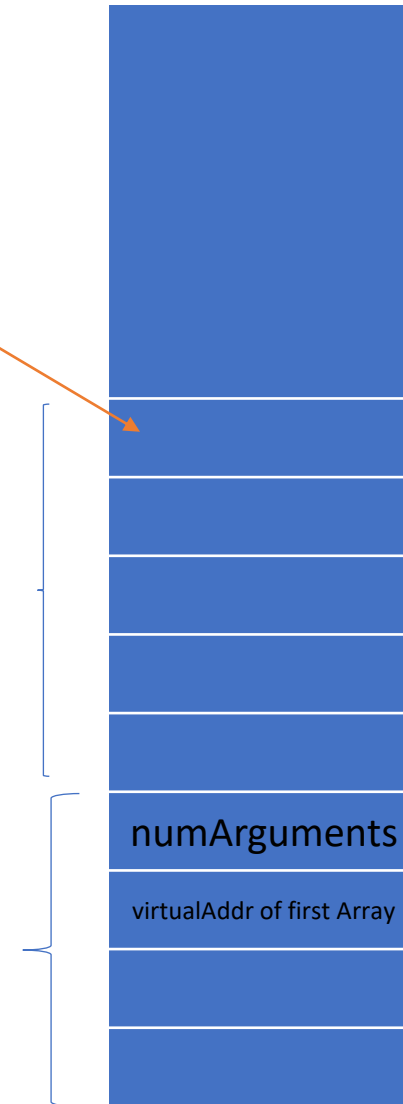

Fill up the args array with the virtual address of arrays you copied. The virtual address is the address holding the size of the array.