

Technical Design Document (TDD): Cold-Chain Logistics AI-Assistant

Author: Forward-Deployed Engineer

Status: Architecture Review

Date: August 2026

Table of Contents


- 1. System Architecture (HLD) 3
 - 1.1 Architectural Overview 3
 - 1.2 Component Responsibilities 3
- 2. Agent Orchestration (LLD) 3
 - 2.1 State Management & Execution Loop 4
 - 2.2 Resiliency & Fallbacks 4
- 3. Data & Security Model (LLD) 4
 - 3.1 Telemetry Security (VW_ACTIVE_FLEET) 5
 - 3.2 Role-Based Access Control (RBAC) 5
 - 3.3 Immutable Auditing 5
- 4. Deployment Strategy 5
 - 4.1 Infrastructure Topology 6
 - 4.2 Network Perimeter Security 6

1. System Architecture (HLD)

The Cold-Chain Logistics AI-Assistant is a decoupled, three-tier enterprise platform designed to enable control tower operators to query fleet telemetry, environmental conditions, and compliance SOPs via a natural language interface.

1.1 Architectural Overview

The system relies on a strictly stateless presentation layer, a state-machine-driven orchestration engine, and a hardened data access layer.

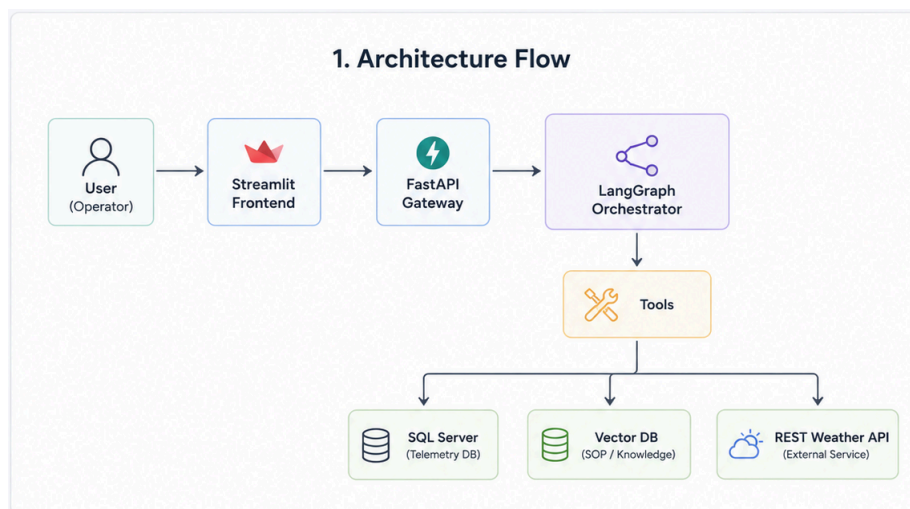

1.2 Component Responsibilities

- **Presentation Tier:** Stateless Streamlit application. Manages UI session state only; all heavy reasoning is offloaded to the Orchestration Tier.
- **Orchestration Engine:** A LangGraph ReAct agent. This component is the "brain." It manages the execution lifecycle, including intent deconstruction, multi-step tool selection, and synthesis of tool outputs into human-readable responses.
- **Data & Integration Tier:** Decoupled backend systems. The system strictly isolates the LLM/Agent from the raw underlying data by utilizing database views and read-only role wrappers.


2. Agent Orchestration (LLD)

The orchestration tier ensures deterministic behavior within a probabilistic framework by utilizing a state-machine architecture.

2.1 State Management & Execution Loop

The agent utilizes a LangGraph state object to maintain context throughout the interaction.

1. **1. Ingestion & Parsing:** The agent receives natural language input and identifies the specific domain (Telemetry vs. SOP vs. Weather).
2. **2. Reasoning Loop:** The agent evaluates the current graph state. If the intent is ambiguous, it requests clarification. If actionable, it dispatches to the optimal tool.
3. **3. Tool Execution:** The agent invokes isolated worker functions, ensuring no side effects occur outside the tool's specific scope.
4. **4. Synthesis:** Raw tool output (e.g., raw JSON, SQL results) is synthesized by the LLM into a cited, context-aware answer.

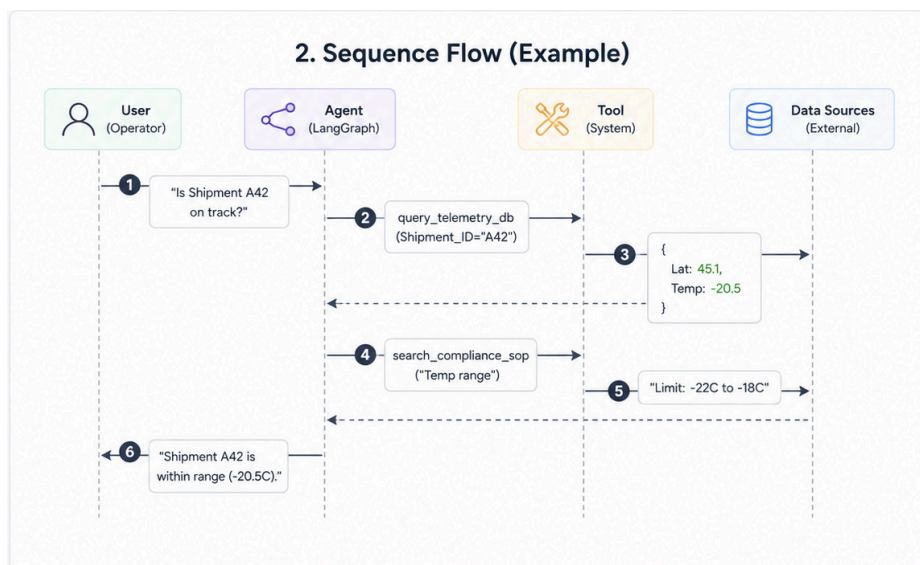

2.2 Resiliency & Fallbacks

- **Graceful Degradation:** If external API calls (e.g., weather) fail, the agent will report stale/missing data rather than hallucinating status.
- **Self-Correction:** If a SQL query returns an error, the agent logs the error and attempts a simplified query iteration before escalating.

3. Data & Security Model (LLD)

Security is implemented at the physical database layer to mitigate prompt injection risks.

3.1 Telemetry Security (VW_ACTIVE_FLEET)

The agent interacts solely with a read-only SQL view, VW_ACTIVE_FLEET.

- **Fields Exposed:** Shipment_ID, Latitude, Longitude, Cargo_Type, Current_Temperature.
- **Security Principle:** By exposing only a flat, view-based schema, we physically prevent the agent from executing DROP, UPDATE, or DELETE commands.

3.2 Role-Based Access Control (RBAC)

Database connections are established using the USR_FDE_R0 service account. This account lacks permissions to write, modify schema, or access tables outside the specified view.

3.3 Immutable Auditing


Every decision cycle is committed to AgentAuditLog (append-only).

- **Log Entry:** {Timestamp, User_Prompt, Tool_Invoked, Tool_Raw_Output, LLM_Decision}.

4. Deployment Strategy

The system utilizes an infrastructure-as-code (IaC) approach.

4.1 Infrastructure Topology

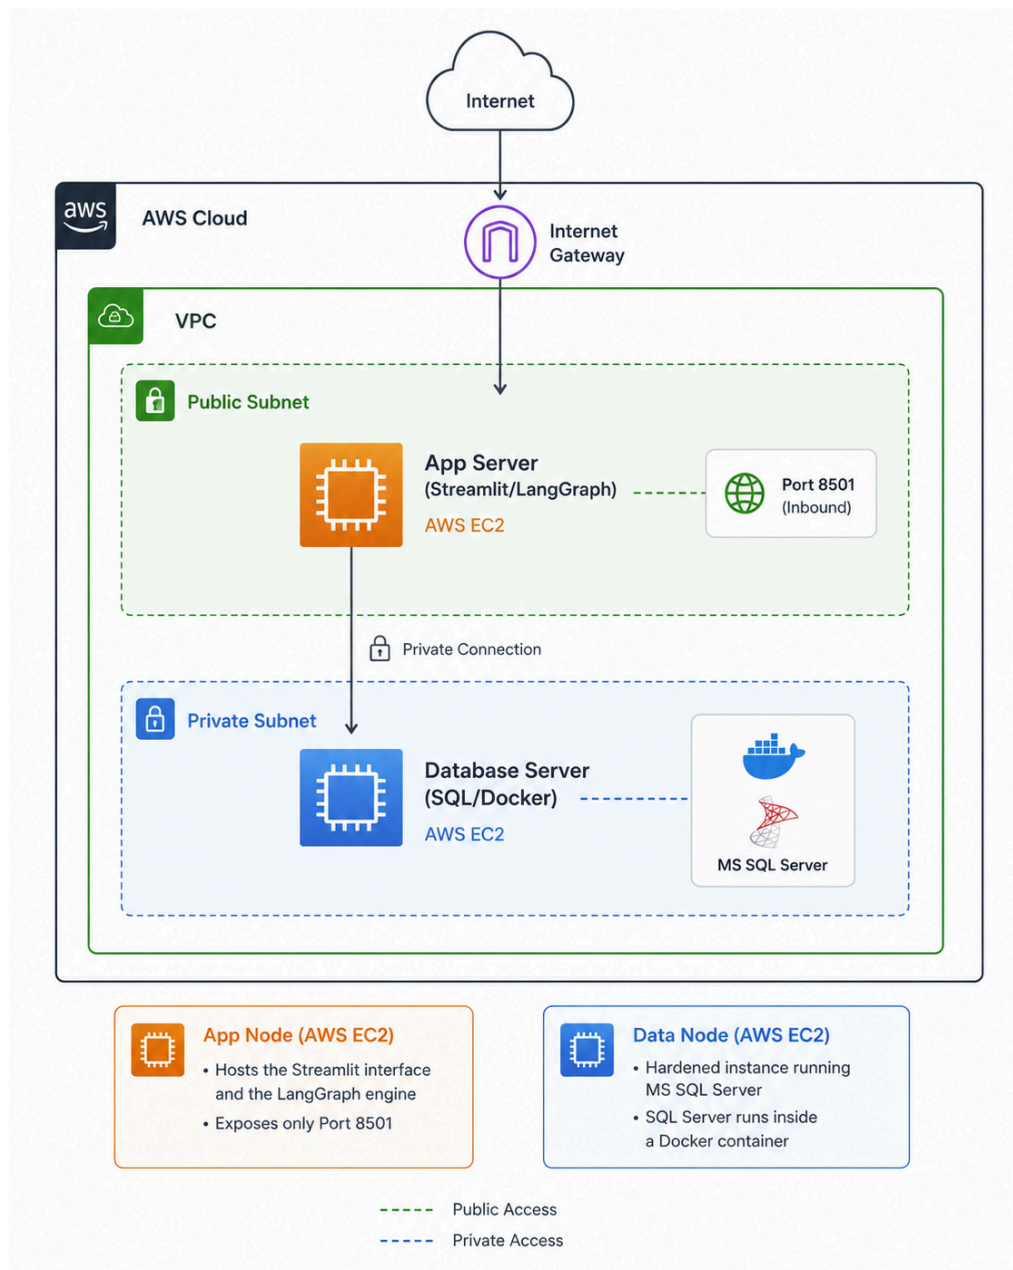

4.2 Network Perimeter Security

- 1. Ingress (Public):** Only Port 8501 (App Node) is accessible.
- 2. Internal Communication:** Port 1433 (SQL) is restricted via Security Group rules to accept traffic only from the private IP of the App Node. The database is invisible to the public internet.