

Lucerne University of Applied Sciences and Arts

# Programming and Algorithms

Personal Documentation

Ervin Mazlagić

Horw, autumn 2013

## Contents

<b>1</b>	<b>Objects and classes</b>	<b>4</b>
1.1	Summary exercises . . . . .	4
<b>2</b>	<b>Understanding class definitions</b>	<b>5</b>
2.1	Start with Eclipse . . . . .	5
2.2	Chapter Exercises . . . . .	6
2.3	Selfstudy-Questions OOP2 . . . . .	7
2.4	Team Exercise 1-4 . . . . .	11
2.5	Team Exercise 5 . . . . .	14
2.6	Team Exercise 5 - Optional . . . . .	17
2.7	Selfstudy-Questions OOP3 . . . . .	18
2.8	Team Exercise 1 . . . . .	20
2.9	Team Exercises 2 . . . . .	20
2.10	Team Exercise 3 . . . . .	21
2.11	Team Exercise 4 . . . . .	21
2.11.1	Team Exercise 4.1 . . . . .	21
2.11.2	Team Exercise 4.2 . . . . .	21
2.12	Summary exercises . . . . .	22
<b>3</b>	<b>Object interaction</b>	<b>23</b>
3.1	Selfstudy-Questions OOP4 . . . . .	23
3.1.1	Chapter 3.6 - Class diagrams vs. object diagrams . . . . .	23
3.1.2	Chapter 3.8 - The ClockDisplay source code . . . . .	23
3.1.3	Chapter 3.9 - Objects creating objects . . . . .	24
3.1.4	Chapter 3.10 - Multiple constructors . . . . .	24
3.1.5	Chapter 3.11 - Method calls . . . . .	25
3.1.6	Chapter 3.12 - Another example of object interaction . . . . .	25
3.1.7	Chapter 3.13 - Using a debugger . . . . .	30
3.2	Team-Exercises . . . . .	31
3.2.1	Exercise 1 - Using a debugger . . . . .	31
3.2.2	Exercise 2 - Some random exercises . . . . .	31
3.2.3	Exercise 3 - Challenges . . . . .	31
3.2.4	Exercise 4 - Programming (optional) . . . . .	31
<b>4</b>	<b>Grouping objects</b>	<b>32</b>
4.1	Selfstudy-Questions OOP5 . . . . .	32
4.1.1	Chapter 4.1 to 4.3 - An organizer for music files . . . . .	32
4.1.2	Chapter 4.4 to 4.7 - Numbering within collections . . . . .	34
4.1.3	Chapter 4.8 to 4.12 - The Iterator type . . . . .	36
4.1.4	Chapter 4.14 - Summary of the music-organizer project . . . . .	38
4.1.5	Chapter 4.15 to 4.17 - Summary . . . . .	39
<b>5</b>	<b>More-sophisticated behavior</b>	<b>41</b>
5.1	Selfstudy-Questions OOP6 . . . . .	41
5.1.1	Chapter 5.2 - The TechSupport system . . . . .	41
5.1.2	Chapter 5.3 - Reading class documentation . . . . .	42
5.1.3	Chapter 5.4 - Adding random behavior . . . . .	43
5.1.4	Chapter 5.5 - Packages and import . . . . .	45
5.2	Selfstudy-Questions ALG1 . . . . .	46
5.3	Programming Exercise . . . . .	50
5.4	Team-Exercise . . . . .	52
5.4.1	Exercise 1 . . . . .	52
5.4.2	Exercise 2 . . . . .	54

5.5	Selfstudy-Questions OOP7 . . . . .	55
5.5.1	Chapter 5.6 - Using maps for associations . . . . .	55
5.5.2	Chapter 5.8 - Dividing Strings . . . . .	57
5.5.3	Chapter 5.10 - Writing class documentation . . . . .	57
5.5.4	Chapter 5.13 - Class variables and constants . . . . .	58
5.6	Selfstudy-Questions ALG2 . . . . .	59
5.7	Team-Exercise . . . . .	63
5.7.1	Exercise 1 . . . . .	63
<b>6</b>	<b>Well-behaved objects</b>	<b>65</b>
6.1	Selfstudy-Questions OOP8 . . . . .	65
6.1.1	Chapter 7.1 to 7.3 - Unit testing with BlueJ . . . . .	65
6.1.2	Chapter 7.4 - Test automation . . . . .	65
6.1.3	Chapter 7.5 to 7.6 - Commenting and style . . . . .	66
6.1.4	Chapter 7.7 - Manual walkthroughs . . . . .	66
6.1.5	Chapter 7.8 - Print statements . . . . .	66
6.1.6	Chapter 7.9 - Debuggers . . . . .	67
6.1.7	Chapter 7.10 - Choosing a debugging strategy . . . . .	67
6.1.8	Chapter 7.11 - Putting the techniques into practice . . . . .	67
6.2	Selfstudy-Questions ALG3 . . . . .	67
<b>7</b>	<b>Designing classes</b>	<b>69</b>
7.1	Selfstudy-Questions OOP9 . . . . .	69
7.1.1	Chapter 6.1 to 6.4 - Code duplication . . . . .	69
7.1.2	Chapter 6.5 to 6.11 - Cohesion . . . . .	69
7.1.3	Chapter 6.12 to 6.14 - Design guidelines . . . . .	70
7.2	Selfstudy-Questions ALG4 . . . . .	71
7.2.1	Optional Exercises about chapter 6.13 (p. 226-231) . . . . .	72
<b>8</b>	<b>Improving structure with inheritance</b>	<b>73</b>
8.1	Selfstudy-Questions OOP10 . . . . .	73
8.1.1	Chapter 8.1 . . . . .	73
8.1.2	Chapter 8.3 . . . . .	73
8.1.3	Chapter 8.4 . . . . .	73
8.1.4	Chapter 8.5 . . . . .	73
8.1.5	Chapter 8.6 . . . . .	73
8.1.6	Chapter 8.7 . . . . .	73
8.1.7	Chapter 8.11 . . . . .	73
8.2	Selfstudy-Questions ALG5 . . . . .	73
	<b>Glossary</b>	<b>75</b>

### Preface

This is a personal documentation and notebook for the first course in programming at the Lucerne University of Applied Sciences and Arts. The goal of this document is to collect useful informations and nice snippets of code out of the course.

This document shall not be provided as a official or unofficial cheatsheet for the course exam or similar.

# 1 Objects and classes

## 1.1 Summary exercises

### Exercise 1.31

*What are the types of the following values?*

0	short, char, byte, int, long
"hello"	String
101	short, char, byte, int, long
-1	int, char, byte, int, long
true	boolean
"33"	String
3.1415	float, double

### Exercise 1.32

*What would you have to do to add a new filed, for example one called name, to a circle object?*

```
private String name;
```

### Exercise 1.33

*Write the signature of a method named send that has one parameter of type String, and does not return a value.*

```
public void send(String foo)
```

### Exercise 1.34

*Write a signature for a method named average that has two parameters, both of type int, and returns an int value.*

```
public int average(int foo, int bar)
```

### Exercise 1.35

*Look at the book you are reading right now. Is it an object or class? If it is a class, name some objects. If it is an object, name its class.*

The book is definitely an object, because it's a specific thing and in no way generic. The class could have a name like SchoolBook, CodingBook or just Book.

### Exercise 1.36

*Can an object have several different classes? Discuss.*

No it can't.

## 2 Understanding class definitions

### 2.1 Start with Eclipse

In the first chapter we've worked with the BlueJ IDE but now I want to check Java-Coding with a common and popular Java-IDE like Eclipse To get the BlueJ-Projects work with Eclipse there are some things that have to be done.

1. Create a new project in Eclipse.
2. Import the source (BlueJ example-code).
3. Add a package-name to the source.
4. Create a main (replaces all interaction which were invoked by hand).

Listing 1: TicketMachine

```
1
2 package foobar;
3
4 public class TicketMachine
5 {
6     // The price of a ticket from this machine.
7     private int price;
8     // The amount of money entered by a customer so far.
9     private int balance;
```

Listing 2: Main (TicketMachine)

```
1 package foobar;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         TicketMachine tml;
8         tml = new TicketMachine(300);
9
10        tml.insertMoney(200);
11
12        System.out.println("Balance: "+tml.getBalance());
13
14        tml.insertMoney(100);
15
16        tml.printTicket();
17    }
18 }
```

### 2.2 Chapter Exercises

#### Exercise 2.21

*Suppose that the class `Pet` has a field called `name` that is of type `String`. Write an assignment statement in the body of the following constructor so that the `name` field will be initialized with the value of the constructor's parameter.*

```
1 public Pet(String petsName)
2 {
3     name = petsName;
4 }
```

#### Exercise 2.22 (challenge)

*The following object creation will result in the constructor of the `Date` class being called. Can you write the constructor's header?*

```
new Date("March", 23, 1861)
```

*Try to give meaningful names to the parameters.*

```
1 public Date(String month, int day, int year)
2 {
3     ...
4 }
```

### 2.3 Selfstudy-Questions OOP2

#### Exercise 4

*A class is build by three essential components. What are they?*

- Instance variables (member variables, attributes)
- constructor
- methods

#### Exercise 5

*What is the order of the three components?*

The order doesn't matter technically but there is a common convention:

1. instance variables
2. constructor
3. methods

#### Exercise 6

*What's their purpose?*

**instance variables** are holding data of an object. All of this data together builds the object's state.

**constructor** is a special method that initializes objects.

**methods** are sequences which are defining the object's behaviour and characteristics.

#### Exercise 8

*What is a variable?*

A variable (or field) is a data storage inside an object that can be used for persistent data storage (limited by the lifetime of the object).

#### Exercise 9

*What are the synonyms to instance variables?*

- member variable
- attribute
- filed
- variable

#### Exercise 10

*What do you think where the term instance variable comes from?*

An instance is a realisation of an class by an object. The expression variable is well defined an known in computer science and if a variable explicitly belongs to an object, so it's clear that this is a variable of an instance or instance variable.



### Exercise 11

*How can you put comments into a Java-Code?*

There are different ways to add comments in a Java source file without having trouble with the compiler.

- Use the single line comment by double slash.

```
1 // this method return the speed
2 private void getSpeed()
```

- Use the multiline comment by slash-dot

```
1 /**
2  * This is a method that will return the
3  * actual speed of the monstetruck that
4  * is driven by the crazy clown IT .
5  */
6 private void getSpeed()
```

### Exercise 12 (important)

*With which access-modification do you declare instance variables usually? Is it **private** or **public**? Do you have a reason for your answer?*

Usually we declare instance variables as private. The reason for this is a common pattern that is used to get or set these data from outside the objects by so called accessor and mutator methods (getSpeed, setSpeed, changeSpeed).

### Exercise 13

*Explain the relation between a constructor and the state of an object.*

The constructor is creating (initializing) an object and has nothing to do with the state of the object once it's set up.

### Exercise 14

*How do we name constructors?*

Constructors are usually named after the class they are used for.

### Exercise 15

*What's the lifetime of instance variables, how long are they reachable/accessable?*

The lifetime of variables is coupled to the lifetime of their objects. As long as the object is alive the variables are also alive.

### Exercise 16

*Why should you (if possible) initialise instance variables explicit?*

If we don't initialize variables explicit the compiler will use default values for the initialization. By explicit initialisation we don't have any disadvantage and it serves well to document what is actually happening.

### Exercise 17

*What's the default value which is given to a `int` variable by its initialisation?*

The default value for an `int` is zero.

### Exercise 19

*What's the use of parameters?*

Parameters provide additional information to a method or object. This is useful in many ways.

### Exercise 20

*What's the difference between a formal and a actual parameter?*

A formal parameter is a parameter that is defined as parameter but has no actual value corresponding. A actual parameter is a parameter with a specific value.

### Exercise 21

*Is the following statement correct; "formal parameters are special variables"?*

Parameters are temporary and restricted variables because their space is allocated by a call to the method or object and as soon as a value is transmitted to it. Once that call has completed its task, the formal parameter disappears and the values in it are lost.

### Exercise 22

*What's about the accessibility of formal parameters?*

The accessibility of parameters are limited to the lifetime of the task which is creating them (method). Also parameter are only reachable from inside the box that they are used in (like a local variable).

### Exercise 23

*In which way this differs from instance variables?*

Instance variables have a lifetime that is identical with the lifetime of their objects. Also parameters are only reachable from inside the block, instance variables are reachable from everywhere inside the class.

### Exercise 24

*How do the lifecycles of formal parameters and instance variables differ?*

Instance variables are persistent (limited by lifetime of the object) and the lifetime of formal parameters is not really defined in runtime.

### Exercise 26

*How would you translate the expressions "assignment" and "expression" in german?*

- assignment = Zuweisung
- expression = Ausdruck

### Exercise 27

*How does an assignment-instruction work exactly? What's about to be aware of in relation to data types?*

An assignment can be done with the operator "=". For example:

```
1 // create a instance variable for speed
2 private int speed;
3
4 // set the speed
5 public void setSpeed(int newSpeed)
6 {
7     speed = newSpeed;
8 }
```

By assigning data you have to be aware of data types. For example you can't assign a **int** to a **float** and so on. There are some strategies to "cast" or "parse" data between different data types but that's not our topic now.

## 2.4 Team Exercise 1-4

Create a Balloon-Class and create some objects and interact with them.

../workspace/balloon/src/flight/Balloon.java

```
1 package flight;
2
3 /**
4  * Balloon models a simple abstraction of a physical balloon.
5  */
6
7 public class Balloon
8 {
9     // size of the balloon. The balloon is abstracted a perfect
10    // bowl defined by its diameter.
11    private float diameter;
12
13    // horizontal position of the balloon
14    private int posHorizontal;
15
16    // altitude (vertical position) of the balloon
17    private int posVertical;
18
19    // color of the balloon
20    private String color;
21
22    // number of the ballon
23    private int number;
24
25    // simple constructor
26    public Balloon()
27    {
28        diameter = 300f;
29        posHorizontal = 300;
30        posVertical = 300;
31        color = "red";
32    }
33
34    // more detailed constructor
35    public Balloon(String newColor)
36    {
37        color = newColor;
38    }
39
40    public void setPosition(int newHorizontal, int newVertical)
41    {
42        posHorizontal = newHorizontal;
43        posVertical = newVertical;
44    }
45
46    public void setDiameter(float newDiameter)
47    {
48        diameter = newDiameter;
49    }
50
```

```
51 public void setColor(String newColor)
52 {
53     color = newColor;
54 }
55
56 public void setNumber(int newNumber)
57 {
58     number = newNumber;
59 }
60
61 public int getHorizontal()
62 {
63     return posHorizontal;
64 }
65
66 public int getVertical()
67 {
68     return posVertical;
69 }
70
71 public float getDiameter()
72 {
73     return diameter;
74 }
75
76 public String getColor()
77 {
78     return color;
79 }
80
81 public int getNumber()
82 {
83     return number;
84 }
85 }
```

../workspace/balloon/src/flight/Main.java

```
1 package flight;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         // create a new balloon (with the simple constructor)
8         Balloon b1 = new Balloon();
9         // get the current horizontal position
10        System.out.println("Horizontal: " + b1.getHorizontal());
11        // set a new horizontal position
12        b1.setPosition(400, 400);
13        // get the current horizontal position
14        System.out.println("Horizontal: " + b1.getHorizontal());
15
16        // create a new balloon with the detailed constructor
17        Balloon b2 = new Balloon("yellow");
```

```
18         // get the color of the new ballon
19         System.out.println("Color: " + b2.getColor());
20     }
21 }
```

### 2.5 Team Exercise 5

You want to write records, so you have to write a class `Book` for this. This class shall have the following four attributes:

- Title (String)
- Author (String)
- Price (float)
- Year on buy (int)

The class shall also have two constructors.

- Title and author are parameters. The book is not bought yet and this is why the price is 0.0 and the "year of buy" is -1.
- All attributes are initialized by parameters.

The class shall have the following methods.

- Two methods to get the title and author.
- A method to get and to set the year of buy.
- A method to get and to set the price.

../workspace/Book/src/library/Book.java

```
1 package library;
2
3 public class Book
4 {
5     // title of the book
6     private String title;
7
8     // author of the book
9     private String author;
10
11    // price of the book
12    private float price;
13
14    // year of buy
15    private int year;
16
17    /**
18     * Create a new book with all attributes.
19     */
20    public Book(String newTitle, String newAuthor, float newPrice, int
        newYear)
21    {
22        title = newTitle;
23        author = newAuthor;
24        price = newPrice;
25        year = newYear;
26    }
27
28    public Book(String newTitle, String newAuthor)
```

```
29     {
30         title = newTitle;
31         author = newAuthor;
32         price = 0.0f;
33         year = -1;
34     }
35
36     public String getTitle()
37     {
38         System.out.println("Title: " + title);
39         return title;
40     }
41
42     public String getAuthor()
43     {
44         System.out.println("Author: " + author);
45         return author;
46     }
47
48     public void setYear(int newYear)
49     {
50         year = newYear;
51     }
52
53     public void setPrice(float newPrice)
54     {
55         price = newPrice;
56     }
57
58     public int getYear()
59     {
60         System.out.println("Year: " + year);
61         return year;
62     }
63
64     public float getPrice()
65     {
66         System.out.println("Price: " + price + " USD");
67         return price;
68     }
69
70 }
```

../workspace/Book/src/library/Main.java

```
1 package library;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         Book b1 = new Book("Objects First with Java", "David Barnes",
8                             70.0f, 2013);
9         b1.getTitle();
10        b1.getAuthor();
```



```
10         b1.getYear();  
11         b1.getPrice();  
12     }  
13 }
```

## 2.6 Team Exercise 5 - Optional

Think about bank accounts, their behaviour and attributes. Implement a class `Account`. To avoid round sum problems work with integer values. Play around with your class and get you some money!

../workspace/Account/src/money/Account.java

```

1 package money;
2
3 public class Account
4 {
5     private String ownerFirstName;
6     private String ownerLastName;
7     private String ownerAddress;
8     private String ownerEMail;
9     private int yearOfBirth;
10    private int yearOfAccount;
11    private int accountNumber;
12    private long accountBalance;
13    private long accountDebit;
14    private long accountCredit;
15    private boolean accountActive;
16
17    /**
18     * Create a new inactive account with default values.
19     */
20    public Account ()
21    {
22        ownerFirstName = "Default";
23        ownerLastName = "Default";
24        ownerAddress = "Default";
25        ownerEMail = "Deafult";
26        yearOfBirth = -1;
27        yearOfAccount = -1;
28        accountNumber = -1;
29        accountBalance = 0;
30        accountDebit = 0;
31        accountCredit = 0;
32        accountActive = false;
33    }
34
35    /**
36     * Create a new active account.
37     */
38
39    public Account ( String newFirstName,
40                    String newLastName,
41                    String newAddress,
42                    String newEMail,
43                    int newYearOfBirth,
44                    int newYearOfAccount,
45                    int newAccountNumber,
46                    long newAccountBalance)
47    {
48        ownerFirstName = newFirstName;
49        ownerLastName = newLastName;

```

```
50     ownerAddress = newAddress;
51     ownerEMail = newEMail;
52     yearOfBirth = newYearOfBirth;
53     yearOfAccount = newYearOfAccount;
54     accountNumber = newAccountNumber;
55     accountBalance = newAccountBalance;
56     accountDebit = 0;
57     accountCredit = 0;
58     accountActive = true;
59 }
60
61 public String getOwnerFirstName()
62 {
63     System.out.println("First name: " + ownerFirstName);
64     return ownerFirstName;
65 }
66
67 public void setOwnerFirstName(String newOwnerFirstName)
68 {
69     ownerFirstName = newOwnerFirstName;
70 }
71 }
```

../workspace/Account/src/money/Main.java

```
1 package money;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         Account acc1 = new Account();
8         acc1.getOwnerFirstName();
9         acc1.setOwnerFirstName("David Barnes");
10        acc1.getOwnerFirstName();
11    }
12 }
```

## 2.7 Selfstudy-Questions OOP3

### Exercise 1

*What is a header? What is a body?*

A header is a part of a method. For example `public int getSpeed()` is the header of the method

```
1 public int getSpeed()
2 {
3     return speed;
4 }
```

### Exercise 2

Write down the signatures of the methods from class *TicketMachine*.

- `getPrice( ... )`
- `getBalance( ... )`
- `insertMoney(int ...)`
- `printTicket( ... )`

### Exercise 3

Where can you place expressions and definitions?

I don't understand that question.

### Exercise 4

What is a block?

A block is the part of a method which is between the curly braces.

### Exercise 5

How many **return** expressions do you find in Code 2.1?

### Exercise 7

What's the meaning of the return-type **void**?

The return type **void** indicates that the method has no return value.

### Exercise 8

Fill out the table.

compound assignment	assignment
<code>a += b</code>	<code>a = a + b</code>
<code>a -= b</code>	<code>a = a - b</code>
<code>a *= b</code>	<code>a = a * b</code>
<code>a /= b</code>	<code>a = a / b</code>

### Exercise 9

In the code of the *TicketMachine*, there are two places where you can place a compound assignment operator. Find those two places.

### Exercise 12

Describe the conditional operator of the pseudo-code on page 42 in german. Try to translate the code in german (except for the keywords **if** and **else**).

### Exercise 16

*At pitfall on page 48 is a very important information. Translate the first sentence in german.*

### Exercise 17

*Fill out the following table.*

	Field	formal parameter	local variable
can store values?	Yes	No	limited
Where is/are they defined?	class	class	method
How long do they exist?	permanent	imaginary	limited
From where can you access them?	global	nowhere	localy

## 2.8 Team Exercise 1

```
1 2.5 * (2+3) = 12.5
2 (int) 2.5 * 2 + 3 = 7
3 (int) 2.5 * (2+3) = 10
4 (int) (2.5 * 2 + 3) = 8
5 (int) (2.5 * (2+3)) = 12
6 (int) 2.5 * 2 + (float) 3 = 7.0
```

## 2.9 Team Exercises 2

- *What are konventions?*  
Konventions are rules that are not strict.
- *For whatr are they good for?*  
They give the programmer a good orientation if every coder used the same conventions or if a coder used a convention consistantly. This improves the portability and make the code easy to maintain.
- *Give the signatures for the following attributes by konventions:*
  - String secondName
  - float hours
  - int personalNumber
  - Object myObject

### Answer

```
– public String getSecondName ()
– public float getHours ()
– public int getPersonalNumber ()
– public Object getMyObject ()
```

- *Can you define a konvention for mutator-methods?*  
Of course you can, just as for getter-methods.

### 2.10 Team Exercise 3

At the exercises 2.27 and 2.59 you had to note error messages.

- *Compare your Notes*  
"Missing return statement" and "unreachable statment".
- *Try to define rules out of these error messages.*  
If you use a return declaration in the header you have to use a return expression and the return expression has to be at the end of the block.

### 2.11 Team Exercise 4

Now you'll get into the **switch** expression on your own. You can use the appendix D of your book and the file `Selection.jar` from ILIAS

#### 2.11.1 Team Exercise 4.1

Look at the following snippet.

```
1 public void output(int value)
2 {
3     System.out.println();
4     System.out.println("actual parameter: " + value);
5     switch(value)
6     {
7         case 1:
8             System.out.println("one");
9             break;
10        case 2:
11            System.out.println("two");
12            break;
13        case 3:
14            System.out.println("three");
15            break;
16        default:
17            System.out.println("other value");
18            break;
19    }
20 }
```

#### 2.11.2 Team Exercise 4.2

../workspace/Selection/src/choose/Selection.java

```
1 /* Copyright 2012 Hochschule Luzern - Technik & Architektur */
2
3 package choose;
4
5 /**
6  * Klasse Selection für die Lernaufgabe zu switch.
7  * @author Peter Sollberger
8  */
9 public class Selection
```

```
10 {
11
12     /**
13      * Der Konstruktor von Selection ist "leer".
14      */
15     public Selection()
16     {
17     }
18
19     /**
20      * In Abhängigkeit des übergebenen Wertes erfolgt die
21      * Ausgabe eines Textes.
22      */
23     public void output(int value)
24     {
25         System.out.println("aktueller Parameter: " + value);
26
27         switch (value)
28         {
29             case 1:
30                 System.out.println("eins");
31             case 2:
32                 System.out.println("zwei");
33             case 3:
34                 System.out.println("drei");
35             default:
36                 System.out.println("anderer Wert");
37         }
38     }
39 }
```

../workspace/Selection/src/choose/Main.java

```
1 package choose;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         Selection mySel = new Selection();
8         mySel.output(5);
9         System.out.println("END OF PROGRAM");
10    }
11 }
```

### 2.12 Summary exercises

## 3 Object interaction

### 3.1 Selfstudy-Questions OOP4

#### 3.1.1 Chapter 3.6 - Class diagrams vs. object diagrams

##### Exercise 1

*How do you declare a referencevariable?*

A referencevariable is a variable that points to an object. For example `Account myAccount = new Account ();` defines a referencevariable `myAccount`. This variable doesn't contain a value but a reference to the storage-space where the object lays (like a pointer in C).

##### Exercise 2

*Draw the object diagram to the BlueJ project "house" from chapter 1.*

##### Exercise 3

*Draw the class diagram to the BlueJ project "house" from chapter 1.*

##### Exercise 4

*Solve the exercises 3.1 to 3.4*

#### 3.1.2 Chapter 3.8 - The ClockDisplay source code

##### Exercise 1

*Solve the exercise 3.5*

##### Exercise 2

*What is the result of the following expressions?*

Question		Result
<code>(3&gt;2)</code>	<code>^</code>	<code>(4&gt;5)</code> <b>true</b>
<code>(3&lt;2)</code>	<code>^</code>	<code>(4&gt;5)</code> fasle
<code>(3&lt;2)</code>	<code>&amp;&amp;</code>	<code>(4&gt;5)</code> <b>false</b>
<code>(3&gt;2)</code>	<code>  </code>	<code>(4&gt;5)</code> <b>true</b>
<code>!(3&gt;2)</code>		<b>false</b>

##### Exercise 3

*Solve the exercises 3.6 to 3.8*

**3.6** Nothing happens. This implemetation is not a good idea. To improve it we could use a error-message that is returned.

**3.7** We could not set the value to zero.

**3.8** If would be true for all inputs, because their either `>0` or `<limit`.



### Exercise 4

*Solve the exercises 3.15 to 3.17 and 3.19*

**3.15** The modulo operator returns the remainder of an division.

**3.16**  $8\%3$  returns 2

**3.17**  $-10\%3$  returns -1,  $10\%-3$  returns +1.

**3.18**  $5-1$

**3.19**  $m-1$

### Exercise 5

*Solve the exercise 3.21*

**3.21**

```
1 if((value+1) < limit){
2     value++;
3 }
4 else{
5     value = 0;
6 }
```

### 3.1.3 Chapter 3.9 - Objects creating objects

#### Exercise 1

*Solve the exercise 3.23*

**3.23** The time is "00:00". The constructor is responsible for this value.

### 3.1.4 Chapter 3.10 - Multiple constructors

#### Exercise 1

*Create the singatures for all possible constructors which accord with the following object-creation.*

**new** Student("Peter", 34);

```
1 // simple creator with no parameters
2 public Student()
3 {
4     name = "No-Name";
5     age = -1;
6 }
7
8 // creator with single-parameter name
9 public Student(String newName)
10 {
11     name = newName;
12     age = -1
13 }
14
15 // creator with single-parameter age
```

```
16 public Student (int newAge)
17 {
18     name = "No-Name";
19     age = newAge;
20 }
21
22 // creator with full parameter list name, age
23 public Student (String newName, int newAge)
24 {
25     name = newName;
26     age = newAge;
27 }
```

### Exercise 2

*Solve the exercises 3.28 and 3.29*

**3.28** It creates two NumberDisplay objects with the overroll limits 24 and 60.

**3.29** Because it is set by the parameters given to the constructor.

### 3.1.5 Chapter 3.11 - Method calls

#### Exercise 1

*Solve the exercise 3.30*

#### 3.30

```
1 // print the Payroll-Summary on Printer p1, two-sided
2 p1.print("Payroll-Summary.txt", true)
3
4 // print the Phone-List on Printer p1, single-sided
5 p1.print("Phone-List.txt", false)
6
7 // show the status of Printer p1 on the console
8 System.out.println(p1.getStatus(20))
9
10 // return the status of Printer p1
11 p1.getStatus(10)
```

### 3.1.6 Chapter 3.12 - Another example of object interaction

#### Exercise 1

*Solve the exercises 3.33 and 3.34*

#### 3.33

../workspace/Mail-System/src/emails/Main.java

```
1 package emails;
2
3 public class Main
```

```

4 {
5     public static void main(String[] args)
6     {
7         // create a MailServer
8         MailServer MS1 = new MailServer();
9
10        // create two MailClients
11        MailClient MC1 = new MailClient(MS1, "Homer");
12        MailClient MC2 = new MailClient(MS1, "Fry");
13
14        // send a message from MC1 to MC2
15        MC1.sendMailItem("Fry", "Hello Fry! How are you?");
16
17        // show the mail at MC2
18        MC2.printNextMailItem();
19
20        // give an answer
21        MC2.sendMailItem("Homer", "Hi Homer! I'm fine, thanks.");
22
23        // show the mail at MC1
24        MC1.printNextMailItem();
25    }
26 }

```

../workspace/Mail-System/src/emails/MailServer.java

```

1 package emails;
2
3 import java.util.ArrayList;
4 import java.util.List;
5 import java.util.Iterator;
6
7 /**
8  * A simple model of a mail server. The server is able to receive
9  * mail items for storage, and deliver them to clients on demand.
10  *
11  * @author David J. Barnes and Michael Kölling
12  * @version 2011.07.31
13  */
14 public class MailServer
15 {
16     // Storage for the arbitrary number of mail items to be stored
17     // on the server.
18     private List<MailItem> items;
19
20     /**
21      * Construct a mail server.
22      */
23     public MailServer()
24     {
25         items = new ArrayList<MailItem>();
26     }
27
28     /**
29      * Return how many mail items are waiting for a user.

```

```

30     * @param who The user to check for.
31     * @return How many items are waiting.
32     */
33     public int howManyMailItems(String who)
34     {
35         int count = 0;
36         for(MailItem item : items) {
37             if(item.getTo().equals(who)) {
38                 count++;
39             }
40         }
41         return count;
42     }
43
44     /**
45     * Return the next mail item for a user or null if there
46     * are none.
47     * @param who The user requesting their next item.
48     * @return The user's next item.
49     */
50     public MailItem getNextMailItem(String who)
51     {
52         Iterator<MailItem> it = items.iterator();
53         while(it.hasNext()) {
54             MailItem item = it.next();
55             if(item.getTo().equals(who)) {
56                 it.remove();
57                 return item;
58             }
59         }
60         return null;
61     }
62
63     /**
64     * Add the given mail item to the message list.
65     * @param item The mail item to be stored on the server.
66     */
67     public void post(MailItem item)
68     {
69         items.add(item);
70     }
71 }

```

../workspace/Mail-System/src/mails/MailClient.java

```

1  /**
2  * A class to model a simple email client. The client is run by a
3  * particular user, and sends and retrieves mail via a particular server.
4  *
5  * @author David J. Barnes and Michael Kölling
6  * @version 2011.07.31
7  */
8
9  package mails;
10

```

```

11 public class MailClient
12 {
13     // The server used for sending and receiving.
14     private MailServer server;
15     // The user running this client.
16     private String user;
17
18     /**
19      * Create a mail client run by user and attached to the given server.
20      */
21     public MailClient(MailServer server, String user)
22     {
23         this.server = server;
24         this.user = user;
25     }
26
27     /**
28      * Return the next mail item (if any) for this user.
29      */
30     public MailItem getNextMailItem()
31     {
32         return server.getNextMailItem(user);
33     }
34
35     /**
36      * Print the next mail item (if any) for this user to the text
37      * terminal.
38      */
39     public void printNextMailItem()
40     {
41         MailItem item = server.getNextMailItem(user);
42         if(item == null) {
43             System.out.println("No new mail.");
44         }
45         else {
46             item.print();
47         }
48     }
49
50     /**
51      * Send the given message to the given recipient via
52      * the attached mail server.
53      * @param to The intended recipient.
54      * @param message The text of the message to be sent.
55      */
56     public void sendMailItem(String to, String message)
57     {
58         MailItem item = new MailItem(user, to, message);
59         server.post(item);
60     }
61 }

```

../workspace/Mail-System/src/emails/MailItem.java

```

1  /**
2   * A class to model a simple mail item. The item has sender and recipient
3   * addresses and a message string.
4   *
5   * @author David J. Barnes and Michael Kölling
6   * @version 2011.07.31
7   */
8
9  package mails;
10
11 public class MailItem
12 {
13     // The sender of the item.
14     private String from;
15     // The intended recipient.
16     private String to;
17     // The text of the message.
18     private String message;
19
20     /**
21      * Create a mail item from sender to the given recipient,
22      * containing the given message.
23      * @param from The sender of this item.
24      * @param to The intended recipient of this item.
25      * @param message The text of the message to be sent.
26      */
27     public MailItem(String from, String to, String message)
28     {
29         this.from = from;
30         this.to = to;
31         this.message = message;
32     }
33
34     /**
35      * @return The sender of this message.
36      */
37     public String getFrom()
38     {
39         return from;
40     }
41
42     /**
43      * @return The intended recipient of this message.
44      */
45     public String getTo()
46     {
47         return to;
48     }
49
50     /**
51      * @return The text of the message.
52      */
53     public String getMessage()
54     {

```

```
55     return message;
56 }
57
58 /**
59  * Print this mail message to the text terminal.
60  */
61 public void print()
62 {
63     System.out.println("From: " + from);
64     System.out.println("To: " + to);
65     System.out.println("Message: " + message);
66 }
67 }
```

### 3.34

#### 3.1.7 Chapter 3.13 - Using a debugger

##### Exercise 1

*Solve the exercises 3.35 to 3.42*

### 3.35 to 3.42

../workspace/Mail-System/src/emails/Sophie.java

```
1 package emails;
2
3 public class Sophie
4 {
5     public static void main(String[] args)
6     {
7         // create a MailServer
8         MailServer MS1 = new MailServer();
9
10        // create two clients
11        MailClient sophie = new MailClient(MS1, "Sophie");
12        MailClient juan = new MailClient(MS1, "Juan");
13
14        // send a message from sophie to juan
15        sophie.sendMailItem("Juan", "Hello Juan. How are you?");
16
17        // print the message at juans client
18        juan.printNextMailItem();
19
20        // check for new messages
21        juan.printNextMailItem();
22    }
23 }
```

## 3.2 Team-Exercises

### 3.2.1 Exercise 1 - Using a debugger

Exercise 3.43, page 90

Exercise 3.44, page 90

### 3.2.2 Exercise 2 - Some random exercises

Exercise 3.9, page 71

*Which of the following expressions return true?*

Expression	Result
<code>! (4&lt;5)</code>	<b>true</b>
<code>! false</code>	<b>true</b>
<code>(2&gt;2)    ((4==4) &amp;&amp; (1&lt;0))</code>	<b>false</b>
<code>(2&gt;2)    (4==4) &amp;&amp; (1&lt;0)</code>	<b>false</b>
<code>(34 != 33) &amp;&amp; ! false</code>	<b>true</b>

Exercise 3.10, page 71

*Write an expression using boolean variables  $a$  and  $b$  that evaluates to true when  $a$  and  $b$  are either true or both false.*

`! (a^b)`

Exercise 3.11, page 71

*Write an expression using boolean variables  $a$  and  $b$  that evaluates to true when only one of  $a$  and  $b$  is true, and that is false if  $a$  and  $b$  are both false or both true.*

`(a^b)`

Exercise 3.12, page 71

*Consider the following expression. Write an equivalent expression (one that evaluates true at exactly the same values for  $a$  and  $b$ ) without using the AND Operator.*

`(a&&b)`

### 3.2.3 Exercise 3 - Challenges

### 3.2.4 Exercise 4 - Programming (optional)

Exercise 3.45, page 91

*Add a subject line for an e-mail to mail items in the mail-system project. Make sure printing messages also prints the subject line. Modify the mail client accordingly.*

Exercise 3.46, page 91

*Given the following class write some lines of java code that create a Screen object. Then call its clear method if (and only if) its number of pixels is greater than two million. (Don't worry about things being logical here; the goal is only to write something that is syntactically correct - i.e., that would compile if we typed it in.)*



## 4 Grouping objects

### 4.1 Selfstudy-Questions OOP5

#### 4.1.1 Chapter 4.1 to 4.3 - An organizer for music files

##### Exercise 1

*Solve the exercises 4.1 to 4.3*

##### 4.1

../workspace/Music-Organiser-V1/src/music/MusicOrganizer.java

```
1 package music;
2
3 import java.util.ArrayList;
4
5 /**
6  * A class to hold details of audio files.
7  *
8  * @author David J. Barnes and Michael Kölling
9  * @version 2011.07.31
10 */
11 public class MusicOrganizer
12 {
13     // An ArrayList for storing the file names of music files.
14     private ArrayList<String> files;
15
16     /**
17      * Create a MusicOrganizer
18      */
19     public MusicOrganizer()
20     {
21         files = new ArrayList<String>();
22     }
23
24     /**
25      * Add a file to the collection.
26      * @param filename The file to be added.
27      */
28     public void addFile(String filename)
29     {
30         files.add(filename);
31     }
32
33     /**
34      * Return the number of files in the collection.
35      * @return The number of files in the collection.
36      */
37     public int getNumberOfFiles()
38     {
39         return files.size();
40     }
41
42     /**
43      * List a file from the collection.
```

```

44     * @param index The index of the file to be listed.
45     */
46     public void listFile(int index)
47     {
48         if(index >= 0 && index < files.size()) {
49             String filename = files.get(index);
50             System.out.println(filename);
51         }
52     }
53
54     /**
55     * Remove a file from the collection.
56     * @param index The index of the file to be removed.
57     */
58     public void removeFile(int index)
59     {
60         if(index >= 0 && index < files.size()) {
61             files.remove(index);
62         }
63     }
64 }

```

../workspace/Music-Organiser-V1/src/music/Main.java

```

1 package music;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         // create a MusicOrganiser object
8         MusicOrganizer myOrg = new MusicOrganizer();
9
10        // store some tracks to it
11        myOrg.addFile("Free Software Song");
12        myOrg.addFile("Hacker after all");
13        myOrg.addFile("CRE197 - IPV6");
14
15        // check the number of tracks that are stored
16        System.out.println("Number of Files: " +
17                            myOrg.getNumberOfFiles());
18
19        // show the name of the first, second and third track
20        myOrg.listFiles(0);
21        myOrg.listFiles(1);
22        myOrg.listFiles(2);
23
24        // remove the first track and ask for the first track
25        myOrg.removeFile(0);
26        myOrg.listFiles(0);
27    }
28 }

```

**4.2** We don't get an error. As we look at the code of the method we'll see, that the method is examining if the index is "valid". If not it does not perform a remove action.

../workspace/Music-Organiser-V1/src/music/MusicOrganizer.java

```
1  public void removeFile(int index)
2  {
3      if(index >= 0 && index < files.size()) {
4          files.remove(index);
5      }
6  }
```

**4.3** The list is shifted, so that the previously second track is the first track after removing the first track.

### Exercise 2

*What do you understand by "Java-Package"?*

A Java-Package is just a collection of classes. It is a namespace to organize classes.

### Exercise 3

*You want to use the library-class ArrayList. What expression makes it possible to use that library-class in your source code?*

If we want to use a library-class, we have to import it to our source with

```
import java.nameOfTheLibraryClass;
```

So to use the ArrayList we just have to write in our source

```
import java.util.ArrayList;
```

#### 4.1.2 Chapter 4.4 to 4.7 - Numbering within collections

### Exercise 4

*Solve the exercises 4.4 to 4.7*

#### Exercise 4.4, page 100

*Write a declaration of a private field named library that can hold an ArrayList. The elements of the ArrayList are of type Book.*

```
private ArrayList<Book> library = new ArrayList<String>();
```

#### Exercise 4.5, page 100

*Write a declaration of a local variable called cs101 that can hold an ArrayList of Student.*

```
private ArrayList<Student> cs101 = new ArrayList<Student>();
```

I'm not really sure about the "local" in the exercise. Do I have to specify that this is private or not?

#### Exercise 4.6, page 101

*Write a declaration of a private field called tracks for sorting a collection of MusicTrack objects.*

```
private ArrayList<MusicTrack> tracks = new ArrayList<MusicTrack>();
```

### Exercise 4.7, page 101

Write assignments to the library, cs101 and track variables (which you defined in the previous three exercises) to create the appropriate ArrayList objects. Write them once without using diamond and once with diamond notation if you are using Java 7 compiler.

```
1 library.add("Objects First with Java");  
2 cs101.add("Leonardo DaVinci");  
3 track.add("Free Software Song");
```

I'm not really sure what is the question here ...

### Exercise 5

Solve the exercises 4.8 to 4.11

### Exercise 4.8, page 102

If a collection stores 10 objects, what value would be returned from a call to its size method?

It would return 9.

### Exercise 4.9, page 102

Write a method call using get to return the fifth object stored in a collection called items.

```
items.get(4)
```

### Exercise 4.10, page 102

What is the index of the last item stored in a collection of 15 objects?

This would be 14.

### Exercise 4.11, page 102

Write a method call to add the object held in the variable favoriteTrack to a collection called files.

```
addFavorite(favoriteTrack, files)
```

I'm not really sure about this question ...

### Exercise 6

Solve the exercises 4.12 to 4.13

### Exercise 4.12, page 103

Write a method call to remove the third object stored in a collection called dates.

```
dates.remove(2)
```

### Exercise 4.13, page 103

*Suppose that an object is stored at index 6 in a collection. What will be its index immediately after the objects at index 0 and 9 are removed?*

After removing index 0, the whole collection is shifted by  $-1$ , so the index of the element, which was at index 5 in the beginning would now be at  $6 - 1 = 5$ . Removing an index after the queried one has non effect of the indexing, so it would still be 5.

### Exercise 7

*Explain the following declaration:*

```
private ArrayList<Balloon> list = new ArrayList<>();
```

A private collection (ArrayList) of type Balloon is set up.

### Exercise 8

*What is the connection between abstraction and ArrayLists?*

Abstraction has the goal to simplify as far as possible. The class ArrayList provides great functionalities that are helping to use the concept of abstraction by minimizing effort in programming a complex class but using a library-class (ArrayList) which is giving a lot of useful and powerful methods. In other words, if we want to manage a collection, we don't want to use our time to implement complex code to manage our collection, we just want to specify how we want to manage. So we use preexisting code (from a library-class like java.util.ArrayList).

### Exercise 9

*What is the difference of the methods remove() and get() on ArrayLists?*

The remove() method of ArrayList is removing the specified objects out of the collection. This is causing a reindexation of all items of the collection that have a higher index as the removed one. These following items will get a new index which is "actual index - 1".

The get() method of ArrayList is returning the element at the specified index. The element is in general a object but it could also be a simple type.

### 4.1.3 Chapter 4.8 to 4.12 - The Iterator type

#### Exercise 10

*Solve the exercises 4.18 to 4.19*

### Exercise 4.18, page 106

*What might the header of a listAllFiles method in the MusicOrganizer class look like? What sort of return type should it have? Does it need to take any parameters*

The header of such a method would certainly not have a parameter and probably the return type void since it would use System.out.println() so the header could look like

```
public void listAllFiles()
```

### Exercise 4.19, page 106

We know that the first file name is stored at index zero in the `ArrayList` and the list stores the file names as strings, so could we write the body of `listAllFiles` along with the following lines?

```
1 System.out.println(files.get(0));
2 System.out.println(files.get(1));
3 System.out.println(files.get(2));
```

We could do so if we would be sure that there won't be more than three used indexes or three tracks. If we would like to have an arbitrary number of tracks we should use a other body, for instance with a loop.

A easy and intended loop for this job is a so called *for-each loop*. The course book is suggesting the following code.

```
1 public void listAllFiles()
2 {
3     for(String filename : files)
4     {
5         System.out.println(filename);
6     }
7 }
```

### Exercise 11

*Solve the exercise 4.22*

Just something to play in BlueJ (creating an `ArrayList` and add, remove, ..., some objects to it).

### Exercise 12

*Explain as detailed as possible the source code on page 108.*

```
1 public void listAllFiles()
2 {
3     for(String filename : files)
4     {
5         System.out.println(filename);
6     }
7 }
```

In the first line we see the header of the method. It is declaring that the method is of type public, that it has no return type (void) and does not take any parameters.

In the third line we see the header of the so called for-each loop. This means translated "for each element of the `ArrayList` files, do the following body". Since the `ArrayList` files is containing Strings, we need to declare "element" as String. So for every round thru the loop, the incremented index of the element that it contains at this index is stored to the local variable "element" that we defined to be of type String.

In the fifth line of code we see the print method, which is printing the "element" to the console, so it prints the String that is at the actual index of the loop.

### Exercise 13

*Is it possible, that the body of an while-loop is never executed?*

Yes of course it is possible because there is a condition that is deciding if the body is run or not.

### Exercise 14

*Show two alternative expressions for `no++`*

```
n += n;
```

```
n = n + n;
```

### Exercise 15

*An `ArrayList` can be traversed by an `foreach`-loop. Do you know other ways to do the same?*

Yes, there is a so called Iterator.

### Exercise 16

*Is `hasNext()` a method of `ArrayList` or `Iterator`? How do you have to understand/interpret the return-value of `hasNext()`?*

`hasNext()` is a method of `Iterator`. This method returns a **true** if there is a element in the collection after the current one and **false** if not.

#### 4.1.4 Chapter 4.14 - Summary of the music-organizer project

### Exercise 17

*DO NOT READ THIS CHAPTER, JUST READ THE CONCEPT-BOX AT PAGE 130.*

### Exercise 18

*A variable that is declared for a classtype (or so called reference-variable) can store the special value `null`. Explain the situation with a drawing/sketch. What does it look like, if it's storing an object?*

The following sketch 1 shows a comparison of two variables of type `Balloon`. One is just declared with `Balloon a;` and the other is initialized with `Balloon b = new Balloon();`.

The difference is that `b` is showing or pointing to the object in the memory and since `a` has no object to show to is has a pointer to **null**.

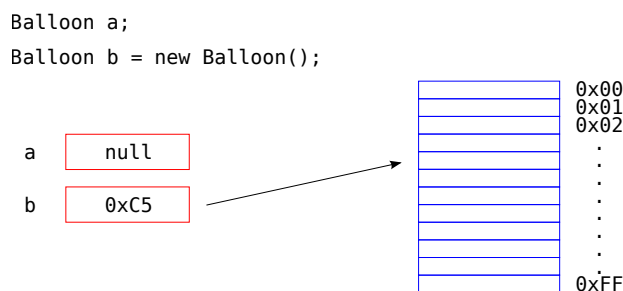


Figure 1: A declared and initialized object in comparison.

### 4.1.5 Chapter 4.15 to 4.17 - Summary

#### Exercise 19

*Solve the exercises 4.62 to 4.65*

4.62 `Person[] people;`  
4.63 `boolean[] vacant;`  
4.64 ???  
4.65 The declaration is wrong (syntax). It should look like  
`int[] counts;`  
`boolean[] occupied = new boolean[5000];`

#### Exercise 20

*Solve the exercises 4.66 to 4.68*

4.66

```
1 double[] readings;  
2 String[] urls;  
3 TicketMachine[] machines;  
4  
5 readings = new double[6];  
6 urls = new String[90];  
7 machines = new TicketMachine[5];
```

4.67 With `String[] labels = new String[20]` 20 String objects are created.

4.68 The correct expression is `double[] piece = new double[50];`

#### Exercise 21

*What are the pros and cons of Arrays?*

- ✓ Arrays are more efficient in access.
- ✓ Arrays can store primitive-types as well as objects.
- ✗ Arrays have a fixed size.

#### Exercise 22

*How do you get the length of an Array?*

The length of an array is accessible by the length operator.

```
1 // create an array of type int with the length 50  
2 int[] i = new int[50];  
3  
4 // return the length of the array  
5 public int getLength(int[] array)  
6 {  
7     return array.length;  
8 }
```



### Exercise 23

Solve the exercises 4.69, 4.71, 4.73 and 4.74

**4.69** This will fail in an error called *Out Of Bound Excepcion*.

**4.71**

```
1 public void printGreater(double[] marks, double mean)
2 {
3     for(index = 0; index < marks.length; index++)
4     {
5         if(marks[index] > mean)
6         {
7             System.out.println(marks[index])
8         }
9     }
10 }
```

**4.73**

```
1 public int numberOfAccesses()
2 {
3     int total = 0;
4     for(ctr = 0; ctr < hourCounts.length; ctr++)
5     {
6         total += hourCounts[ctr];
7     }
8     return total;
9 }
```

**4.74**

## 5 More-sophisticated behavior

### 5.1 Selfstudy-Questions OOP6

#### 5.1.1 Chapter 5.2 - The TechSupport system

##### Exercise 1

*Solve the exercise 5.1*

../workspace/TechSupport/src/support/Main.java

```
1 package support;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         // create a support system and start it
8         SupportSystem sys = new SupportSystem();
9         sys.start();
10
11     }
12 }
```

##### Exercise 2

*At page 157 and 158 there is a Method start() that uses a while-loop. Create a code snippet with the same functionality by using a do-while loop.*

```
1 public void start()
2 {
3     boolean finished = false;
4
5     printWelcome();
6
7     do{
8         String input = reader.getInput();
9         if(input.startsWith("bye")){
10             finished = true;
11         } else{
12             String response = responder.generateResponse();
13             System.out.println(response);
14         }
15     }while(!finished)
16
17     printGoodbye();
18 }
```

### 5.1.2 Chapter 5.3 - Reading class documentation

#### Exercise 3

*Solve the exercises 5.2 to 5.5 as well as 5.7 to 5.11*

**5.2** The Java documentation has a clear design. Every class like `String` is described in different sections, to get as fast as possible to the information needed. This documentation is arranged by the following sections:

- Summary
  - Nested
  - Field
  - Constructor
  - Method
- Detail
  - Field
  - Constructor
  - Method

**5.3** The class `String` has two methods called `startsWith`, where one method has only one parameter (`String`) and the other has two parameters (`String` and `int`). The method that has only one parameter is returning `true` if the specified string is found at the very beginning of the specified `String` object. The other method with two parameters is returning `true` if the specified string is found after the specified offset. The offset is a `int` value representing the number of characters.

Here is an example for the behavior. Both of these `if` statements are returning `true`.

```
1 String s = "Hi, my name is Avaj Elcaro.";
2
3 // check if the very beginning of the String object is "Hi"
4 if(s.startsWith("Hi")){
5     System.out.println("found match at the very beginning");
6 }
7
8 // check if the String object has the string "my" after the 4th character
9 if(s.startsWith("my", 4)){
10    System.out.println("found match after the 4th character");
11 }
```

**5.4** There is a method in the class `String` that checks if a `String` ends with a specified suffix.

```
1 public boolean endsWith(String suffix)
```

**5.5** There is a method in the class `String` that returns the number of unicode characters in a specified string.

```
1 public int length()
```

### Exercise 4

*In which package do you suppose the class `FileWriter`? Check your guess with the Java API documentation.*

The class `FileWriter` is a part of the package `java.io` where the `io` stands for Input-Output.

### Exercise 5

*With the class `BufferedReader` you can read files line by line. How does that work? You can find the answer in the Java API documentation.*

We can use the method `readLine()` for that job. Here is an example from <http://www.roseindia.net/java/beginners/java-read-file-line-by-line.shtml>

```
1 import java.io.*;
2 class FileRead
3 {
4     public static void main(String args[])
5     {
6         try{
7             // Open the file
8             FileInputStream fstream = new FileInputStream("textfile.txt");
9             // Get the object of DataInputStream
10            DataInputStream in = new DataInputStream(fstream);
11            BufferedReader br = new BufferedReader(new
12                InputStreamReader(in));
13            String strLine;
14            //Read File Line By Line
15            while ((strLine = br.readLine()) != null) {
16                // Print the content on the console
17                System.out.println (strLine);
18            }
19            //Close the input stream
20            in.close();
21        } catch (Exception e) { //Catch exception if any
22            System.err.println("Error: " + e.getMessage());
23        }
24    }
25 }
```

### 5.1.3 Chapter 5.4 - Adding random behavior

#### Exercise 6

*Solve the exercises 5.12 and 5.13*

**5.12** The `Random` class is from the package `java.util`. It is used to generate a stream of pseudorandom numbers. An instance can be constructed with the following code.

```
1 import java.util.Random;
2
3 public class Main
4 {
```

```
5 public static void main(String[] args)
6 {
7     // create an instance of Random
8     Random rand = new Random();
9
10    // print out 10 random numbers between 0 and 20
11    for(int i = 0; i < 10; i++)
12    {
13        System.out.println(rand.nextInt(21));
14    }
15 }
16 }
```

**5.13** See 5.12

### Exercise 7

*Solve the exercise 5.15*

If we use `rand.nextInt(100)` we will get any integer number between 0 and 99.

### Exercise 8

*Solve the exercise 5.18*

Simple example of a random response program.

../workspace/Snippets/src/randomResponse/RandomResponse.java

```
1 package randomResponse;
2
3 import java.util.ArrayList;
4 import java.util.Random;
5
6 public class RandomResponse
7 {
8     public static void main(String[] args)
9     {
10        // create an ArrayList for String objects
11        ArrayList<String> responses = new ArrayList<String>();
12
13        // create an Random instance
14        Random rand = new Random();
15        int ans = 0;
16
17        // add some responses to the ArrayList
18        responses.add("Have you tried turning it off and on again?");
19        responses.add("Are you sure you have the latest update installed?");
20        responses.add("Maybe you should upgrade to platinum version.");
21        responses.add("Have you tried a complete new setup?");
22        responses.add("I'm on pause now, I'll be back in 5 minutes.");
23        responses.add("I'm new to this company and I didn't see such a
24            problem yet.");
25
26        // give a random responses
27        System.out.println(responses.get(rand.nextInt(responses.size())));
```

```
27     }  
28 }
```

### 5.1.4 Chapter 5.5 - Packages and import

#### Exercise 9

*Solve the exercises 5.21 and 5.22*

**5.21** See Exercise 8 - 5.18

**5.22** If we implement the response generation like in the example code above, it will work for any number of responses in the ArrayList. This is because the code is flexible for the size of the ArrayList.

## 5.2 Selfstudy-Questions ALG1

### Exercise 10

*Describe in words or as pseudocode one algorithm per problem.*

- (a) *Calculate the product of two integers without a multiplication-operator.*

One possible approach to solve this problem could be to use simple addition and iteration. This is because a multiplication, for example  $3 \cdot 5 = 15$ , can be substituted with  $(3 + 3 + 3 + 3 + 3) = (5 + 5 + 5) = 15$ .

../workspace/Snippets/src/multiply/Multiplier.java

```
1 package multiply;
2
3 public class Multiplier
4 {
5     public Multiplier()
6     {
7
8     }
9
10    public int multiply(int a, int b)
11    {
12        int result = 0;
13        if((a==0) || (b==0)){
14            return 0;
15        } else if(a < b){
16            for(int i = 0; i < b; i++){
17                result += a;
18            }
19        } else{
20            for(int i = 0; i < a; i++){
21                result += b;
22            }
23        }
24        return result;
25    }
26 }
```

../workspace/Snippets/src/multiply/Main.java

```
1 package multiply;
2
3 import java.util.Random;
4
5 public class Main
6 {
7     public static void main(String[] args)
8     {
9         int product = 0;
10        int factor1 = 0;
11        int factor2 = 0;
12    }
```

```

13 // create a Random instance
14 Random rand = new Random();
15 Multiplier multi = new Multiplier();
16
17
18 // do a multiplication
19 factor1 = rand.nextInt(10);
20 factor2 = rand.nextInt(10);
21 product = multi.multiply(factor1, factor2);
22 System.out.println(factor1 + " times " + factor2 + " = " +
23     product);
24 }

```

An alternative approach is to think of the factors as binary numbers. In the binary system we multiply also by a addition. See the following example: Lets multiply  $11 \cdot 14 = 154$ . In binary this looks like following:

	$1011_b$	$11_d$
.	$1110_b$	$14_d$
<hr/>		
	$0000_b$	$0 \cdot 1011_b$
+	$1011_b$	$1 \cdot 1011_b$ and leftshift by 1
+	$1011_b$	$1 \cdot 1011_b$ and leftshift by 2
+	$1011_b$	$1 \cdot 1011_b$ and leftshift by 3
<hr/>		
=	$10011010_b$	$154_d$

If we wanted to implement that alorithm, we would have to operate binary, but in fact that would be not really different form the fist approach.

- (b) Find the lowest number out of a sequence like  $S = 4, -1, 50, 10, 0, 1, -2, 5, 10$

../workspace/Snippets/src/search/Main.java

```

1 package search;
2
3 import java.util.Random;
4
5 public class Main
6 {
7     public static void main(String[] args)
8     {
9         // create a random sequence
10        Random rand = new Random();
11        int size = 10;
12        int range = 100;
13        int[] seq = new int[size];
14        String sequence = "Sequence: ";
15        for(int i = 0; i < size; i++){
16            seq[i] = rand.nextInt(range) - (range/2);
17            sequence += seq[i] + ", ";
18        }
19
20        // show the sequence
21        System.out.println(sequence);
22

```



```

23      // get the biggest value
24      System.out.println("Biggest value in sequence: " +
25                          getBiggest(seq));
26
27      // get smallest value
28      System.out.println("Smallest value in sequence:" +
29                          getSmallest(seq));
30
31      }
32
33      public static int getBiggest(int[] sequence)
34      {
35          int biggest = sequence[0];
36          for(int i = 0; i < sequence.length; i++){
37              if(sequence[i] > biggest){
38                  biggest = sequence[i];
39              }
40          }
41          return biggest;
42      }
43
44      public static int getSmallest(int[] sequence)
45      {
46          int smallest = sequence[0];
47          for(int i = 0; i < sequence.length; i++){
48              if(sequence[i] < smallest){
49                  smallest = sequence[i];
50              }
51          }
52          return smallest;
53      }
54
55      }
56
57      }
58
59      }
60
61      }
62
63      }
64
65      }
66
67      }
68
69      }
70
71      }
72
73      }
74
75      }
76
77      }
78
79      }
80
81      }
82
83      }
84
85      }
86
87      }
88
89      }
90
91      }
92
93      }
94
95      }
96
97      }
98
99      }
100
101      }
102
103      }
104
105      }
106
107      }
108
109      }
110
111      }
112
113      }
114
115      }
116
117      }
118
119      }
120
121      }
122
123      }
124
125      }
126
127      }
128
129      }
130
131      }
132
133      }
134
135      }
136
137      }
138
139      }
140
141      }
142
143      }
144
145      }
146
147      }
148
149      }
150
151      }
152
153      }
154
155      }
156
157      }
158
159      }
160
161      }
162
163      }
164
165      }
166
167      }
168
169      }
170
171      }
172
173      }
174
175      }
176
177      }
178
179      }
180
181      }
182
183      }
184
185      }
186
187      }
188
189      }
190
191      }
192
193      }
194
195      }
196
197      }
198
199      }
200
201      }
202
203      }
204
205      }
206
207      }
208
209      }
210
211      }
212
213      }
214
215      }
216
217      }
218
219      }
220
221      }
222
223      }
224
225      }
226
227      }
228
229      }
230
231      }
232
233      }
234
235      }
236
237      }
238
239      }
240
241      }
242
243      }
244
245      }
246
247      }
248
249      }
250
251      }
252
253      }
254
255      }
256
257      }
258
259      }
260
261      }
262
263      }
264
265      }
266
267      }
268
269      }
270
271      }
272
273      }
274
275      }
276
277      }
278
279      }
280
281      }
282
283      }
284
285      }
286
287      }
288
289      }
290
291      }
292
293      }
294
295      }
296
297      }
298
299      }
300
301      }
302
303      }
304
305      }
306
307      }
308
309      }
310
311      }
312
313      }
314
315      }
316
317      }
318
319      }
320
321      }
322
323      }
324
325      }
326
327      }
328
329      }
330
331      }
332
333      }
334
335      }
336
337      }
338
339      }
340
341      }
342
343      }
344
345      }
346
347      }
348
349      }
350
351      }
352
353      }
354
355      }
356
357      }
358
359      }
360
361      }
362
363      }
364
365      }
366
367      }
368
369      }
370
371      }
372
373      }
374
375      }
376
377      }
378
379      }
380
381      }
382
383      }
384
385      }
386
387      }
388
389      }
390
391      }
392
393      }
394
395      }
396
397      }
398
399      }
400
401      }
402
403      }
404
405      }
406
407      }
408
409      }
410
411      }
412
413      }
414
415      }
416
417      }
418
419      }
420
421      }
422
423      }
424
425      }
426
427      }
428
429      }
430
431      }
432
433      }
434
435      }
436
437      }
438
439      }
440
441      }
442
443      }
444
445      }
446
447      }
448
449      }
450
451      }
452
453      }
454
455      }
456
457      }
458
459      }
460
461      }
462
463      }
464
465      }
466
467      }
468
469      }
470
471      }
472
473      }
474
475      }
476
477      }
478
479      }
480
481      }
482
483      }
484
485      }
486
487      }
488
489      }
490
491      }
492
493      }
494
495      }
496
497      }
498
499      }
500
501      }
502
503      }
504
505      }
506
507      }
508
509      }
510
511      }
512
513      }
514
515      }
516
517      }
518
519      }
520
521      }
522
523      }
524
525      }
526
527      }
528
529      }
530
531      }
532
533      }
534
535      }
536
537      }
538
539      }
540
541      }
542
543      }
544
545      }
546
547      }
548
549      }
550
551      }
552
553      }
554
555      }
556
557      }
558
559      }
560
561      }
562
563      }
564
565      }
566
567      }
568
569      }
570
571      }
572
573      }
574
575      }
576
577      }
578
579      }
580
581      }
582
583      }
584
585      }
586
587      }
588
589      }
590
591      }
592
593      }
594
595      }
596
597      }
598
599      }
600
601      }
602
603      }
604
605      }
606
607      }
608
609      }
610
611      }
612
613      }
614
615      }
616
617      }
618
619      }
620
621      }
622
623      }
624
625      }
626
627      }
628
629      }
630
631      }
632
633      }
634
635      }
636
637      }
638
639      }
640
641      }
642
643      }
644
645      }
646
647      }
648
649      }
650
651      }
652
653      }
654
655      }
656
657      }
658
659      }
660
661      }
662
663      }
664
665      }
666
667      }
668
669      }
670
671      }
672
673      }
674
675      }
676
677      }
678
679      }
680
681      }
682
683      }
684
685      }
686
687      }
688
689      }
690
691      }
692
693      }
694
695      }
696
697      }
698
699      }
700
701      }
702
703      }
704
705      }
706
707      }
708
709      }
710
711      }
712
713      }
714
715      }
716
717      }
718
719      }
720
721      }
722
723      }
724
725      }
726
727      }
728
729      }
730
731      }
732
733      }
734
735      }
736
737      }
738
739      }
740
741      }
742
743      }
744
745      }
746
747      }
748
749      }
750
751      }
752
753      }
754
755      }
756
757      }
758
759      }
760
761      }
762
763      }
764
765      }
766
767      }
768
769      }
770
771      }
772
773      }
774
775      }
776
777      }
778
779      }
780
781      }
782
783      }
784
785      }
786
787      }
788
789      }
790
791      }
792
793      }
794
795      }
796
797      }
798
799      }
800
801      }
802
803      }
804
805      }
806
807      }
808
809      }
810
811      }
812
813      }
814
815      }
816
817      }
818
819      }
820
821      }
822
823      }
824
825      }
826
827      }
828
829      }
830
831      }
832
833      }
834
835      }
836
837      }
838
839      }
840
841      }
842
843      }
844
845      }
846
847      }
848
849      }
850
851      }
852
853      }
854
855      }
856
857      }
858
859      }
860
861      }
862
863      }
864
865      }
866
867      }
868
869      }
870
871      }
872
873      }
874
875      }
876
877      }
878
879      }
880
881      }
882
883      }
884
885      }
886
887      }
888
889      }
890
891      }
892
893      }
894
895      }
896
897      }
898
899      }
900
901      }
902
903      }
904
905      }
906
907      }
908
909      }
910
911      }
912
913      }
914
915      }
916
917      }
918
919      }
920
921      }
922
923      }
924
925      }
926
927      }
928
929      }
930
931      }
932
933      }
934
935      }
936
937      }
938
939      }
940
941      }
942
943      }
944
945      }
946
947      }
948
949      }
950
951      }
952
953      }
954
955      }
956
957      }
958
959      }
960
961      }
962
963      }
964
965      }
966
967      }
968
969      }
970
971      }
972
973      }
974
975      }
976
977      }
978
979      }
980
981      }
982
983      }
984
985      }
986
987      }
988
989      }
990
991      }
992
993      }
994
995      }
996
997      }
998
999      }
1000
1001      }
1002
1003      }
1004
1005      }
1006
1007      }
1008
1009      }
1010
1011      }
1012
1013      }
1014
1015      }
1016
1017      }
1018
1019      }
1020
1021      }
1022
1023      }
1024
1025      }
1026
1027      }
1028
1029      }
1030
1031      }
1032
1033      }
1034
1035      }
1036
1037      }
1038
1039      }
1040
1041      }
1042
1043      }
1044
1045      }
1046
1047      }
1048
1049      }
1050
1051      }
1052
1053      }
1054
1055      }
1056
1057      }
1058
1059      }
1060
1061      }
1062
1063      }
1064
1065      }
1066
1067      }
1068
1069      }
1070
1071      }
1072
1073      }
1074
1075      }
1076
1077      }
1078
1079      }
1080
1081      }
1082
1083      }
1084
1085      }
1086
1087      }
1088
1089      }
1090
1091      }
1092
1093      }
1094
1095      }
1096
1097      }
1098
1099      }
1100
1101      }
1102
1103      }
1104
1105      }
1106
1107      }
1108
1109      }
1110
1111      }
1112
1113      }
1114
1115      }
1116
1117      }
1118
1119      }
1120
1121      }
1122
1123      }
1124
1125      }
1126
1127      }
1128
1129      }
1130
1131      }
1132
1133      }
1134
1135      }
1136
1137      }
1138
1139      }
1140
1141      }
1142
1143      }
1144
1145      }
1146
1147      }
1148
1149      }
1150
1151      }
1152
1153      }
1154
1155      }
1156
1157      }
1158
1159      }
1160
1161      }
1162
1163      }
1164
1165      }
1166
1167      }
1168
1169      }
1170
1171      }
1172
1173      }
1174
1175      }
1176
1177      }
1178
1179      }
1180
1181      }
1182
1183      }
1184
1185      }
1186
1187      }
1188
1189      }
1190
1191      }
1192
1193      }
1194
1195      }
1196
1197      }
1198
1199      }
1200
1201      }
1202
1203      }
1204
1205      }
1206
1207      }
1208
1209      }
1210
1211      }
1212
1213      }
1214
1215      }
1216
1217      }
1218
1219      }
1220
1221      }
1222
1223      }
1224
1225      }
1226
1227      }
1228
1229      }
1230
1231      }
1232
1233      }
1234
1235      }
1236
1237      }
1238
1239      }
1240
1241      }
1242
1243      }
1244
1245      }
1246
1247      }
1248
1249      }
1250
1251      }
1252
1253      }
1254
1255      }
1256
1257      }
1258
1259      }
1260
1261      }
1262
1263      }
1264
1265      }
1266
1267      }
1268
1269      }
1270
1271      }
1272
1273      }
1274
1275      }
1276
1277      }
1278
1279      }
1280
1281      }
1282
1283      }
1284
1285      }
1286
1287      }
1288
1289      }
1290
1291      }
1292
1293      }
1294
1295      }
1296
1297      }
1298
1299      }
1300
1301      }
1302
1303      }
1304
1305      }
1306
1307      }
1308
1309      }
1310
1311      }
1312
1313      }
1314
1315      }
1316
1317      }
1318
1319      }
1320
1321      }
1322
1323      }
1324
1325      }
1326
1327      }
1328
1329      }
1330
1331      }
1332
1333      }
1334
1335      }
1336
1337      }
1338
1339      }
1340
1341      }
1342
1343      }
1344
1345      }
1346
1347      }
1348
1349      }
1350
1351      }
1352
1353      }
1354
1355      }
1356
1357      }
1358
1359      }
1360
1361      }
1362
1363      }
1364
1365      }
1366
1367      }
1368
1369      }
1370
1371      }
1372
1373      }
1374
1375      }
1376
1377      }
1378
1379      }
1380
1381      }
1382
1383      }
1384
1385      }
1386
1387      }
1388
1389      }
1390
1391      }
1392
1393      }
1394
1395      }
1396
1397      }
1398
1399      }
1400
1401      }
1402
1403      }
1404
1405      }
1406
1407      }
1408
1409      }
1410
1411      }
1412
1413      }
1414
1415      }
1416
1417      }
1418
1419      }
1420
1421      }
1422
1423      }
1424
1425      }
1426
1427      }
1428
1429      }
1430
1431      }
1432
1433      }
1434
1435      }
1436
1437      }
1438
1439      }
1440
1441      }
1442
1443      }
1444
1445      }
1446
1447      }
1448
1449      }
1450
1451      }
1452
1453      }
1454
1455      }
1456
1457      }
1458
1459      }
1460
1461      }
1462
1463      }
1464
1465      }
1466
1467      }
1468
1469      }
1470
1471      }
1472
1473      }
1474
1475      }
1476
1477      }
1478
1479      }
1480
1481      }
1482
1483      }
1484
1485      }
1486
1487      }
1488
1489      }
1490
1491      }
1492
1493      }
1494
1495      }
1496
1497      }
1498
1499      }
1500
1501      }
1502
1503      }
1504
1505      }
1506
1507      }
1508
1509      }
1510
1511      }
1512
1513      }
1514
1515      }
1516
1517      }
1518
1519      }
1520
1521      }
1522
1523      }
1524
1525      }
1526
1527      }
1528
1529      }
1530
1531      }
1532
1533      }
1534
1535      }
1536
1537      }
1538
1539      }
1540
1541      }
1542
1543      }
1544
1545      }
1546
1547      }
1548
1549      }
1550
1551      }
1552
1553      }
1554
1555      }
1556
1557      }
1558
1559      }
1560
1561      }
1562
1563      }
1564
1565      }
1566
1567      }
1568
1569      }
1570
1571      }
1572
1573      }
1574
1575      }
1576
1577      }
1578
1579      }
1580
1581      }
1582
1583      }
1584
1585      }
1586
1587      }
1588
1589      }
1590
1591      }
1592
1593      }
1594
1595      }
1596
1597      }
1598
1599      }
1600
1601      }
1602
1603      }
1604
1605      }
1606
1607      }
1608
1609      }
1610
1611      }
1612
1613      }
1614
1615      }
1616
1617      }
1618
1619      }
1620
1621      }
1622
1623      }
1624
1625      }
1626
1627      }
1628
1629      }
1630
1631      }
1632
1633      }
1634
1635      }
1636
1637      }
1638
1639      }
1640
1641      }
1642
1643      }
1644
1645      }
1646
1647      }
1648
1649      }
1650
1651      }
1652
1653      }
1654
1655      }
1656
1657      }
1658
1659      }
1660
1661      }
1662
1663      }
1664
1665      }
1666
1667      }
1668
1669      }
1670
1671      }
1672
1673      }
1674
1675      }
1676
1677      }
1678
1679      }
1680
1681      }
1682
1683      }
1684
1685      }
1686
1687      }
1688
1689      }
1690
1691      }
1692
1693      }
1694
1695      }
1696
1697      }
1698
1699      }
1700
1701      }
1702
1703      }
1704
1705      }
1706
1707      }
1708
1709      }
1710
1711      }
1712
1713      }
1714
1715      }
1716
1717      }
1718
1719      }
1720
1721      }
1722
1723      }
1724
1725      }
1726
1727      }
1728
1729      }
1730
1731      }
1732
1733      }
1734
1735      }
1736
1737      }
1738
1739      }
1740
1741      }
1742
1743      }
1744
1745      }
1746
1747      }
1748
1749      }
1750
1751      }
1752
1753      }
1754
1755      }
1756
1757      }
1758
1759      }
1760
1761      }
1762
1763      }
1764
1765      }
1766
1767      }
1768
1769      }
1770
1771      }
1772
1773      }
1774
1775      }
1776
1777      }
1778
1779      }
1780
1781      }
1782
1783      }
1784
1785      }
1786
1787      }
1788
1789      }
1790
1791      }
1792
1793      }
1794
1795      }
1796
1797      }
1798
1799      }
1800
1801      }
1802
1803      }
1804
1805      }
1806
1807      }
1808
1809      }
1810
1811      }
1812
1813      }
1814
1815      }
1816
1817      }
1818
1819      }
1820
1821      }
1822
1823      }
1824
1825      }
1826
1827      }
1828
1829      }
1830
1831      }
1832
1833      }
1834
1835      }
1836
1837      }
1838
1839      }
1840
1841      }
1842
1843      }
1844
1845      }
1846
1847      }
1848
1849      }
1850
1851      }
1852
1853      }
1854
1855      }
1856
1857      }
1858
1859      }
1860
1861      }
1862
1863      }
1864
1865      }
1866
1867      }
1868
1869      }
1870
1871      }
1872
1873      }
1874
1875      }
1876
1877      }
1878
1879      }
1880
1881      }
1882
1883      }
1884
1885      }
1886
1887      }
1888
1889      }
1890
1891      }
1892
1893      }
1894
1895      }
1896
1897      }
1898
1899      }
1900
1901      }
1902
1903      }
1904
1905      }
1906
1907      }
1908
1909      }
1910
1911      }
1912
1913      }
1914
1915      }
1916
1917      }
1918
1919      }
1920
1921      }
1922
1923      }
1924
1925      }
1926
1927      }
1928
1929      }
1930
1931      }
1932
1933      }
1934
1935      }
1936
1937      }
1938
1939      }
1940
1941      }
1942
1943      }
1944
1945      }
1946
1947      }
1948
1949      }
1950
1951      }
1952
1953      }
1954
1955      }
1956
1957      }
1958
1959      }
1960
1961      }
1962
1963      }
1964
1965      }
1966
1967      }
1968
1969      }
1970
1971      }
1972
1973      }
1974
1975      }
1976
1977      }
1978
1979      }
1980
1981      }
1982
1983      }
1984
1985      }
1986
1987      }
1988
1989      }
1990
1991      }
1992
1993      }
1994
1995      }
1996
1997      }
1998
1999      }
2000
2001      }
2002
2003      }
2004
2005      }
2006
2007      }
2008
2009      }
2010
2011      }
2012
2013      }
2014
2015      }
2016
2017      }
2018
2019      }
2020
2021      }
2022
2023      }
2024
2025      }
2026
2027      }
2028
2029      }
2030
2031      }
2032
2033      }
2034
2035      }
2036
2037      }
2038
2039      }
2040
2041      }
2042
2043      }
2044
2045      }
2046
2047      }
2048
2049      }
2050
2051      }
2052
2053      }
2054
2055      }
2056
2057      }
2058
2059      }
2060
2061      }
2062
2063      }
2064
2065      }
2066
2067      }
2068
2069      }
2070
2071      }
2072
2073      }
2074
2075      }
2076
2077      }
2078
2079      }
2080
2081      }
2082
2083      }
2084
2085      }
2086
2087      }
2088
2089      }
2090
2091      }
2092
2093      }
2094
2095      }
2096
2097      }
2098
2099      }
2100
2101      }
2102
2103      }
2104
2105      }
2106
2107      }
2108
2109      }
2110
2111      }
2112
2113      }
2114
2115      }
2116
2117      }
2118
2119      }
2120
2121      }
2122
2123      }
2124
2125      }
2126
2127      }
2128
2129      }
2130
2131      }
2132
2133      }
2134
2135      }
2136
2137      }
2138
2139      }
2140
2141      }
2142
2143      }
2144
2145      }
2146
2147      }
2148
2149      }
2150
2151      }
2152
2153      }
2154
2155      }
2156
2157      }
2158
2159      }
2160
2161      }
2162
2163      }
2164
2165      }
2166
2167      }
2168
2169      }
2170
2171      }
2172
2173      }
2174
2175      }
2176
2177      }
2178
2179      }
2180
2181      }
2182
2183      }
2184
2185      }
2186
2187      }
2188
2189      }
2190
2191      }
2192
2193      }
2194
2195      }
2196
2197      }
2198
2199      }
2200
2201      }
2202
2203      }
2204
2205      }
2206
2207      }
2208
2209      }
2210
2211      }
2212
2213      }
2214
2215      }
2216
2217      }
2218
2219      }
2220
2221      }
2222
2223      }
2224
2225     
```

```

16         System.out.println( "GCD of "
17                               + num1
18                               + " and "
19                               + num2
20                               + " is "
21                               + gcd(num1,num2));
22     }
23
24     public static int gcd(int a, int b)
25     {
26         while((a != 0) && (b != 0)) {
27             if(a > b) {
28                 a = a % b;
29             }
30             else {
31                 b = b % a;
32             }
33         }
34         return (a + b);
35     }
36 }

```

- (a) Test your algorithm with some examples.
- (b) Change your algorithm so that you don't use the modulo operator. Change the modulo operation with a combined expression and test your implementation again.  
*Hint: The modulo operator can be substituted by a sequence of subtractions that is finished as the result is smaller than the subtrahend.*

../workspace/Snippets/src/euklid2/Main.java

```

1 package euklid2;
2
3 import java.util.Random;
4
5 public class Main
6 {
7     public static void main(String[] args)
8     {
9         // create two random numbers
10        Random rand = new Random();
11        int range = 20;
12        int num1 = rand.nextInt(range) + 1;
13        int num2 = rand.nextInt(range) + 1;
14
15        // get the greatest common divisor
16        System.out.println( "GCD of "
17                              + num1
18                              + " and "
19                              + num2
20                              + " is "
21                              + gcd(num1,num2));
22    }
23
24    public static int gcd(int a, int b)

```

```

25 {
26     // the arguments must not be 0
27     if((a == 0) || (b == 0)){
28         return 0;
29     }
30     while(a != b) {
31         if(a > b) {
32             a = a-b;
33         } else {
34             b = b-a;
35         }
36     }
37     return a;
38 }
39 }

```

### Exercise 12

What's the order of the algorithm to calculate the  $n$ -th pseudo random number  $z$  (see OOP6 presentation page 28 and ALG1 presentation page 15)?

$$z_{n+1} = (a \cdot Z_n + r) \% m$$

### 5.3 Programming Exercise

Write a class `FormLetter` that is able to produce serial letters. The class has an `ArrayList` of type `FormalAddress` (see OOP3). With the method `addAddress()` a new object of type `FormalAddress` is generated and added to the `ArrayList`. With the method `void print(int actualYear, String subject, String textBody)` a new serial letter is generated for all elements in the `ArrayList`. The letter contains a greeting, a subject and of course the text itself. This shall be printed to the console.

../workspace/FormLetter/src/letter/Main.java

```

1 package letter;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         FormLetter myLetter = new FormLetter();
8
9         myLetter.addAddress("Richard", "Stallman", "Freeroad 91",
10                             "Freetown");
11         myLetter.addAddress("Linus", "Torvalds", "Unixstreet 101",
12                             "Helsinki");
13         myLetter.addAddress("Ervin", "Knuth", "Stanfordstreet 5",
14                             "Brooklyn");
15
16         myLetter.print(2013, "New Kernel Realease",
17                         "I'd like to inform you that there is a new Kernel
18                         release.");
19     }
20 }

```

../workspace/FormLetter/src/letter/FormLetter.java

```

1 package letter;
2
3 import java.util.ArrayList;
4
5 public class FormLetter
6 {
7     private ArrayList<FormalAddress> fa = new ArrayList<>();
8
9     public FormLetter() {
10
11     }
12
13     public void addAddress( String firstname,
14                             String lastname,
15                             String address,
16                             String city)
17     {
18         FormalAddress newAddress = new FormalAddress(firstname,
19                                                         lastname,
20                                                         address,
21                                                         city);
22         fa.add(newAddress);
23     }
24
25     void print(int actualYear, String subject, String textBody)
26     {
27         for(FormalAddress a : fa){
28             System.out.println("=====");
29             System.out.println(a.getName());
30             System.out.println(a.getAddress());
31             System.out.println(a.getCity());
32             System.out.println("");
33             System.out.println(subject);
34             System.out.println("");
35             System.out.println("Dear" + a.getName() + ",");
36             System.out.println(textBody);
37             System.out.println("");
38             System.out.println("=====");
39         }
40
41     }
42 }

```

../workspace/FormLetter/src/letter/FormalAddress.java

```

1 package letter;
2
3 public class FormalAddress
4 {
5     private String firstname = "Default";
6     private String lastname = "Default";
7     private String address = "Default";
8     private String city = "Default";

```

```

9
10 public FormalAddress (    String newFirstName,
11                           String newLastName,
12                           String newAddress,
13                           String newCity)
14 {
15     firstname = newFirstName;
16     lastname = newLastName;
17     address = newAddress;
18     city = newCity;
19 }
20
21 public String getName() {
22     return firstname + " " + lastname;
23 }
24
25 public String getAddress() {
26     return address;
27 }
28
29 public String getCity() {
30     return city;
31 }
32 }

```

## 5.4 Team-Exercise

### 5.4.1 Exercise 1

Create a class *ListIteratorApplication* with the attribute of type *ArrayList* for Strings. Fill the *ArrayList* with the words of the sentence "With the iterator it is possible to travers Lists back and forth".

1. Program a method *iterateDown()* that is iterating through the *ArrayList*. Use a *Iterator* for this method.
2. Program a method *iterateUp()* that is iterating reverse through the *ArrayList*. Use a *for-loop* and the *get()* method from *ArrayList*.
3. Program a method *iterateBothWays()* that is iterating through the *ArrayList* and then backwards. Use the *ListIterator* for this method and take a look at the API documentation of it.
4. Optional Exercise: Use the *StringTokenizer* to fill the *ArrayList*. An example is given by the OOP5 presentation on page 10. Take also a look at the API documentation.

../workspace/ListApp/src/list/Main.java

```

1 package list;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         final String input = "With the ListIterator it is possible to "
8             + "travers Lists back and forth";
9
10        ListIteratorApplication lia = new ListIteratorApplication(input);

```

```
11     lia.iterateDown();
12     lia.iterateUp();
13     lia.iterateBothWays();
14 }
15 }
16 }
```

../workspace/ListApp/src/list/ListIteratorApplication.java

```
1 package list;
2
3 import java.util.ArrayList;
4 import java.util.Iterator;
5 import java.util.ListIterator;
6 import java.util.StringTokenizer;
7
8 public class ListIteratorApplication
9 {
10     ArrayList<String> sentence = new ArrayList<String>();
11
12     public ListIteratorApplication(String input)
13     {
14         snipString(input);
15
16         /* this would be needed without the snipString() method
17         sentence.add("With");
18         sentence.add("the");
19         sentence.add("ListIterator");
20         sentence.add("it");
21         sentence.add("is");
22         sentence.add("possible");
23         sentence.add("to");
24         sentence.add("travers");
25         sentence.add("Lists");
26         sentence.add("back");
27         sentence.add("and");
28         sentence.add("forth");
29         */
30     }
31
32     public void iterateDown() {
33         Iterator<String> it = sentence.iterator();
34         while(it.hasNext()) {
35             System.out.print(it.next() + " ");
36         }
37         System.out.println("");
38     }
39
40     public void iterateUp() {
41         Iterator<String> it = sentence.iterator();
42         for(int i = sentence.size(); i > 0; i--) {
43             System.out.print(sentence.get(i-1) + " ");
44         }
45         System.out.println("");
46     }
47 }
```

```

47
48     public void iterateBothWays() {
49         ListIterator<String> it = sentence.listIterator();
50         while(it.hasNext()) {
51             System.out.print(it.next() + " ");
52         }
53         System.out.println("");
54
55         while(it.hasPrevious()) {
56             System.out.print(it.previous() + " ");
57         }
58         System.out.println("");
59     }
60
61     public void snipString(String input) {
62         StringTokenizer st = new StringTokenizer(input);
63         while(st.hasMoreElements()) {
64             sentence.add(st.nextToken());
65         }
66     }
67 }

```

### 5.4.2 Exercise 2

A sequence of integers is arranged in an array. A subsequence of a sequence is of arbitrary length but is combined by trailed parts of it. See the following example.

```

int[] series = {5, -8, 3, 4, -5, 7, -2, -7, 3, 5}
int[] subseries1 = {5, -8, 3}
int[] subseries2 = {-5, 7, -2, -7, 3}

```

Of course an empty sequence is also a valid subsequence. A subtotal is the sum of all entries of a subsequence. The subtotal of subseries1 from the example is 0, the subtotal of subseries2 is -4. An empty subsequence has the subtotal 0. The following pseudocode describes a intuitiv algorithm.

```

1 For all start values form 0 up to the length of the sequence
2     For all end values from start value up to the length of the sequence
3         Calculate the sum of the subsequence form start value up to the end
           value
4         Is it the maximum sum?

```

1. What order has the algorithm described above?
2. Create a method `public int maxSubtotal(int[] sequence)` in class `Series`, which implements the algorithm above.
3. Test your implementation with a testmethod, which generates different sequences and calls the method `maxSubtotal()`.

## 5.5 Selfstudy-Questions OOP7

### 5.5.1 Chapter 5.6 - Using maps for associations

#### Exercise 1

*Solve the exercises 5.24 to 5.30*

**5.24** HashMap is a parameterized class and these are the methods that depend on the type.

**5.25** If we want to know how many entries are contained in a map we can use the `size()` method.

**5.26** A very simple phone book implementation with HashMap.

../workspace/Snippets/src/phoneBook/Main.java

```

1 package phoneBook;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         // create a new phoneBook
8         MapTester myContacts = new MapTester();
9
10        // add some entries
11        myContacts.enterNumber("Richard Stallman", "1234567890");
12        myContacts.enterNumber("Donald Ervin Knuth", "1123581321");
13
14        // lookup for the numbers
15        System.out.println(myContacts.lookupNumber("Richard Stallman"));
16        System.out.println(myContacts.lookupNumber("Donald Ervin Knuth"));
17
18        if(myContacts.checkForKey("Richard Stallman")){
19            System.out.println("Yep, he's in your phonebook!");
20        } else{
21            System.out.println("Nope, he's not in your phonebook!");
22        }
23    }
24 }
25

```

../workspace/Snippets/src/phoneBook/MapTester.java

```

1 package phoneBook;
2
3 import java.util.HashMap;
4
5 public class MapTester
6 {
7     private HashMap<String, String> myMap = new HashMap<String, String>();
8
9     public MapTester()
10    {
11
12    }
13
14    public void enterNumber(String name, String number)
15    {

```



```
16     myMap.put(name, number);
17 }
18
19 public String lookupNumber(String name)
20 {
21     return myMap.get(name);
22 }
23
24 public boolean checkForKey(String key)
25 {
26     return myMap.containsKey(key);
27 }
28 }
```

**5.27** If a map is holding a key and a new pair is added with the same key, the previous value is overwritten by the new value. See the following example.

```
1 // add a pair for the key "A" with value "a"
2 myMap.put("A", "a");
3
4 // add a pair for the key "A" with value "b"
5 myMap.put("A", "b");
6
7 // lookup the value for the key "A"
8 System.out.println(myMap.get("A"))
```

The output will be **"b"** and there is only one pair for the key **"A"**.

**5.28** If you put two different keys to a map there will be two keys in this map. That's it, it is the usual usage.

**5.29** If I want to know if there is already a key stored contained in a map I have to use the `containsKey(Object key)` method.

```
1 // add a pair for the key "A" with value "a"
2 myMap.put("A", "a");
3
4 // add a pair for the key "A" with value "b"
5 myMap.put("A", "b");
6
7 // check for the key "A"
8 if(myMap.containsKey("A")){
9     System.out.println("Key is already there!");
10 }
11 else{
12     System.out.println("Key isn't set yet!");
13 }
```

**5.30** I don't get the question.

### Exercise 2

*For what kind of lookups are maps the ideal collections?*

Maps are ideal for paired information like a phonebook or similar.

### 5.5.2 Chapter 5.8 - Dividing Strings

#### Exercise 3

*Solve the exercises 5.35 and 5.37*

**5.35** The method `split()` is used to separate a string into different strings. The method is taking one parameter which is defining the separator. See the following example.

```
1 String myString = "Hello. My Name is Foo. I live in Bar."
2
3 String[] mySubStrings = myString.split(".");
```

This example above will create a new array of String with size 2 and the strings "Hello", "My Name is Foo", "I live in Bar".

**5.36** If you want to split a string at ":" then give that as parameter to the split method.

**5.37** If you split a string in pieces and return them to an HashSet, then you will have every string only once in that HashSet. If you return it to an ArrayList you'll get the whole string there and it's indexed, so you can only search by iteration.

### 5.5.3 Chapter 5.10 - Writing class documentation

#### Exercise 4

*Solve the exercises 5.46 to 5.48*

**5.46** To generate documentation for Java code you can use the command line tool `javadoc`. If we want to document a single file (class), we can run the following command

```
1 $ cd /path/to/source
2 $ javadoc -d myDocumentation File.java
```

This command will make a new directory named `myDocumentation` and there it places a bunch of HTML files including the documentation for the given file. If you want to document all Java files in that directory, you can change the command to

```
1 $ javadoc -d myDocumentation *.java
```

**5.47** Some javadoc key symbols from the TechSupport project are

- `@author`
- `@version`
- `@return`

Not all of these key symbols do influence the formatting of the documentation but `@return` does (see the documentation for details).

**5.48** There is a nice table for all tags (key symbols) on wikipedia, see <http://de.wikipedia.org/w/index.php?title=Javadoc&oldid=124140284>

### Exercise 5

*Comment one of your own projects with javadoc.*

../workspace/Snippets/src/recursions/Main.java

```

1 package recursions;
2
3 /**
4  * This is a test project to write a recursive method.
5  * @author ninux
6  * @version 1.0
7  */
8 public class Main
9 {
10     /**
11      * The main method is defining a fixed array of type integer
12      * with the values {1,2,3,4,5}. This array will be printed
13      * reverse with the method reverse
14      * @param args
15      */
16     public static void main(String[] args)
17     {
18         int[] myRow = new int[] {1,2,3,4,5};
19         reverse(myRow, (myRow.length-1));
20     }
21
22     /**
23      * This method is taking an array and prints it in reverse order.
24      * The index specifies the first element of the array that shall
25      * be printed. The common value for the index is (array.length - 1).
26      * @param array
27      * @param index
28      */
29     public static void reverse(int[] array, int index) {
30         System.out.println(array[index]);
31         if(index > 0) {
32             reverse(array, index-1);
33         }
34     }
35 }

```

### 5.5.4 Chapter 5.13 - Class variables and constants

#### Exercise 6

*Solve the exercise 5.68*

- A public variable that is used to measure tolerance, with the value 0.001.

```

1 public static final double TOLERANCE = 0.001;

```

- A private variable that is used to indicate a pass mark, with the integer value of 40.

```
1 private static final int PASSMARK = 40;
```

- A public character variable that is used to indicate that the help command is 'h'.

```
1 public static final char HELP = 'h';
```

## 5.6 Selfstudy-Questions ALG2

### Exercise 7

*The following method shall be called with a actual parameter. Durign the execution the maximum height of the call-stack is 5. So how many times was the method coolMethod() called?*

```
1 public int coolMethod(int n)
2 {
3     if(n >= 2){
4         return (coolMethod(n-1) + coolMethod(n-2));
5     }
6     else{
7         return n;
8     }
9 }
```

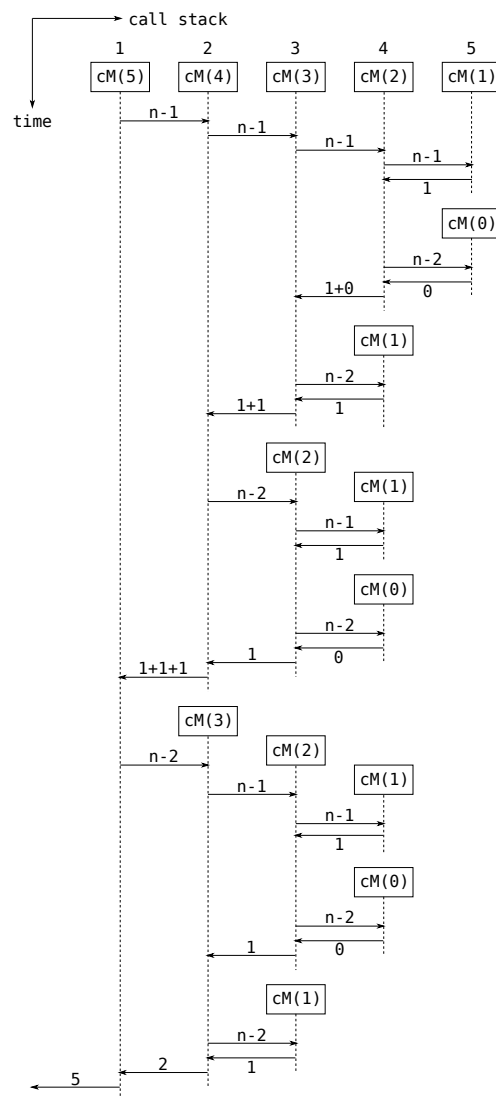


Figure 2: Graphical explanation of call stack rising.

### Exercise 8

Implement a recursive algorithm for the calculation of the faculty (see presentation ALG2, page 9). Debug you method for the faculty of 4.

../workspace/Snippets/src/faculty/Main.java

```

1 package faculty;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         System.out.println(fac(6));
8     }
9
10    public static int fac(int n)

```

```

11 {
12     if (n <= 1) {
13         return 1;
14     }
15     else {
16         return (n * fac(n - 1));
17     }
18 }
19 }

```

### Exercise 9

Implement a recursive method to print an array forwards and backwards (see presentation ALG2, pages 29 and 30).

../workspace/Snippets/src/reverse/Main.java

```

1 package reverse;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         int[] myArray = new int[] {0, 1, 2, 3, 4, 5, 6, 7, 8, 9};
8         printBackAndForth(myArray, myArray.length, 0);
9     }
10
11     public static void printBackAndForth(int[] array, int length, int index)
12     {
13         System.out.println("Forward: ");
14         printForth(array, length, index);
15         System.out.println("\nBackwards: ");
16         printBack(array, length, index);
17     }
18
19     public static void printForth(int[] array, int length, int index)
20     {
21         System.out.print(array[index] + ", ");
22
23         if (index < (length - 1)) {
24             printForth(array, length, index + 1);
25         }
26     }
27
28     public static void printBack(int[] array, int length, int index)
29     {
30         if (index == array.length) {
31             return;
32         }
33         else {
34             printBack(array, length, index + 1);
35             System.out.print(array[index] + ", ");
36         }
37     }

```

38 }

## Exercise 10

Implement a recursive method that is calculating the sum of all integer values of an array. Make a documentation with javadoc.

../workspace/Snippets/src/sum/Main.java

```


1 package sum;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         int[] myArray = new int[]{0,1,2,3,4,5,6,7,8,9};
8         System.out.println(sum(myArray, myArray.length, 0));
9     }
10
11     public static int sum(int[] array, int length, int index)
12     {
13
14         if(index < (length-1)){
15             return array[index] + sum(array, length, index+1);
16         }
17         else{
18             return array[index];
19         }
20     }
21 }

```

## Additional Exercise

Think about a algorithm that can perform a permutation on an array. Lets say for the sequence 1,2,3,4.

The idea is that we have to use a tree. The tree shows every possible path that can be used for the rearrangement of the numbers. If we start with the number 1, what are the possible paths that we can go trough? See the graphical tree in picture 3 to get an idea of it.

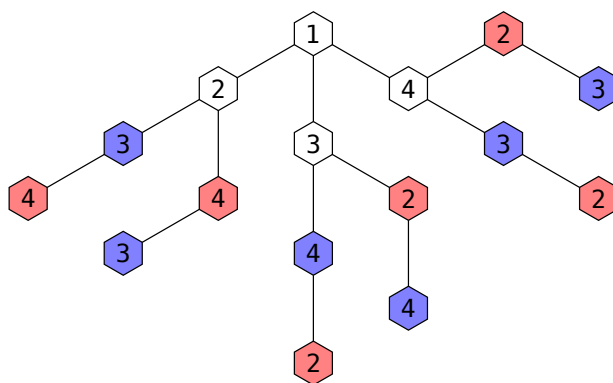

So we see, that the tricky part is at the end because the last two segments are turned around while the other are just incremented.

### 5.7 Team-Exercise

#### 5.7.1 Exercise 1

*Solve the exercise 5.71*

../workspace/StarWars/src/star/NameGenerator.java

```
1 package star;
2
3 public class NameGenerator
4 {
5
6     public NameGenerator()
7     {
8
9     }
10
11     /**
12      * This method returns a name that is created by the
13      * Star Wars algorithm.
14      * @param yourLastName
15      * @param yourFirstName
16      * @param yourMothersMaidenName
17      * @param yourHomeTownName
18      * @return
19      */
20     public String generateStarWarsName( String yourLastName,
21                                         String yourFirstName,
22                                         String yourMothersMaidenName,
23                                         String yourHomeTownName)
24     {
25         String newFirstName;
26         String newLastName;
27
28         /**
29          * The new first name is built by the first three letters
30          * of the last name and the first two letters of the
31          * first name.
32          */
33         newFirstName = yourLastName.substring(0,3) +
34                       yourFirstName.substring(0,2);
35
36         /**
37          * The new last name is built by the first two letters of
38          * the mothers maiden name and the first three letters of
39          * the home town.
40          */
41         newLastName = yourMothersMaidenName.substring(0, 2) +
42                     yourHomeTownName.substring(0,3);
43
44         /**
```



```
45     * Return the new names as full name (first and last name)
46     * separated by a whitespace.
47     */
48     return newFirstName + " " + newLastName;
49 }
50
51 }
```

../workspace/StarWars/src/star/Main.java

```
1 package star;
2
3 public class Main
4 {
5     public static void main(String[] args)
6     {
7         NameGenerator ng = new NameGenerator();
8
9         System.out.println(ng.generateStarWarsName("Nino", "Ninux",
10             "Fooman", "Bartown"));
11     }
12 }
```

## 6 Well-behaved objects

### 6.1 Selfstudy-Questions OOP8

#### 6.1.1 Chapter 7.1 to 7.3 - Unit testing with BlueJ

##### Exercise 1

*Solve the exercises 7.1 to 7.11*

**7.1 - 7.9** Solved by testing the source code.

**7.10** The source has 2 bugs. These are fixed with the following code:

Bugfix 1 in SalesItem.java

```
1  private boolean ratingInvalid(int rating)
2  {
3      return rating <= 0 || rating > 5;
4  }
```

Bugfix 2 in SalesItem.java

```
1  public Comment findMostHelpfulComment()
2  {
3      Iterator<Comment> it = comments.iterator();
4      if (comments.size() > 0) {
5          Comment best = it.next();
6          while (it.hasNext())
7          {
8              Comment current = it.next();
9              if (current.getVoteCount() > best.getVoteCount()) {
10                 best = current;
11             }
12         }
13         return best;
14     } else {
15         return new Comment("System", "no comment yet", 3);
16     }
17 }
```

#### 6.1.2 Chapter 7.4 - Test automation

##### Exercise 2

*Solve the exercises 7.12 to 7.19*

**7.15**

../workspace/OnlineShopJUnit/src/shop/SalesItemTest.java

```
1  /**
2   * Test that the same user can't give multiple comments on the same
3   * product.
4   */
5  @Test
6  public void testDoubleComment()
```

```
6      {
7          SalesItem salesItem1 = new SalesItem("test name", 1000);
8          assertEquals(true, salesItem1.addComment("Max Power", "a", 1));
9          assertEquals(false, salesItem1.addComment("Max Power", "b", 5));
10     }
```

**7.16**

../workspace/OnlineShopJUnit/src/shop/SalesItemTest.java

```
1      /**
2       * Test that a rating out of the specified range isn't possible.
3       */
4      @Test
5      public void testOutOfBoundaryRating()
6      {
7          SalesItem salesItem1 = new SalesItem("test name", 1000);
8          assertEquals(false, salesItem1.addComment("Max Power", "a", 0));
9          assertEquals(false, salesItem1.addComment("Homer Jay", "b", 6));
10     }
```

**7.18**

../workspace/OnlineShopJUnit/src/shop/CommentTest.java

```
1      /**
2       * Test that the given information on a comment is stored
3       * correctly.
4       */
5      @Test
6      public void testCommentCreation()
7      {
8          Comment comment1 = new Comment("Max Power", "a", 1);
9          assertEquals("Max Power", comment1.getAuthor());
10         assertEquals(1, comment1.getRating());
11     }
```

### 6.1.3 Chapter 7.5 to 7.6 - Commenting and style

#### Exercise 3

*Solve the exercises 7.21 to 7.23*

### 6.1.4 Chapter 7.7 - Manual walkthroughs

#### Exercise 4

*Solve the exercises 7.24 to 7.27*

### 6.1.5 Chapter 7.8 - Print statements

#### Exercise 5

*Solve the exercises 7.30 to 7.33*

### 6.1.6 Chapter 7.9 - Debuggers

#### Exercise 6

*Solve the exercise 7.34*

### 6.1.7 Chapter 7.10 - Choosing a debugging strategy

#### Exercise 7

*Solve the exercise 7.36*

### 6.1.8 Chapter 7.11 - Putting the techniques into practice

#### Exercise 8 (optional)

*Solve the exercise 7.37*

#### Exercise 9

*Write a test specification for a program that calculates the volume  $V$  of a cuboid with the sides  $a, b, c$ . Use the following table.*

Case	Case No.	Input	Output	Passed
normal	1	$0 < a, b, c < \text{INT\_MAX\_VALUE}$	$> 0$	yes
normal	2	$0 \leq a, b, c < \text{INT\_MAX\_VALUE}$	$\geq 0$	yes
normal	3			
acceptable	4			
acceptable	5			
acceptable	6			
illegal	7			
illegal	8			
illegal	9			

Table 1: Test specification for volume calculation program.

## 6.2 Selfstudy-Questions ALG3

#### Exercise 10

*Implement a pseudo code for the "towers of hanoi" in Java.*

../workspace/HanoiTowers/src/towers/Main.java

```

1 package towers;
2
3 public class Main{
4     public static void main(String[] args) {
5         moveDisk("A", "B", "C", 3);
6     }
7
8     public static void moveDisk(String from, String via, String to, int n){
9         if(n==1) {
10             System.out.println("Move Disk from " + from + " to " + to);
11         } else {
12             moveDisk(from, to, via, n-1);

```

```
13         moveDisk(from, "", to, 1);
14         moveDisk(via, from, to, n-1);
15     }
16 }
17 }
```

### Exercise 11

*Observe the open methods that are frozen on the stack. Use the Call Graph from the BlueJ Debugger for observation.*

## 7 Designing classes

### 7.1 Selfstudy-Questions OOP9

#### 7.1.1 Chapter 6.1 to 6.4 - Code duplication

##### Exercise 1

*Solve the exercises 6.1, 6.2, 6.4 and 6.5*

##### Exercise 2

*What is coupling and how should it be?*

Coupling describes interconnectedness of classes. This means, that the coupling is a description for the interface of classes or the connection between classes. A good source code has a loose or weak coupling which means that the implementation of a class can be changed easily without affecting the application.

##### Exercise 3

*What is cohesion and how should it be?*

Cohesion is a term that describes how well a unit (package, class, method) maps to a logical task or entity. Ideally, one unit of code should be responsible for one cohesive task (one code – one job).

##### Exercise 4

*What's the problem with code duplication?*

The problem at code duplication is that the maintenance of an application is going to be ineffective and buggy. Especially the danger of changing not all of the duplicates can lead to painful bugs that are hard to find. After all code duplication is also just a sign for bad design, so it has to be avoided.

##### Exercise 5

*Code duplication is a symptom for what? Bad coupling or bad cohesion?*

Code duplication is usually a sign of bad cohesion because one job should be done by one code.

#### 7.1.2 Chapter 6.5 to 6.11 - Cohesion

##### Exercise 6

*Solve the exercises 6.6 to 6.8, 6.11, 6.14, 6.16 and 6.17*

##### Exercise 7

*The Room class is now managing neighboring rooms with a HashMap. To do so the program had to be changed at a lot of different places. Is this an evidence of strong or weak coupling?*

This is a clear evidence of tight or strong coupling.

##### Exercise 8

*What is information hiding or encapsulation and what's the effect of this fundamental principle?*

Information hiding or encapsulation is a fundamental principle of good class design. In short it says that a user of a class should only know that much that is needed to use it. This means a class should only provide information about what it does and not how it does that. The effect of this principle is that we can change the implementation of something without affecting the rest of the application, so it supports automatically a weak or loose coupling.

### Exercise 9

*What's the meaning of the concept "localizing change"?*

The concept of "localizing change" says that it should be clear where to make changes by improving the code. Ideally, only a single class needs to be changed to make a modification. This is primarily achieved by following the general design rules such as responsibility-driven design, loose coupling and strong cohesion.

### Exercise 10

*What's the difference between explicit and implicit coupling?*

Explicit coupling is a coupling that is obvious, not just for a human reader of the code but also for the compiler. Implicit coupling is the worst kind of a strong coupling because it is not obvious, typically neither for a human reader nor the compiler. This is often a symptom of not following the rule of responsibility-driven design.

### Exercise 11

*Do cohesive methods make also sense?*

Of course they make sense. It's just an other level of code base but the rule is the same either it's a method, class, package or application. The cohesion should be as strong as possible in the following manner:

- method – very strong
- class – less stronger than a method
- package – less stronger than a class
- application – less stronger than a package

### Exercise 12

*What are the two most powerful benefits of strong cohesion?*

The two most powerful benefits of strong cohesion are

- readability – easy to understand and to maintain
- reuse – one particular job can be used more than once

## 7.1.3 Chapter 6.12 to 6.14 - Design guidelines

### Exercise 13

*Solve the exercise 6.27*

### Exercise 14

*What's the reason for refactoring?*

The reasons for refactoring are mostly changed functionality and requirements. The refactoring itself is a process of rethinking and redesigning existing classes and methods.

### Exercise 15

*Describe the method or the steps at a refactoring.*

The refactoring follows usually the following steps:

1. Change the internal structure but don't add new functionality to the code. After the restructuration everything should work as before. Therefore the previous test should be ran again.
2. Since the restructuration is done and the tests gone well, the new functionalities can be implemented. Of course the tests should be ran again to prove the operation of the new developed code.

## Exercise 16

*At which point is a method too long?*

A method is too long if the cohesion is not strong. In such a case we should consider to make helper methods to outsource details from a method. An other unwritten rule is to check the indentations. If the code has an indentation degree far more than three, you should probably change your code.

Simplified one could say "a method is too long if it does more than one logical task".

## Exercise 17

*At which point is a class too complex?*

A class is too complex if there are things that don't belong there following the responsibility-driven design rule. This leads to a creation of a new class or making the changes into an other class.

Simplified one could say "a class is too complex if it represents more than one logical entity".

## 7.2 Selfstudy-Questions ALG4

### Exercise 18

*Illustrate the difference between stable and instable sorting with a simple example.*

Stable sorting means that the order of same keys is preserved in the result and vice versa. See the following example:

array	$[r_0]$	$[r_1]$	$[r_2]$	$[r_3]$	$[r_4]$
unsorted	1	12 <sub>1</sub>	4	12 <sub>2</sub>	3
stable sorted	1	3	4	12 <sub>1</sub>	12 <sub>2</sub>
instable sorted	1	3	4	12 <sub>2</sub>	12 <sub>1</sub>

Table 2: Comparison of stable and unstable sorting.

### Exercise 19

*What's the effort for simple or direct sorting algorithms?*

Simple or direct sorting algorithms have an effort of  $O(n^2)$

### Exercise 20

*What's the effort for higher sorting algorithms?*

Higher sorting algorithms have an effort of  $O(n \cdot \log(n))$

### Exercise 21

*Enumerate three simple or direct sorting algorithms.*

Name	type	$O$
Insertion sort	stable	$O(n^2)$
Selection sort	instable	$O(n^2)$
Shellsort	instable	$O(n^2)$
Bubble sort	stable	$O(n^2)$

Table 3: Basic sorting algorithms



### Exercise 22

Which of the sorting algorithms that we talked about in class are instable?  
See the table 3.

### Exercise 23

At the analysis of sorting algorithms it is important to know how to calculate the following sum. Solve the problem for  $x$ .

$$1 + 2 + 3 + \dots + n = \sum_{i=1}^n i = x$$

This is a limit of sequence problem which has the form

$$S_n = \sum_{k=1}^n a_k = a_1 + a_2 + a_3 + \dots + a_n$$

This can be either geometrical or arithmetical. In this case it's an arithmetical one. So it has the rule

$$S_n = n \cdot \left( a_1 + d \cdot \frac{n-1}{2} \right) = n \cdot \frac{a_1 + a_n}{2}$$

Substituting with the given values we get the solution

$$S_n = n \cdot \frac{1+n}{2}$$

The following examples shall give the prove

$$\begin{aligned} \sum_{i=1}^{n=1} &= 1 \\ \sum_{i=1}^{n=2} &= 1 + 2 = 3 \\ \sum_{i=1}^{n=3} &= 1 + 2 + 3 = 6 \\ \sum_{i=1}^{n=4} &= 1 + 2 + 3 + 4 = 10 \end{aligned}$$

So the solution of this problem is

$$\sum_{i=1}^n i = \lim_{n \rightarrow k} n \cdot \frac{1+n}{2} = \frac{1}{2}n(1+n)$$

### 7.2.1 Optional Exercises about chapter 6.13 (p. 226-231)

#### Exercise 24

What's the difference between a class type (with the keyword `class`) and a enumeration type (with the keyword `enum`)?

#### Exercise 25

Every enumeration type knows a method `values()`. What's the return value of that method?

## 8 Improving structure with inheritance

### 8.1 Selfstudy-Questions OOP10

#### 8.1.1 Chapter 8.1

##### Exercise 1

*Solve the exercise 8.1*

#### 8.1.2 Chapter 8.3

##### Exercise 2

*Solve the exercise 8.3*

#### 8.1.3 Chapter 8.4

##### Exercise 3

*Solve the exercises 8.4 and 8.7*

#### 8.1.4 Chapter 8.5

##### Exercise 4

*Solve the exercise 8.8*

#### 8.1.5 Chapter 8.6

##### Exercise 5

*Solve the exercise 8.9*

#### 8.1.6 Chapter 8.7

##### Exercise 6

*Solve the exercises 8.12 and 8.14*

#### 8.1.7 Chapter 8.11

##### Exercise 7

*Solve the exercise 8.18*

### 8.2 Selfstudy-Questions ALG5

##### Exercise 8

*Sort the following sequence with the classic Quicksort algorithm (according to the implementation in the class Quicksort.java on ILIAS). Write down the steps and results in between.*

Step	$[r_0]$	$[r_1]$	$[r_2]$	$[r_3]$	$[r_4]$	$[r_5]$	$[r_6]$	$[r_7]$	$[r_8]$
Initial sequence	8	2	4	9	5	3	1	7	6

Table 4: Quicksort example

### Exercise 9

*Check your results from exercise 8 by implementing a console output for the given algorithm.*

### Exercise 10

*When would you prefer an other sorting algorithm over the Quicksort algorithm? Define two different scenarios and explain your answer.*

### Exercise 11

*Sort the following sequence with the Mergesort algorithm (according to the implementation in Java, see Page 36). Write down the steps and results in between.*

Step	$[r_0]$	$[r_1]$	$[r_2]$	$[r_3]$	$[r_4]$	$[r_5]$	$[r_6]$	$[r_7]$	$[r_8]$
Initial sequence	8	2	4	9	5	3	1	7	6

Table 5: Mergesort example

## Glossary

### A

#### abstraction

Abstraction describes the ability to ignore details and focus attention on a higher level of a problem. As an example think about an car as a Parking-Boy. You would ignore how many seats the car has, but not how big it is, because it's relevant for your task. 75

#### access modifier

An access modifier defines the visibility of the declared field, constructor or method. There are only four of them in Java: **private** (visible only from inside the same class), nothing specified aka. default (visible inside the same package), **protected** (visible from inside the same package and subclasses) and **public** (visible from everywhere). 75, 76

#### accessor

An accessor or accessor method is a method that provides access to information about an object's state (get-methods). 75

#### agile

Agile or agile software development is a methodology in software development. In short it says that only the very next step in the project is planned. 75

#### array

An array is a special type of collection that can store a fixed number of items. These items have to be of the same data type. 75

#### assignment

An assignment (statement) is a directive to assign a value into a variable, for example `speed = newSpeed;` is an assignment. 75

### B

#### blackbox testing

Blackbox testing is a testmethod in software development. Using this method, the test is only observing the in- and output of the software that is been tested. The inner occurrences of the tested software are not observed (see whitebox testing for inner observation). 75, 78, 79

### body

A body is a part of an method. It is the part that is bordered by the curly braces. The whole content between these braces is called body (see header for contrast). 75

#### boolean expressions

A boolean expression is an expression that has only two possible values: **true** or **false**. They are often controlling conditional statements. For example an **if**(a<b) can only return a **true** or **false**. 75

### C

#### class

A class describes the kind of an object. This is done by giving instance variables and methods. The objects represents individual instantiations of the class. 75

#### class variable

In Java a class can also have a field in contrast to fields that belong to each and every object that is created. Such a field is called class variable or static variable and exists only once for all instances of that class. 75, 78

#### code coverage

Code coverage is a testmethod in software development. Using this method the testspecification is made such that every possible path in the code is taken at least once. 75

#### code review

Code review or code inspection is a systematic examination of source code. Reviews are done in various forms such as pair programming, informal walkthroughs, and formal inspections. Usually a code review is done by a person that hadn't developed the code. This is rising the chance to find overlooked mistakes in the development phase of the code. 75

#### collection

A collection can store an arbitrary number of other objects. Common variants for collections in Java are the ArrayList-Objects and arrays. 75

#### conditional statement

A conditional statement takes one of two possible actions based upon the result of a test. For example **if**(a<b) ... **else** ... is a typical conditional statement. 75

### constructor

A constructor is a special method in a class which is responsible to initialize objects properly. In difference to usual methods it has no return value and is only used once. 75

## D

### debugger

A debugger is a software tool used by programmers to do a examination of their own code. It allows usually a step by step examination with and without breakpoints and supports the view on variables and other data during the procedure. Debuggers can be used standalone or inplemented in a so called IDE (Integrated Development Environment) like eclipse, NetBeans or BlueJ. 75

### documentation

Documentation in programming is very important and nobody can achieve success in programming without a good use of documentation. In Java there are some conventions on documentation but in general the following rule is the most important: Write documentation (comments) so that you explain what something does but not how it does it. This is an important aspect of desing pattern and strategy (see information hiding). Java has a tool named javadoc that is converting source comments into a HTML formatted documentation. 75

## E

### error

An error in software can be of different kind, in general there are three types: Syntax error (spelling), semantic error (meaning), logic error (operational). An error is often called a bug. 75

## F

### field

Fields store data for an object. Fields are also known as instance or member variables. 75

## H

### header

A header is a part of a method. It is the part that is not only including the signature

but the whole definition. Example: **public int** getAge(String name) is the header whereas getAge(String ) is the signature. 75

## I

### immutability

In Java the expression "immutable" is mostly used to describe an object. It sais that the objects state or contents cannot be changed once it's created. A common example in Java are String object which are always immutable. So in short this means that a immutable object is a unchangable or fixed object. 75

### implementation

An implementation is a source code that is defining something like a class or method. Takling about methods you could say something like "this is the implementation of the method XY" pointing to a source code. The implementation is a recipe how something is actually done (recipe is a good analogy to source code). 75

### information hiding

Information hiding is a principle that states that internal details of an implementation should be hidden from the user of it. This shall ensure better modularization and support abstraction. In Java this is done with the use of an access modifier like **private** or **protected**. 75, 76

### instance

An instance is a realisation of a class to a real object, so instance is a synonym to object. 75

### integration test

The integration test is a testmethod in software development. Using this testmethod multiple software components are tested together (for example multiple calsses form a package). Other testmethods are the unit test and the system test. 75, 78

### interface

An interface in Java is used to agree or declare signatures of methods that are shared over different classes. The interface is declaring which methods exist or have to exist. It can be used without showing the implementation. 75

### iterator

An iterator is an object that provides functionality to iterate over all elements of a collection. 75

## L

### library

In Java a library is a importable collection of classes. These classes are arranged in packages. A known library is the so called Java standard class library, which contains very useful classes for almost all Java programs. 75

### library documentation

The Java class library documentation shows details about all classes in the library. Using this documentation is essential in order to make good use of the library classes. 75

### lifetime

The lifetime of a variable describes how long the variable continues to exist before it is destroyed. 75

### local variable

A local variable is a variable declared and used within a single method. Its scope and lifetime are limited to that specific method they're defined in. A special variant of local variables are actual parameters. 75

### loop

A loop is a functionality that is given by the elementary functions of a programming language, like in Java. They are used to repeat a sequence of expressions (a body) for a number of times, coupled to one or more conditions. In Java there are three essential types of loops: The **while**, **do while** and **for** loop. There are also other types of loops like the "foreach" loop. 75

## M

### map

A map is a collection type. It stores key-value pairs as entries and it stores each individual element (key) at most once. It does not maintain any specific order. A good use for maps is a phonebook, where every key (person, name) is only once in the book. 75

### method

A method is a action (function) of a specific class that can be invoked on an object of the given class. Objects usually do something when a method is invoked, so a good keyword to it would be *what*, as most methods are named by a verb. The methods give the objects their own particular and characteristic behavior. 75

### modularization

Modularization is the process of dividing a whole into well-defined parts that can be build and examined separately and that interact in well defined ways. For example a car as a whole entity can be divided into modules such as the engine, seats, radio, wheels and so on. 75

### mutator

A mutator or mutator method is a method that provides the ability to change fields of an object. For example `changeSize(int newSize)` is a typical mutator method. 75

## N

### non-primitive types

Java has eight primitive types ( **boolean**, **char**, **byte**, **short**, **int**, **long**, **float**, **double**) and gives the programmer the ability to define own types of a more complex manner. For example a class defines a new type with the name of the class. Variables that have a class as their type can store objects of that class. A popular example of such a type is `String` which in fact is a class. 75

### null

**null** is a reserved word in Java (and many other programming languages) that indicates that a reference is not referencing to something, that it is showing to **null**. In Java it's used to mean "no object" because a reference variable should point to a object, if it's not so it's containing the reference **null**. Also a field that has not been explicitly set will contain **null** if it's not defined by an other default value (like 0 for variables of type **int**). 75

## O

### object

An object is a instance of a class. 75

### object reference

Variables of an object type (non-primitive type) always store references to objects. 75

### overloading

In Java sources, classes may contain multiple constructors, methods and variables (variable vs. parameter) with the same name. This is called overloading. In Java there is a keyword **this** to specify the variables so that the compiler can differ them plural. 75

## P

### parameter

Addition information (data) given to a method or object is called parameter. 75

### primitive types

The primitive types in Java are the non-object types **boolean**, **char**, **byte**, **short**, **int**, **long**, **float**, **double**. An important characteristic to primitive-types is, that they don't have methods. 75

## R

### random number

Real or pure random numbers in computer programming are not that easy to implement, since computers operate in a well defined and deterministic way which makes them highly predictable and that way quite the opposite of everything random. A common but not equivalent alternative are so called pseudo-random numbers. These numbers are calculated by special algorithms that try to give random numbers. 75

## S

### scope

The scope of a variable defines the section of source code from which the variable can be accessed. 75

### set

A set is a collection type. It stores each individual element at most once. It does not maintain any specific order. A good use for a set is to collect all used words in a string (sentence, page, book), where you want to have every word only once. 75

### signature

The signature of a method is the part that identifies it to the compiler. For example the signature of **public** `setSpeed(int newSpeed, int newTolerance)` is not the whole head of the method but the name `setSpeed` and the list of parameter-types **int** ..., **int** .... 75

### state

A object or its status is represented by his state. The state is represented by the values in the fields (instance variables). 75

### static variable

See class variable. 75

### system test

A system test is a testmethod in software development. Using this testmethod a complete system is tested with all components. Most of these tests are done by blackbox testing. 75, 78

## T

### type

The type defines the kind of data or value (for example to a parameter, return value (see data types) or a variable. 75

## U

### unit test

Unit tests are a testmethod in software development. Using this test only a specific software part is tested completely isolated from other software components of the same project (for example a single class is tested). Other testmethods are the integration test and the system test. 75, 76

## V

### verification

Verification or formal verification is a act of proving or disproving an software with formal methods or mathematics. This is in general very complicated and therefore very uncommon for standard applications, since it is very expensive in all kind of resources.. 75

## W

### **walkthrough**

A walkthrough is a examination of source code done by at least two persons where one is the developer of the source code and leads the examination and the other is a person that was not involved in the development. Usually the code isn't examined into details by a walkthrough. 75

### **waterfall**

Waterfall or waterfall model is a sequential design process or methodology. In programming

it is declaring that a project is planned from the very beginning up to the end in sequences. 75

### **whitebox testing**

Whitebox testing is a test method in software development. Using this method, the test is observing the in- and output as well as the inner occurrences of the software that is being tested (see blackbox testing for only in- and output observation). 75