

Systems Administration-IIN3462

Lab2 Linux Essential

Index No. – ICT/23/810

Name – A.K. Nipuna Darshana

- Exercise1

Go to /var folder check the file types in that folder using following commands

$cd /var

$ls -l

What is the path of log files?

  - /var/log



- Exercise2

Create a file1.txt file, add exercise2 as text and save it. check the stat of that file

$vi file1.txt

$stat file1.txt


What is the inode number of the file1.txt?

  - 25212




- Exercise3


  - Both show the same content: My File Content, Because a soft link is only a pointer to the original file

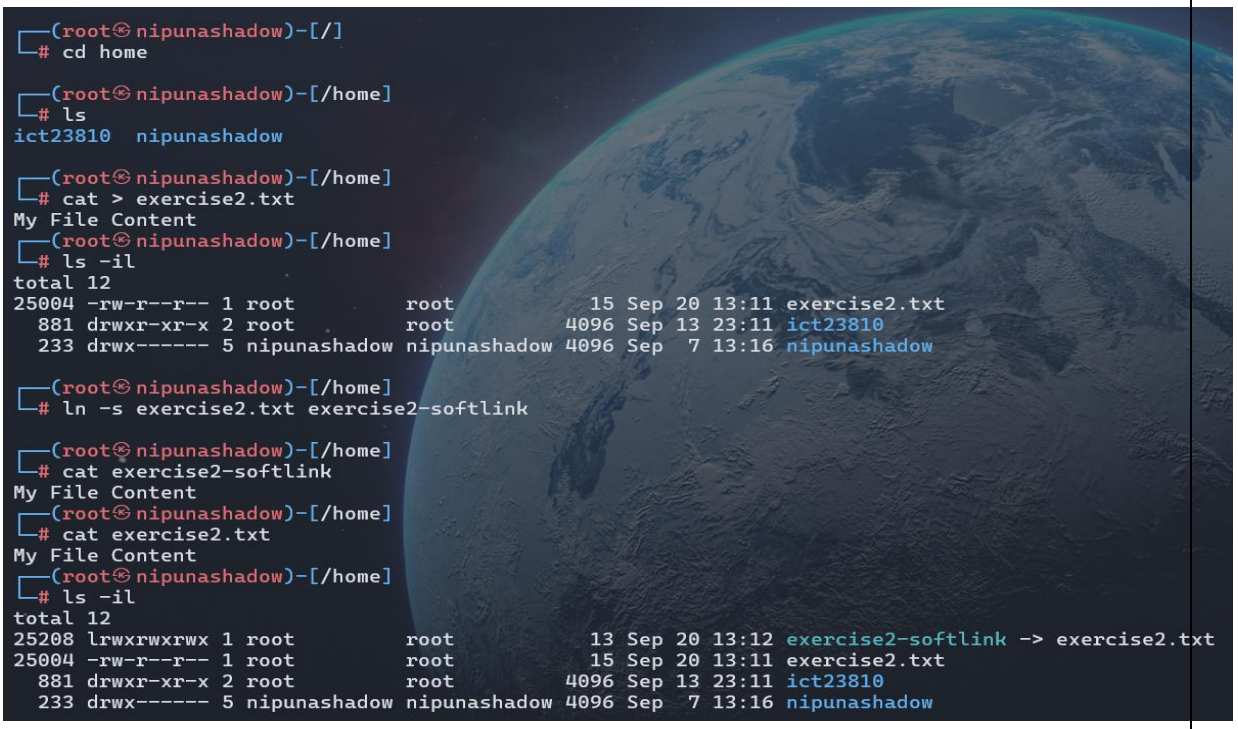


- Exercise4
  - Both files show the new text ,because of editing the soft link edits the original file it points too

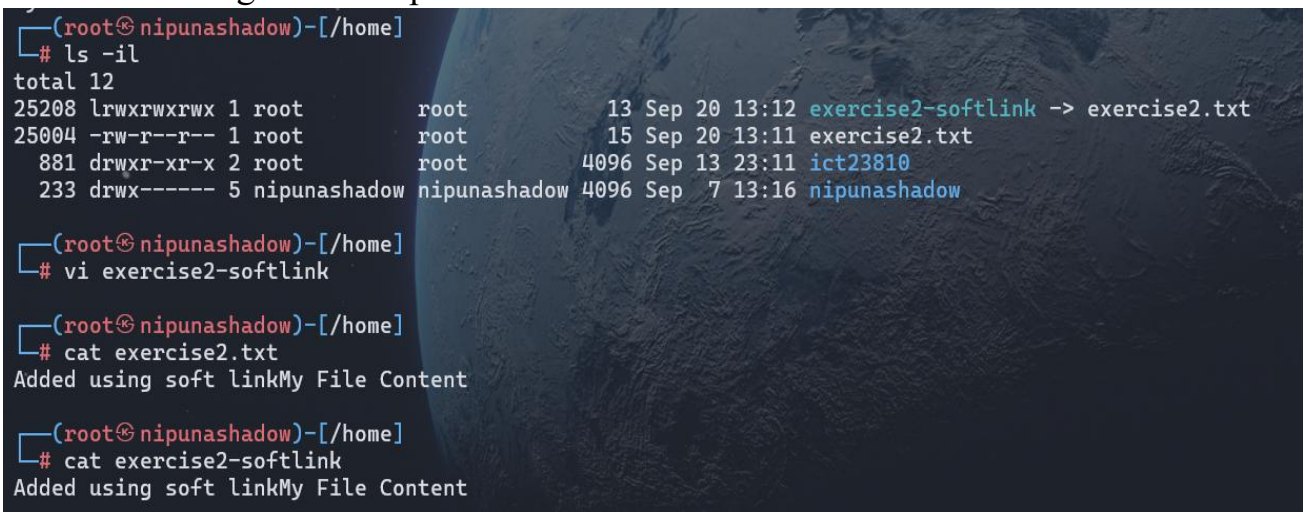


- Exercise5
  - The soft link points to exercise2.txt, but that original file has been deleted. So shown that no such file or directory

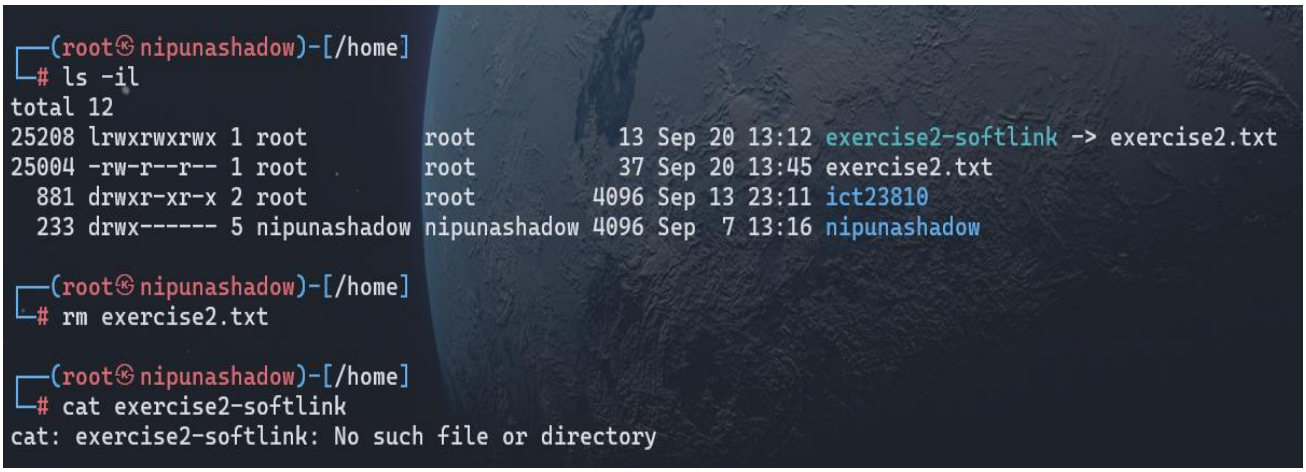


- Exercise6
  - It still works. Because of a hard link is another name for the same inode/data. Deleting one name does not delete the data

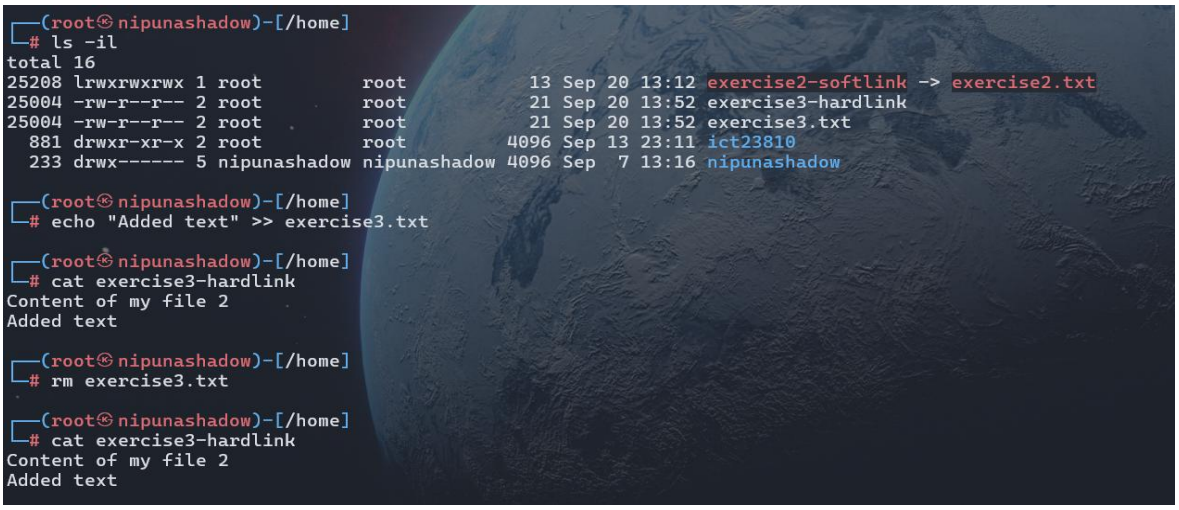


- Exercise7

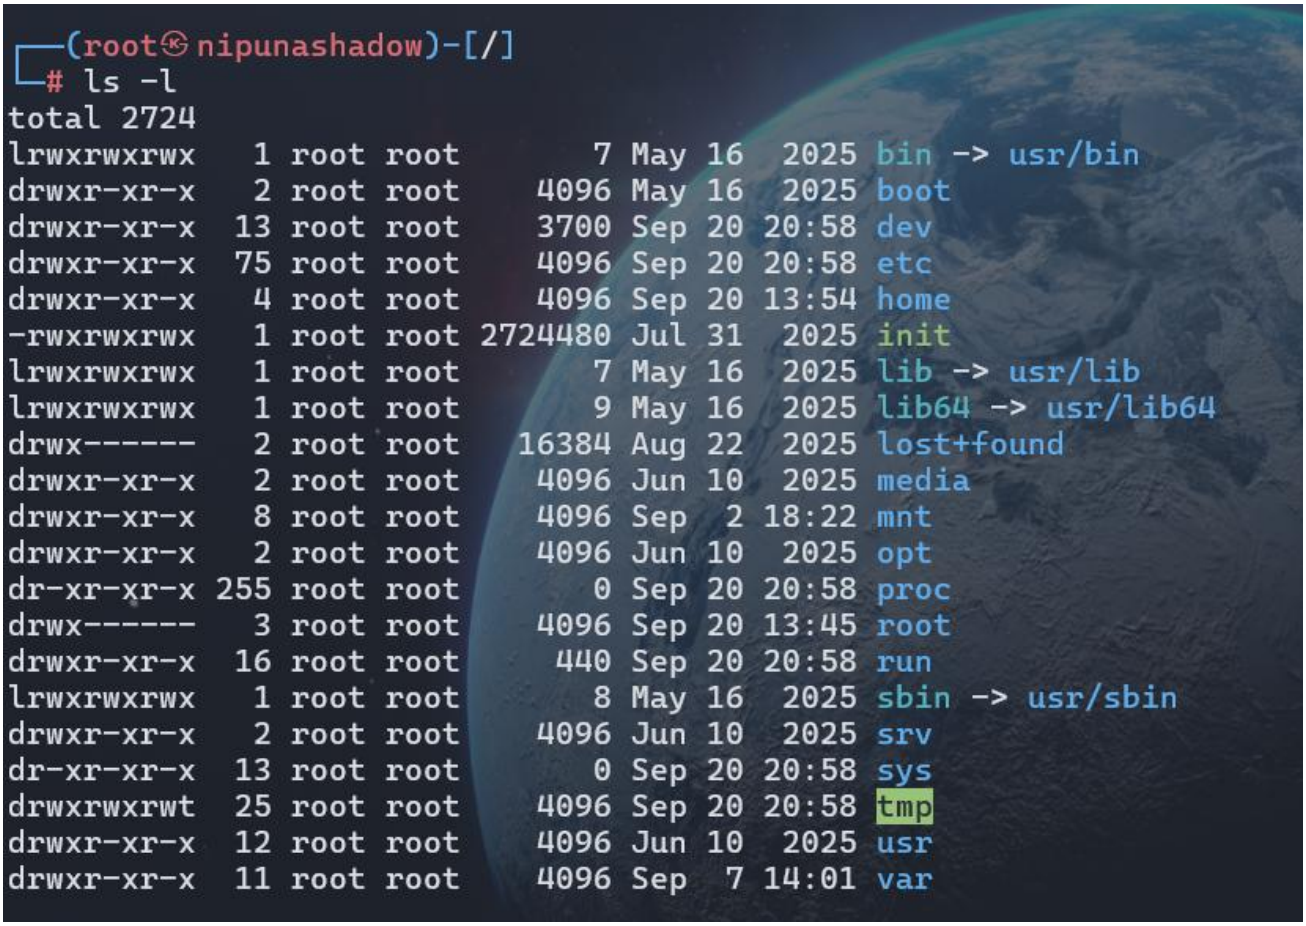


- Exercise8

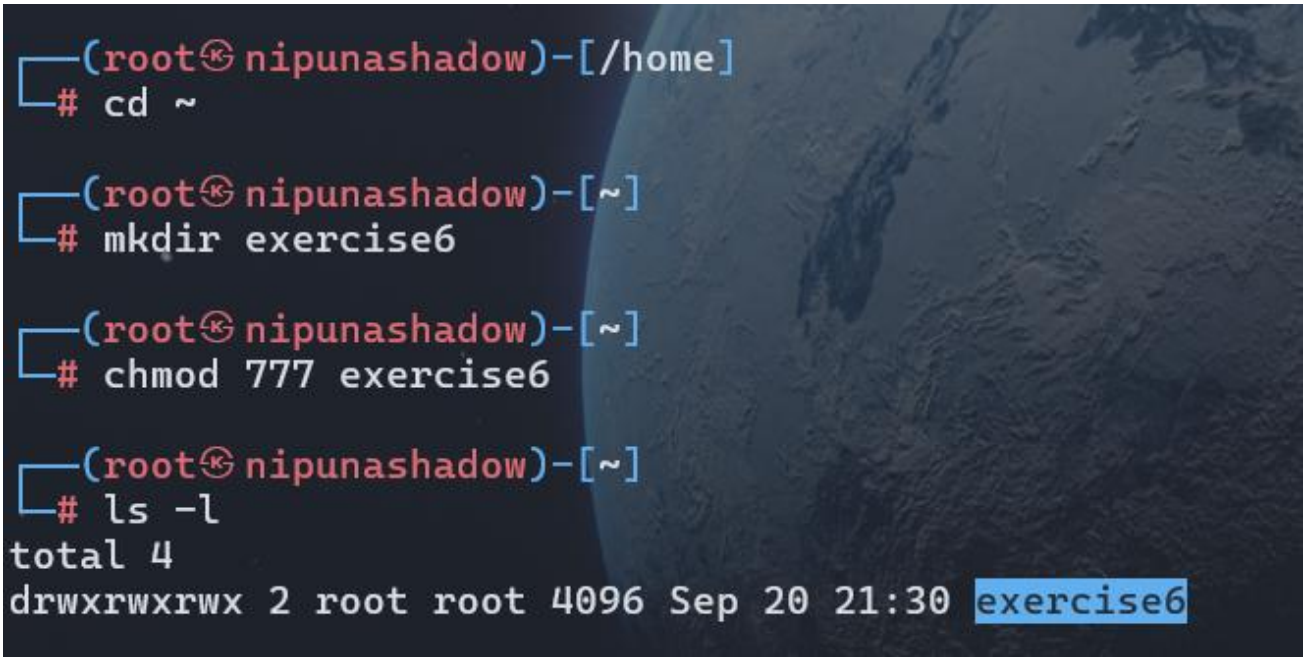

- Exercise9

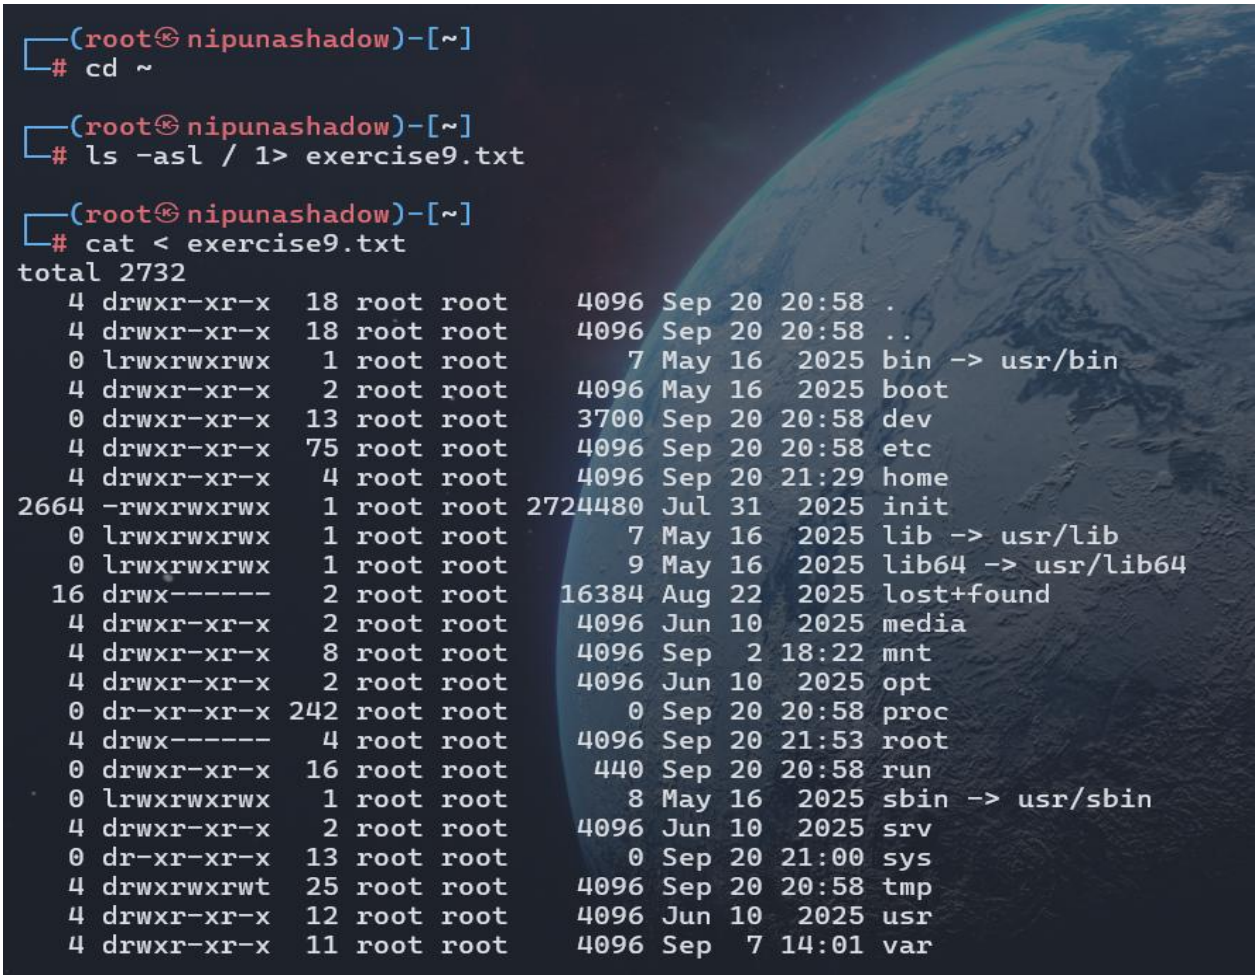

- Exercise10
  - Question: Why is exercise10.txt empty?
  - Answer: Because ls -asl / succeeds and produces no error messages.2> redirects only standard error (stderr). Since there were no errors, the file is empty.

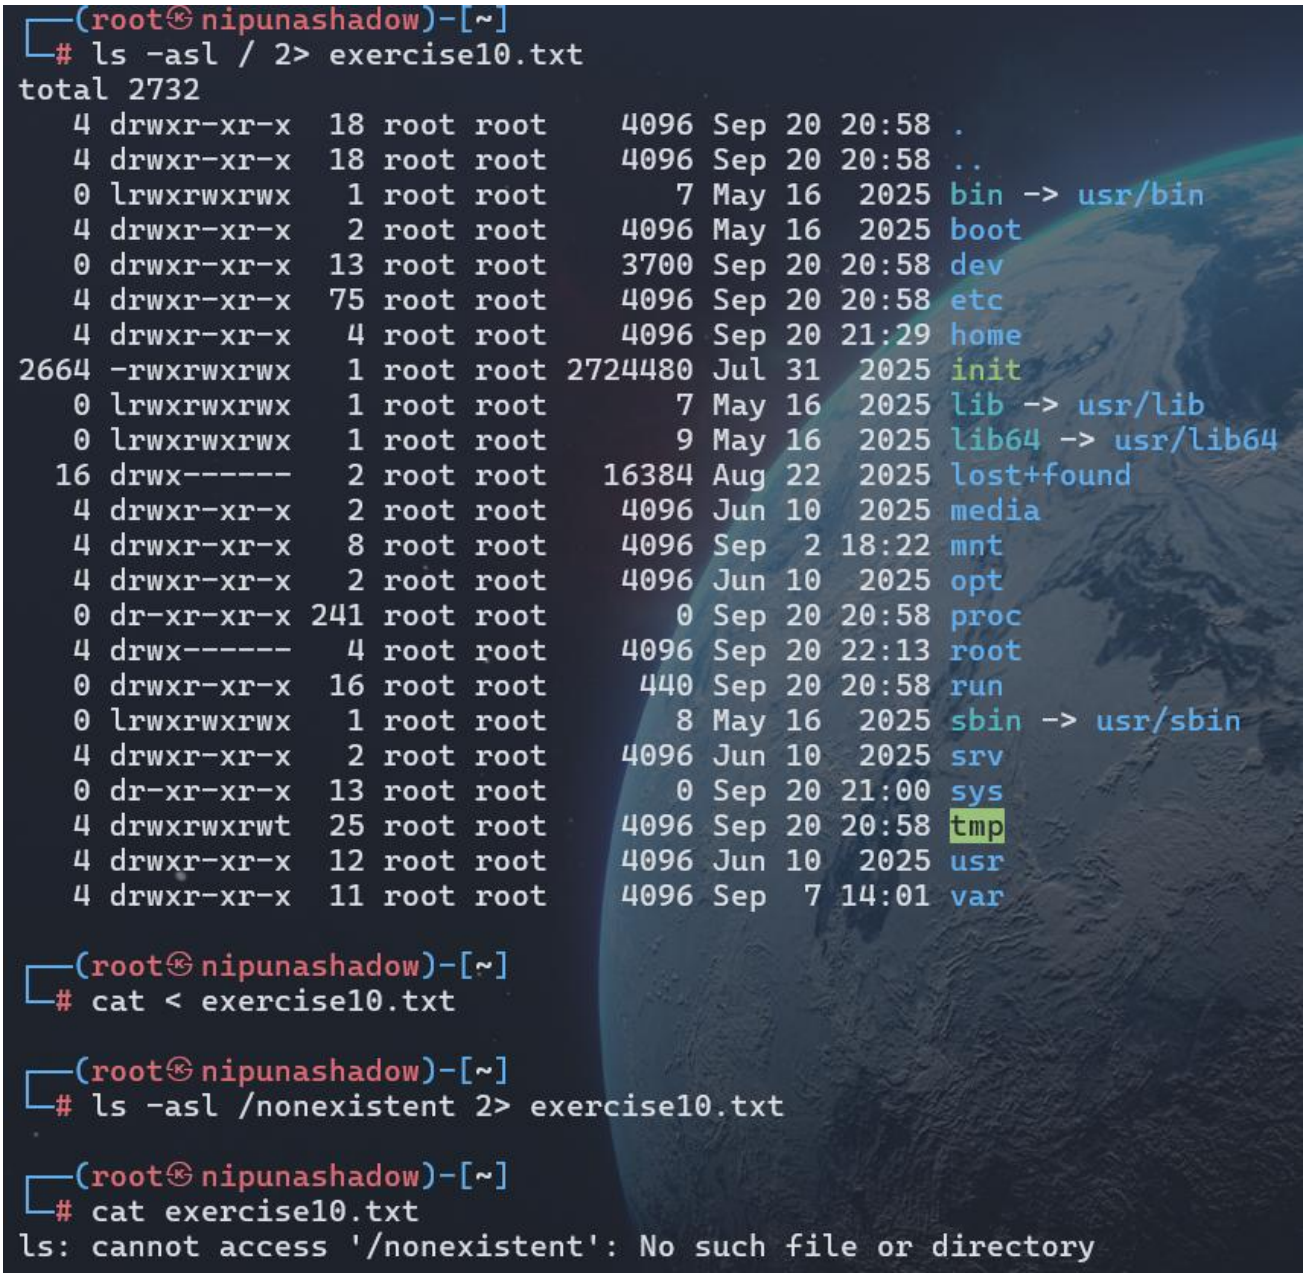

- Exercise11
  - Question: What is the usage of >>?
  - Answer: >> appends output to the end of an existing file. In contrast, > overwrites/truncates the file first.

