



Step1- Create VPC A (ap-south-1)

- Name: test-vpc-A (CIDR-10.0.0.0/16)

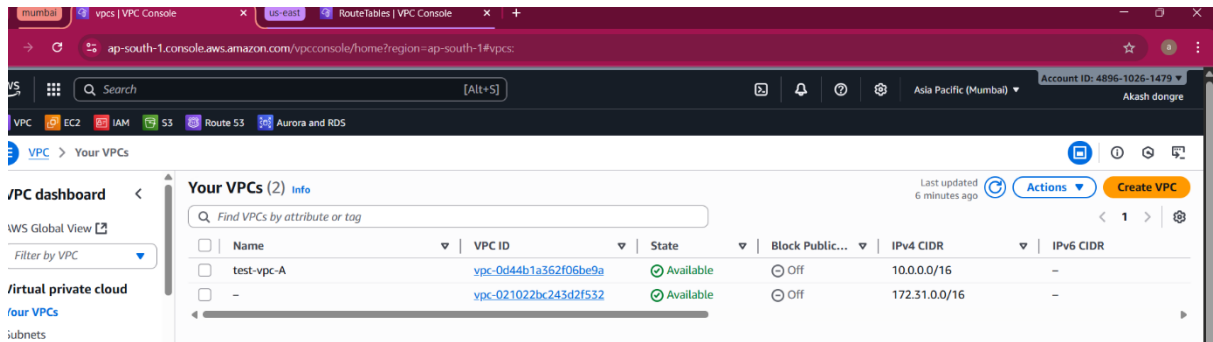


- Create subnets:
- Public subnet (ap-south-1a): 10.0.0.0/24 — enable Auto-assign IPv4.
- Private subnet (ap-south-1a): 10.0.1.0/24 — disable auto-assign.
- Create an Internet Gateway Attach to test-vpc-A.
- Create route table rtb-public-a add route 0.0.0.0/0 Target: igw-... Associate rtb-public-a with public subnet 10.0.0.0/24.
- Create route table rtb-private-a associate with private subnet 10.0.1.0/24.

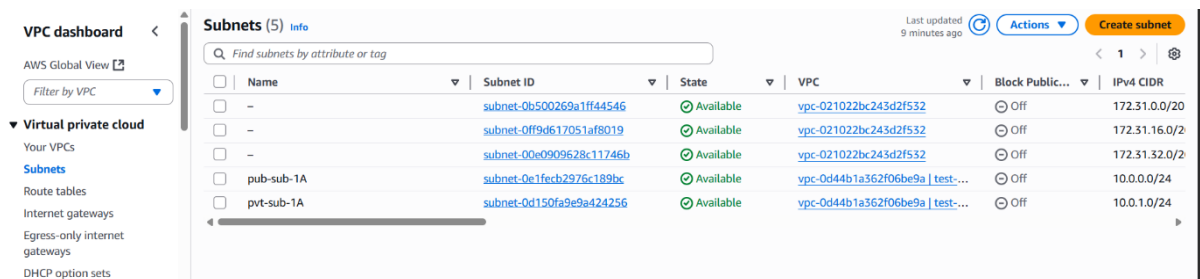


Step 2 - Create VPC B (us-east-1)

- Name: test-vpc-B (CIDR-10.1.0.0/16)


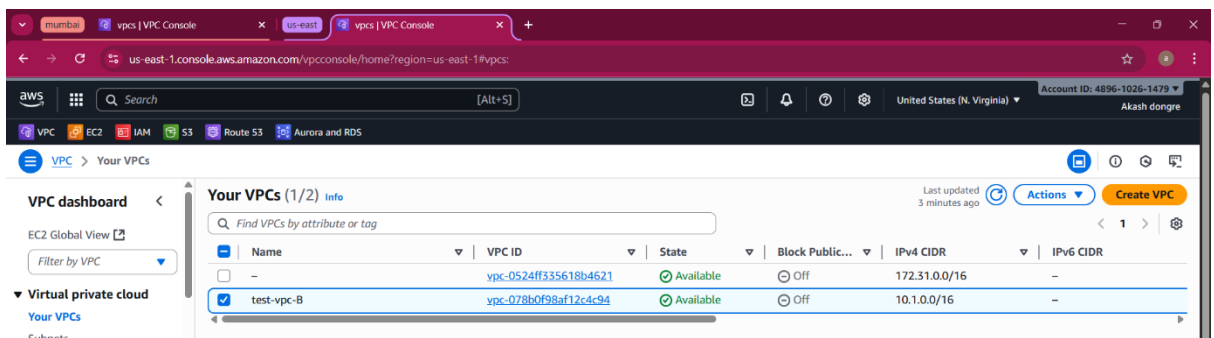


- Create subnets:
- Public subnet (ap-south-1a): 10.1.0.0/24 — enable Auto-assign IPv4.
- Private subnet (ap-south-1a): 10.1.1.0/24 — disable auto-assign.
- Create an Internet Gateway Attach to test-vpc-A.
- Create route table rtb-public-a add route 0.0.0.0/0 Target: igw-... Associate rtb-public-a with public subnet 10.1.0.0/24.
- Create route table rtb-private-a associate with private subnet 10.1.1.0/24.


Step-3-Launch public and private EC2in test-vpc-A

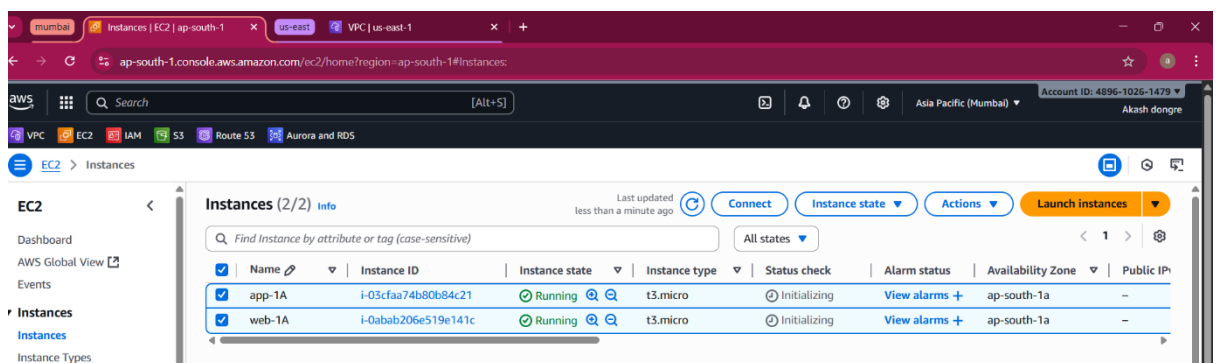

- Connect web-1A and through web-1A connect to private app-1A
-

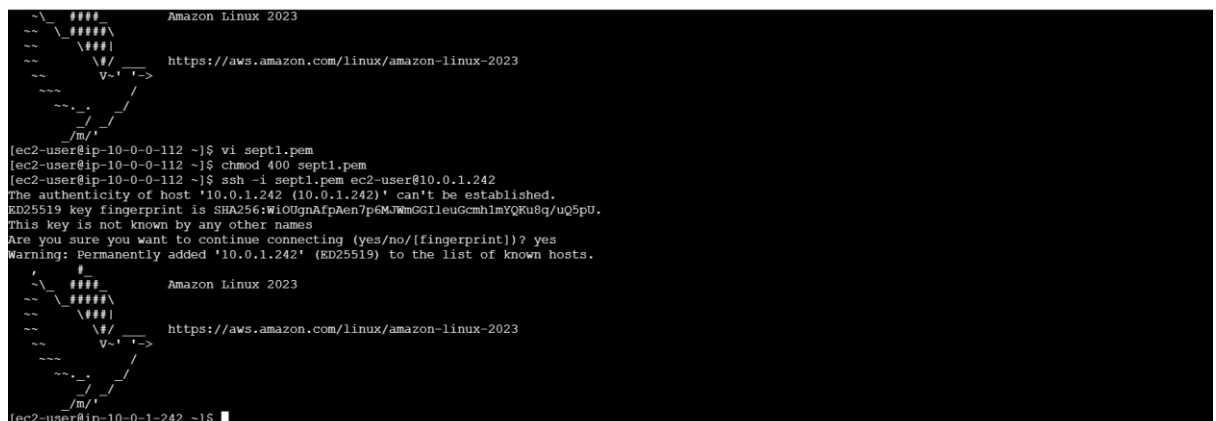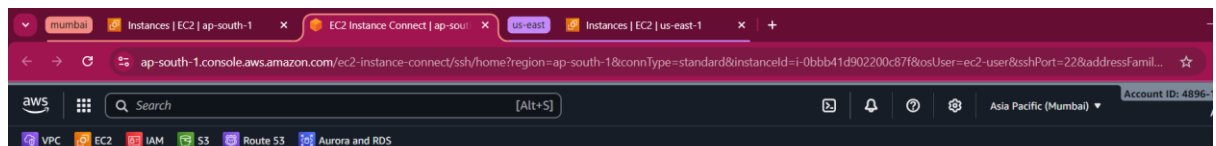


Step-4-Launch public and private EC2in test-vpc-B

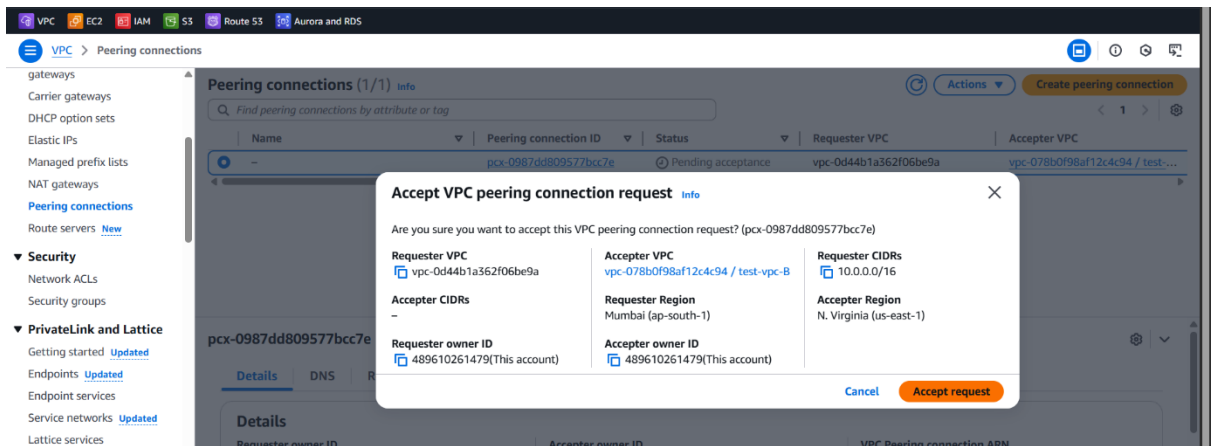

- After acceptance, status becomes Active.

Step-5 Update route tables:

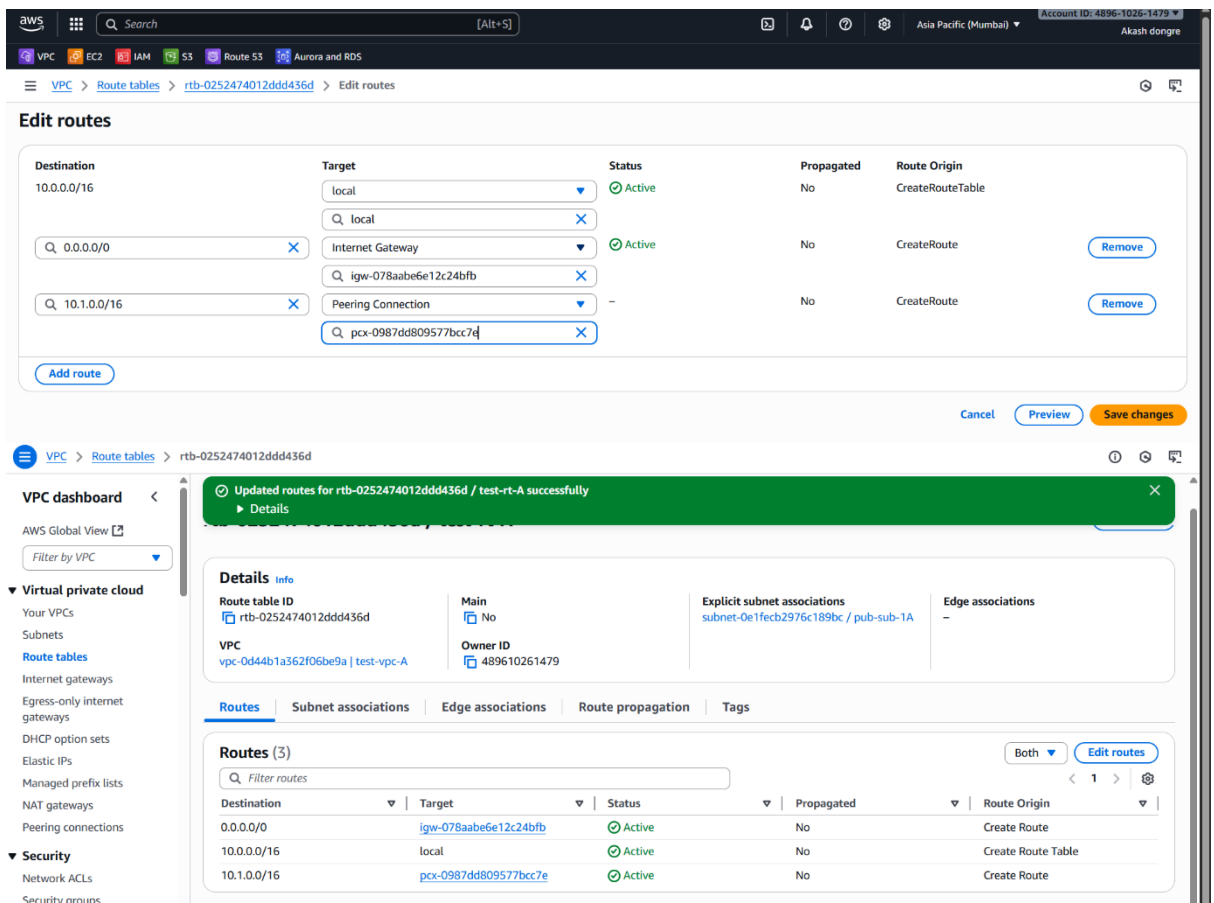

Step-6 Test connectivity:

1. From a bastion or the public EC2 in test-vpc-A, SSH into the private EC2 in test-vpc-A
2. From private EC2 in test-vpc-A, ping the private IP of the EC2 in test-vpc-B
ping 10.20.2.10

