

# Research Statement

Niranjan Balasubramanian

December 15, 2013

My research spans two broad areas: Information retrieval and Natural Language Processing. Applications like web search, information extraction, summarization and question answering provide easy access to the vast amounts information on the web. These challenging applications require computer systems to extract, understand and reason with knowledge present in natural language texts. This long-standing Artificial Intelligence (AI) vision has tremendous societal and scientific impacts. My research is motivated by this vision and aims at building large scale open domain knowledge targeted towards specific applications.

Consider a system answering a 4th grade science question: “Which is the best conductor of electricity? (A) metal fork (B) rubber boat”. The system needs access to the knowledge that i) a metal fork is made of metal, ii) metals conduct electricity, and iii) properties of a metal apply to things made of metal. It also needs to reason with this knowledge to arrive at the answer. Consider an event extraction system that is “reading” an article about an arrest event. If the system had knowledge about what a typical arrest event is – i.e., who the key actors are and what their roles are – then it can use that information to identify the salient pieces to extract from the article.

My current research focuses on developing methods for extracting such large scale open-domain knowledge and robust mechanisms for applying this knowledge. For wide applicability, I target methods that meet the following design goals: Scale to arbitrary domains, model semantics without ambiguity, and generalize to unseen contexts. I use scalable Open Information Extraction (Open IE) techniques to extract open-domain relations fashion and build representations with semantic classes to reduce ambiguity and improve generalization.

My research methods are centered on identifying the core aspects of the problem space through careful analysis of existing systems and data. For instance, in my work on event schemas, I analyzed output from a previous system and identified the key shortcomings of underspecified representations. The insights led to a better representation that vastly improved the quality of the schemas. In my work on mobile search, I conducted a systematic study of data transfer costs in cellular networks. This study identified a key energy inefficiency, which spawned a large body of research aimed at minimizing its impact.<sup>1</sup>

Here I describe some of my research and lay out my vision for future work.

**NLP [EMNLP 2013, AKBC-WEKEX 2012, 2013]**

## **Modeling Events**

Event schemas specify actors and their roles within events. They are widely used in event extraction. Figure 1 shows an example arrest schema. The key actors are an arresting agent who arrests and charges a suspect, a lawyer who represents the suspect and a judge who rules on the case. My research aims to automatically generate these schemas from text without any manual effort.

The main premise behind my work is that an accurate model of co-occurring actors and their actions can provide a basis for automatically generating schemas. The main challenge is in defining a suitable representation for the actions. My analysis of the output from a previous system showed that simpler (subject, verb) and (verb, object) pairs are underspecified and split critical context. In response, I developed an Open IE triple-based solution that uses a (Arg1, Relation,

---

<sup>1</sup>This work has more than 350 citations.

Arg2) triple that captures more specific information about the actions and reduces ambiguity. However, this reduction in ambiguity comes at a cost of increased sparsity and reduced generalization. To counter this issue, I represent arguments using semantic classes, which allows the model to generalize beyond the specific entities to new unseen contexts. The relational co-occurrence model (Rel-grams) built over this triple representation yields a form of entailment type knowledge [6] and produces schemas that are more coherent than state-of-the-art systems [7].

## Question Answering

Achieving human-level performance on tasks that require intelligence has a long tradition in the history of AI. As one of the foundational members of the Allen Institute for Artificial Intelligence, I am co-leading efforts to design and develop a QA system that is capable of passing a 4th grade science exam.<sup>2</sup> This is an exciting long-term research project that seeks to address several fundamental challenges in representation, extraction, and reasoning all in the context of a single task.

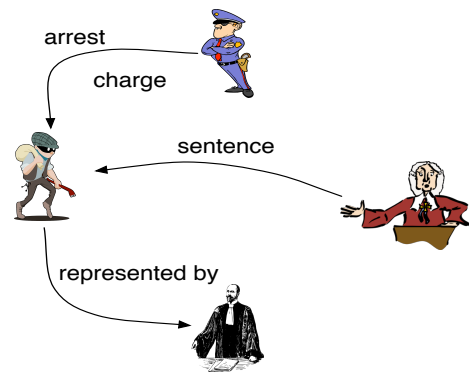


Figure 1: Arrest schema: A model for an arrest scenario including key actors, the police, the suspect, judge etc. and their roles.

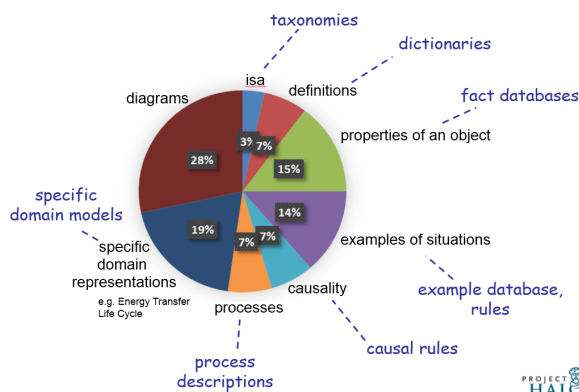


Figure 2: Knowledge Requirements for a 4th Grade Science Exam

representing domain and background knowledge (e.g., animal breathes oxygen –enables→ animal make energy), and 4) Qualitative domain models (e.g., Reasoning with predator-prey models: If population of snakes rise, what happens to the population of frogs?).

We are building a wide array of solutions to address these difficult challenges. We extract definitional and general purpose relations such as cause/effect and entity/function using hand-generated lexico-syntactic patterns that exploit strong regularities in language. We use Open IE style relations to represent information but expand them to cover nested relations. In addition, we also use facts extracted using a state-of-the-art Open IE extractor. Our preliminary experiments show about 15% improvement over simple keyword search baselines.

**Information Retrieval [SIGIR 2010, CIKM 2009, IMC 2009, CoNext 2012]**

## Combining Alternatives

The IR research community continuously develops query representations, retrieval models, and various ranking algorithms. As part of my thesis, I developed a dynamic query-dependent approach for combining different alternatives. The main premise behind my thesis is that different alternatives work well for different queries. For example, a navigation query (intent to visit a specific url) is well served by click-based features, whereas a informational query is better served by query-document match features. If we can select the best choice(s) for a given query, then we can further improve retrieval performance.

<sup>2</sup>I also contribute to the long term research planning and have written grant proposals with Dr. Oren Etzioni that secured funding on earlier versions of this project.

To this end, I developed a novel method that estimates the relative performance of the alternatives with respect to a baseline [5]. The key insight behind this method was that accurate estimation of the absolute effectiveness value was not essential. The estimation only needed to induce a good ordering of the available alternatives. This relative estimation method outperformed using the single best alternative for query representations [3] and standard fusion methods for combining ranking functions [4].

## Topic Pages

As an alternative to the typical web search paradigm, I built a system that automatically generates wikipedia like pages for queries [2]. The primary challenge here is to identify the salient but diverse aspects pertaining to the query topic. I used web search logs to build diverse aspect models on topics. To generalize to topics beyond those that are observed in the search logs, I generalized the aspect models to include information from related topics. A second challenge here is to extract and organize information pertaining to the diverse aspects in a coherent fashion. I built a sentence extractor that identifies most typical connection between the topic and its aspect and used simple word-precedence models to organize the retrieved sentences. The resulting topic pages outperformed state-of-the-art summarization systems in terms of grammaticality, salience and coherence.

## Mobile Search

I studied the impact of system constraints on web search from mobile phones. I conducted a systematic study of how network activity consumed energy in mobile phones. My study revealed that energy consumption also depended on inter-transfer times in addition to the size of the data being transferred [1]. Based on this insight, I designed interaction strategies that reduced the energy consumption of web search applications. In addition to improving the energy efficiency of web search, the key finding in this work led to a large body of work aimed at addressing the energy inefficiency.

I also worked on *FindAll*, a mobile search engine aimed at improving local availability of previously visited documents. Because indexing on the phone is expensive, the system must balance local availability against resource usage and energy consumption. Using actual search logs from mobile users, we learned user-specific re-finding patterns to predict when a user is likely to re-find documents. Using this predictive model, FindAll selectively indexes documents when cost of indexing is lower than cost of re-finding the document over the network. Evaluations show that FindAll dramatically improves local availability for heavy users without increasing the energy costs.

## Future Work

I am interested in three veins of research for future work. First, I am interested in continuing my work on extracting open-domain knowledge from text. In particular, I want to extract rich descriptions of open-domain events that can serve as background knowledge during extraction. Second, I am interested in developing methods that can reason with automatically extracted knowledge. Third, I am interested in applying semantic resources to improve information retrieval techniques.

## Event Extraction using script-like knowledge

The goal of event extraction is to identify events mentioned in texts and extract key actors and their actions. Building an automatic system for this task is challenging in many respects. In addition to having a model of the key actors and their actions, the system should also fill in missing connections and resolve ambiguous references. Consider the sentences “John went to Bill’s restaurant. [He] ordered a steak. [He] paid \$50 in cash for [the meal]”. When we read these sentences, we easily identify that the key actors are John, the restaurant, a waiter who took the order etc. Note that the waiter was never mentioned in the text. Also, we are able to infer that the pronouns in the sentences all refer to John, [the meal] refers to the steak, and going a step further we can even infer that John probably ate the steak before paying for the meal. To do this automatically, we need a rich model of background knowledge about people eating in restaurants.

Scripts were proposed as a general purpose description of events or scenarios. They include the key actors, their actions, and causal and temporal relationship between the different actions [9]. My prior work on open event schemas provide a starting point for building scripts but many challenges remain: First, we need extractors for the actors and their actions – i.e., patterns that can be used to

extract from new texts. The key challenge here is to expand the schemas by identifying the different ways in which certain actions and actors are specified in texts. I intend to leverage existing semantic resources such as Freebase, YAGO and NELL to expand the descriptions of actors and actions. Second, the system needs to handle entity and event co-reference. This presents an opportunity for joint modeling of entity and event co-reference. Third, schemas do not include causal and temporal ordering of the actions in a scenario. This is challenging because causal and temporal links can be implicit. However, the explicit links can be identified more reliably especially when combined with structural constraints such as transitivity and can be aggregated to identify implicit links.

A common theme underlying all these challenges is extrapolating and generalizing from knowledge that can be identified with high precision either from text or from other sources. Addressing these challenges requires development of high precision methods as well as representations that allow for generalization of the knowledge to new unseen contexts.

## Reasoning with Automatically Extracted Knowledge

Reasoning with knowledge extracted from texts requires robust mechanisms to handle the inherent uncertainty, redundancy, and vocabulary mismatch issues. I am interested in addressing these issues in the context of question answering. Specifically, I intend to build a probabilistic reasoning framework that can verify propositions using text-based inference rules and Open IE style relations as evidence. I believe in approaches that preserve a deductive style of reasoning as much as possible but revert to feature-based textual entailment style reasoning when necessary. This combines the best of both worlds – explaining the reasoning, showing where the current knowledge is lacking or where textual reasoning is required, while also retaining the robustness of the entailment style methods.

To this end, I am interested in building a Markov Logic Network (MLN) based solution. MLNs provide a principled approach for probabilistic reasoning over first-order logic rules. Different from traditional applications of MLNs, the knowledge and rules here are textual, which result in gaps from vocabulary mismatch. These gaps can exist anywhere in the reasoning chain and can range from simple to complex inference problems themselves. To address these gaps, I will build a search solution that uses coarse but fast methods to locate plausible gaps and bridge them using deeper (more expensive) entailment techniques. The key challenges here include keeping the search space tractable and to have broad coverage entailment methods.

## Information Retrieval

I am also interested in exploiting semantic knowledge for Information retrieval. In the past, IR applications have had mixed success with using semantic resources. The key limiting factor was the coverage of the resources used and scalability of the methods. Recent advances in large scale language processing and knowledge extraction techniques provide an ideal opportunity to test integration of semantics. Open Information Extraction presents an ideal starting point. It provides fast and a shallow representation of salient information in a corpus that can be used to improve retrieval.

## References

- [1] Niranjan Balasubramanian, Aruna Balasubramanian, and Arun Venkataramani. Energy consumption in mobile phones: a measurement study and implications for network applications. In *Proceedings of the 9th ACM SIGCOMM conference on Internet measurement conference*, pages 280–293. ACM, 2009.
- [2] Niranjan Balasubramanian and Silviu Cucerzan. Topic pages: An alternative to the ten blue links. In *Semantic Computing (ICSC), 2010 IEEE Fourth International Conference on*, pages 353–360. IEEE, 2010.
- [3] Niranjan Balasubramanian, Giridhar Kumaran, and Vitor R Carvalho. Exploring reductions for long web queries. In *Proceedings of the 33rd international ACM SIGIR conference on Research and development in information retrieval*, pages 571–578. ACM, 2010.
- [4] Niranjan Balasubramanian, Giridhar Kumaran, and Vitor R Carvalho. Learning to select rankers. In *Proceedings of the 33rd international ACM SIGIR conference on Research and development in information retrieval*, pages 785–786. ACM, 2010.

- [5] Niranjana Balasubramanian, Giridhar Kumaran, and Vitor R Carvalho. Predicting query performance on the web. In *Proceedings of the 33rd international ACM SIGIR conference on Research and development in information retrieval*, pages 785–786. ACM, 2010.
- [6] Niranjana Balasubramanian, Stephen Soderland, Mausam, and Oren Etzioni. Rel-grams: a probabilistic model of relations in text. In *Proceedings of the Joint Workshop on Automatic Knowledge Base Construction and Web-scale Knowledge Extraction*, pages 101–105. Association for Computational Linguistics, 2012.
- [7] Niranjana Balasubramanian, Stephen Soderland, and Oren Etzioni Mausam. Generating coherent event schemas at scale. In *Proceedings of the Empirical Methods in Natural Language Processing*. ACM, 2013.
- [8] Peter Clark, Phil Harrison, and Niranjana Balasubramanian. A study of the akbc requirements for passing an elementary science test.
- [9] Roger C Schank and Robert P Abelson. *Scripts, plans, and knowledge*. Yale University, 1975.