

INDIAN INSTITUTE OF INFORMATION TECHNOLOGY BHOPAL



“SIGN LANGUAGE TO TEXT CONVERSION”

MINOR PROJECT REPORT

*Submitted in partial fulfillment of the
requirements for the award of the degree
of*

BACHELOR OF TECHNOLOGY

in

DEPARTMENT OF COMPUTER SCIENCE AND INFORMATION TECHNOLOGY

Submitted By

1. RAHUL SAINI (19U03053)
2. AKSHIT PANWAR (19U03052)
3. NIRMAL KUMAR (19U03062)
4. POOJAN MISHRA (19U02051)

Submitted To

Dr. VISHAKHA CHOURASIA
Dr. YATENDRA SAHU



INDIAN INSTITUTE OF INFORMATION TECHNOLOGY BHOPAL

CERTIFICATE

This is to certify that **RAHUL SAINI (19U03053), AKSHIT PANWAR (19U03052), NIRMAL KUMAR (19U03062) and POOJAN MISHRA (19U02051)** students of B.Tech. III year, VI semester, Department of Computer Science and Information Technology, Indian Institute of Information Technology Bhopal have successfully completed their project work on “**SIGN LANGUAGE TO TEXT CONVERSION**” in partial fulfillment of the requirement of Minor Project Lab in Computer Science and Information Technology.

1. Dr. VISHAKHA CHOURASIA
2. Dr. YATENDRA SAHU



INDIAN INSTITUTE OF INFORMATION TECHNOLOGY BHOPAL

DECLARATION

We, hereby, declare that the work which is being presented in the report entitled “**SIGN LANGUAGE TO TEXT CONVERSION**” in partial fulfillment of the requirements of the III year, VI semester Minor Project Lab and submitted in the Department of Computer Science and Information Technology of the Indian Institute of Information Technology Bhopal is an authentic record of our own work carried out under the supervision of Dr. YATENDRA SAHU and Dr. VISHAKHA CHOURASIA Department of Computer Science and Information Technology, Indian Institute of Information Technology Bhopal. The work has been carried out entirely at Indian Institute of Information Technology Bhopal. The following project and its report, in part or whole, has not been presented or submitted by us for any purpose in any other institute or organization.

We, hereby, declare that the facts mentioned above are true to the best of our knowledge. In case of any discrepancies, we will be the ones to take responsibility.

1. RAHUL SAINI (19U03053)
2. AKSHIT PANWAR (19U03053)
3. NIRMAL KUMAR (19U03062)
4. POOJAN MISHRA (19U02051)

ACKNOWLEDGEMENTS

With due respect, we express our deep sense of gratitude to our respected supervisor Dr VISHAKHA CHOURASIA, for his invaluable support and guidance. We are thankful for the encouragement that he has given us in completing this project successfully. Her rigorous evaluation and constructive criticism was of great assistance. It is imperative for us to mention the fact that this minor project could not have been without the periodic suggestion and advice of our project co-supervisor Dr YATENDRA SAHU.

We are also grateful to our respected Director Dr. Narendra Singh Raghuvanshi for permitting us to utilize all the necessary facilities of the college. Needless to mention is the additional help and support extended by our respected nodal officer Dr. Meenu Chawla, in allowing us to use the department laboratories and other services.

We are also thankful to Dr. Dheeraj K. Agrawal who continuously supported and encouraged us by his advice. We are also thankful to Student Welfare in charge Dr. Jaytrilok Choudhary for constantly motivating us to work harder for the completion of the project. We extend our sincere thanks to Dr. Amit Bhagat who cooperated with us nicely for smooth development of this project.

We would also like to thank all the other faculty members, staff members and laboratory attendants of our department for their kind cooperation and help. Last but certainly not least, we would like to express our deep appreciation towards our family members and class mates for providing the much needed support and encouragement.

Personally Thanks to All!

1. Rahul Saini (19U03053)
2. Akshit Panwar (19U03052)
3. Nirmal Kumar (19U03062)
4. Poojan Mishra (19U02051)

ABSTRACT

Sign language is one of the oldest and most natural form of language for communication, but since most people do not know sign language and interpreters are very difficult to come by, we have come up with a real time method using neural networks for fingerspelling based American sign language. In our method, the hand is first passed through a filter and after the filter is applied the hand is passed through a classifier which predicts the class of the hand gestures. Our method provides 95.7 % accuracy for the 26 letters of the alphabet.

List of Figures

Figure No.	Figure heading	Page No
1	Components of sign language	09
2	Hand Signs	10
3	ANN Architecture	16
4	CNN Layers	18
5	Max Pooling	18
6	Fully connected layer	19
7	Data set generation	21
8	Testing	22
9	Gesture classification	23
10	Use case diagram	26
11	Confusion matrix 1	29
12	Confusion matrix 2	30

Table Of Contents

	Title Page	1
	Certificate	2
	Declaration of the Student	3

	Acknowledgement	4
	Abstract	5
	List of figures	6
	Table of Content	7
1.	INTRODUCTION	9
2.	MOTIVATION	11
3.	LITERATURE REVIEW	12
	3.1 Data Acquisition	
	3.2 Data Pre-Pprocessing	
	3.3 Feature Extraction	
	3.4 Gesture Classification	
4.	KEYWORD AND DEFINITION	15
	4.1 Feature Extraction and Representation	
	4.2 Artificial Neural Network (ANN)	
	4.3 Convolutional Neural Network (CNN)	
	4.4 TensorFlow	
	4.5 Keras	
	4.6 openCV	
5.	METHODOLOGY	21
	5.1 Data Set Generation	
	5.2 Gesture Classification	
	5.3 Finger Spelling Sentence Formation Implementation	
	5.4 Auto-correct Feature	
	5.5 Training and Testing	

6.	CHALLENGES FACED	28
7.	RESULTS	28
8.	CONCLUSION	30
9.	FUTURE SCOPE	31

10.	REFERENCE	32
11.	APPENDIX	33

1. Introduction:

American sign language is a predominant sign language. Since the only disability Deaf and Dumb (hereby referred to as D&M) people have is communication related and since they cannot use spoken languages, the only way for them to communicate is through sign language. Communication is the process of exchange of thoughts and messages in various ways such as speech, signals, behavior and visuals. D&M people make use of their hands to express different gestures to express their ideas with other people. Gestures are the non-verbally exchanged messages and these gestures are understood with vision. This nonverbal communication of deaf and dumb people is called sign language. A sign language is a language which uses gestures instead of sound to convey meaning combining hand-shapes, orientation and movement of the hands, arms or body, facial expressions and lip-patterns. Contrary to popular belief, sign language is not international. These vary from region to region.

Sign language is a visual language and consists of 3 major components [6]:

Fingerspelling	Word level sign vocabulary	Non-manual features
Used to spell words letter by letter .	Used for the majority of communication.	Facial expressions and tongue, mouth and body position.

Figure -1

Minimizing the verbal exchange gap among D&M and non-D&M people turns into a want to make certain effective conversation among all. Sign language translation is among one of the most growing lines of research and it enables the maximum natural manner of communication for those with hearing impairments. A hand gesture recognition system offers an opportunity for deaf people

to talk with vocal humans without the need of an interpreter. The system is built for the automated conversion of ASL into textual content and speech.

In our project we primarily focus on producing a model which can recognize Fingerspelling based hand gestures in order to form a complete word by combining each gesture. The gestures we aim to train are as given in the image below.

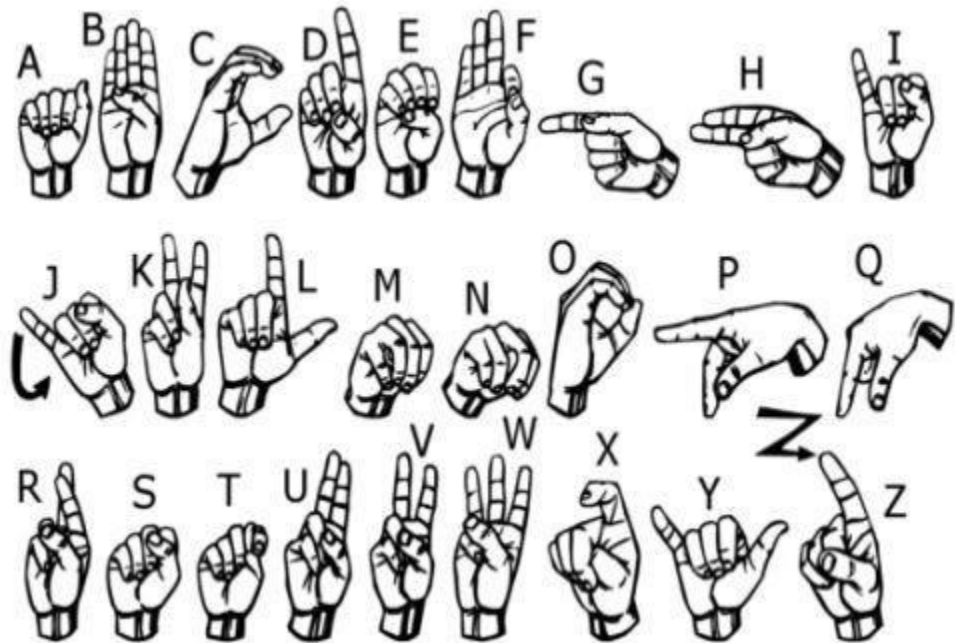


Figure - 2

2. Motivation:

For interaction between normal people and D&M people a language barrier is created as sign language structure since it is different from normal text. So, they depend on vision-based communication for interaction.

If there is a common interface that converts the sign language to text, then the gestures can be easily understood by non-D&M people. So, research has been made for a vision-based interface system where D&M people can enjoy communication without really knowing each other's language.

The aim is to develop a user-friendly Human Computer Interface (HCI) where the computer understands the human sign language.

There are various sign languages all over the world, namely American Sign Language (ASL), French Sign Language, British Sign Language (BSL), Indian Sign language, Japanese Sign Language and work has been done on other languages all around the world.

3. **Literature Survey:**

In the recent years there has been tremendous research done on the hand gesture recognition. With the help of literature survey, we realized that the basic steps in hand gesture recognition are:

-

- Data acquisition
- Data pre-processing
- Feature extraction
- Gesture classification

3.1 Data acquisition:

The different approaches to acquire data about the hand gesture can be done in the following ways:

1. Use of sensory devices:

It uses electromechanical devices to provide exact hand configuration, and position. Different glove-based approaches can be used to extract information. But it is expensive and not user friendly.

2. Vision based approach:

In vision-based methods, the computer webcam is the input device for observing the information of hands and/or fingers. The Vision Based methods require only a camera, thus realizing a natural interaction between humans and computers without the use of any extra devices, thereby reducing cost. These systems tend to complement biological vision by describing artificial vision systems that are implemented in software and/or hardware. The main challenge of vision-based hand detection ranges from coping with the large variability of the human hand's appearance due to a huge number of hand movements, to different skin-

color possibilities as well as to the variations in viewpoints, scales, and speed of the camera capturing the scene.

3.2 Data Pre-Processing and 3.3 Feature extraction for vision-based approach:

- In [1] the approach for hand detection combines threshold-based colour detection with background subtraction. We can use AdaBoost face detector to differentiate between faces and hands as they both involve similar skin-color.
- We can also extract necessary image which is to be trained by applying a filter called Gaussian Blur (also known as Gaussian smoothing). The filter can be easily applied using open computer vision (also known as OpenCV) and is described in [3].
- For extracting necessary image which is to be trained we can use instrumented gloves as mentioned in [4]. This helps reduce computation time for Pre-Processing and gives us more concise and accurate data compared to applying filters on data received from video extraction.
- We tried doing the hand segmentation of an image using color segmentation techniques but skin color and tone is highly dependent on the lighting conditions due to which output, we got for the segmentation we tried to do were not so great. Moreover, we have a huge number of symbols to be trained for our project many of which look similar to each other like the gesture for symbol 'V' and digit '2', hence we decided that in order to produce better accuracies for our large number of symbols, rather than segmenting the hand out of a random background we keep background of hand a stable single colour so that we don't need to segment it on the basis of skin colour. This would help us to get better results.

3.4 Gesture Classification:

- In [1] Hidden Markov Models (HMM) is used for the classification of the gestures. This model deals with dynamic aspects of gestures. Gestures are extracted from a sequence of video images by tracking the skin-color blobs corresponding to the hand into a body– face space centred on the face of the user.
- The goal is to recognize two classes of gestures: deictic and symbolic. The image is filtered using a fast look–up indexing table. After filtering, skin colour pixels are gathered into blobs. Blobs are statistical objects based on the location (x, y) and the colorimetry (Y, U, V) of the skin color pixels in order to determine homogeneous areas.
- In [2] Naïve Bayes Classifier is used which is an effective and fast method for static hand gesture recognition. It is based on classifying the different gestures according to geometric based invariants which are obtained from image data after segmentation.
- Thus, unlike many other recognition methods, this method is not dependent on skin colour. The gestures are extracted from each frame of the video, with a static background. The first step is to segment and label the objects of interest and to extract geometric invariants from them. Next step is the classification of gestures by using a K nearest neighbor algorithm aided with distance weighting algorithm (KNNDW) to provide suitable data for a locally weighted Naïve Bayes“ classifier.
- According to the paper on “Human Hand Gesture Recognition Using a Convolution Neural Network” by Hsien-I Lin, Ming-Hsiang Hsu, and Wei-Kai Chen (graduates of Institute of Automation Technology National Taipei University of Technology Taipei, Taiwan), they have constructed a skin model to extract the hands out of an image and then apply binary threshold to the whole image. After obtaining the threshold image they calibrate it about the principal axis in order to centre the image about the axis. They input this image to a convolutional neural network

model in order to train and predict the outputs. They have trained their model over 7 hand gestures and using this model they produced an accuracy of around 95% for those 7 gestures.

4. Key words and Definitions:

4.1 Feature Extraction and Representation:

The representation of an image as a 3D matrix having dimension as of height and width of the image and the value of each pixel as depth (1 in case of Grayscale and 3 in case of RGB).

Further, these pixel values are used for extracting useful features using CNN.

4.2 Artificial Neural Network (ANN):

Artificial Neural Network is a connection of neurons, replicating the structure of human brain. Each connection of neuron transfers information to another neuron. Inputs are fed into first layer of neurons which processes it and transfers to another layer of neurons called as hidden layers. After processing of information through multiple layers of hidden layers, information is passed to final output layer.

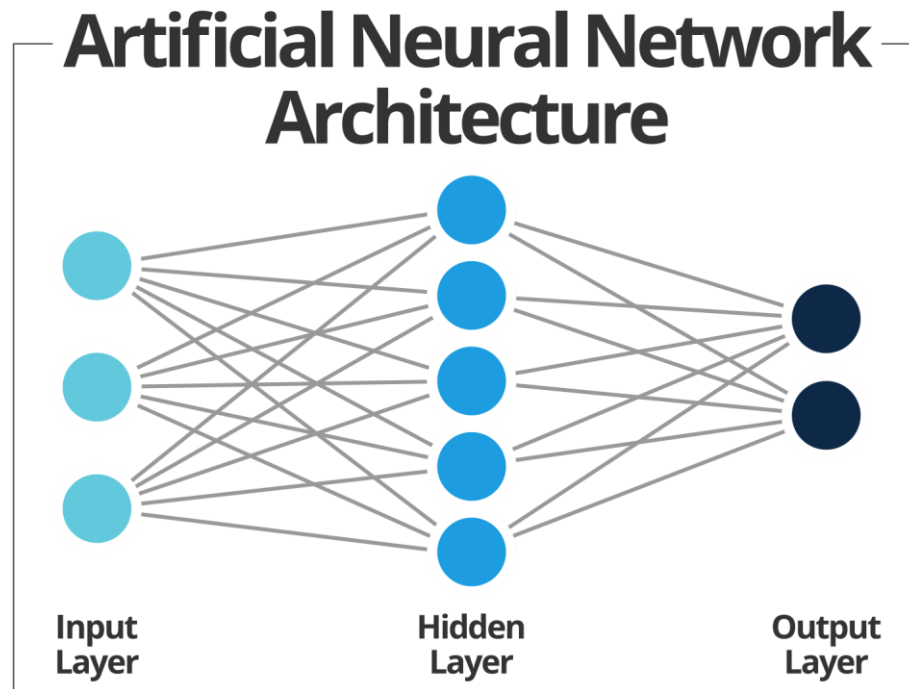


Figure - 3

These are capable of learning and have to be trained. There are different learning strategies:

1. Unsupervised Learning
2. Supervised Learning
3. Reinforcement Learning

4.3 Convolutional Neural Network (CNN):

Unlike regular Neural Networks, in the layers of CNN, the neurons are arranged in 3 dimensions: width, height, depth. The neurons in a layer will only be connected to a small region of the layer (window size) before it, instead of all of the neurons in a fully-connected manner. Moreover, the final output layer would have dimensions (number of classes), because by the end of the CNN architecture we will reduce the full image into a single vector of class scores.

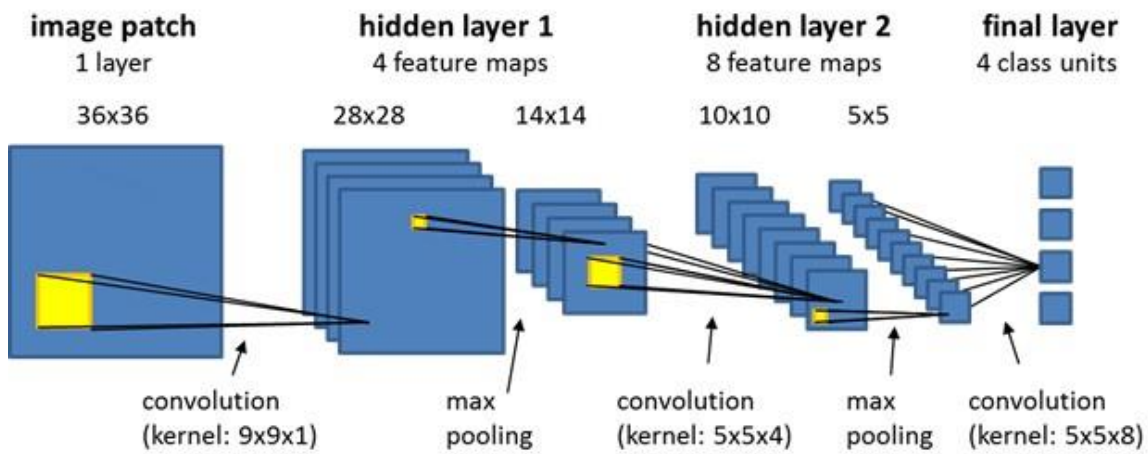


Figure – 4

1. Convolution Layer:

In convolution layer we take a small window size [typically of length 5*5] that extends to the depth of the input matrix. The layer consists of learnable filters of window size. During every iteration we slid the window by stride size [typically 1], and compute the dot product of filter entries and input values at a given position.

As we continue this process we will create a 2-Dimensional activation matrix that gives the response of that matrix at every spatial position. That is, the network will learn filters that activate when they see some type of visual feature such as an edge of some orientation or a blotch of some colour.

2. Pooling Layer:

We use pooling layer to decrease the size of activation matrix and ultimately reduce the learnable parameters. There are two types of pooling:

- a. **Max Pooling:** In max pooling we take a window size [for example window of size

2*2], and only take the maximum of 4 values. Well lid this window and continue this process, so well finally get an activation matrix half of its original Size.

b. Average Pooling: In average pooling, we take advantage of of all Values in a window.

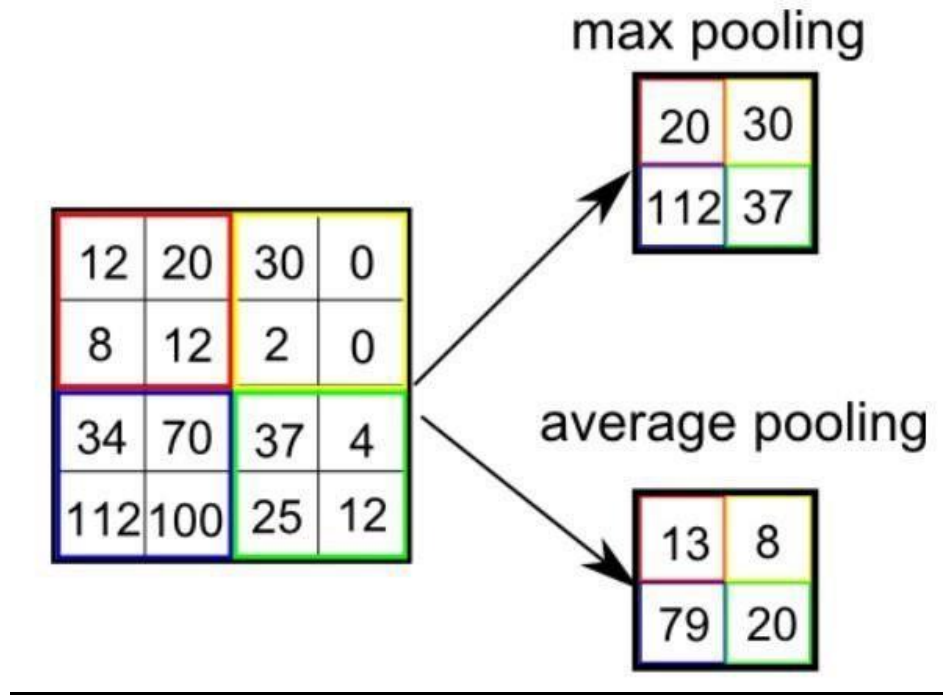


Figure - 5

3. Fully Connected Layer:

In convolution layer, neurons are connected only to a local region, while in a fully connected region, we will connect all the inputs to neurons.

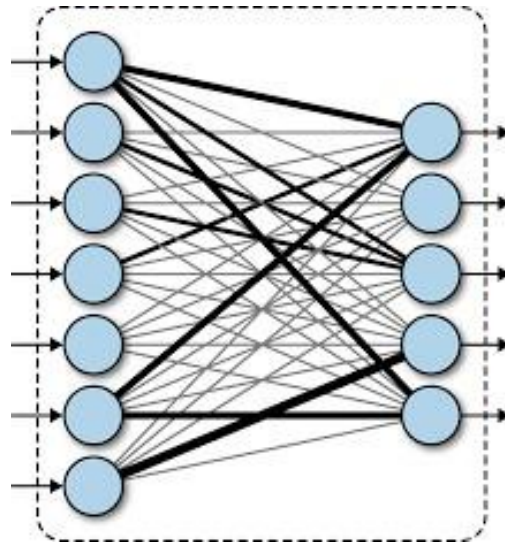


Figure - 6

4. Final Output Layer:

After getting values from fully connected layer, we will connect them to the final layer of neurons [having count equal to total number of classes], that will predict the probability of each image to be in different classes.

4.4 TensorFlow:

TensorFlow is an end-to-end open-source platform for Machine Learning. It has a comprehensive, flexible ecosystem of tools, libraries and community resources that lets researchers push the state-of-the-art in Machine Learning and developers easily build and deploy Machine Learning powered applications.

TensorFlow offers multiple levels of abstraction so you can choose the right one for your needs. Build and train models by using the high-level Keras API, which makes getting started with TensorFlow and machine learning easy.

If you need more flexibility, eager execution allows for immediate iteration and intuitive debugging. For large ML training tasks, use the Distribution Strategy API for distributed training on different hardware configurations without changing the model definition.

4.5 Keras:

Keras is a high-level neural networks library written in python that works as a wrapper to TensorFlow. It is used in cases where we want to quickly build and test the neural network with minimal lines of code. It contains implementations of commonly used neural network elements like layers, objective, activation functions, optimizers, and tools to make working with images and text data easier.

4.6 OpenCV:

OpenCV (Open-Source Computer Vision) is an open-source library of programming functions used for real-time computer-vision.

It is mainly used for image processing, video capture and analysis for features like face and object recognition. It is written in C++ which is its primary interface, however bindings are available for Python, Java, MATLAB/OCTAVE.

5. Methodology:

The system is a vision-based approach. All signs are represented with bare hands and so it eliminates the problem of using any artificial devices for interaction.

5.1 Data Set Generation:

For the project we tried to find already made datasets but we couldn't find dataset in the form of raw images that matched our requirements. All we could find were the datasets in the form of RGB values. Hence, we decided to create our own data set. Steps we followed to create our data set are as follows.

We used Open computer vision (OpenCV) library in order to produce our dataset.

Firstly, we captured around 800 images of each of the symbol in ASL (American Sign Language) for training purposes and around 200 images per symbol for testing purpose.

First, we capture each frame shown by the webcam of our machine. In each frame we define a Region Of Interest (ROI) which is denoted by a blue bounded square as shown in the image below:

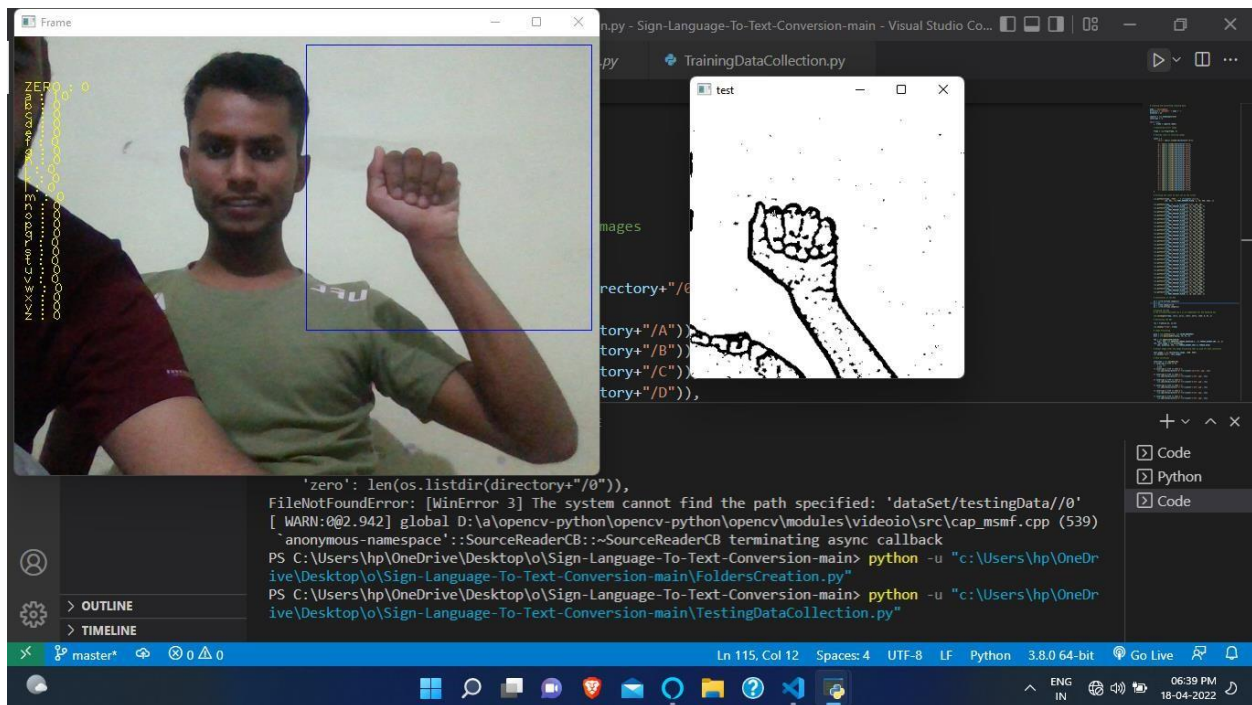


Figure - 7

Then, we apply Gaussian Blur Filter to our image which helps us extract various features of our image. The image, after applying Gaussian Blur, looks as follows:

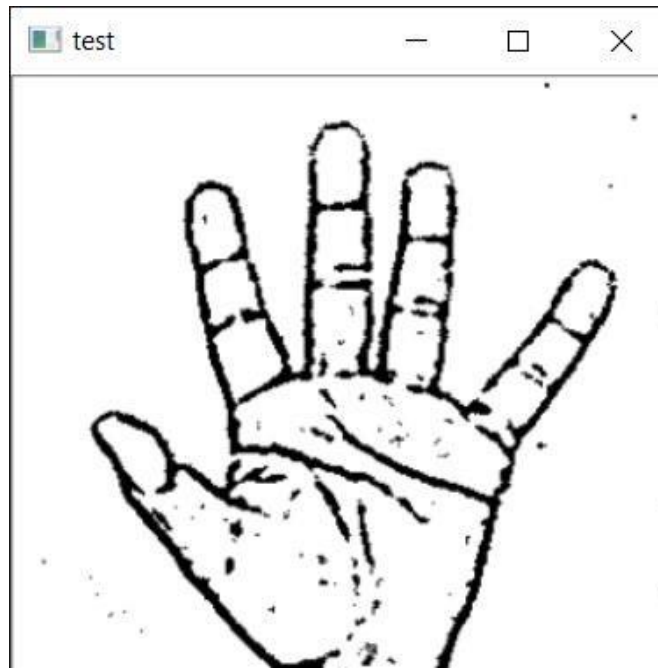


Figure – 8

5.2 Gesture Classification:

Our approach uses two layers of algorithm to predict the final symbol of the user.

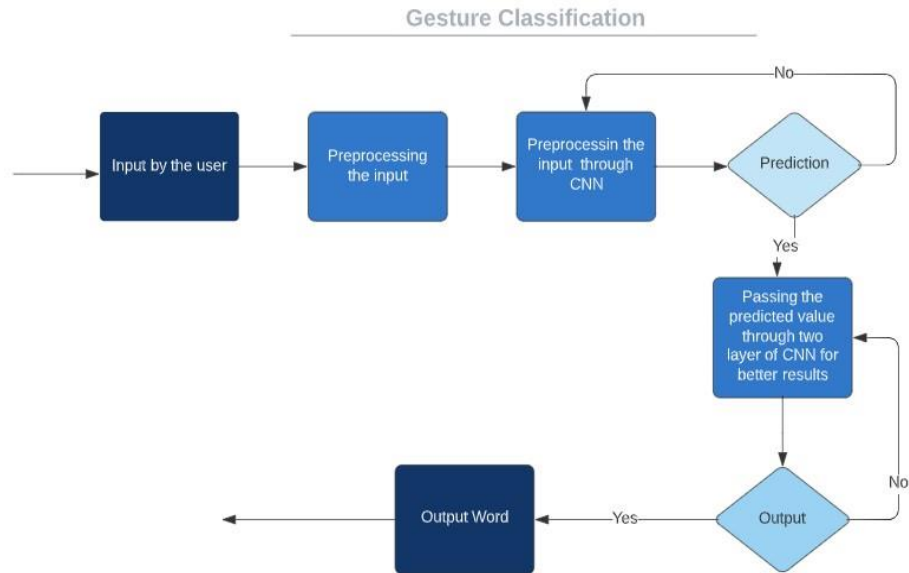


Figure - 9

Algorithm Layer 1:

1. Apply Gaussian Blur filter and threshold to the frame taken with openCV to get the processed image after feature extraction.
2. This processed image is passed to the CNN model for prediction and if a letter is detected for more than 50 frames then the letter is printed and taken into consideration for forming the word.
3. Space between the words is considered using the blank symbol.

Algorithm Layer 2:

1. We detect various sets of symbols which show similar results on getting detected.
2. We then classify between those sets using classifiers made for those sets only.

Layer 1:

★ CNN Model:

1. **1st Convolution Layer:** The input picture has resolution of 128x128 pixels. It is first processed in the first convolutional layer using 32 filter weights (3x3 pixels each). This will result in a 126X126 pixel image, one for each Filter-weights.
2. **1st Pooling Layer:** The pictures are down sampled using max pooling of 2x2 i.e we keep the highest value in the 2x2 square of array. Therefore, our picture is down sampled to 63x63 pixels.
3. **2nd Convolution Layer:** Now, these 63 x 63 from the output of the first pooling layer is served as an input to the second convolutional layer. It is processed in the second convolutional layer using 32 filter weights (3x3 pixels each). This will result in a 60 x 60 pixel image.
4. **2nd Pooling Layer:** The resulting images are down sampled again using max pool of 2x2 and is reduced to 30 x 30 resolution of images.
5. **1st Densely Connected Layer:** Now these images are used as an input to a fully connected layer with 128 neurons and the output from the second convolutional layer is reshaped to an array of $30 \times 30 \times 32 = 28800$ values. The input to this layer is an array of 28800 values. The output of these layer is fed to the 2nd Densely Connected Layer. We are using a dropout layer of value 0.5 to avoid overfitting.
6. **2nd Densely Connected Layer:** Now the output from the 1st Densely Connected Layer is used as an input to a fully connected layer with 96 neurons.
7. **Final layer:** The output of the 2nd Densely Connected Layer serves as an input for the final layer which will have the number of neurons as the number of classes we are classifying (alphabets + blank symbol).

- **Activation Function:**

We have used ReLU (Rectified Linear Unit) in each of the layers (convolutional as well as fully connected neurons).

ReLU calculates $\max(x, 0)$ for each input pixel. This adds nonlinearity to the formula and helps to learn more complicated features. It helps in removing the vanishing gradient problem and speeding up the training by reducing the computation time.

- **Pooling Layer:**

We apply **Max** pooling to the input image with a pool size of (2, 2) with ReLU activation function. This reduces the amount of parameters thus lessening the computation cost and reduces overfitting.

- **Dropout Layers:**

The problem of overfitting, where after training, the weights of the network are so tuned to the training examples they are given that the network doesn't perform well when given new examples. This layer "drops out" a random set of activations in that layer by setting them to zero. The network should be able to provide the right classification or output for a specific example even if some of the activations are dropped out [5].

- **Optimizer:**

We have used Adam optimizer for updating the model in response to the output of the loss function.

Adam optimizer combines the advantages of two extensions of two stochastic gradient descent algorithms namely adaptive gradient algorithm (ADA GRAD) and root mean square propagation (RMSProp).

Layer 2:

We are using two layers of algorithms to verify and predict symbols which are more similar to each other so that we can get us close as we can get to detect the symbol shown. In our testing we found that following symbols were not showing properly and were giving other symbols also:

- 1. For D : R and U**
- 2. For U : D and R**
- 3. For I : T, D, K and I**
- 4. For S : M and N**

So, to handle above cases we made three different classifiers for classifying these sets:

- 1. {D, R, U}**
- 2. {T, K, D, I}**

3. {S, M, N}

5.3 Finger Spelling Sentence Formation Implementation:

1. Whenever the count of a letter detected exceeds a specific value and no other letter is close to it by a threshold, we print the letter and add it to the current string (In our code we kept the value as 50 and difference threshold as 20).
2. Otherwise, we clear the current dictionary which has the count of detections of present symbol to avoid the probability of a wrong letter getting predicted.
3. Whenever the count of a blank (plain background) detected exceeds a specific value and if the current buffer is empty no spaces are detected.
4. In other case it predicts the end of word by printing a space and the current gets appended to the sentence below.

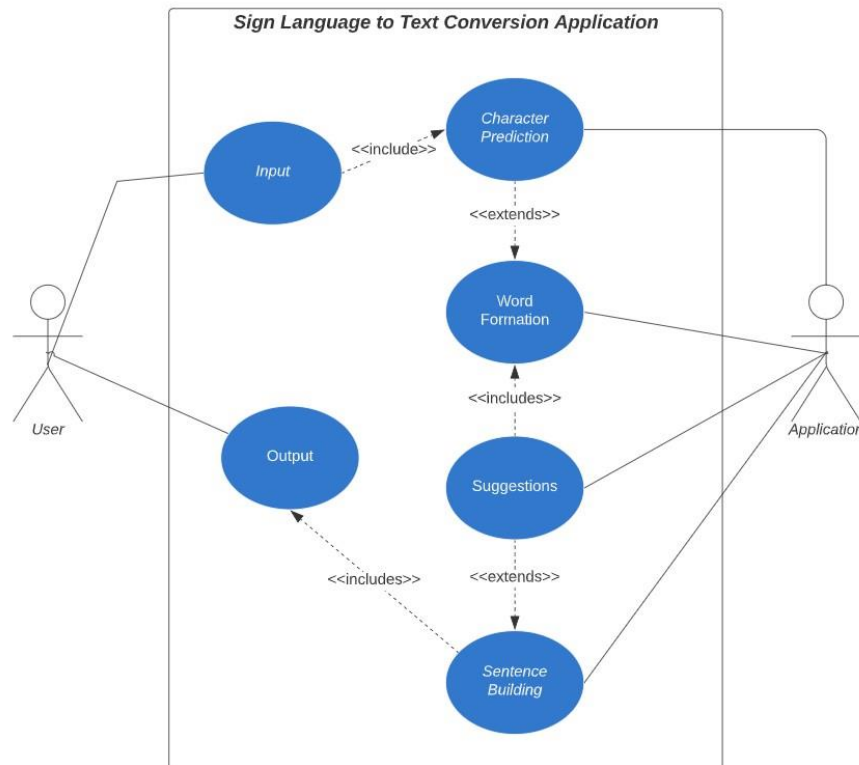


Figure - 10

5.4 AutoCorrect Feature:

A python library **Hunspell_suggest** is used to suggest correct alternatives for each (incorrect) input word and we display a set of words matching the current word in which the user can select a word to append it to the current sentence. This helps in reducing mistakes committed in spellings and assists in predicting complex words.

5.5 Training and Testing:

We convert our input images (RGB) into grayscale and apply gaussian blur to remove unnecessary noise. We apply adaptive threshold to extract our hand from the background and resize our images to 128 x 128.

We feed the input images after pre-processing to our model for training and testing after applying all the operations mentioned above.

The prediction layer estimates how likely the image will fall under one of the classes. So, the output is normalized between 0 and 1 and such that the sum of each value in each class sums to 1. We have achieved this using SoftMax function.

At first the output of the prediction layer will be somewhat far from the actual value. To make it better we have trained the networks using labelled data. The cross-entropy is a performance measurement used in the classification. It is a continuous function which is positive at values which is not same as labelled value and is zero exactly when it is equal to the labelled value. Therefore, we optimized the cross-entropy by minimizing it as close to zero. To do this in our network layer we adjust the weights of our neural networks. TensorFlow has an inbuilt function to calculate the cross entropy.

As we have found out the cross-entropy function, we have optimized it using Gradient Descent in fact with the best gradient descent optimizer is called Adam Optimizer.

6. Challenges Faced:

There were many challenges faced during the project. The very first issue we faced was that concerning the data set. We wanted to deal with raw images and that too square images as CNN in Keras since it is much more convenient working with only square images.

We couldn't find any existing data set as per our requirements and hence we decided to make our own data set. Second issue was to select a filter which we could apply on our images so that proper features of the images could be obtained and hence then we could provide that image as input for CNN model.

We tried various filters including binary threshold, canny edge detection, Gaussian blur etc. but finally settled with Gaussian Blur Filter.

More issues were faced relating to the accuracy of the model we had trained in the earlier phases. This problem was eventually improved by increasing the input image size and also by improving the data set.

7. Results:

We have achieved an accuracy of **95.8%** in our model using only layer 1 of our algorithm, and using the combination of **layer 1 and layer 2** we achieve an accuracy of **98.0%**, which is a better accuracy than most of the current research papers on American sign language.

Most of the research papers focus on using devices like Kinect for hand detection.

In [7] they build a recognition system for Flemish sign language using convolutional neural networks and Kinect and achieve an error rate of **2.5%**.

In [8] a recognition model is built using hidden Markov model classifier and a vocabulary of 30 words and they achieve an error rate of **10.90%**.

In [9] they achieve an average accuracy of **86%** for 41 static gestures in Japanese sign language.

Using depth sensors map [10] achieved an accuracy of **99.99%** for observed signers and **83.58%** and **85.49%** for new signers.

They also used CNN for their recognition system. One thing should be noted that our model doesn't use any background subtraction algorithm while some of the models present above do that.

Below are the confusion matrices for our results.

Figure - 11

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
	A	147	0	0	0	0	0	0	0	0	0	0	0	1	2	0	0	0	0	0	0	0	0	2	0	0
	B	0	139	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	11	0	0	0
	C	0	0	152	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	D	0	0	0	153	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	E	0	0	0	0	152	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	F	0	0	0	0	0	135	0	0	0	0	0	4	0	0	0	0	0	0	0	0	3	10	0	0	0
C	G	0	0	0	0	0	0	150	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
o	H	1	0	0	0	0	0	7	143	0	0	0	0	0	1	0	0	0	0	1	0	0	0	0	0	1
r	I	0	0	0	0	0	0	0	0	150	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
r	J	0	0	0	0	0	0	0	0	0	153	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
e	K	0	0	0	0	0	0	0	0	0	0	153	0	0	0	0	0	0	0	0	0	0	0	0	0	0
c	L	0	0	0	0	0	0	0	0	0	0	0	153	0	0	0	0	0	0	0	0	0	0	0	0	0
t	M	0	0	0	0	0	0	0	0	0	0	2	0	152	0	0	0	0	0	0	0	0	0	0	0	0
	N	0	0	0	0	0	0	0	0	0	0	0	0	0	152	0	0	0	0	0	0	0	0	0	0	0
V	O	0	0	0	0	0	0	0	0	0	0	0	0	0	0	154	0	0	0	0	0	0	0	0	0	0
a	P	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	153	0	0	0	0	0	0	0	0	0
l	Q	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	2	147	1	0	0	0	0	0	0	0
u	R	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	150	0	0	0	0	0	0	0
e	S	0	0	0	0	1	0	0	0	0	0	0	0	0	0	10	0	0	0	133	0	0	0	0	8	0
s	T	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	151	0	0	0	0	0
	U	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	150	0	0	0	0
	V	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	151	1	0	0
	W	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	149	0	0	0
	X	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	0	0	0	148	0
	Y	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	151
	Z	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Algo 1 + Algo 2

Figure – 12

8. Conclusion:

In this report, a functional real time vision based American Sign Language recognition for D&M people have been developed for asl alphabets.

We achieved final accuracy of **98.0%** on our data set. We have improved our prediction after implementing two layers of algorithms wherein we have verified and predicted symbols which are more similar to each other.

This gives us the ability to detect almost all the symbols provided that they are shown properly, there is no noise in the background and lighting is adequate.

9. Future Scope:

We are planning to achieve higher accuracy even in case of complex backgrounds by trying out various background subtraction algorithms.

We are also thinking of improving the Pre Processing to predict gestures in low light conditions with a higher accuracy.

This project can be enhanced by being built as a web/mobile application for the users to conveniently access the project. Also, the existing project only works for ASL; it can be extended to work for other native sign languages with the right amount of data set and training. This project implements a finger spelling translator; however, sign languages are also spoken in a contextual basis where each gesture could represent an object, or verb. So, identifying this kind of a contextual signing would require a higher degree of processing and natural language processing (NLP).

10. References:

- [1] T. Yang, Y. Xu, and “A., Hidden Markov Model for Gesture Recognition”, CMU-RI-TR-94 10, Robotics Institute, Carnegie Mellon Univ., Pittsburgh, PA, May 1994.
- [2] Pujan Ziaie, Thomas M uller, Mary Ellen Foster, and Alois Knoll “A Naïve Bayes Munich, Dept. of Informatics VI, Robotics and Embedded Systems, Boltzmannstr. 3, DE-85748 Garching, Germany.
- [3]https://docs.opencv.org/2.4/doc/tutorials/imgproc/gaussian_median_blur_bilateral_filter/gaussian_median_blur_bilateral_filter.html
- [4] Mohammed Waleed Kalous, Machine recognition of Auslan signs using PowerGloves: Towards large-lexicon recognition of sign language.
- [5][aeshpande3.github.io/A-Beginner%27s-Guide-To-Understanding-Convolutional-Neural Networks-Part-2/](https://aeshpande3.github.io/A-Beginner%27s-Guide-To-Understanding-Convolutional-Neural-Networks-Part-2/)
- [6] <http://www-i6.informatik.rwth-aachen.de/~dreuw/database.php>
- [7] Pigou L., Dieleman S., Kindermans PJ., Schrauwen B. (2015) Sign Language Recognition Using Convolutional Neural Networks. In: Agapito L., Bronstein M., Rother C. (eds) Computer Vision - ECCV 2014 Workshops. ECCV 2014. Lecture Notes in Computer Science, vol 8925. Springer, Cham
- [8] Zaki, M.M., Shaheen, S.I.: Sign language recognition using a combination of new visionbased features. Pattern Recognition Letters 32(4), 572–577 (2011).
- [9] N. Mukai, N. Harada and Y. Chang, "Japanese Fingerspelling Recognition Based on Classification Tree and Machine Learning," *2017 Nicograph International (NicoInt)*, Kyoto, Japan, 2017, pp. 19-24. doi:10.1109/NICOInt.2017.9
- [10] Byeongkeun Kang, Subarna Tripathi, Truong Q. Nguyen” Real-time sign language fingerspelling recognition using convolutional neural networks from depth map” 2015 3rd IAPR Asian Conference on Pattern Recognition (ACPR)

- [11] Number System Recognition (<https://github.com/chasinginfinity/number-sign-recognition>) [12] <https://opencv.org/>
- [13] <https://en.wikipedia.org/wiki/TensorFlow>
- [14] https://en.wikipedia.org/wiki/Convolutional_neural_network [15]
- <http://hunspell.github.io/>

11. Appendix:

1. openCV:

openCV (Open-Source Computer Vision Library) is released under a BSD license and hence it's free for both academic and commercial use.

It has C++, Python and Java interfaces and supports Windows, Linux, Mac OS, iOS and Android. OpenCV was designed for computational efficiency and with a strong focus on realtime applications.

Written in optimized C/C++, the library can take advantage of multi-core processing. Enabled with OpenCL, it can take advantage of the hardware acceleration of the underlying heterogeneous compute platform.

Adopted all around the world, OpenCV has more than 47 thousand people of user community and estimated number of downloads exceeding 14 million. Usage ranges from interactive art, to mines inspection, stitching maps on the web or through advanced robotics.

2. Convolutional Neural Network:

CNNs use a variation of multilayer perceptron's designed to require minimal pre-processing. They are also known as shift invariant or space invariant artificial neural networks (SIANN), based on their shared-weights architecture and translation invariance characteristics.

Convolutional networks were inspired by biological processes in that the connectivity pattern between neurons resembles the organization of the animal visual cortex. Individual cortical neurons respond to stimuli only in a restricted region of the visual field known as the receptive field. The receptive fields of different neurons partially overlap such that they cover the entire visual field.

CNNs use relatively little pre-processing compared to other image classification algorithms. This means that the network learns the filters that in traditional algorithms were hand-engineered. This independence from prior knowledge and human effort in feature design is a major advantage.

They have applications in image and video recognition, recommender systems, image classification, medical image analysis, and natural language processing.

3. TensorFlow:

TensorFlow is an open-source software library for dataflow programming across a range of tasks. It is a symbolic math library, and is also used for machine learning applications such as neural networks.

It is used for both research and production at Google.

TensorFlow was developed by the Google brain team for internal Google use. It was released under the Apache 2.0 open-source library on November 9, 2015.

TensorFlow is Google Brain's second-generation system. Version 1.0.0 was released on February 11, 2017. While the reference implementation runs on single devices, TensorFlow can run on multiple CPUs and GPUs (with optional CUDA and SYCL extensions for general-purpose computing on graphics processing units).

TensorFlow is available on 64-bit Linux, macOS, Windows, and mobile computing platforms including Android and iOS.

Its flexible architecture allows for the easy deployment of computation across a variety of platforms (CPUs, GPUs, TPUs), and from desktops to clusters of servers to mobile and edge devices.

References

[1]C. Senaras, M. Ozay, and F. T. Yarman Vural. Building detection with decision fusion. IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing, 6(3):1295–1304, June 2013.