Hackathon
G.vishnu Sanjeev
192210101

1.Dim_customer mapping and mapping task

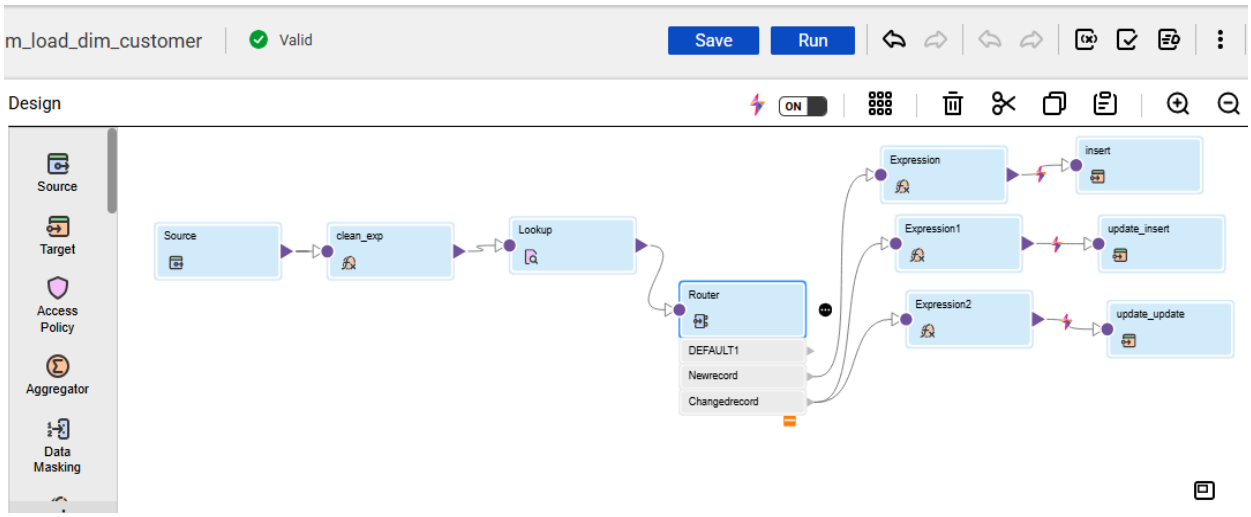

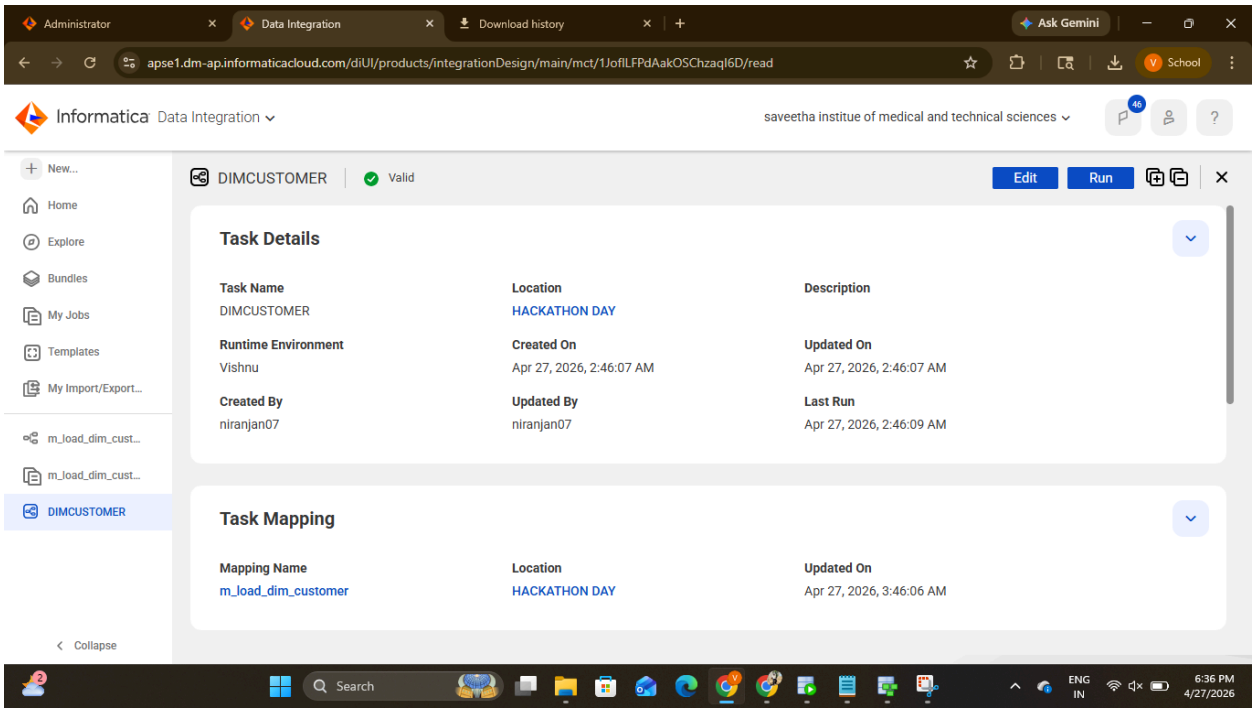

Loading the data into the dim customers from the staging tables
Source: oracle - stg_customers
Target: oracle - dim_customer

FLOW CHART:

```
STG_CUSTOMER (Source)
        ↓
clean_exp (Expression - Data Cleaning)
        ↓
Lookup (DIM_CUSTOMER - Active Records)
        ↓
Router (SCD Logic)
   ├── Newrecord
   │       ↓
   │   Expression (Set SCD fields)
   │       ↓
   │   insert (Insert into DIM)
   │
   ├── Changedrecord
   │       ↓
   │   Expression1 (Prepare new record)
   │       ↓
   │   update_insert (Insert new version)
   │
   │       ↓
   │   Expression2 (Expire old record)
   │       ↓
   │   update_update (Update old record)
   │
   └── DEFAULT (Unchanged)
          ↓
       Ignore / Drop
```

Expressions used:

Cleaning :

phone number: ltrim(rtrim(src_PHONE_NUMBER))

Name :

```
IIF(
  ISNULL(SRC_CUSTOMER_NAME),
  'UNKNOWN',
  RTRIM(LTRIM(SRC_CUSTOMER_NAME))
)
```

Plan_clean:

```
IIF(
  ISNULL(src_PLAN_TYPE),
  'UNKNOWN',
  RTRIM(LTRIM(src_PLAN_TYPE))
)
```

Expression in Router:

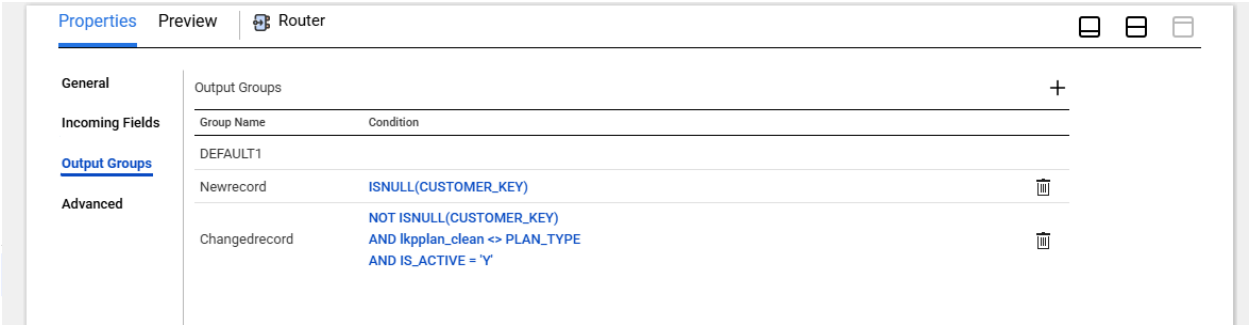

Expressions used for scd 2:

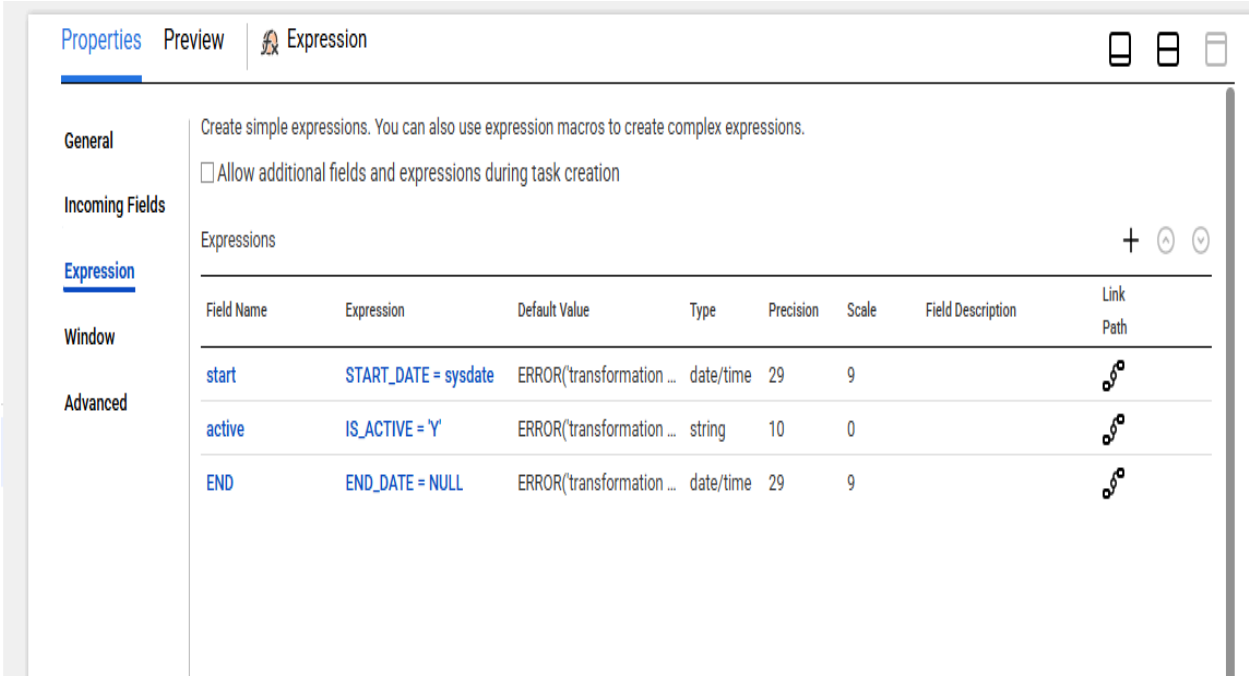

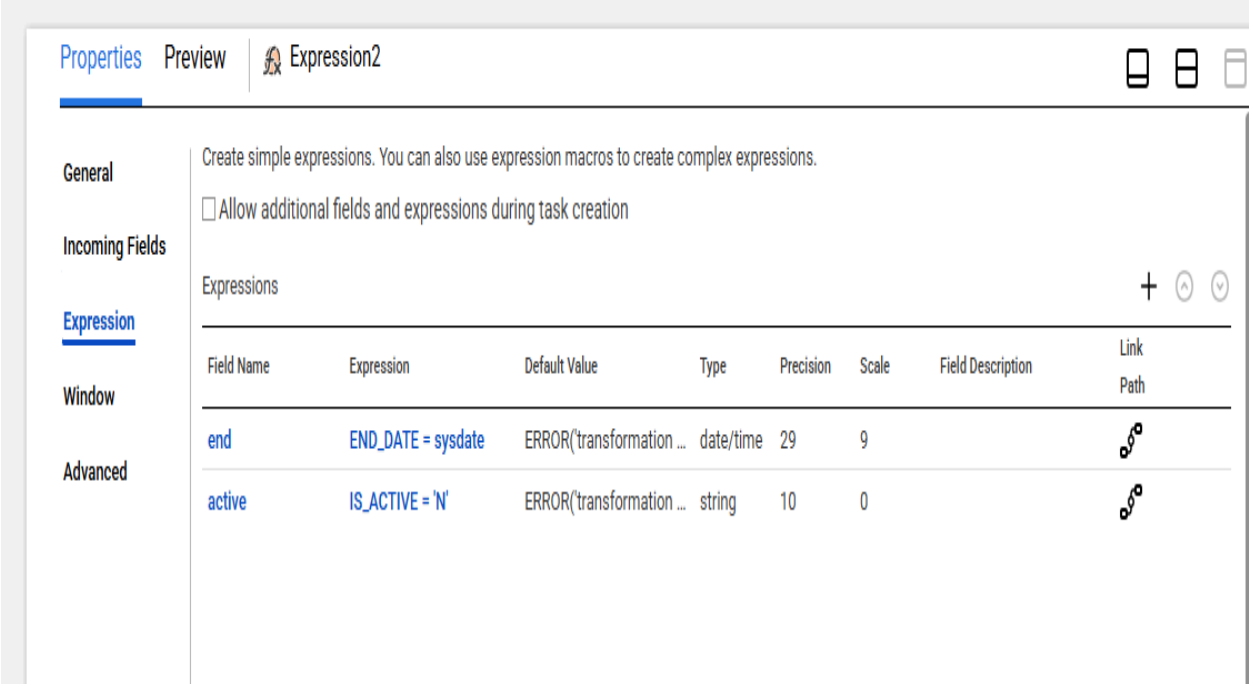

Implemented scd 2 and incremental load in the loading of the dimension customers

Load fact table

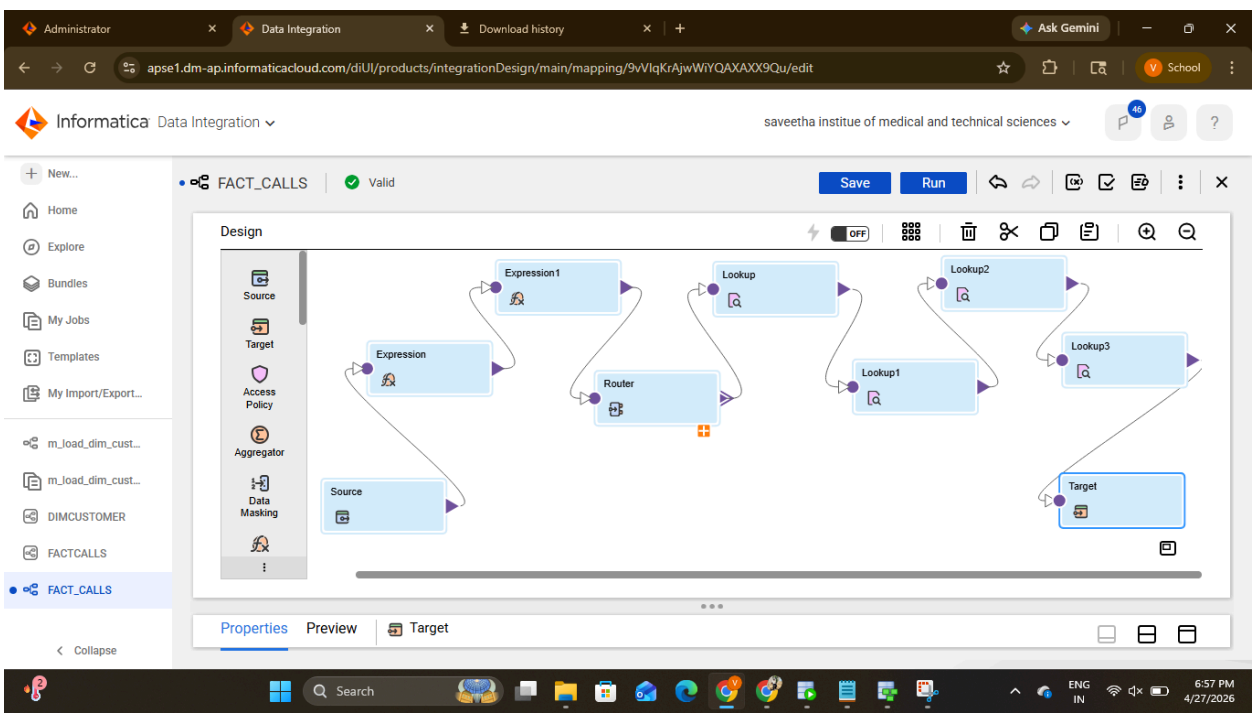

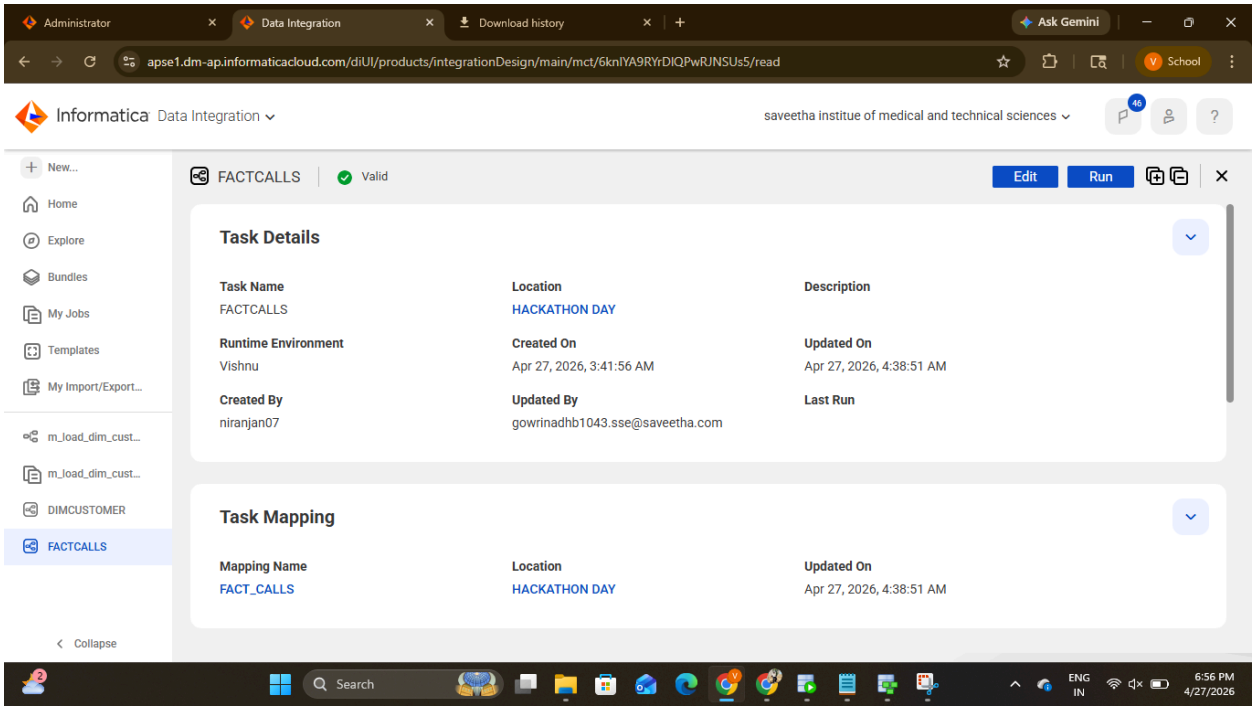

Mapping for the load of the fact table and the mapping task

Flow chart

```
STG_CDR_RAW (Source)
      ↓
Expression (Data Cleaning + Business Logic)
      ↓
Router (Valid / Invalid Records)
  ├── VALID RECORDS
  │     ↓
  │   Lookup DIM_CUSTOMER
  │     ↓
  │   Lookup DIM_TOWER
  │     ↓
  │   Lookup DIM_DATE
  │     ↓
  │   Lookup DIM_CALL_TYPE
  │     ↓
  │   Expression (Final Transformations)
  │     ↓
  │   Target → FACT_CALLS (INSERT)
  │
  └── INVALID RECORDS
```

↓

Expression (Error Message)

↓

Target → ERROR_LOG

Expressions used:

DURATION CLEANING (MOST IMPORTANT)

Removes `-`, text, nulls

```
IIF(
 REG_MATCH(LTRIM(RTRIM(DURATION)), '^[0-9]+$'),
 TO_INTEGER(LTRIM(RTRIM(DURATION))),
 NULL
)
```

2. REVENUE CALCULATION

```
TO_DECIMAL(duration_clean) * 0.02
```

3.INTERNATIONAL FLAG

```
IIF(CALL_TYPE = 'INT', 1, 0)
```

4.DATE KEY GENERATION

Converts timestamp → `DDMMYYYY`

```
TO_INTEGER(
 TO_CHAR(
   TO_DATE(CALL_TIMESTAMP, 'YYYY-MM-DD HH24:MI:SS'),
   'DDMMYYYY'
 )
)
```

5.Duration clean

```
IIF(
    REG_MATCH(LTRIM(RTRIM(DURATION)), '^[0-9]+(\.[0-9]+)?$'),
    TO_DECIMAL(LTRIM(RTRIM(DURATION))),
    NULL
)
```

KPI-1

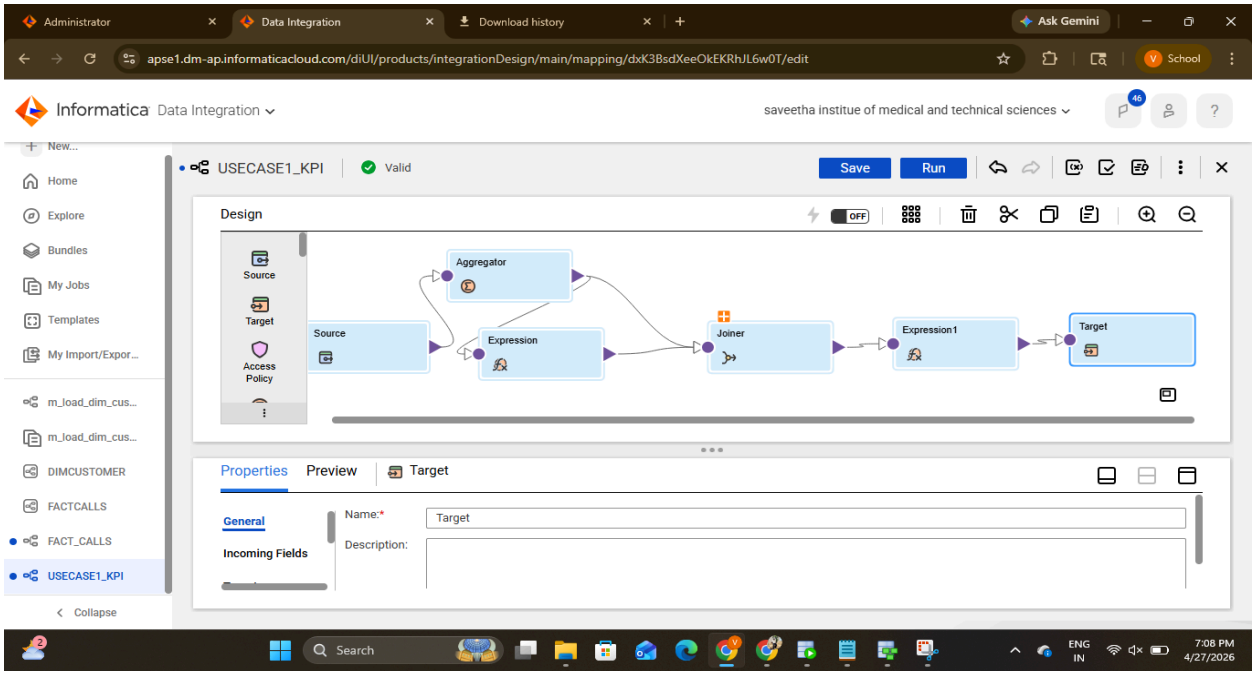
Administrator
Data Integration
Download history
Ask Gemini
apse1.dm-ap.informaticacloud.com/diUI/products/integrationDesign/main/mapping/dxK3BsdXeeOkEKRhJL6w0T/edit
Informatica Data Integration
saveetha institue of medical and technical sciences
Home
Explore
Bundles
My Jobs
Templates
My Import/Expor...
m_load_dim_cus...
m_load_dim_cus...
DIMCUSTOMER
FACTCALLS
FACT_CALLS
USECASE1_KPI
Collapse
USECASE1_KPI
Valid
Save
Run
Design
Source
Target
Access Policy
Aggregator
Source
Expression
Joiner
Expression1
Target
Properties
Preview
Target
General
Incoming Fields
Name:*
Target
Description:

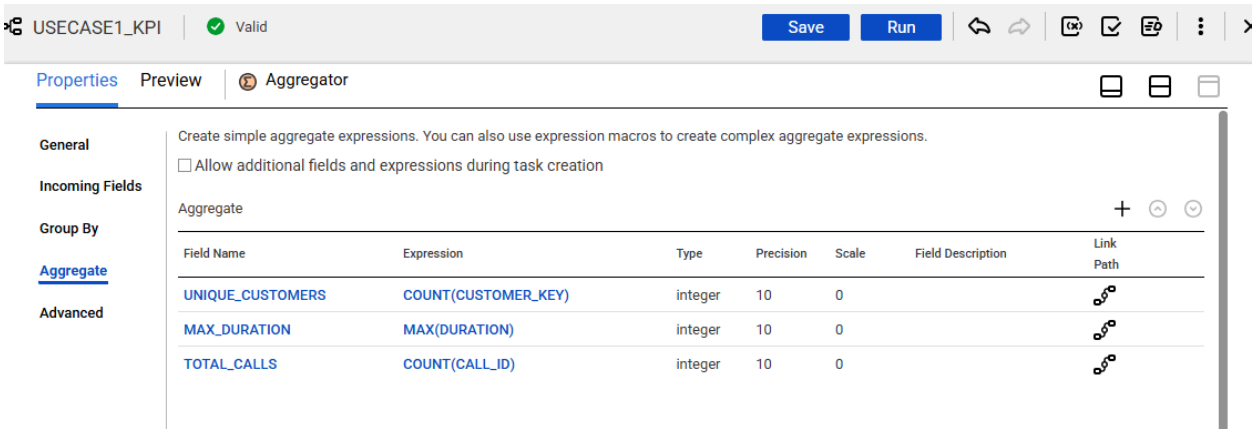
USECASE1_KPI
Valid
Save
Run
Properties
Preview
Aggregator
General
Incoming Fields
Group By
Aggregate
Advanced
Create simple aggregate expressions. You can also use expression macros to create complex aggregate expressions.
Allow additional fields and expressions during task creation
Aggregate
Field Name
Expression
Type
Precision
Scale
Field Description
Link Path
UNIQUE_CUSTOMERS
COUNT(CUSTOMER_KEY)
integer
10
0
MAX_DURATION
MAX(DURATION)
integer
10
0
TOTAL_CALLS
COUNT(CALL_ID)
integer
10
0

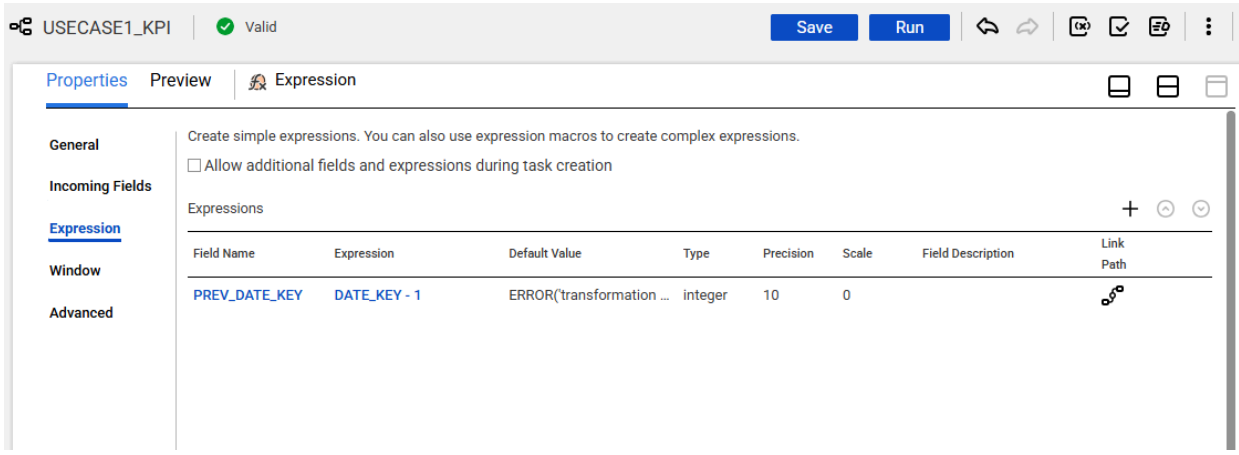
USECASE1_KPI
Valid
Save
Run
Properties
Preview
Expression
General
Incoming Fields
Expression
Window
Advanced
Create simple expressions. You can also use expression macros to create complex expressions.
Allow additional fields and expressions during task creation
Expressions
Field Name
Expression
Default Value
Type
Precision
Scale
Field Description
Link Path
PREV_DATE_KEY
DATE_KEY - 1
ERROR('transformation ...
integer
10
0

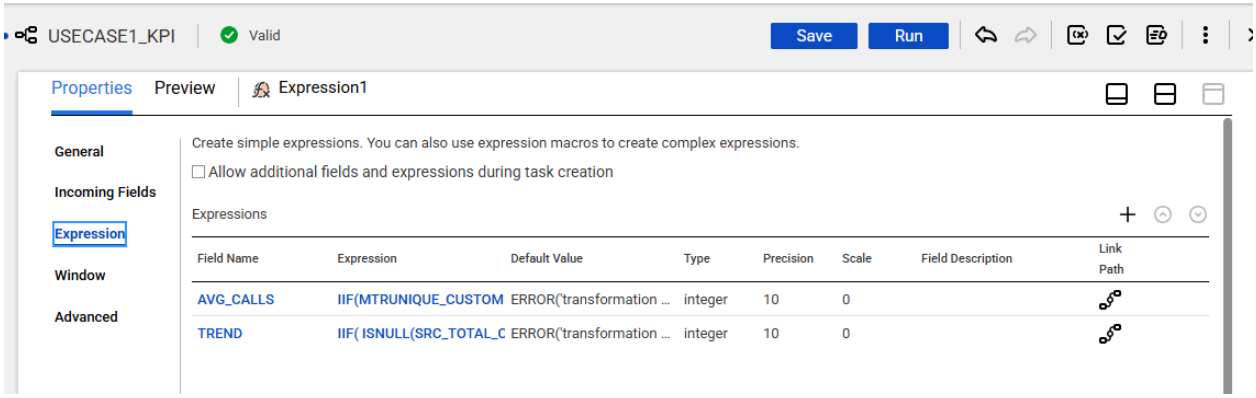

It analyses the trend ,avg calls per active customers , peak call duration, unique customers called daily