


1. Create table customer with column name customer_id, customer_name, contact_number and country.
2. Create table order with column name order_id, order_date, amount, customer_id (foreign key referencing customer)
3. Insert a sample data minimum 5 records in both table.
4. Update the contact name of customer with ID 3 to 'laxmi prasad'.
5. Update the amount of order with ID 2 to 999.99.
6. Delete the customer with customer_id = 5.
7. Delete all orders with an amount less than 500.
8. List all orders sorted by amount in descending order.
9. Display the top 5 most expensive orders.
10. Show customer names sorted alphabetically.
11. Get the 3 most recent orders by order_date.
12. Retrieve orders, skipping the first 2 records and showing the next 5.
13. Find all customers whose name starts with 'A'.
14. Find customers whose contact name ends with 'son'.
15. List orders where amount is between 500 and 1500.
16. List customers from countries 'USA', 'Canada', and 'UK'.
17. List all orders with their amount and a status column showing 'High' if amount > 500, otherwise 'Low'.
18. Demonstrate what happens to orders when a customer is deleted using ON DELETE CASCADE.
19. Demonstrate what happens to orders when a customer is deleted using ON DELETE SET NULL.
20. Write an SQL query to display all customers and their corresponding orders.
21. Write an SQL query to list all customers and their orders, including customers who haven't placed any orders.
22. Write an SQL query to display Order ID, Order Date, and the Customer Name for each order.
23. Display customer names and order amounts sorted by customer name.
24. Use INNER JOIN to list customers who have placed orders with an amount greater than 1000.

1. Create table department with column name department_id and department name.
2. Create table employee with column name emp_id, first_name, last_name, email, salary.
3. Insert a sample data minimum 10 records in both table.
4. Modify the employee table definition to ensure that the department_id column references the department_id in the department table. This should enforce referential integrity. Write the SQL code required to implement this foreign key relationship.
5. Write an SQL statement to drop the existing foreign key from Employee and add a new one with ON DELETE CASCADE
6. If a department with DepartmentID = 1 is deleted, its associated employees should have their DepartmentID set to NULL. Then, update all employees whose DepartmentID is NULL to assign them to a different department with DepartmentID = 13.
7. What SQL command would you use to reassign all affected employees to department 13?
8. Write an SQL command to delete the employees whose EmployeeID is 2 and 3 using a single query.
9. Write a SQL query to select EmployeeID, FirstName, LastName, and Salary from the Employee table.

10. Use a CASE statement to create a new column in the result set, called SalaryStatus, that:
 - displays 'High' if the employee's salary is greater than or equal to 70,000
 - displays 'Medium' if the salary is between 40,000 and 69,999.
 - displays 'Low' if the salary is less than 40,000.
11. Write a query to retrieve employees who have a salary greater than 60,000 and whose LastName starts with the letter 'S'.
12. Write an SQL query to find employees whose EmployeeID is in 1, 3, 5, 7, and whose Salary is between 50,000 and 100,000.
13. Write a SQL query to find employees whose LastName does not start with the letter 'A'.
14. Write an SQL query to find all employees whose FirstName is exactly 3 characters long and starts with the letter 'S'.
15. Write an SQL query to find all employees whose LastName starts with 's' and ends with 'a'. The search should be case-sensitive.
16. Create 5 MySQL users: ram, krishna, sita, laxmiprasad all with password 'Pass@123'.
17. Grant SELECT permission on the employee table to sita.
18. Grant INSERT and UPDATE permissions on the employee table to krishna.
19. Grant ALL privileges on all tables in Softwarica_college to ram and laxmiprasad
20. Revoke SELECT permission on the employee table from sita.
21. Revoke ALL privileges from laxmiprasad and then drop his user account.
22. Show all permissions for the user krishna.

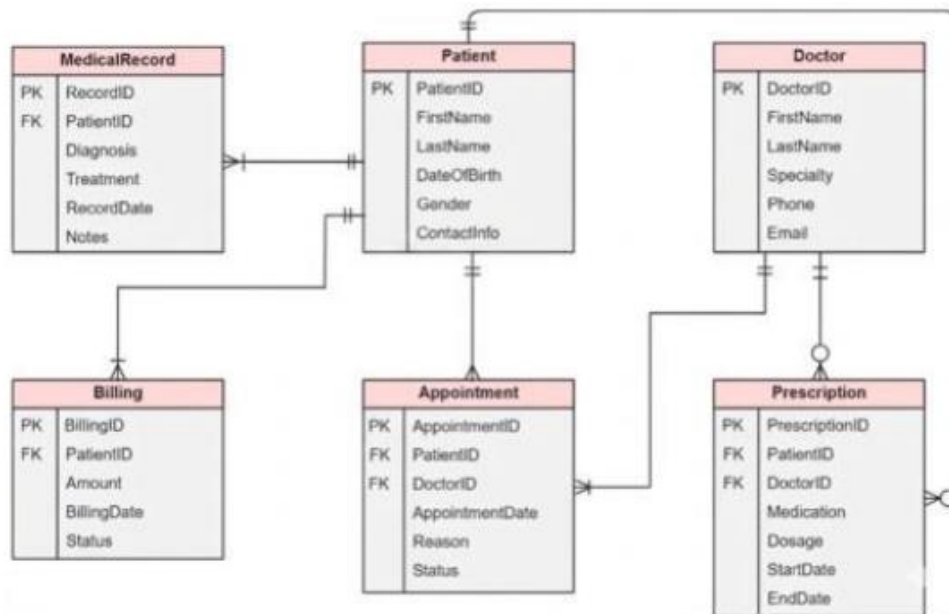

1. Write a CREATE TABLE statement for the Patient table with all fields shown in the ERD. Include appropriate data types and a primary key.
2. Create the Appointment table with foreign keys referencing Patient and Doctor. Add a CHECK constraint so Status can only be 'Scheduled', 'Completed', or 'Cancelled'.
3. Create the Prescription table with all ERD fields. Ensure PrescriptionID auto-increments and both PatientID and DoctorID are foreign keys.
4. Insert a new doctor named Dr. raman khatiwada, specialty 'Cardiology', phone '9812311222', email 'khatiwada@hospital.com' into the Doctor table.
5. Insert a patient named Ram Sharma, born 1990-05-10, gender 'M', into the Patient table. Then insert a billing record for him with Amount 5000 and Status 'Pending'.
6. Insert a medical record for PatientID 101 with diagnosis 'Hypertension', treatment 'Medication', recorded today.
7. Update the Status of all appointments for PatientID 101 from 'Scheduled' to 'Completed'.
8. A doctor changed their email. Update Doctor email to 'ramankhatiwada@hospital.com' where DoctorID = 1.

9. A prescription's EndDate needs to be extended by 30 days for PrescriptionID = 5. Write the UPDATE statement.
10. Delete all appointments that have Status 'Cancelled'.
11. Add a new column 'BloodGroup' of type VARCHAR(5) to the Patient table.
12. Rename the 'ContactInfo' column in the Patient table to 'Phone' and change its data type to VARCHAR(15).
13. Add a NOT NULL constraint to the Billing.Amount column and set a default value of 0.
14. List each patient's full name along with their doctor's full name and appointment date.
15. Show all patients and their billing amounts. Include patients with no billing records.
16. Retrieve all prescriptions along with the prescribing doctor's name and the patient's name.
17. Find all patients born between 1980 and 2000 using the BETWEEN operator.
18. List all doctors whose specialty is either 'Cardiology' or 'Neurology' using the IN operator.

1. Find the total billing amount paid by each patient. Display PatientID and total amount.
2. Count the total number of appointments booked for each doctor. Display Doctorname and appointment count.
3. Find the average billing amount from the Billing table.
4. Display the maximum and minimum billing amount recorded in the Billing table.
5. List all doctors who have issued more than 2 prescriptions. Display doctorname and prescription count.
6. Find the total number of medical records grouped by Diagnosis. Display Diagnosis and record count.
7. Display the full name of each patient along with their diagnosis from the MedicalRecord table.
8. List all appointments along with the patient's first name, last name, and the doctor's first name and last name.
9. Show all prescriptions along with the medication name, patient name, and the prescribing doctor's name.
10. List all patients and their billing details. Include patients who have no billing records as well.
11. Display all doctors and any appointments they have. Show doctors with no appointments too.