

[Write an Article](#)[Login](#)

Decision Making in Java (if, if-else, switch, break, continue, jump)

Decision Making in programming is similar to decision making in real life. In programming also we face some situations where we want a certain block of code to be executed when some condition is fulfilled. A programming language uses control statements to control the flow of execution of program based on certain conditions. These are used to cause the flow of execution to advance and branch based on changes to the state of a program.

Java's Selection statements:

- **if**
- **if-else**
- **nested-if**
- **if-else-if**
- **switch-case**
- **jump** – break, continue, return

These statements allow you to control the flow of your program's execution based upon conditions known only during run time.

- **if:** if statement is the most simple decision making statement. It is used to decide whether a certain statement or block of statements will be executed or not i.e if a certain condition is true then a block of statement is executed otherwise not.

Syntax:

```
if(condition)
{
    // Statements to execute if
    // condition is true
}
```


Here, **condition** after evaluation will be either true or false. if statement accepts boolean values – if the value is true then it will execute the block of statements under it.

If we do not provide the curly braces '{' and '}' after **if(condition)** then by default if statement will consider the immediate one statement to be inside its block. For example,

```
if(condition)
    statement1;
    statement2;

// Here if the condition is true, if block
// will consider only statement1 to be inside
// its block.
```

Flow chart:

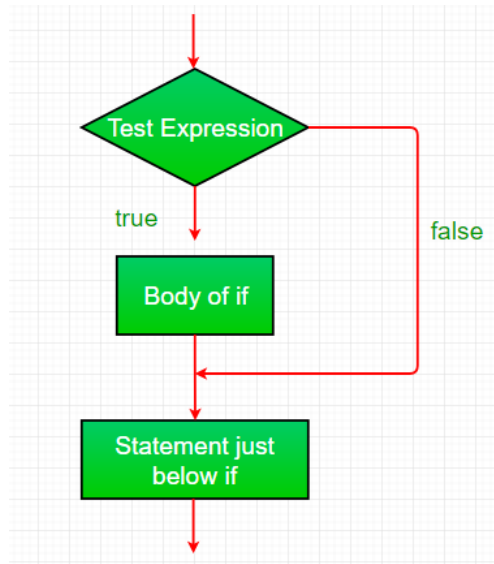

Example:

```
// Java program to illustrate If statement
class IfDemo
{
    public static void main(String args[])
    {
        int i = 10;

        if (i > 15)
            System.out.println("10 is less than 15");

        // This statement will be executed
        // as if considers one statement by default
        System.out.println("I am Not in if");
    }
}
```

[Run on IDE](#)

Output:




I am Not in if

- **if-else:** The if statement alone tells us that if a condition is true it will execute a block of statements and if the condition is false it won't. But what if we want to do something else if the condition is false. Here comes the else statement. We can use the else statement with if statement to execute a block of code when the condition is false.

Syntax:

```
if (condition)
{
    // Executes this block if
    // condition is true
}
else
{
    // Executes this block if
    // condition is false
}
```

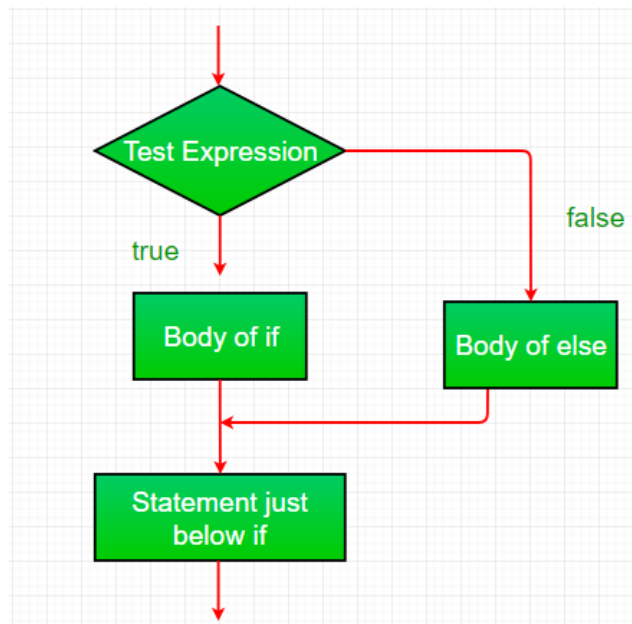**Example:**

```
// Java program to illustrate if-else statement
class IfElseDemo
{
    public static void main(String args[])
    {
        int i = 10;

        if (i < 15)
            System.out.println("i is smaller than 15");
        else
            System.out.println("i is greater than 15");
    }
}
```


[Run on IDE](#)**Output:**

```
i is smaller than 15
```

- **nested-if:** A nested if is an if statement that is the target of another if or else. Nested if statements means an if statement inside an if statement. Yes, java allows us to nest if statements within if statements. i.e, we can place an if statement inside another if statement.

Syntax:

```
if (condition1)
{
    // Executes when condition1 is true
    if (condition2)
    {
        // Executes when condition2 is true
    }
}
```

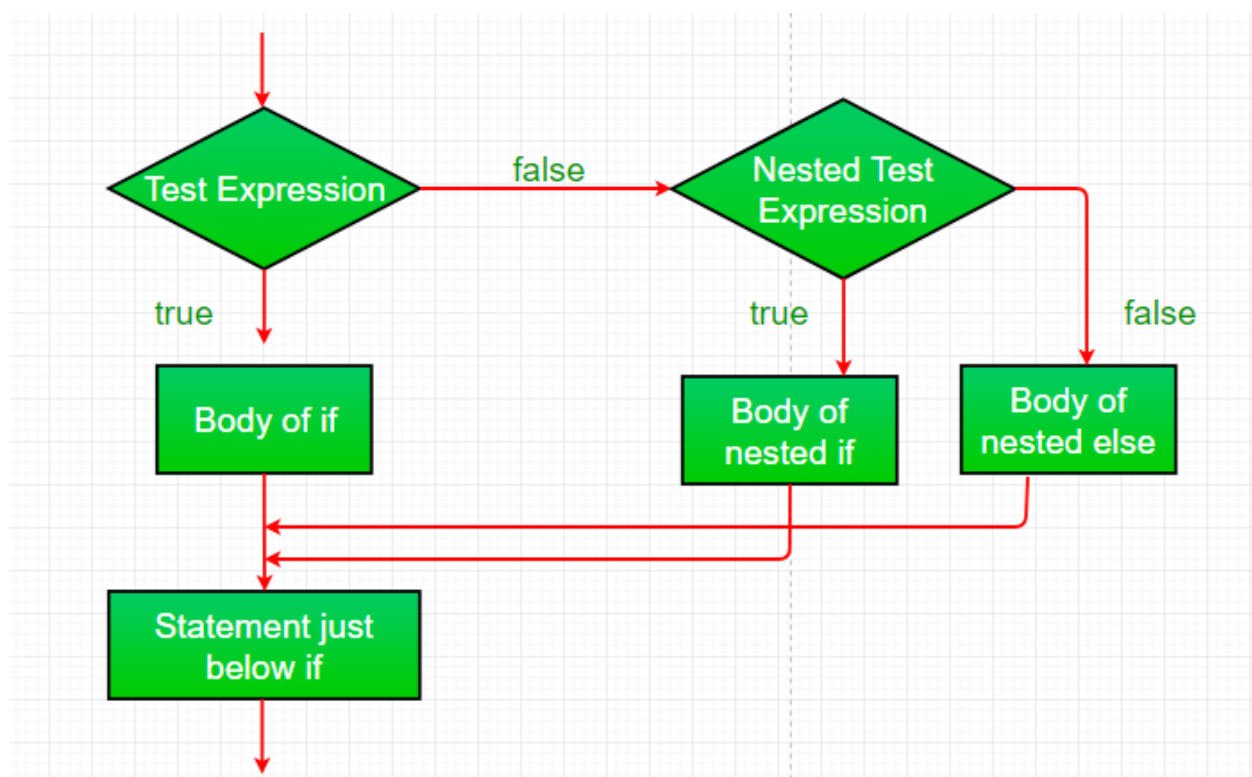

Example:

```
// Java program to illustrate nested-if statement
class NestedIfDemo
{
    public static void main(String args[])
    {
        int i = 10;
        if (i == 10)
        {
            // First if statement
            if (i < 15)
                System.out.println("i is smaller than 15");

            // Nested - if statement
            // Will only be executed if statement above
        }
    }
}
```

```
// it is true
if (i < 12)
    System.out.println("i is smaller than 12 too");
else
    System.out.println("i is greater than 15");
}
```


[Run on IDE](#)

Output:

```
i is smaller than 15
i is smaller than 12 too
```

- **if-else-if ladder:** Here, a user can decide among multiple options. The if statements are executed from the top down. As soon as one of the conditions controlling the if is true, the statement associated with that if is executed, and the rest of the ladder is bypassed. If none of the conditions is true, then the final else statement will be executed.

```
if (condition)
    statement;
else if (condition)
    statement;
.
.
else
    statement;
```

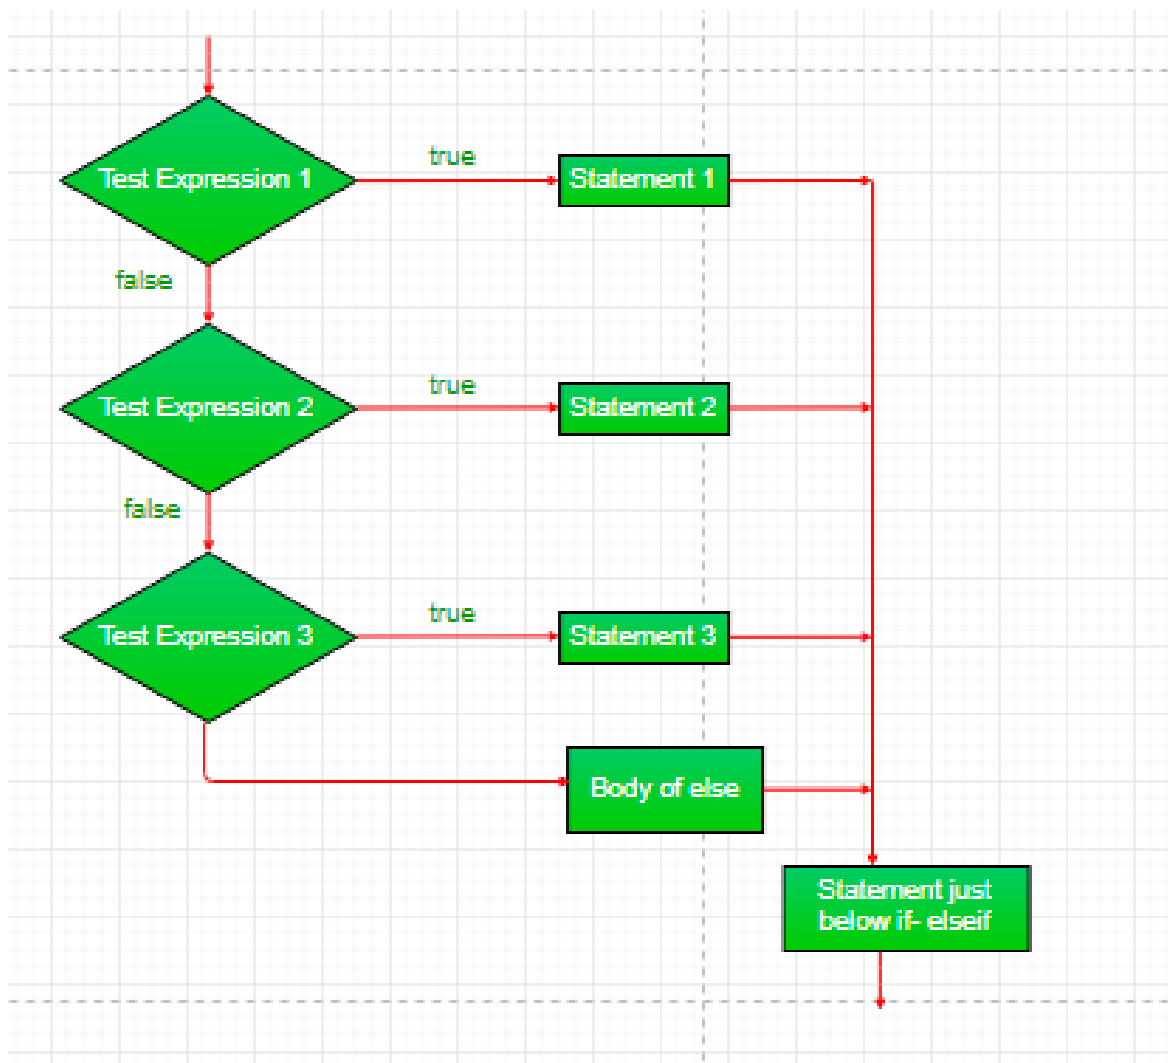

Example:

```
// Java program to illustrate if-else-if ladder
class ifelseifDemo
{
    public static void main(String args[])
    {
        int i = 20;

        if (i == 10)
            System.out.println("i is 10");
        else if (i == 15)
            System.out.println("i is 15");
        else if (i == 20)
            System.out.println("i is 20");
        else
            System.out.println("i is not present");
    }
}
```

Run on IDE

Output:


i is 20

- **switch-case** The switch statement is a multiway branch statement. It provides an easy way to dispatch execution to different parts of code based on the value of the expression.

Syntax:

```
switch (expression)
{
    case value1:
        statement1;
        break;
    case value2:
        statement2;
        break;
    .
    .
    case valueN:
        statementN;
        break;
    default:
        statementDefault;
}
```

- Expression can be of type byte, short, int char or an enumeration. Beginning with JDK7, *expression* can also be of type String.
- Duplicate case values are not allowed.
- The default statement is optional.
- The break statement is used inside the switch to terminate a statement sequence.
- The break statement is optional. If omitted, execution will continue on into the next case.

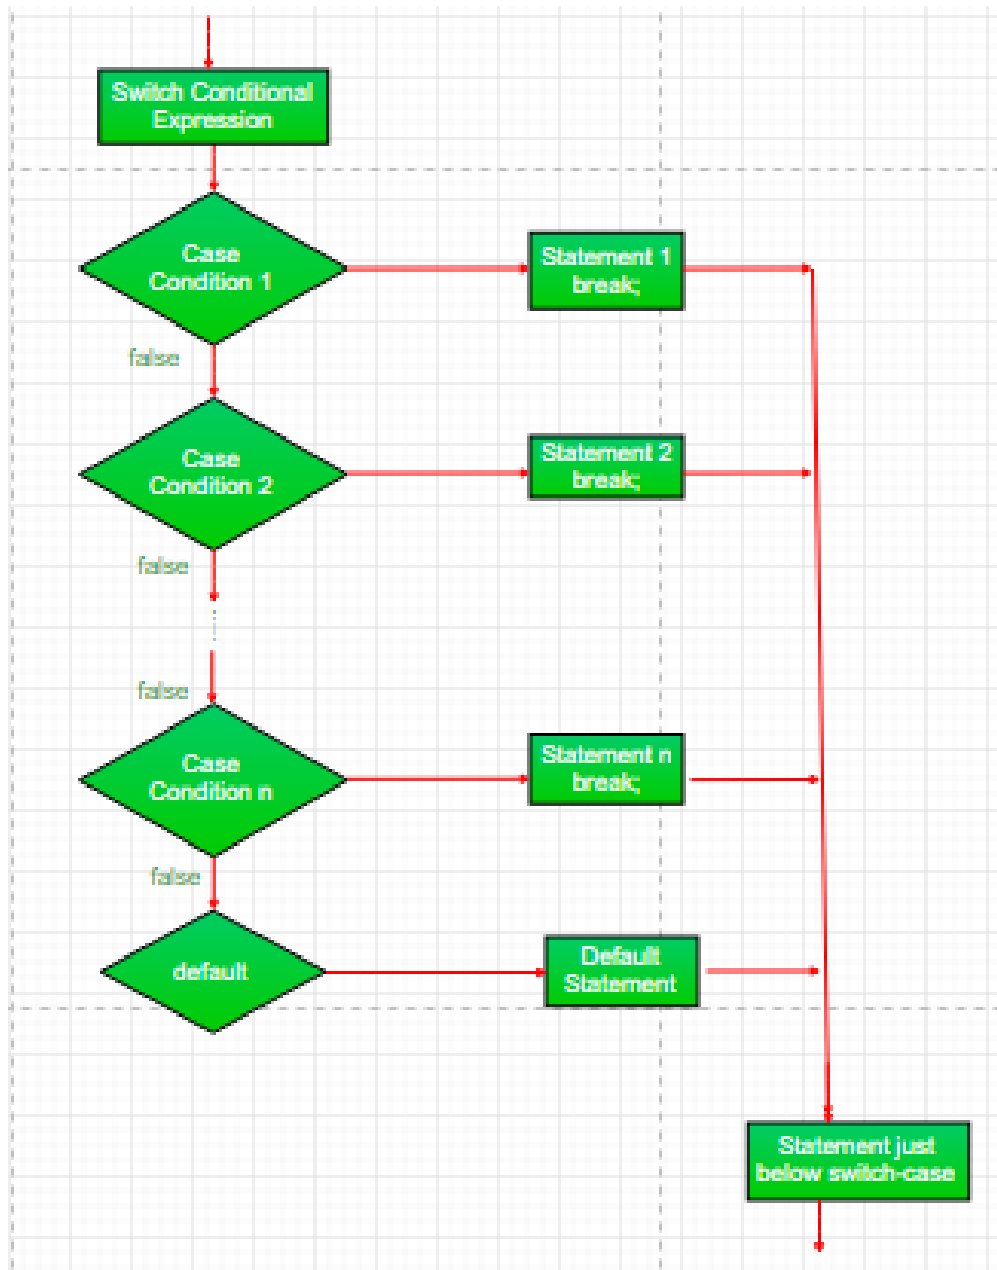

Example:

```
// Java program to illustrate switch-case
class SwitchCaseDemo
{
    public static void main(String args[])
    {
        int i = 9;
        switch (i)
        {
            case 0:
                System.out.println("i is zero.");
                break;
            case 1:
                System.out.println("i is one.");
                break;
            case 2:
                System.out.println("i is two.");
                break;
            default:
                System.out.println("i is greater than 2.");
        }
    }
}
```



```

    }
}

```

[Run on IDE](#)

Output:

```
i is greater than 2.
```

- **jump:** Java supports three jump statement: **break**, **continue** and **return**. These three statements transfer control to other part of the program.


1. **Break:** In Java, break is majorly used for:

- Terminate a sequence in a switch statement (discussed above).
- To exit a loop.
- Used as a “civilized” form of goto.

Using break to exit a Loop

Using break, we can force immediate termination of a loop, bypassing the conditional expression and any remaining code in the body of the loop.

Note: Break, when used inside a set of nested loops, will only break out of the innermost loop.

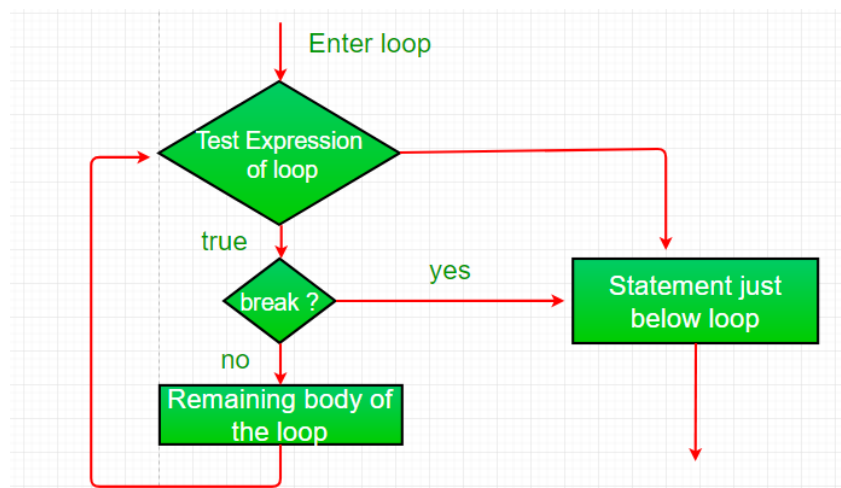

Example:

```

// Java program to illustrate using
// break to exit a loop
class BreakLoopDemo
{
    public static void main(String args[])
    {
        // Initially loop is set to run from 0-9
        for (int i = 0; i < 10; i++)
        {
            // terminate loop when i is 5.
            if (i == 5)
                break;

            System.out.println("i: " + i);
        }
    }
}

```

```
        }  
    }  
    System.out.println("Loop complete.");  
}
```

[Run on IDE](#)

Output:

```
i: 0  
i: 1  
i: 2  
i: 3  
i: 4  
Loop complete.
```

Using break as a Form of Goto

Java does not have a goto statement because it provides a way to branch in an arbitrary and unstructured manner. Java uses label. A Label is used to identify a block of code.

Syntax:

```
label:  
{  
    statement1;  
    statement2;  
    statement3;  
    .  
    .  
}
```

Now, break statement can be used to jump out of target block.

Note: You cannot break to any label which is not defined for an enclosing block.

Syntax:

```
break label;
```

Example:

```
// Java program to illustrate using break with goto  
class BreakLabelDemo  
{  
    public static void main(String args[])  
    {  
        boolean t = true;  
  
        // label first  
        first:  
        {  
            // Illegal statement here as label second is not  
            // introduced yet break second;  
            second:  
            {  
                third:  
                {  
                    // Before break  
                    System.out.println("Before the break statement");  
                }  
            }  
        }  
    }  
}
```

```

        // break will take the control out of
        // second label
        if (t)
            break second;
        System.out.println("This won't execute.");
    }
    System.out.println("This won't execute.");
}

// Third block
System.out.println("This is after second block.");
}
}
}

```

[Run on IDE](#)


Output:

```

Before the break.
This is after second block.

```

2. **Continue:** Sometimes it is useful to force an early iteration of a loop. That is, you might want to continue running the loop but stop processing the remainder of the code in its body for this particular iteration. This is, in effect, a goto just past the body of the loop, to the loop's end. The continue statement performs such an action.

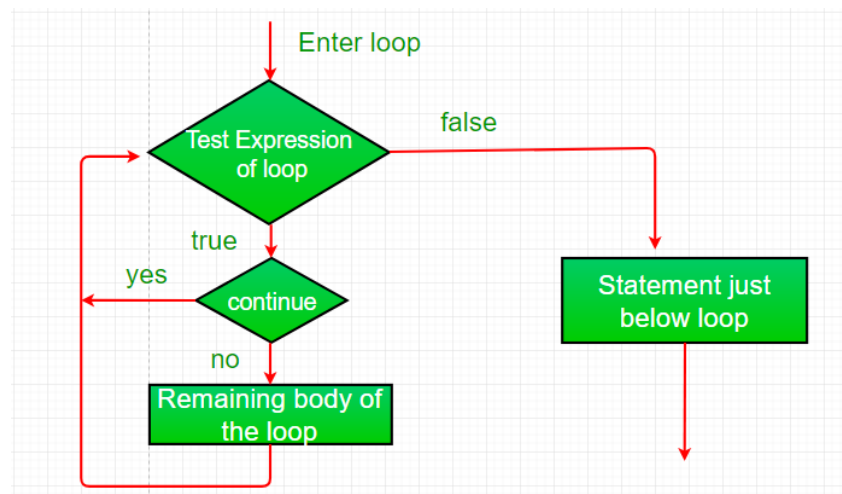

Example:

```

// Java program to illustrate using
// continue in an if statement
class ContinueDemo
{
    public static void main(String args[])
    {
        for (int i = 0; i < 10; i++)
        {
            // If the number is even
            // skip and continue
            if (i%2 == 0)
                continue;
        }
    }
}

```

```
        // If number is odd, print it
        System.out.print(i + " ");
    }
}
```

[Run on IDE](#)

Output:

1 3 5 7 9

3. **Return:** The return statement is used to explicitly return from a method. That is, it causes a program control to transfer back to the caller of the method.

Example:

```
// Java program to illustrate using return
class Return
{
    public static void main(String args[])
    {
        boolean t = true;
        System.out.println("Before the return.");

        if (t)
            return;

        // Compiler will bypass every statement
        // after return
        System.out.println("This won't execute.");
    }
}
```

[Run on IDE](#)

Output:

Before the return.

This article is contributed by **Anuj Chauhan** and Harsh Aggarwal. If you like GeeksforGeeks and would like to contribute, you can also write an article using contribute.geeksforgeeks.org or mail your article to contribute@geeksforgeeks.org. See your article appearing on the GeeksforGeeks main page and help other Geeks.

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.



Please write to us at contribute@geeksforgeeks.org to report any issue with the above content.

Recommended Posts:

[Switch Statement in Java](#)

[String in Switch Case in Java](#)

[Java Identifiers](#)

[For-each loop in Java](#)

[Loops in Java](#)

[Java Math copySign\(\) method with Examples](#)

[Java | Converting an Image into Grayscale using cvtColor\(\)](#)

[Java | Removing whitespaces using Regex](#)

[Java System.nanoTime\(\) vs System.currentTimeMillis](#)

[Java toDegrees\(\) method with Example](#)

(Login to Rate)

1.6

Average Difficulty : **1.6/5.0**
Based on **20** vote(s)

☐

Add to TODO List

☐

Mark as DONE

Basic

Easy

Medium

Hard

Expert

Writing code in comment? Please use ide.geeksforgeeks.org, generate link and share the link here.

Load Comments

Share this post!

A computer science portal for geeks

710-B, Advant Navis Business Park,
Sector-142, Noida, Uttar Pradesh - 201305
feedback@geeksforgeeks.org

COMPANY

[About Us](#)
[Careers](#)
[Privacy Policy](#)
[Contact Us](#)

PRACTICE

[Company-wise](#)
[Topic-wise](#)
[Contests](#)
[Subjective Questions](#)

LEARN

[Algorithms](#)
[Data Structures](#)
[Languages](#)
[CS Subjects](#)
[Video Tutorials](#)

CONTRIBUTE

[Write an Article](#)
[GBlog](#)
[Videos](#)

@geeksforgeeks, Some rights reserved