

IOT Dashboard using Power BI and Google Sheets

Google Spreadsheet script to get the values form the web link:

```
function doGet(e) {
  Logger.log( JSON.stringify(e) );
  var result = 'Ok';
  if (e.parameter == 'undefined') {
    result = 'No Parameters';
  }
  else {
    var sheet_id = ''; // Spreadsheet ID
    var sheet = SpreadsheetApp.openById(sheet_id).getActiveSheet();
    var newRow = sheet.getLastRow() + 1;
    var rowData = [];
    var Curr_Date = new Date();
    rowData[0] = Curr_Date; // Date in column A
    var Curr_Time = Utilities.formatDate(Curr_Date, 'Asia/', 'HH:mm:ss');
    rowData[1] = Curr_Time; // Time in column B
    for (var param in e.parameter) {
      Logger.log('In for loop, param=' + param);
      var value = stripQuotes(e.parameter[param]);
      Logger.log(param + ':' + e.parameter[param]);
      switch (param) {
        case 'temperature':
          rowData[2] = value; // Temperature in column C
          result = 'Temperature Written on column C';
          break;
        case 'humidity':
          rowData[3] = value; // Humidity in column D
```

```

result += ' ,Humidity Written on column D';

break;

default:

result = "unsupported parameter";

}

}

Logger.log(JSON.stringify(rowData));

var newRange = sheet.getRange(newRow, 1, 1, rowData.length);

newRange.setValues([rowData]);

}

return ContentService.createTextOutput(result);


}

function stripQuotes( value ) {

return value.replace(/^["]|["]$/g, "");

}

```

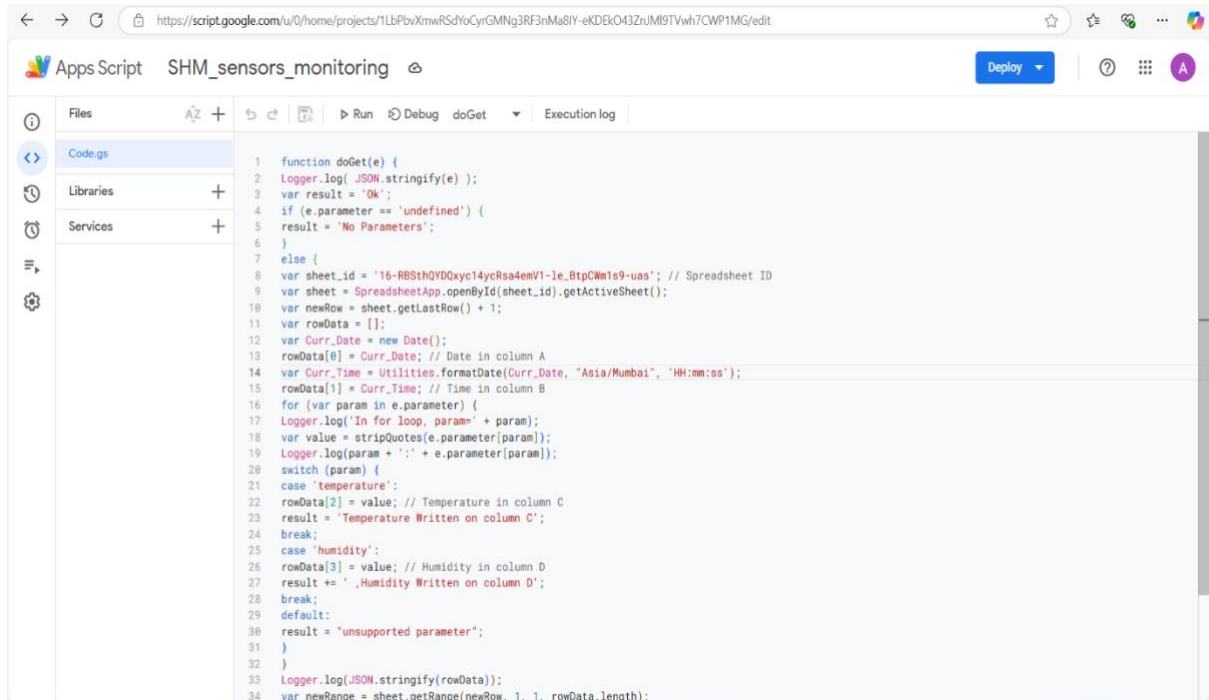

```

1  function doGet(e) {
2    Logger.log( JSON.stringify(e) );
3    var result = 'Ok';
4    if (e.parameter == 'undefined') {
5      result = 'No Parameters';
6    }
7    else {
8      var sheet_id = '16-RBStH0YDQxyc14ycRsa4emV1-le_BtpCWm1s9-uas'; // Spreadsheet ID
9      var sheet = SpreadsheetApp.openById(sheet_id).getActiveSheet();
10     var newRow = sheet.getLastRow() + 1;
11     var rowData = [];
12     var Curr_Date = new Date();
13     rowData[0] = Curr_Date; // Date in column A
14     var Curr_Time = Utilities.formatDate(Curr_Date, "Asia/Mumbai", 'HH:mm:ss');
15     rowData[1] = Curr_Time; // Time in column B
16     for (var param in e.parameter) {
17       Logger.log('In for loop, param=' + param);
18       var value = stripQuotes(e.parameter[param]);
19       Logger.log(param + ':' + e.parameter[param]);
20       switch (param) {
21         case 'temperature':
22           rowData[2] = value; // Temperature in column C
23           result = 'Temperature Written on column C';
24           break;
25         case 'humidity':
26           rowData[3] = value; // Humidity in column D
27           result += ' ,Humidity Written on column D';
28           break;
29         default:
30           result = "unsupported parameter";
31         }
32       }
33     Logger.log(JSON.stringify(rowData));
34     var newRange = sheet.getRange(newRow, 1, 1, rowData.length);

```

URL:https://script.google.com/macros/s/AKfycbw0ywYGGshC3nouL6USLspToH82VodI7TKrZ79RoI0x5i9UV_patIXsWJo4Cv-Fxf0_fQ/exec?temperature=100&humidity=24

Deployment Id:

The screenshot shows a web browser with multiple tabs. The active tab is a Google search result for the query "Temperature Written on column C ,humidity Written on column D". The search results show a link to a script on Google User Content, which is a macro for the JupyterLab environment. The macro is named "ee.vjtii.ac.in/echo?user_content_key=Olp3dDZS3AZ_R7IK3L1W9ZpSVhMYkg:X65_6bzZr1r1PKqra9CIX0t_hSho5_JCO-ZzDn8ZA9kKTPSlqXV..." and is used to display the output of a JupyterLab notebook. The output of the notebook is a table with two columns: "Temperature" and "Humidity". The table contains two rows of data: the first row has values "25.0" and "65.0", and the second row has values "26.0" and "66.0".

[illegible]

Power BI dashboard:

