

## Jobs

### Generated by Talend Cloud Data Management Platform

Project Name	talendcloud	GENERATION DATE	31 Jan, 2019 3:01:07 PM
AUTHOR	Joshi, Nishad	Talend Cloud VERSION	7.1.1.20181026_1147

### **Summary**

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

### **Project Description**


Properties	Values
Name	talendcloud
Language	java

|--|

## **Description**

Properties	Values
Name	fsd
Author	Joshi, Nishad
Version	0.1
Purpose	
Status	
Description	
Creation	24 Feb, 2017 9:45:17 AM
Modification	9 Aug, 2018 3:33:44 PM

### **Preview Picture**

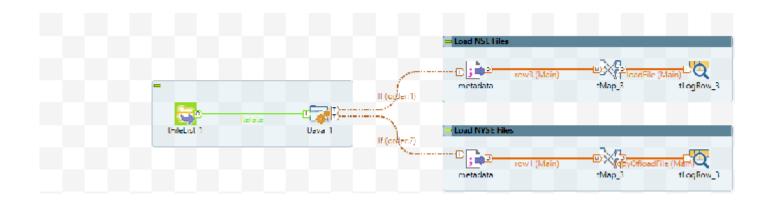

## **Settings**

### Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

### Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true

Catch user errors	true
Catch user warnings	true

### **Context List**

#### ContextDefault

Name	Prompt	Need Prompt?	Туре	Value	Source
strclause	strclause?	false	id_String		

## **Component List**

Component Name	Component Type
tFileInputDelimited_1	tFileInputDelimited
tFileInputDelimited_2	tFileInputDelimited
tFileList_1	tFileList
tJava_1	tJava
tLogRow_1	tLogRow
tLogRow_2	tLogRow
tMap_1	tMap

tMap_2	tMap	

## **Components Description**

### Component tFileInputDelimited

 UNIQUE NAME	tFileInputDelimited_1	INPUT(S)	tJava_1
LABEL	metadata	OUTPUT(S)	tMap_1

Component Parameters:		
Properties	Values	
Unique Name	tFileInputDelimited_1	
Component Name	tFileInputDelimited	
Version	0.102 (ALPHA)	
Family	File/Input	
Start	false	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	false	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tFileInputDelimited	
Update components	true	

IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-Studio-20181026_1147-V7.1.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SV	WHTEH
Schema	repository: DELIM:NYSE - metadata
File name/Stream	((String)globalMap.get("tFileList_1_CURRENT_FILEPATH"))
CSV options	false
Row Separator	"\n"
CSV Row Separator	"\n"
Field Separator	" "
Escape char	
Text enclosure	
Header	1
Footer	0
Limit	1000
Skip empty rows	false
Uncompress as zip file	false

Die on error	false
Schema	repository: DELIM:NYSE - metadata
!!!TEMP_DIR.NAME!!!	"D:/Talend-Tools-Studio-20151214_1327-V6.1.1/workspace"
Advanced separator (for numbers)	false
Thousands separator	","
Decimal separator	" "
Extract lines at random	false
Number of lines	10
Trim all columns	false
Check column to trim	[{SCHEMA_COLUMN=exchange, TRIM=false}, {SCHEMA_COLUMN=stock_symbol, TRIM=false}, {SCHEMA_COLUMN=date, TRIM=false}, {SCHEMA_COLUMN=stock_price_open, TRIM=false}, {SCHEMA_COLUMN=stock_price_high, TRIM=false}, {SCHEMA_COLUMN=stock_price_low, TRIM=false}, {SCHEMA_COLUMN=stock_price_close, TRIM=false}, {SCHEMA_COLUMN=stock_volume, TRIM=false}, {SCHEMA_COLUMN=stock_volume, TRIM=false}, {SCHEMA_COLUMN=stock_price_adj_close, TRIM=false}]
Check each row structure against schema	false
Check date	false
Encoding	"US-ASCII"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false
Decode table	[{SCHEMA_COLUMN=exchange, DECODE=false}, {SCHEMA_COLUMN=stock_symbol, DECODE=false}, {SCHEMA_COLUMN=date, DECODE=false}, {SCHEMA_COLUMN=stock_price_open, DECODE=false}, {SCHEMA_COLUMN=stock_price_high, DECODE=false}, {SCHEMA_COLUMN=stock_price_low, DECODE=false}, {SCHEMA_COLUMN=stock_price_low, DECODE=false}, {SCHEMA_COLUMN=stock_price_close, DECODE=false}, {SCHEMA_COLUMN=stock_volume, DECODE=false}, {SCHEMA_COLUMN=stock_price_adj_close, DECODE=false}]
!!!DESTINATION.NAME!!!	

Min column number of optimize code	100
Label format	metadata
Hint format	<b>UNIQUE_NAME</b> <brcomment< td=""></brcomment<>
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for metadata :

Column	Key	Туре	Length	Precision	Nullable	Comment
exchange	false	String	4		true	
stock_symbol	false	String	3		true	
date	false	String	10		true	
stock_price_open	false	String	4		true	
stock_price_high	false	Float	4	3	true	
stock_price_low	false	Float	4	3	true	
stock_price_close	false	Float	4	3	true	
stock_volume	false	String	7		true	
stock_price_adj_close	false	Float	4	3	true	

# Original Function Parameters: Component tFileInputDelimited

 UNIQUE NAME	tFileInputDelimited_2	INPUT(S)	tJava_1
LABEL	metadata	OUTPUT(S)	tMap_2

Component Paramete	ers:	
Properties	Values	
Unique Name	tFileInputDelimited_2	
Component Name	tFileInputDelimited	
Version	0.102 (ALPHA)	
Family	File/Input	
Start	false	
Startable	true	
SUBTREE_START	true	
END_OF_FLOW	false	
Activate	true	
DUMMY	false	
tStatCatcher Statistics	false	
Help	org.talend.help.tFileInputDelimited	
Update components	true	
IREPORT_PATH		
JAVA_LIBRARY_PATH	C:\Talend-Studio-20181026_1147-V7.1.1\configuration\lib\java	
Subjob color		

Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
REPOSITORY_ALLOW_AUTO_SV	ALIEH
Schema	repository: DELIM:NYSE - metadata
File name/Stream	((String)globalMap.get("tFileList_1_CURRENT_FILEPATH"))
CSV options	false
Row Separator	"\n"
CSV Row Separator	"\n"
Field Separator	","
Escape char	
Text enclosure	
Header	1
Footer	0
Limit	1000
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
Schema	repository: DELIM:NYSE - metadata
!!!TEMP_DIR.NAME!!!	"D:/Talend-Tools-Studio-20151214_1327-V6.1.1/workspace"

Advanced separator (for numbers)	false
Thousands separator	II II
Decimal separator	
Extract lines at random	false
Number of lines	10
Trim all columns	false
Check column to trim	[{SCHEMA_COLUMN=exchange, TRIM=false}, {SCHEMA_COLUMN=stock_symbol, TRIM=false}, {SCHEMA_COLUMN=date, TRIM=false}, {SCHEMA_COLUMN=stock_price_open, TRIM=false}, {SCHEMA_COLUMN=stock_price_high, TRIM=false}, {SCHEMA_COLUMN=stock_price_low, TRIM=false}, {SCHEMA_COLUMN=stock_price_close, TRIM=false}, {SCHEMA_COLUMN=stock_volume, TRIM=false}, {SCHEMA_COLUMN=stock_volume, TRIM=false}, {SCHEMA_COLUMN=stock_price_adj_close, TRIM=false}]
Check each row structure against schema	false
Check date	false
Encoding	"US-ASCII"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false
Decode table	[{SCHEMA_COLUMN=exchange, DECODE=false}, {SCHEMA_COLUMN=stock_symbol, DECODE=false}, {SCHEMA_COLUMN=date, DECODE=false}, {SCHEMA_COLUMN=stock_price_open, DECODE=false}, {SCHEMA_COLUMN=stock_price_high, DECODE=false}, {SCHEMA_COLUMN=stock_price_low, DECODE=false}, {SCHEMA_COLUMN=stock_price_low, DECODE=false}, {SCHEMA_COLUMN=stock_price_close, DECODE=false}, {SCHEMA_COLUMN=stock_volume, DECODE=false}, {SCHEMA_COLUMN=stock_price_adj_close, DECODE=false}]
!!!DESTINATION.NAME!!!	
Min column number of optimize code	100
Label format	metadata
Hint format	<b>UNIQUE_NAME</b> COMMENT

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for metadata:

Column	Key	Туре	Length	Precision	Nullable	Comment
exchange	false	String	4		true	
stock_symbol	false	String	3		true	
date	false	String	10		true	
stock_price_open	false	String	4		true	
stock_price_high	false	Float	4	3	true	
stock_price_low	false	Float	4	3	true	
stock_price_close	false	Float	4	3	true	
stock_volume	false	String	7		true	
stock_price_adj_close	false	Float	4	3	true	

# Original Function Parameters: Component tFileList

UNIQUE NAME	tFileList_1	INPUT(S)	none

BELUNIQUE_NAMEOUTPUT(S) tJava_1
---------------------------------

Component Parameters:					
Properties	Values				
Unique Name	tFileList_1				
Component Name	tFileList				
Version	0.102 (ALPHA)				
Family	File/Management Orchestration				
Start	true				
Startable	true				
SUBTREE_START	true				
END_OF_FLOW	true				
Activate	true				
DUMMY	false				
tStatCatcher Statistics	false				
Help	org.talend.help.tFileList				
Update components	true				
IREPORT_PATH					
JAVA_LIBRARY_PATH	C:\Talend-Studio-20181026_1147-V7.1.1\configuration\lib\java				
Subjob color					
Title color					
Enable parallel execution	false				
Number of parallel executions	2				

PARALLELIZE_KEEP_EMPTY	false
Directory	"F:/Trainings/CITI/SampleFiles/FTP"
FileList Type	FILES
Includes subdirectories	false
Case Sensitive	YES
Generate Error if no file found	false
Use Glob Expressions as Filemask (Unchecked means Perl5 Regex Expressions)	true
Files	[{FILEMASK="*.*"}]
By default	true
By file name	false
By file size	false
By modified date	false
ASC	true
DESC	false
Use Exclude Filemask	false
Exclude Filemask	"*.txt"
Format file path to slash(/) style (useful on Windows)	false
Label format	UNIQUE_NAME
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row
Show Information	false

г

Comment	
Use an existing validation rule	false
Validation Rule Type	

# Original Function Parameters: Component tJava

UNIQUE NAME	tJava_1	a_1 INPUT(S) tFileList_1	
			tFileInputDelimited_1
LABEL	UNIQUE_NAME	OUTPUT(S)	, tFileInputDelimited_2

Component Parameters:				
Properties	Values			
Unique Name	tJava_1			
Component Name	tJava			
Version	0.101 (ALPHA)			
Family	Custom_Code			
Start	false			
Startable	true			
SUBTREE_START	false			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tJava			

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-Studio-20181026_1147-V7.1.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Code	System.out.println(((String)globalMap.get("tFileList_1_CURRENT_FILEPATH")));
Import	//import java.util.List;
Schema	Built-In
Label format	UNIQUE_NAME
Hint format	<b>_UNIQUE_NAME</b> _COMMENT
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

### Schema for tJava\_1 :

	Column	Key	Туре	Length	Precision	Nullable	Comment
İ							

# Original Function Parameters: Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_1	
	LABEL	tLogRow_1	OUTPUT(S)	none	

Component Parameters:				
Properties	Values			
Unique Name	tLogRow_1			
Component Name	tLogRow			
Version	0.101 (ALPHA)			
Family	Logs_Errors			
Startable	false			
SUBTREE_START	false			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tLogRow			
Update components	true			
IREPORT_PATH				
JAVA_LIBRARY_PATH	C:\Talend-Studio-20181026_1147-V7.1.1\configuration\lib\java			
Subjob color				
Title color				
Enable parallel execution	false			
Number of parallel executions	2			

PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SV	ALLIEH
Schema	Built-In
Basic	false
Table (print values in cells of a table)	true
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=exchange, LENGTH=10}, {SCHEMA_COLUMN=stock_symbol, LENGTH=10}, {SCHEMA_COLUMN=date, LENGTH=10}, {SCHEMA_COLUMN=stock_price_open, LENGTH=10}, {SCHEMA_COLUMN=stock_price_high, LENGTH=10}, {SCHEMA_COLUMN=stock_price_low, LENGTH=10}, {SCHEMA_COLUMN=stock_price_close, LENGTH=10}, {SCHEMA_COLUMN=stock_volume, LENGTH=10}, {SCHEMA_COLUMN=stock_price_adj_close, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	tLogRow_1
Hint format	<b>UNIQUE_NAME</b> <brcomment< td=""></brcomment<>

Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for metadata:

Column	Key	Туре	Length	Precision	Nullable	Comment
exchange	false	String	4		true	
stock_symbol	false	String	3		true	
date	false	String	10		true	
stock_price_open	false	String	4		true	
stock_price_high	false	Float	4	3	true	
stock_price_low	false	Float	4	3	true	
stock_price_close	false	Float	4	3	true	
stock_volume	false	String	7		true	
stock_price_adj_close	false	Float	4	3	true	

# Original Function Parameters: Component tLogRow

	UNIQUE NAME	tLogRow_2	INPUT(S)	tMap_2

|--|

Component Parameters:				
Properties	Values			
Unique Name	tLogRow_2			
Component Name	tLogRow			
Version	0.101 (ALPHA)			
Family	Logs_Errors			
Startable	false			
SUBTREE_START	false			
END_OF_FLOW	true			
Activate	true			
DUMMY	false			
tStatCatcher Statistics	false			
Help	org.talend.help.tLogRow			
Update components	true			
IREPORT_PATH				
JAVA_LIBRARY_PATH	C:\Talend-Studio-20181026_1147-V7.1.1\configuration\lib\java			
Subjob color				
Title color				
Enable parallel execution	false			
Number of parallel executions	2			
PARALLELIZE_KEEP_EMPTY	false			

REPOSITORY_ALLOW_AUTO_SV	MITTEH
Schema	Built-In
Basic	false
Table (print values in cells of a table)	true
Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=exchange, LENGTH=10}, {SCHEMA_COLUMN=stock_symbol, LENGTH=10}, {SCHEMA_COLUMN=date, LENGTH=10}, {SCHEMA_COLUMN=stock_price_open, LENGTH=10}, {SCHEMA_COLUMN=stock_price_high, LENGTH=10}, {SCHEMA_COLUMN=stock_price_low, LENGTH=10}, {SCHEMA_COLUMN=stock_price_close, LENGTH=10}, {SCHEMA_COLUMN=stock_price_close, LENGTH=10}, {SCHEMA_COLUMN=stock_volume, LENGTH=10}, {SCHEMA_COLUMN=stock_price_adj_close, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	tLogRow_2
Hint format	<b>UNIQUE_NAME</b> COMMENT
Connection format	row

Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

#### Schema for metadata :

Column	Key	Туре	Length	Precision	Nullable	Comment
exchange	false	String	4		true	
stock_symbol	false	String	3		true	
date	false	String	10		true	
stock_price_open	false	String	4		true	
stock_price_high	false	Float	4	3	true	
stock_price_low	false	Float	4	3	true	
stock_price_close	false	Float	4	3	true	
stock_volume	false	String	7		true	
stock_price_adj_close	false	Float	4	3	true	

# Original Function Parameters: Component tMap

 UNIQUE NAME	tMap_1	INPUT(S)	tFileInputDelimited_1
LABEL	tMap_1	OUTPUT(S)	tLogRow_1

**Component Parameters:** 

Component Parameters.	
Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	200000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap\_1 (input):
Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( row3 ):

Name	Туре	Expression	isNullable
exchange	String		true
stock_symbol	String		true
date	String		true
stock_price_open	String		true
stock_price_high	Float		true
stock_price_low	Float		true
stock_price_close	Float		true
stock_volume	String		true
stock_price_adj_close	Float		true

Constraint Table Entries( row3 ):

Name Type Expression Isnullable		Name	Туре	Expression	isNullable	
---------------------------------	--	------	------	------------	------------	--

Mapper table for tMap\_1 ( output ):
Mapper table Properties( loadFile ):

Properties	Values
Name	loadFile
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

**Metadata Table Entries( loadFile ):** 

Name	Туре	Expression	isNullable
exchange	String	row3.exchange	true
stock_symbol	String	row3.stock_symbol	true
date	String	row3.date	true
stock_price_open	String	row3.stock_price_open	true
stock_price_high	Float	row3.stock_price_high	true
stock_price_low	Float	row3.stock_price_low	true
stock_price_close	Float	row3.stock_price_close	true
stock_volume	String	row3.stock_volume	true
stock_price_adj_close	Float	row3.stock_price_adj_close	true

Constraint Table Entries( loadFile ):

Name	Туре	Expression	isNullable	

### Mapper table for tMap\_1 ( var ):

Mapper table Properties (Var):

mapper table i repetites val j.			
Properties	Values		
Name	Var		
Matching-mode			
isMinimized	true		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries( Var ):

me	Туре	Expression	isNullable
----	------	------------	------------

**Constraint Table Entries(Var):** 

Name Type Expre	ssion isNullable
-----------------	------------------

#### Component tMap

 UNIQUE NAME	tMap_2	INPUT(S)	tFileInputDelimited_2
LABEL	tMap_2	OUTPUT(S)	tLogRow_2

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	false
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap\_2 ( input ):
Mapper table Properties( row1 ):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( row1 ):

Name	Туре	Expression	isNullable
exchange	String		true
stock_symbol	String		true
date	String		true
stock_price_open	String		true
stock_price_high	Float		true
stock_price_low	Float		true
stock_price_close	Float		true
stock_volume	String		true
stock_price_adj_close	Float		true

Constraint Table Entries( row1 ):

Name	Туре	Expression	isNullable	

Mapper table for tMap\_2 ( output ):
Mapper table Properties( copyOfloadFile ):

Properties	Values
Name	copyOfloadFile
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries( copyOfloadFile ):

Name	Туре	Expression	isNullable
exchange	String	row1.exchange	true
stock_symbol	String	row1.stock_symbol	true
date	String	row1.date	true
stock_price_open	String	row1.stock_price_open	true
stock_price_high	Float	row1.stock_price_high	true
stock_price_low	Float	row1.stock_price_low	true
stock_price_close	Float	row1.stock_price_close	true
stock_volume	String	row1.stock_volume	true
stock_price_adj_close	Float	row1.stock_price_adj_close	true

Constraint Table Entries( copyOfloadFile ):

Name Type Expression isNullable		
---------------------------------	--	--

### Mapper table for tMap\_2 ( var ):

**Mapper table Properties (Var):** 

mapper table i reporties ( tai ):			
Properties	Values		
Name	Var		
Matching-mode			
isMinimized	true		
isReject	false		
isRejectInnerJoin	false		
isInnerJoin	false		
expressionFilter	null		

Metadata Table Entries( Var ):

me	Туре	Expression	isNullable	
----	------	------------	------------	--

**Constraint Table Entries(Var):** 

Name	Туре	Expression	isNullable