Ex:10

Date:

Internetworking with routers in CISCO PACKET TRACER Simulator

AIM:

To Internetworking with routers in CISCO packet Tracer Simulator.

PROCEDURE:

1) Select the router and open CLI and press Enter to start Configuring Router1.

Type enable to the privileged mode Router1 command Line Interface.

Router > enable

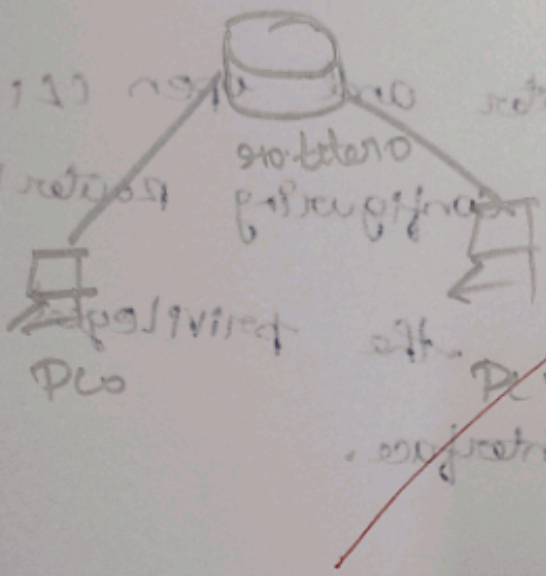
Router # configt

Enter configuration command, one per line. End with CNTL/2. Router (config) # interface Fast Ethernet 0/0 Router (config.if) # ip address 192.168.10.1 255.255.255.0 Router (config-if) # no Shutdown

Router (config-if) #

%-Link-5 changed: Interface Gib Ethernet 0/0, Changed State to up Router (config-if) # ip address 192.168.20.1 255.255.255.0

Router (config.if) # no Shutdown.


PC0
PC1

Step 2 : (Configuring PCs) :

* Assign IP address to every PC in the network.
* Select the PC, Go to the desktop and select ip configuration.
* Assign the default gateway of PC0 as 192.168.10.1
* Assign the default gateway of PC1 as 192.168.20.1

Step 3 : (connecting PC with Router) :

* Connect Fast Ethernet 0 port of PC0 with Fast Ethernet 0/0.
* Connect Fast Ethernet 0 port of PC1 with Fast Ethernet 0/1 port of Router.

Router configuration Table :

Device Name	IP address Fast Ethernet	subnet mask	IP Ethernet 0/1	Subnet Mask
Router 1	192.168.10.1	255.255.255.0	192.168.20.1	255. 255. 0

PC configuration :

Device Name	IP	Subnet Mask	Gateway
PC1	192.168.10.2	255.255.255.0	192.168.10.1
PC2	192.168.20.2	255.255.255.0	192.168.10.1