API Settings

API URL

http://127.0.0.1:8001/compare/

Upload Documents

Upload Base Document

barcode_base.png
181.4KB

+

Upload Revised Document(s)

barcode_revised.png
205.0KB

+

Run Comparison

Image Comparison & Diff Viewer

Processing Complete! Compared 1 base against 1 revised file(s).

Comparison Results for `barcode_revised.png`

Total differences detected: 7

type	change	base	revised	bbox
text	modified	eee INA	eee ILM	234 1238
text	modified	456735	456735 &/	783 1345
text	removed	Using the special Docmosis field: <<barcode: >> y	None	152 1042
text	removed	...	None	675 1057
text	removed	the barcode from within the template.	None	150 1071
barcode	removed	123355	None	496 452
text	added	None	THANK YOU	533 1582

Visual Boundary Map

Red = Removed | **Green** = Added | **Yellow** = Modified/Shifted

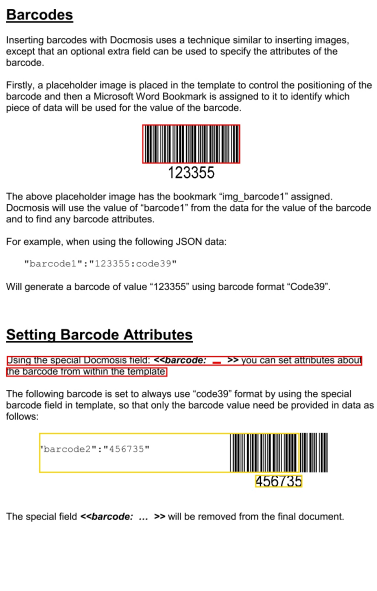

Barcodes

Inserting barcodes with Docmosis uses a technique similar to inserting images, except that an optional extra field can be used to specify the attributes of the barcode.

Firstly, a placeholder image is placed in the template to control the positioning of the barcode and then a Microsoft Word Bookmark is assigned to it to identify which piece of data will be used for the value of the barcode.

123355

The above placeholder image has the bookmark "img_barcode1" assigned. Docmosis will use the value of "barcode1" from the data for the value of the barcode and to find any barcode attributes.

For example, when using the following JSON data:

"barcode1":"123355:code39"

Will generate a barcode of value "123355" using barcode format "Code39".

Setting Barcode Attributes

Using the special Docmosis field: ***<<barcode: ... >>*** you can set attributes about the barcode from within the template.

The following barcode is set to always use "code39" format by using the special barcode field in template, so that only the barcode value need be provided in data as follows:

"barcode2":"456735"

456735

The special field ***<<barcode: ... >>*** will be removed from the final document.

BASE: barcode_base.png

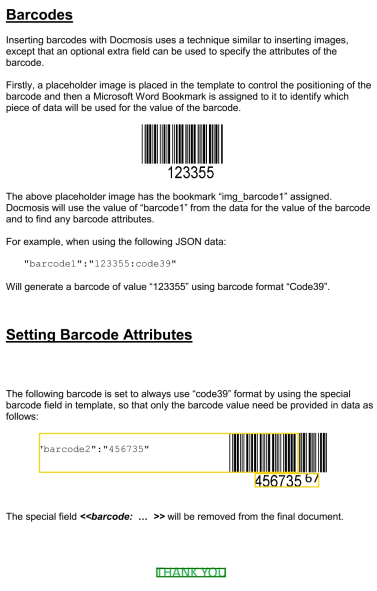

Barcodes

Inserting barcodes with Docmosis uses a technique similar to inserting images, except that an optional extra field can be used to specify the attributes of the barcode.

Firstly, a placeholder image is placed in the template to control the positioning of the barcode and then a Microsoft Word Bookmark is assigned to it to identify which piece of data will be used for the value of the barcode.

123355

The above placeholder image has the bookmark "img_barcode1" assigned. Docmosis will use the value of "barcode1" from the data for the value of the barcode and to find any barcode attributes.

For example, when using the following JSON data:

"barcode1":"123355:code39"

Will generate a barcode of value "123355" using barcode format "Code39".

Setting Barcode Attributes

The following barcode is set to always use "code39" format by using the special barcode field in template, so that only the barcode value need be provided in data as follows:

"barcode2":"456735"

456735 &/

The special field ***<<barcode: ... >>*** will be removed from the final document.

THANK YOU

REVISED: barcode_revised.png