

Software Architecture
Module 5
Techniques in a typical layered
Architecture

**BITS** Pilani

Harvinder S Jabbal SEZG651/SSZG653 Software Architectures


#### **Contents**



- Typical layers in Layered architecture
- Techniques used in different layers


## innovate achieve lead

## **Typical layered architecture**

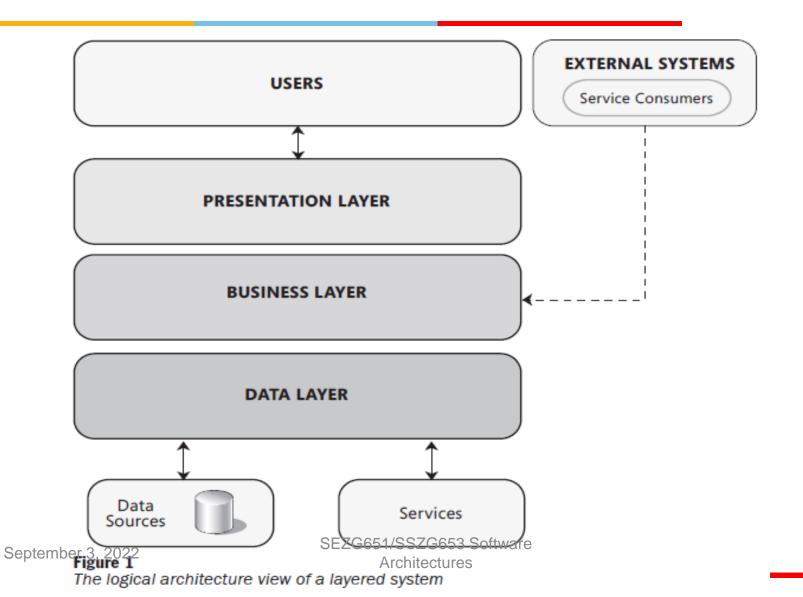


# **Example of layers in Judiciary system**



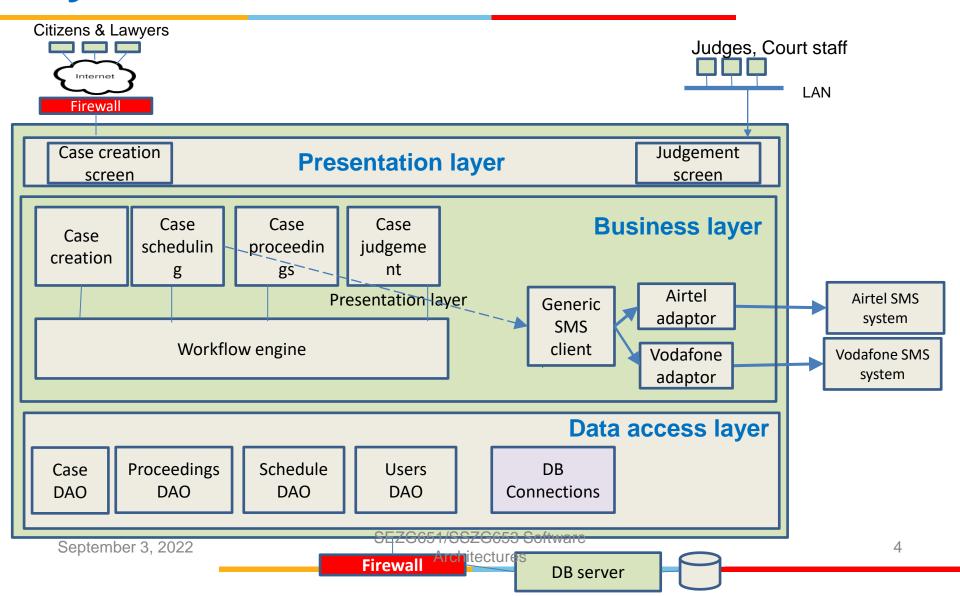



## **Typical layered architecture**

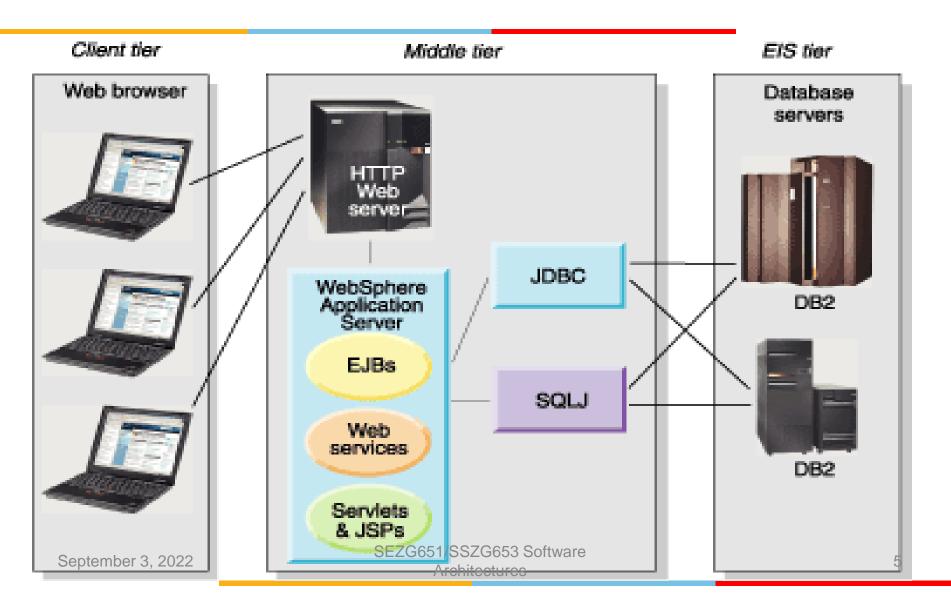

### **Benefits**



What are the benefits of layered architecture?

## innovate achieve lead

### **Characteristics & benefits**

- Clearly defined functional layers (separation of concerns)
- Loose coupling
- Reusable lower layer components
- Exchangeable parts

## Techniques used in different layers



## Presentation layer techniques

- Cache frequently used data such as Product catalog (Client side caching vs Server side caching)
- Use asynchronous communication between UI & Webserver to update parts of the web page without loading the whole web page (ex. AJAX)
- Different rendering for different form-factors: Responsive design

# Client side caching vs Server side caching




**Client-side caching**: Here we store frequently used data in the browser of the client machine – example user preference such as payment method, delivery address, etc.

**Server-side caching**: Here we store frequently used data needed by different back-end modules on the server-side – example: Product codes and description, promotions, etc.

**Combination:** In practice, a combination the above 2 techniques is used.

### Memcached

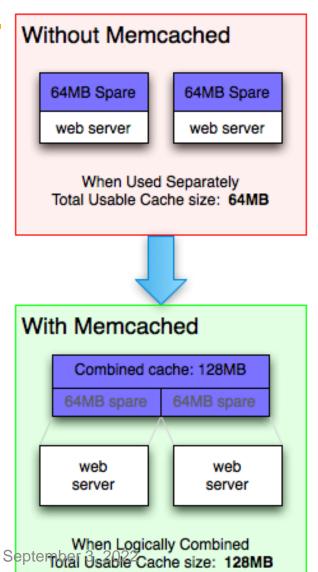

memcached is a high-performance, distributed memory object caching system, generic in nature, but originally intended for use in speeding up dynamic web applications by alleviating database load.

You can think of it as a short-term memory for your applications.

memcached allows you to take memory from parts of your system where you have more than you need and make it accessible to areas where you have less than you need.

## Asynchronous communication with web server




#### Example use cases:

- Show product list depending on the product category selected by user
- Validating a user input such as loan amount whether it is within permissible limits, depending on user profile
- Displaying a chat panel
- Reloading Captcha

## Asynchronous communication with web server



#### **AJAX Architecture**

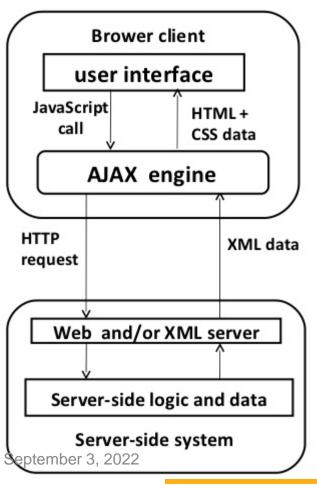

AJAX stands for **A**synchronous **Ja**vaScript and **X**ML.

AJAX is a technique for creating better, faster, and more interactive web applications with the help of XML, HTML, CSS, and Java Script.


Some famous web applications that use AJAX:

Google Maps (Drag entire map) Google Suggest (Google suggests as you type)

SEZG651/SSZG653 Software Architectures

# Responsive web design: Examples



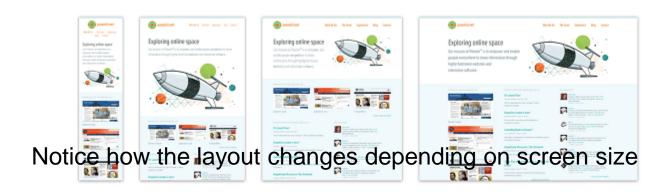


**Responsive web design** is an approach that renders web pages well on a variety of devices or screen sizes.

# Consider different form factors – Use Responsive design



Ref: Wikipedia

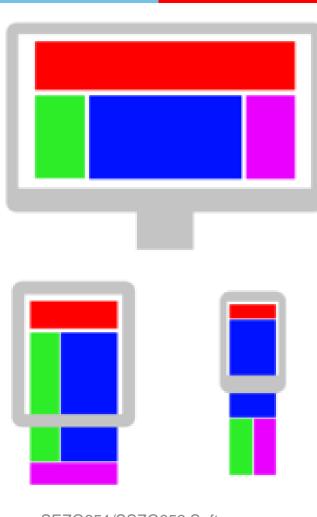

SEZG651/SSZG653 Software Architectures

#### Flexible grids


Allows varying layout depending on screen size

HTML5 and CSS3 help in specifying the display arrangement



## **Presentation layer**

Have you used any other techniques in Presentation layer?

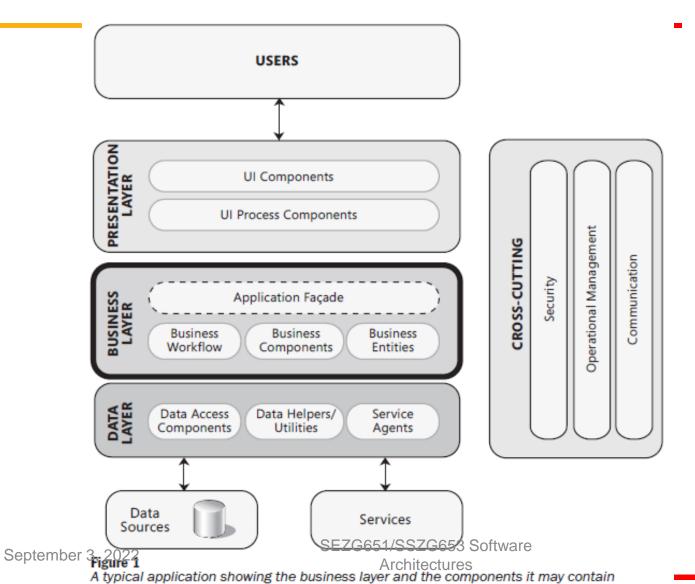




## **Business layer techniques**

- Use Application façade to hide internal modules
- Implement session management
- Use Work flow engine, Rules engine, etc. for modifiability

### Facade: Making sub-system easier to use

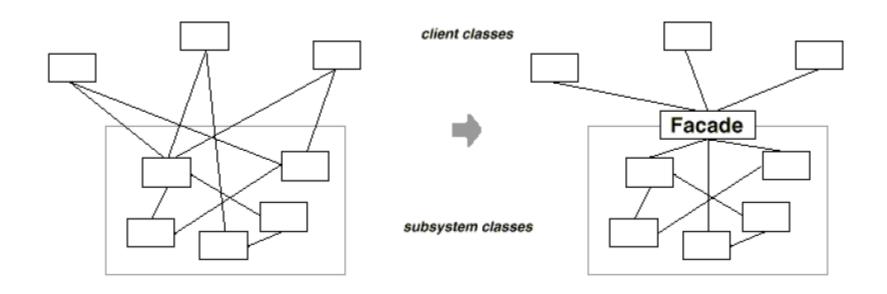


#### Intent:

- Provide a unified interface to a set of interfaces in a subsystem.
- Facade defines a higher-level interface that makes the subsystem easier to use.
- It typically involves a single wrapper class which contains a set of members required by client.


# **Example of Application façade: Flight booking**



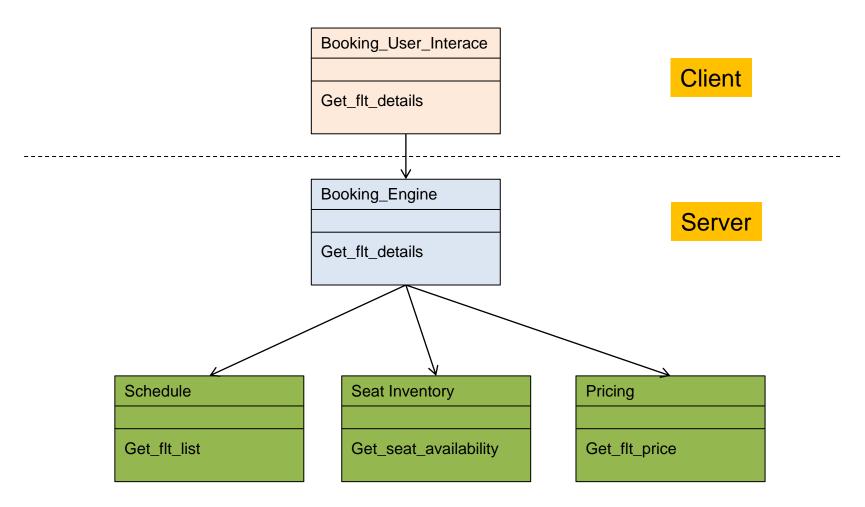

## **Session management**



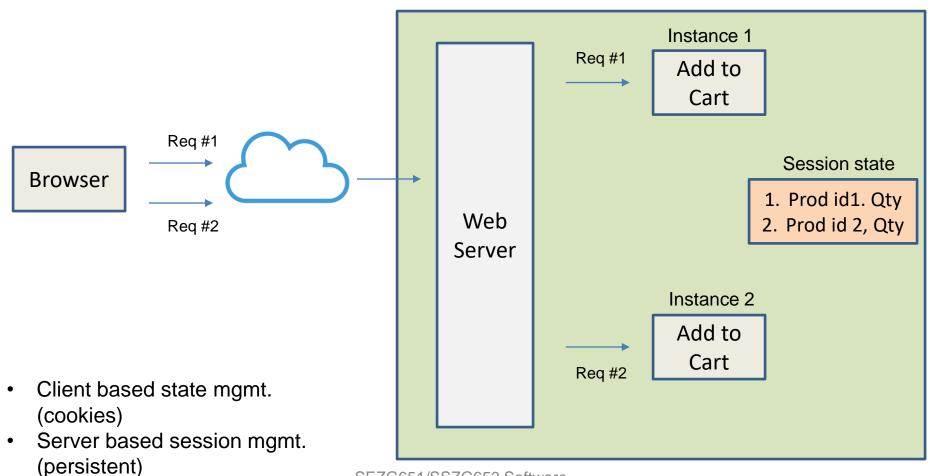

September 3, 2022

SEZG651/SSZG653 Software Architectures **EJB: Stateless & Stateful** 

session beans

**Stateful session Bean**: All requests from a Client goes to the same instance of the Bean.

Bean maintains the state of the session

Stateless session Bean: Subsequent request from a client to a Bean may go to another instance of the Bean

Hence Client needs to main the state

of the session
September 3, 2022

Architecture

Of the session
September 3, 2022

Architectures

Server J2EE server **EJB Container** Container Client 1 Stateful Client 1 Bean State Instance 1 Client 2 Stateful Client 3 Bean State Instance 3 Stateful Client 3 Client 2 Bean State Instance 2 Server J2EE server Container EJB Container Client 1 Client 1 State Stateless Bean Instance 1 Client 2 Client 3 Stateless State Bean Instance 3 Stateless Client 3

Bean

Instance 2

22

innovate

lead





#### Insurance policy processing



**Example Activities** 

Once an activity is completed, the engine invokes the next step in the process The next step / activity could be a manual one or an automated one

Popular engines: BizTalk Server, Oracle BPEL processor, IBM WebSphere Process Server

# Aspect oriented design for cross cutting concerns




Aspect Oriented design aims to encapsulate cross-cutting concerns into aspects (enhancing modularity)

#### Examples of aspects:

- Logging & instrumentation
- Auditing: Who is doing what
- Caching
- Security

### **Aspect Oriented Design**



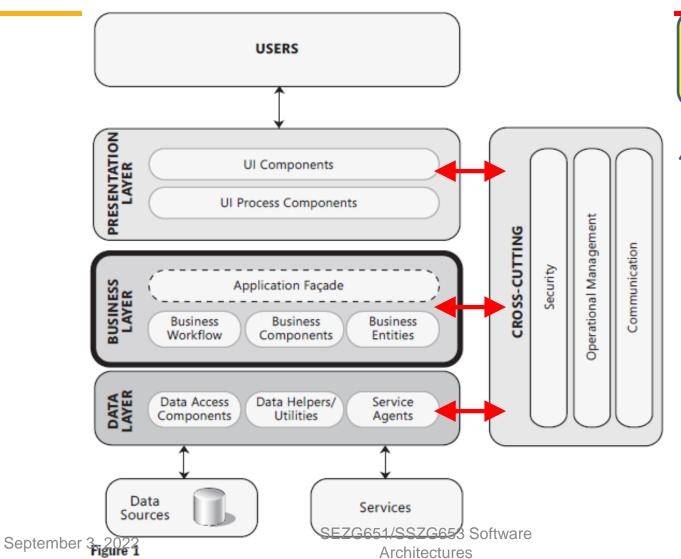

Different aspects of the system

They cut across layers

Modules in different layers call the modules in the cross-cutting subsystem at different points in time



## **Logging & instrumentation**

- Log actionable information such as errors
  - "Database is unavailable"
  - Information useful to diagnose errors
- Logging is expensive. Log only the most essential data
- Instrumentation helps in understanding the usage & behaviour of the system
  - Request rate
  - Error rate
  - Duration of requests
  - Queue length





#### We saw:

- Façade
- Session mangement
- Work flow engine
- Aspect oriented design

Have you used any other technique in Business layer?

# Data layer: Prominent techniques used



- Use DB connection pool, if there are too many users
- Use multiple copies of data for faster access
- Use transactions to achieve atomicity
- Use Object Relational mapping
- Use stored procedures to improve performance
- Use parameterized SQL queries to reduce SQL injection attacks



## **Object-Relational mapping**

- Helps in mapping objects in our program to database table
- Hibernate is a framework that provides an Object/Relational Mapping (O/RM)





#### Do not concatenate user entered string to SQL string

- Malicious input can result in the following:
- SELECT product-data FROM table WHERE product-name = 'Toothpaste' OR 'x' = 'x';
- This will return all product data

#### Use parameterized SQL queries

- SELECT product-data FROM table WHERE product-name = ?
- ? Is a parameter which contains the value entered by user



## **Data layer**

Have you used any other technique in Data layer?


### **Services layer**

innovate achieve lead

Provides services to external systems

Example: A bank may provide following services to external systems:

- Get Balance
- Request chequebook

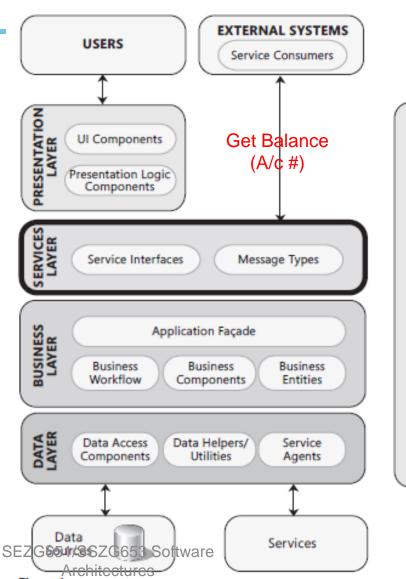



## **Service layer**



Situations that need to be handled by service layer

- Handle same request coming twice
- Handle message coming out of sequence
- Handle communication failure (using retry mechanism or by queuing work and sending once communication is restored)

## Question

Have you used any other techniques in a layered architecture?





## What are some of the components of Departure Control System in

- Presentation layer
- Business layer
- Data layer
- Service layer

# **Exercise: Identify components in different layers of DCS**



#### **Exercise 2**



What software mechanism will you use to improve the performance in the following situation:

- One of the frequently used screens in Aadhaar system is citizen registration.
- This screen has a fields "State" and "District" and "Town", which are Drop-down fields
- It takes time to loading this screen due to the large number of states, districts and towns in India

#### **Solution**



- Cache states, districts and towns in the backend
- Use AJAX for dynamic loading of districts and towns

#### **Exercise 3:**



- Suppose you are developing a hotel reservation system.
- You want to provide is an interface to externals applications such as Makemytrip.com, to inquire about availability of rooms and book rooms.
- What layer would you build and what will be the component (s) in that layer?





## Services layer is needed to provide interface to external systems.

#### This layer will have components such as

- Get room availability (from date, to date) return (# rooms available by type of room)
- Reserve room (# of rooms, type of room, from date, to date) Return (Success / Failure)

#### **Exercise 4**



Suppose you are building a complex logistics system for a shipping & container company

Users wanting to send goods via containers will login to the system and place their requests

A number of modules need to be called for this:

- Find out the nearest location of an empty container
- Find a the best transporter to pick up the goods
- Find a ship that is scheduled leave to the desired destination and has spare capacity to load the container

As an architect you want to hide these modules from the client layer.

#### **Answer**




- In the Business layer, provide a unified API façade to place a shipping request
- The façade will in turn make use of modules to search for appropriate container, appropriate transporter, appropriate ship, etc.

## **Appendix**








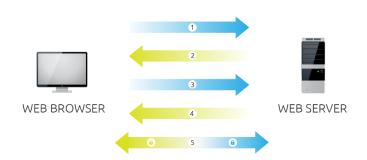


- 1. Browser connects to a web server (website) secured with SSL (https). Browser requests that the server identify itself.
- 2. Server sends a copy of its SSL Certificate, including the server's public key.
- 3. Browser checks the certificate root against a list of trusted CAs and that the certificate is unexpired, unrevoked, and that its common name is valid for the website that it is connecting to. If the browser trusts the certificate, it creates, encrypts, and sends back a symmetric session key using the server's public key.
- 4. Server decrypts the symmetric session key using its private key and sends back an acknowledgement encrypted with the session key to start the encrypted session.
- 5. Server and Browser now encrypt all transmitted data with the session key.

# innovate achieve lead

### Logging: Apache Log4j

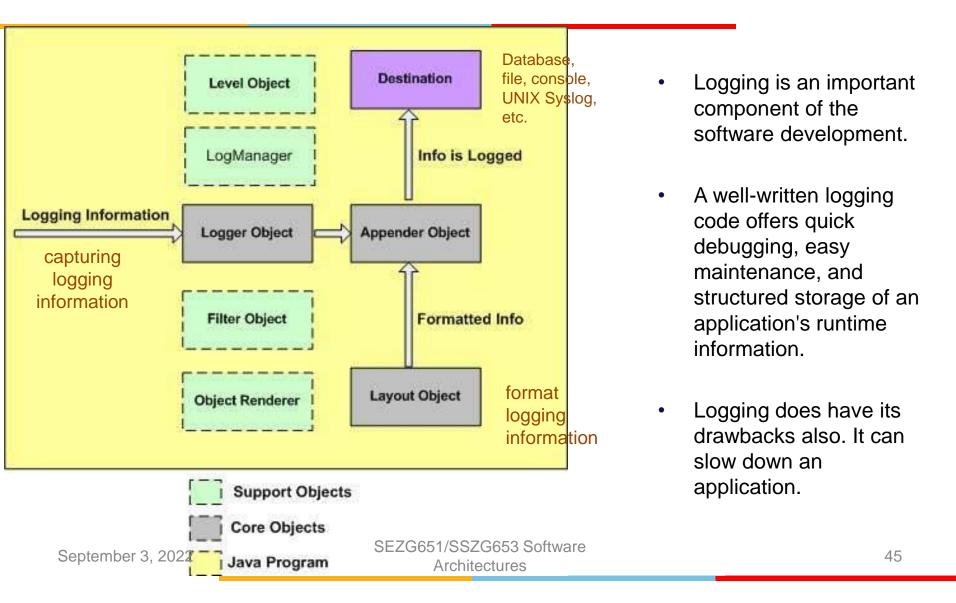



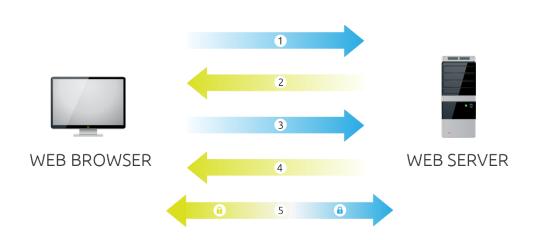

- 1. Browser requests that the server identify itself.
- 2. Server sends a copy of its SSL Certificate
- 3. Browser checks the certificate. and sends back a symmetric session key
- 4. Server sends back an acknowledgement.
- 5. Server and Browser now encrypt all transmitted data with the session key.

# IPSec – Internet Protocol Security




**IPSec** is an Internet Engineering Task Force (IETF) standard suite of protocols that provides data authentication, integrity, and confidentiality as data is transferred between communication points across IP networks.

**IPSec** provides data security at the IP packet level.





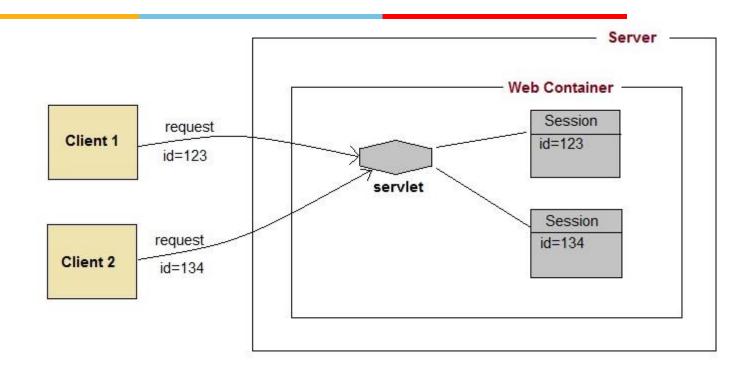

- A web **session** is a sequence of network HTTP request and response transactions associated to the same user.
- Modern and complex web applications require the retaining of information
  or status about each user for the duration of multiple requests.

September 3, 2022

Architectures

48