

EXPERIMENT: 28

DEVELOPING A CLIENT THAT CONTACTS A GIVEN DNS SERVER TO RESOLVE A GIVEN HOSTNAME in JAVA/C

```
#include <stdio.h>

#include <string.h>

#include <netdb.h>

#include <arpa/inet.h>

#include <sys/socket.h>


int main()
{
    char host[100];
    struct hostent *h;
    struct in_addr **addr;

    printf("Enter hostname: ");
    scanf("%s", host);

    h = gethostbyname(host);

    if (h == NULL)
    {
        printf("Host not found\n");
        return 1;
    }

    printf("\nHost Name    : %s\n", h->h_name);
    printf("Address Type  : IPv4\n");
    printf("Address Length: %d bytes\n", h->h_length);
```

```
printf("IP Addresses:\n");
```

```
addr = (struct in_addr **)h->h_addr_list;
```

```
while (*addr != NULL)
```

```
{
```


```
    printf("%s\n", inet_ntoa(**addr));
```

```
    addr++;
```

```
}
```

```
return 0;
```

```
}
```

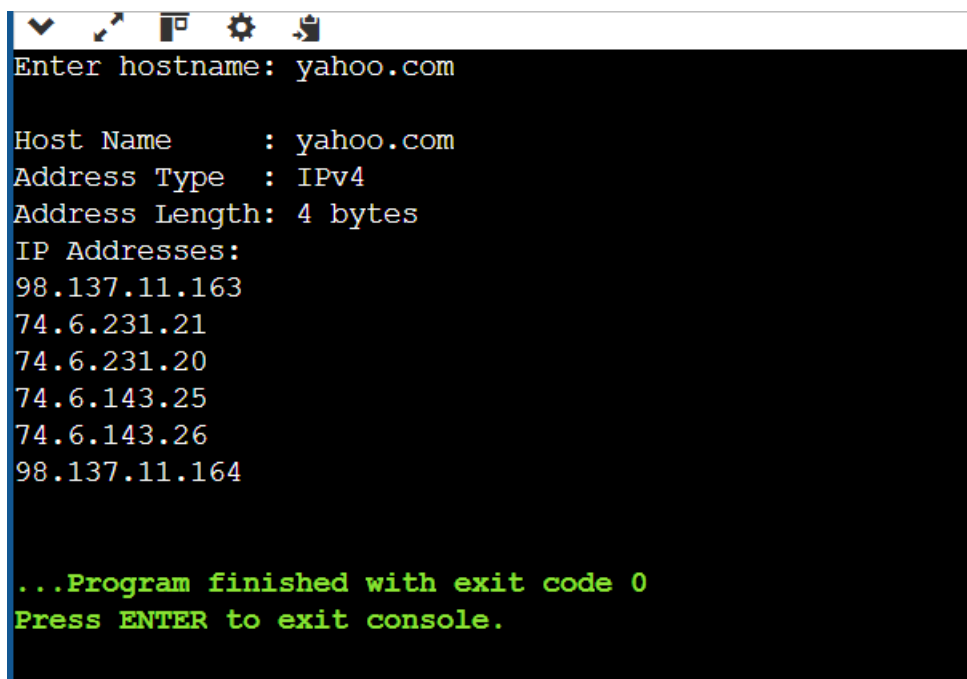

```
Enter hostname: yahoo.com

Host Name      : yahoo.com
Address Type   : IPv4
Address Length: 4 bytes
IP Addresses:
98.137.11.163
74.6.231.21
74.6.231.20
74.6.143.25
74.6.143.26
98.137.11.164

...Program finished with exit code 0
Press ENTER to exit console.
```